


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	54%
Test Engineer	Serway Li	Configurations	2.4G + 5G

Horizontal

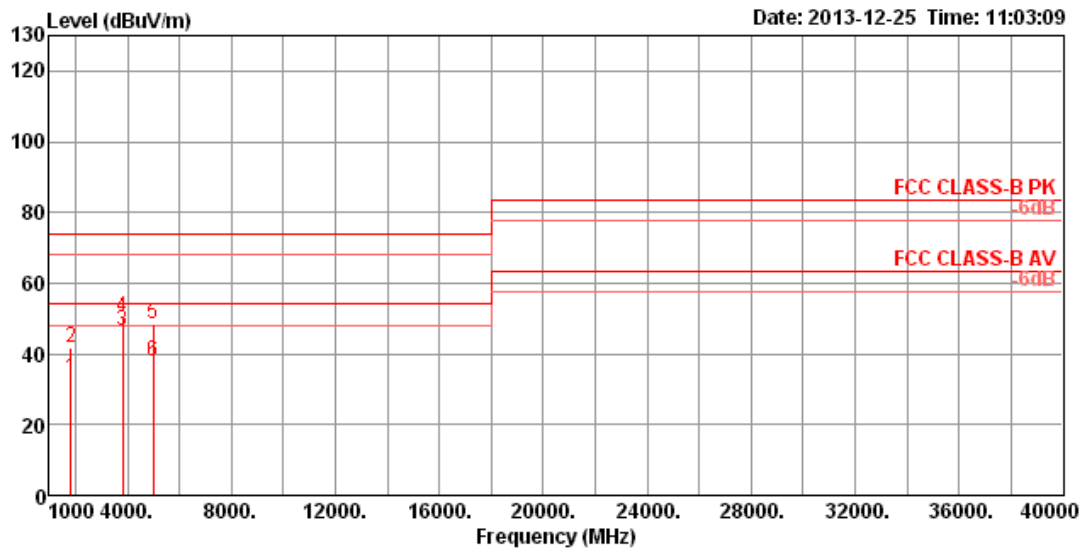

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1812.57	32.96	54.00	-21.04	39.78	3.23	26.23	36.28	146	80	HORIZONTAL Average
2	1812.58	41.71	74.00	-32.29	48.53	3.23	26.23	36.28	146	80	HORIZONTAL Peak
3	3805.26	46.46	54.00	-7.54	45.97	4.83	31.39	35.73	158	123	HORIZONTAL Average
4	3805.36	50.34	74.00	-23.66	49.85	4.83	31.39	35.73	158	123	HORIZONTAL Peak
5	4999.77	48.26	74.00	-25.74	44.82	5.90	32.90	35.36	132	272	HORIZONTAL Peak
6	5000.10	37.93	54.00	-16.07	34.49	5.90	32.90	35.36	132	272	HORIZONTAL Average

Vertical

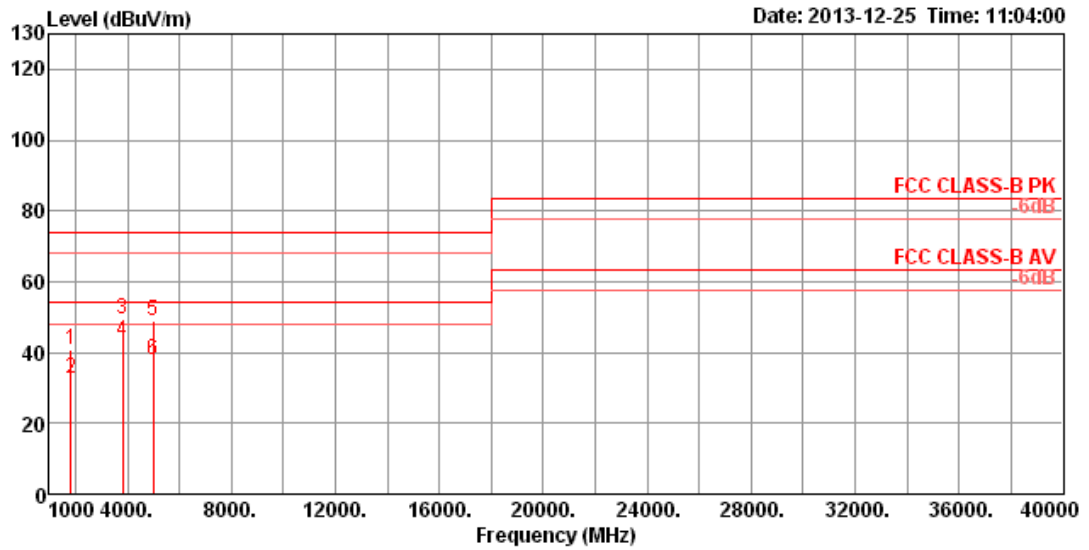

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1812.57	40.87	74.00	-33.13	47.69	3.23	26.23	36.28	100	75 VERTICAL	Peak
2	1812.59	32.82	54.00	-21.18	39.64	3.23	26.23	36.28	100	75 VERTICAL	Average
3	3805.29	49.54	74.00	-24.46	49.05	4.83	31.39	35.73	100	134 VERTICAL	Peak
4	3805.65	43.33	54.00	-10.67	42.84	4.83	31.39	35.73	100	134 VERTICAL	Average
5	4999.96	49.17	74.00	-24.83	45.73	5.90	32.90	35.36	103	254 VERTICAL	Peak
6	5000.02	37.98	54.00	-16.02	34.54	5.90	32.90	35.36	103	254 VERTICAL	Average