


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	2.4G + 5G

Horizontal

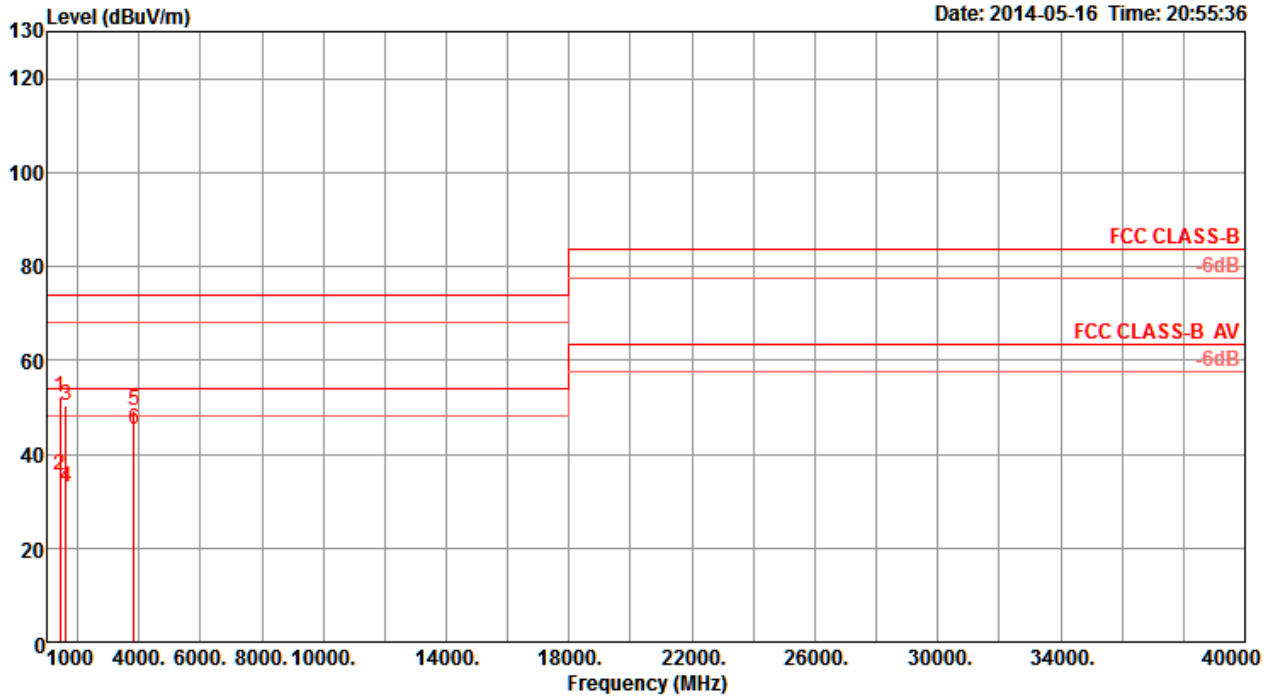

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	1439.96	52.32	74.00	-21.68	59.87	2.21	25.31	35.07	Peak	55	100	HORIZONTAL
2	1440.26	35.57	54.00	-18.43	43.12	2.21	25.31	35.07	Average	55	100	HORIZONTAL
3	1630.82	50.51	74.00	-23.49	56.72	2.36	26.27	34.84	Peak	122	100	HORIZONTAL
4	1631.24	33.06	54.00	-20.94	39.27	2.36	26.27	34.84	Average	122	100	HORIZONTAL
5	3843.96	49.30	74.00	-24.70	48.88	3.74	31.20	34.52	Peak	131	100	HORIZONTAL
6	3844.23	45.27	54.00	-8.73	44.85	3.74	31.20	34.52	Average	131	100	HORIZONTAL

Vertical

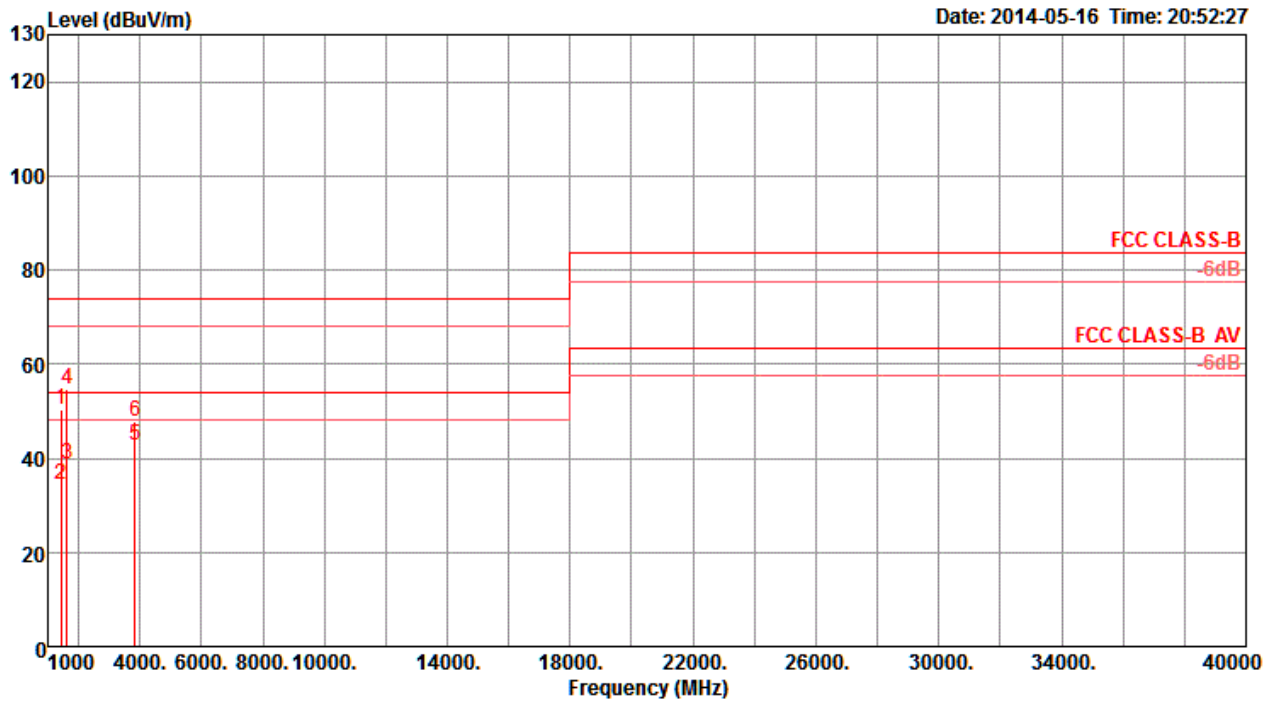

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	1440.09	50.23	74.00	-23.77	57.78	2.21	25.31	35.07	Peak	327	100	VERTICAL
2	1440.09	34.23	54.00	-19.77	41.78	2.21	25.31	35.07	Average	327	100	VERTICAL
3	1631.17	38.75	54.00	-15.25	44.96	2.36	26.27	34.84	Average	42	100	VERTICAL
4	1631.30	54.72	74.00	-19.28	60.93	2.36	26.27	34.84	Peak	42	100	VERTICAL
5	3843.86	42.82	54.00	-11.18	42.40	3.74	31.20	34.52	Average	176	187	VERTICAL
6	3843.91	47.86	74.00	-26.14	47.44	3.74	31.20	34.52	Peak	176	187	VERTICAL