

## FCC Test Report

**Report No.:** RF170113E13

**FCC ID:** KA2IR878A1

**Test Model:** DIR-878

**Received Date:** Jan. 16, 2017

**Test Date:** Mar. 15 to 20, 2017

**Issued Date:** Mar. 29, 2017

**Applicant:** D-Link Corporation

**Address:** 17595 Mt. Herrmann Street Fountain Valley, CA92708 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	11
3.2.1 Test Mode Applicability and Tested Channel Detail .....	12
3.3 Duty Cycle of Test Signal .....	14
3.4 Description of Support Units .....	15
3.4.1 Configuration of System under Test .....	16
3.5 General Description of Applied Standards .....	17
<b>4 Test Types and Results</b> .....	<b>18</b>
4.1 Radiated Emission and Bandedge Measurement .....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	18
4.1.2 Test Instruments .....	19
4.1.3 Test Procedures .....	21
4.1.4 Deviation from Test Standard .....	21
4.1.5 Test Setup .....	22
4.1.6 EUT Operating Conditions .....	23
4.1.7 Test Results (Mode 1) .....	24
4.1.8 Test Results (Mode 2) .....	36
4.2 Conducted Emission Measurement .....	49
4.2.1 Limits of Conducted Emission Measurement .....	49
4.2.2 Test Instruments .....	49
4.2.3 Test Procedures .....	50
4.2.4 Deviation from Test Standard .....	50
4.2.5 Test Setup .....	50
4.2.6 EUT Operating Conditions .....	50
4.2.7 Test Results (Mode 2) .....	51
4.2.8 Test Results (Mode 3) .....	53
4.2.9 Test Results (Mode 4) .....	55
4.3 6dB Bandwidth Measurement .....	57
4.3.1 Limits of 6dB Bandwidth Measurement .....	57
4.3.2 Test Setup .....	57
4.3.3 Test Instruments .....	57
4.3.4 Test Procedure .....	57
4.3.5 Deviation from Test Standard .....	57
4.3.6 EUT Operating Conditions .....	57
4.3.7 Test Result .....	58
4.4 Conducted Output Power Measurement .....	60
4.4.1 Limits of Conducted Output Power Measurement .....	60
4.4.2 Test Setup .....	60
4.4.3 Test Instruments .....	60
4.4.4 Test Procedures .....	60
4.4.5 Deviation from Test Standard .....	60
4.4.6 EUT Operating Conditions .....	60
4.4.7 Test Results (Mode 1) .....	61
4.4.8 Test Results (Mode 2) .....	62
4.5 Power Spectral Density Measurement .....	63
4.5.1 Limits of Power Spectral Density Measurement .....	63
4.5.2 Test Setup .....	63

4.5.3 Test Instruments .....	63
4.5.4 Test Procedure .....	63
4.5.5 Deviation from Test Standard .....	63
4.5.6 EUT Operating Condition .....	63
4.5.7 Test Results (Mode 1).....	64
4.5.8 Test Results (Mode 2).....	67
4.6 Conducted Out of Band Emission Measurement .....	70
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	70
4.6.2 Test Setup.....	70
4.6.3 Test Instruments .....	70
4.6.4 Test Procedure .....	70
4.6.5 Deviation from Test Standard .....	70
4.6.6 EUT Operating Condition .....	70
4.6.7 Test Results .....	70
<b>5 Pictures of Test Arrangements.....</b>	<b>87</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>88</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170113E13	Original release.	Mar. 29, 2017

## 1 Certificate of Conformity

**Product:** AC1900 MU-MIMO Wi-Fi Gigabit Router

**Brand:** D-Link

**Test Model:** DIR-878

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** D-Link Corporation

**Test Date:** Mar. 15 to 20, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Midoli Peng , **Date:** Mar. 29, 2017  
Midoli Peng / Specialist

**Approved by :** May Chen , **Date:** Mar. 29, 2017  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.84dB at 0.41953MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2374.00MHz, 2483.50MHz & 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex (MHF) not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.78 dB
	6GHz ~ 18GHz	4.52 dB
	18GHz ~ 40GHz	5.08 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AC1900 MU-MIMO Wi-Fi Gigabit Router
Brand	D-Link
Test Model	DIR-878
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz band
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ac (80+80): up to 3466.7Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412GHz ~ 2.462GHz <b>5GHz:</b> 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 <b>5GHz:</b> 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2 802.11ac (VHT80+80): 1 set
Output Power	<b>For Antenna set 1 (Gain : 2dBi)</b> <b>2.4GHz:</b> 788.724mW <b>5GHz:</b> <b>5.18GHz ~ 5.24GHz:</b> <b>CDD Mode:</b> 995.277mW <b>Beamforming Mode:</b> 571.911mW <b>5.745GHz ~ 5.825GHz:</b> <b>CDD Mode:</b> 975.714mW <b>Beamforming Mode:</b> 600.3mW

Output Power	<b>For Antenna set 2 (Gain : 5dBi)</b> <b>2.4GHz:</b> 788.724mW <b>5GHz:</b> <b>5.18GHz ~ 5.24GHz:</b> <b>CDD Mode:</b> 322.367mW <b>Beamforming Mode:</b> 313.257mW <b>5.745GHz ~ 5.825GHz:</b> <b>CDD Mode:</b> 655.424mW <b>Beamforming Mode:</b> 310.007mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

**Note:** The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter and following three different models could be chosen as following table:

No	Brand	Model No.	Spec.
1	Frecom	F18L7-120150SPAU	Input: 100-240V, 0.6A, 50/60Hz Output: 12V, 1.5A DC output cable (Unshielded, 1.2m)
2	Shenzhen Gongjin Electronics Co., Ltd	S18B72-120A150-C4	Input: 100-240V, 0.7A, 50/60Hz Output: 12V, 1.5A DC output cable (Unshielded, 1.1m)
3	Frecom	WB-18D12R	Input: 100-240V, 0.5A, 50-60Hz Output: 12V, 1.5A DC output cable (Unshielded, 1.2m)

NOTE: For Radiated emission, the adapter 1 ~ 3, the worst case was found in adapter 3. Therefore only the test data of the adapter was recorded in this report.



3. The antennas provided to the EUT, please refer to the following table:

Set 1 Antenna				
Chain No.	Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
Chain 0	2	2.4~2.4835	Dipole	i-pex (MHF)
	2	5.15~5.85		
Chain 1	2	2.4~2.4835	Dipole	i-pex (MHF)
	2	5.15~5.85		
Chain 2	2	2.4~2.4835	Dipole	i-pex (MHF)
	2	5.15~5.85		
Chain 3	2	2.4~2.4835	Dipole	i-pex (MHF)
	2	5.15~5.85		
Set 2 Antenna				
Chain No.	Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
Chain 0	5	2.4~2.4835	Dipole	i-pex (MHF)
	5	5.15~5.85		
Chain 1	5	2.4~2.4835	Dipole	i-pex (MHF)
	5	5.15~5.85		
Chain 2	5	2.4~2.4835	Dipole	i-pex (MHF)
	5	5.15~5.85		
Chain 3	5	2.4~2.4835	Dipole	i-pex (MHF)
	5	5.15~5.85		

4. The Directional gain table:

Frequency (MHz)	Max Gain (dBi)
2412-2462	7.39 (for Set 1 Antenna) 10.06 (for Set 2 Antenna)
5180-5825	7.75 (for Set 1 Antenna) 10.90 (for Set 2 Antenna)

Note:

1. Non-TxBF mode & TxBF mode antenna gain refer to KDB 662911 F 2) f) (ii)

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k/20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;

$G_k$  is the gain in dBi of the  $k$ th antenna.

2. Above directional gain were calculated from actual measurement data.

5. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	4TX	4RX
802.11g	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
VHT20	MCS 0~8, Nss=1	4TX	4RX
	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~8, Nss=4	4TX	4RX
VHT40	MCS0~9 Nss=1	4TX	4RX
	MCS0~9 Nss=2	4TX	4RX
	MCS0~9 Nss=3	4TX	4RX
	MCS0~9 Nss=4	4TX	4RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=1	4TX	4RX
	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~8, Nss=4	4TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT80+VHT80) noncontiguous	MCS 0~9, Nss=1	2TX+2TX	2RX +2RX
	MCS 0~9, Nss=2	2TX+2TX	2RX +2RX

Note:

- All of modulation mode support beamforming function except 2.4GHz & 802.11a modulation mode.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
1	√	-	-	√	Adapter 3 + antenna set 1 (Gain : 2dBi)
2	√	√	√	√	Adapter 3 + antenna set 2 (Gain : 5dBi)
3	-	-	√	-	Adapter 1 + antenna set 2 (Gain : 5dBi)
4	-	-	√	-	Adapter 2 + antenna set 2 (Gain : 5dBi)

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

**NOTE:** 1.The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.  
 2.“-”means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5


**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
<b>RE<math>\geq</math>1G</b>	23deg. C, 66%RH	120Vac, 60Hz	Terry Huang
<b>RE<math>&lt;</math>1G</b>	25deg. C, 72%RH	120Vac, 60Hz	Weiwei Lo
<b>PLC</b>	21deg. C, 75%RH	120Vac, 60Hz	Weiwei Lo
<b>APCM</b>	24deg. C, 63%RH	120Vac, 60Hz	Anderson Chen


### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.


802.11b

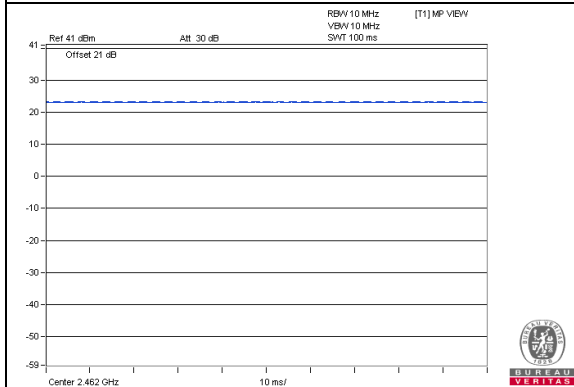


802.11g

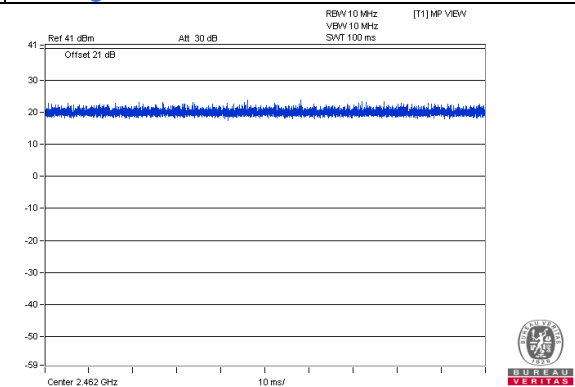

802.11n (HT20)

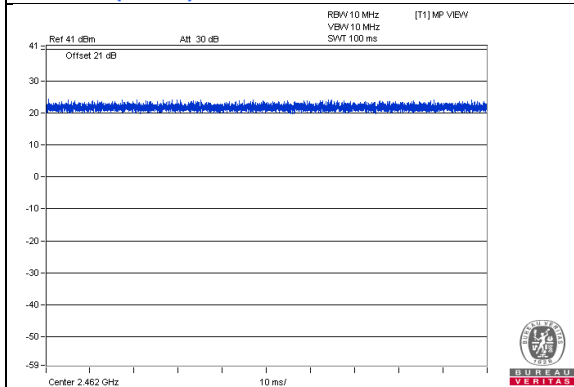

802.11n (HT40)

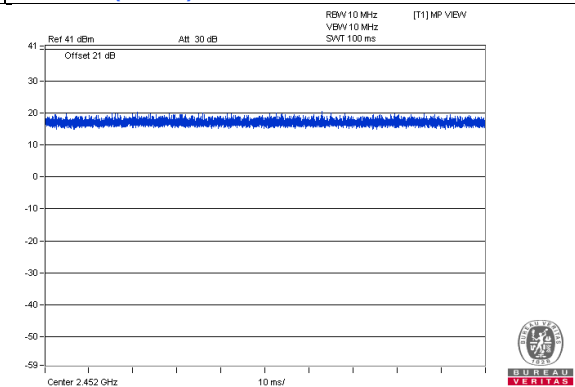

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.1(For adapter 2) 1.2(For adapter 1&3)	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab

### 3.4.1 Configuration of System under Test

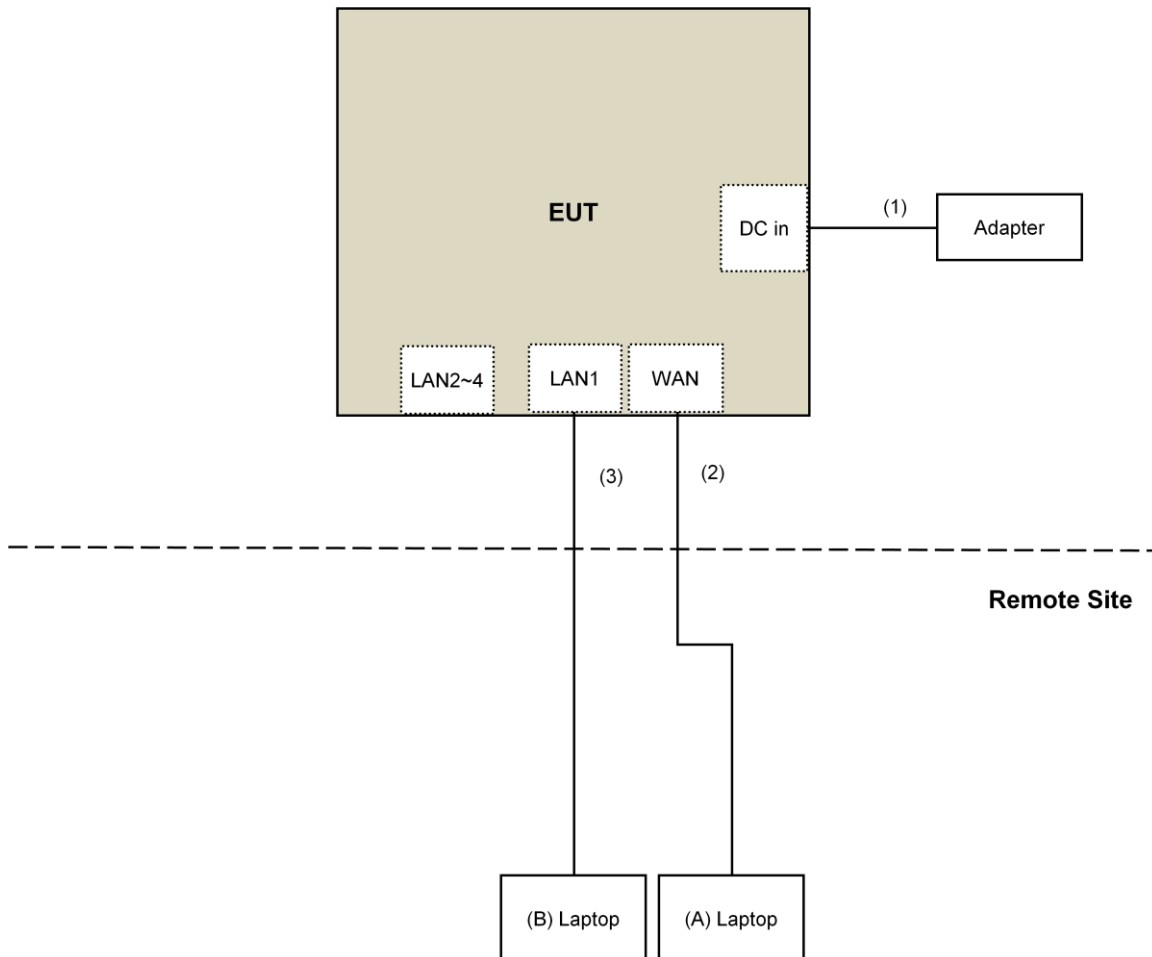



### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 DTS Meas Guidance v03r05**  
**KDB 662911 D01 Multiple Transmitter Output v02r01**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna <sup>(*)</sup> Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM- SM-2000 EMC104-SM- SM-5000 EMC104-SM- SM-5000	160923 150318 150323	Feb. 02, 2017 Mar. 30, 2016 Mar. 30, 2016	Feb. 01, 2018 Mar. 29, 2017 Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045S E	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	0824006	May 26, 2016	May 25, 2017
Power sensor Anritsu	MA2411B	0738172	May 26, 2016	May 25, 2017

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
6. Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Mar. 15 to 20, 2017

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

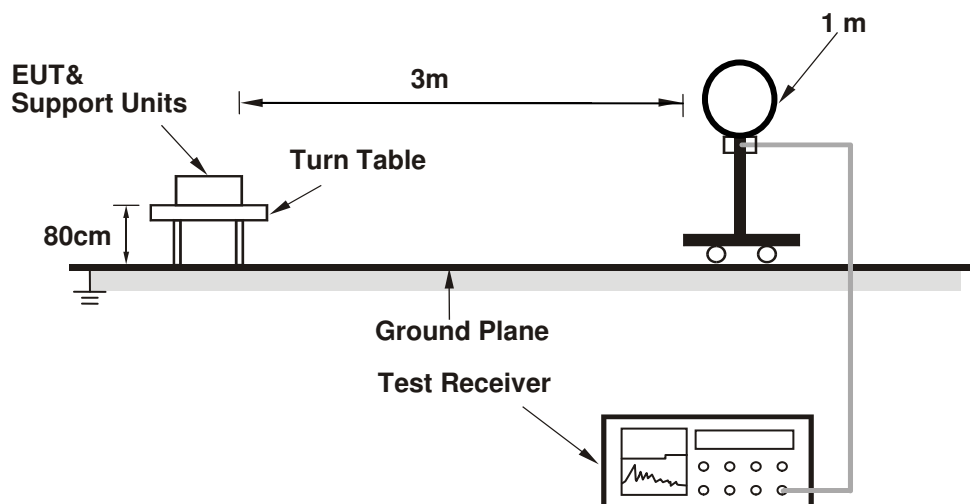

##### For Radiated emission 30MHz to 1GHz

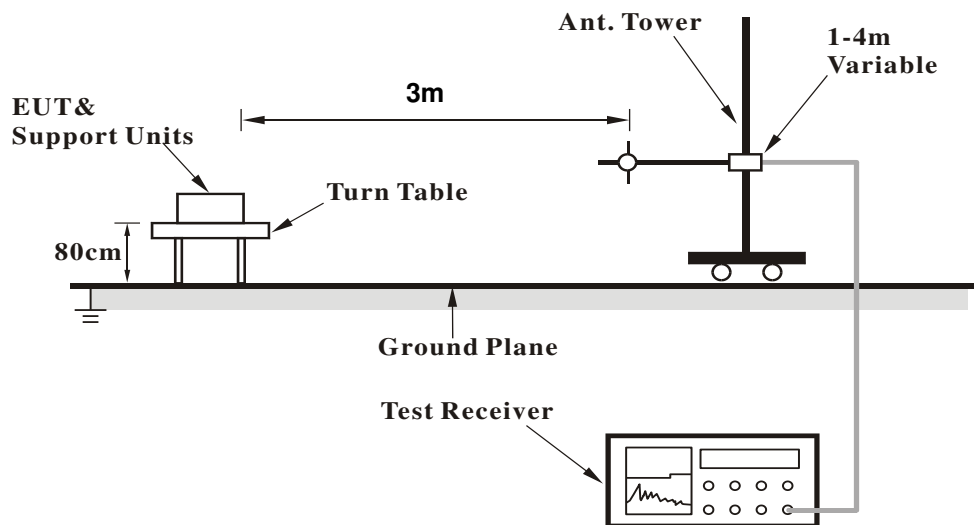

### For Radiated emission above 1GHz

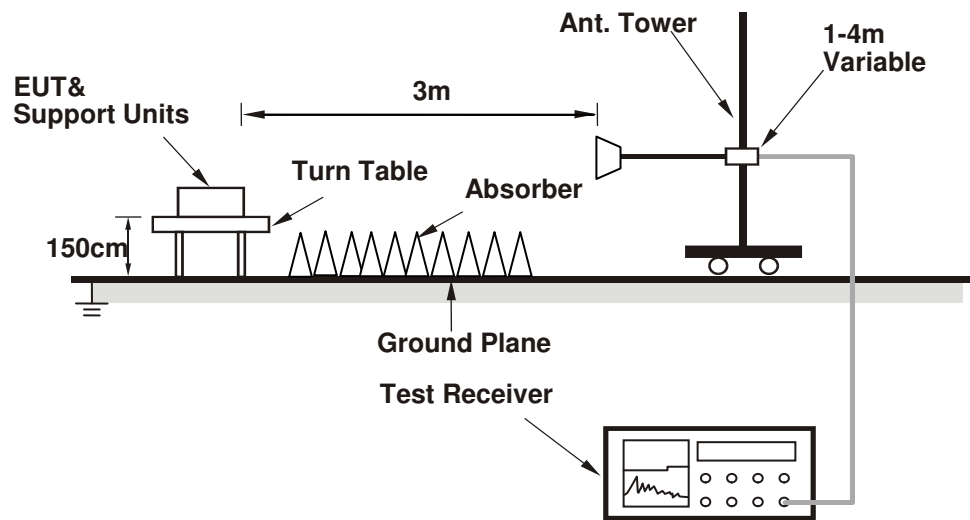

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (MT7615 QA 0.0.1.73) has been activated to set the EUT on specific status.

## 4.1.7 Test Results (Mode 1)

## Above 1GHz Data :

## 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2374.00	50.8 PK	74.0	-23.2	1.69 H	163	53.0	-2.2
2	2374.00	44.2 AV	54.0	-9.8	1.69 H	163	46.4	-2.2
3	*2412.00	111.3 PK			1.69 H	163	113.3	-2.0
4	*2412.00	108.9 AV			1.69 H	163	110.9	-2.0
5	4824.00	45.6 PK	74.0	-28.4	1.02 H	8	43.4	2.2
6	4824.00	40.4 AV	54.0	-13.6	1.02 H	8	38.2	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2374.00	60.5 PK	74.0	-13.5	1.23 V	29	62.7	-2.2
2	<b>2374.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.23 V</b>	<b>29</b>	<b>56.1</b>	<b>-2.2</b>
3	*2412.00	121.4 PK			1.23 V	29	123.4	-2.0
4	*2412.00	119.1 AV			1.23 V	29	121.1	-2.0
5	4824.00	48.4 PK	74.0	-25.6	1.05 V	131	46.2	2.2
6	4824.00	43.8 AV	54.0	-10.2	1.05 V	131	41.6	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.8 PK	74.0	-23.2	1.67 H	162	52.9	-2.1
2	2390.00	40.0 AV	54.0	-14.0	1.67 H	162	42.1	-2.1
3	*2437.00	112.2 PK			1.67 H	162	114.1	-1.9
4	*2437.00	109.7 AV			1.67 H	162	111.6	-1.9
5	2483.50	51.7 PK	74.0	-22.3	1.67 H	162	53.4	-1.7
6	2483.50	40.9 AV	54.0	-13.1	1.67 H	162	42.6	-1.7
7	4874.00	46.6 PK	74.0	-27.4	1.00 H	20	44.3	2.3
8	4874.00	42.4 AV	54.0	-11.6	1.00 H	20	40.1	2.3
9	7311.00	47.6 PK	74.0	-26.4	1.69 H	206	39.2	8.4
10	7311.00	36.9 AV	54.0	-17.1	1.69 H	206	28.5	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.53 V	29	62.4	-2.1
2	2390.00	53.7 AV	54.0	-0.3	1.53 V	29	55.8	-2.1
3	*2437.00	122.2 PK			1.53 V	29	124.1	-1.9
4	*2437.00	120.0 AV			1.53 V	29	121.9	-1.9
5	2483.50	60.2 PK	74.0	-13.8	1.53 V	29	61.9	-1.7
6	2483.50	50.7 AV	54.0	-3.3	1.53 V	29	52.4	-1.7
7	4874.00	49.7 PK	74.0	-24.3	1.05 V	118	47.4	2.3
8	4874.00	47.1 AV	54.0	-6.9	1.05 V	118	44.8	2.3
9	7311.00	49.3 PK	74.0	-24.7	1.50 V	228	40.9	8.4
10	7311.00	38.0 AV	54.0	-16.0	1.50 V	228	29.6	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.8 PK			1.09 H	164	112.6	-1.8
2	*2462.00	106.8 AV			1.09 H	164	108.6	-1.8
3	2483.50	49.8 PK	74.0	-24.2	1.09 H	164	51.5	-1.7
4	2483.50	42.3 AV	54.0	-11.7	1.09 H	164	44.0	-1.7
5	4924.00	46.5 PK	74.0	-27.5	1.10 H	21	44.1	2.4
6	4924.00	40.3 AV	54.0	-13.7	1.10 H	21	37.9	2.4
7	7386.00	47.8 PK	74.0	-26.2	1.54 H	335	39.3	8.5
8	7386.00	34.2 AV	54.0	-19.8	1.54 H	335	25.7	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.3 PK			1.32 V	27	121.1	-1.8
2	*2462.00	117.0 AV			1.32 V	27	118.8	-1.8
3	2483.50	61.3 PK	74.0	-12.7	1.32 V	27	63.0	-1.7
4	2483.50	53.7 AV	54.0	-0.3	1.32 V	27	55.4	-1.7
5	4924.00	48.7 PK	74.0	-25.3	1.09 V	117	46.3	2.4
6	4924.00	43.9 AV	54.0	-10.1	1.09 V	117	41.5	2.4
7	7386.00	48.1 PK	74.0	-25.9	1.44 V	237	39.6	8.5
8	7386.00	36.5 AV	54.0	-17.5	1.44 V	237	28.0	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.6 PK	74.0	-24.4	1.08 H	161	51.7	-2.1
2	2390.00	42.3 AV	54.0	-11.7	1.08 H	161	44.4	-2.1
3	*2412.00	111.9 PK			1.08 H	161	113.9	-2.0
4	*2412.00	100.8 AV			1.08 H	161	102.8	-2.0
5	4824.00	42.6 PK	74.0	-31.4	1.00 H	12	40.4	2.2
6	4824.00	31.7 AV	54.0	-22.3	1.00 H	12	29.5	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.00 V	28	69.8	-2.1
2	2390.00	53.7 AV	54.0	-0.3	1.00 V	28	55.8	-2.1
3	*2412.00	119.3 PK			1.00 V	28	121.3	-2.0
4	*2412.00	109.2 AV			1.00 V	28	111.2	-2.0
5	4824.00	46.8 PK	74.0	-27.2	1.01 V	157	44.6	2.2
6	4824.00	34.5 AV	54.0	-19.5	1.01 V	157	32.3	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.8 PK			1.04 H	172	116.7	-1.9
2	*2437.00	105.2 AV			1.04 H	172	107.1	-1.9
3	2483.50	52.2 PK	74.0	-21.8	1.04 H	172	53.9	-1.7
4	2483.50	43.8 AV	54.0	-10.2	1.04 H	172	45.5	-1.7
5	4874.00	43.5 PK	74.0	-30.5	1.48 H	37	41.2	2.3
6	4874.00	32.2 AV	54.0	-21.8	1.48 H	37	29.9	2.3
7	7311.00	47.8 PK	74.0	-26.2	1.55 H	299	39.4	8.4
8	7311.00	36.1 AV	54.0	-17.9	1.55 H	299	27.7	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	125.3 PK			1.44 V	30	127.2	-1.9
2	*2437.00	115.7 AV			1.44 V	30	117.6	-1.9
3	2483.50	70.6 PK	74.0	-3.4	1.44 V	30	72.3	-1.7
4	2483.50	53.5 AV	54.0	-0.5	1.44 V	30	55.2	-1.7
5	4874.00	46.0 PK	74.0	-28.0	1.32 V	138	43.7	2.3
6	4874.00	34.8 AV	54.0	-19.2	1.32 V	138	32.5	2.3
7	7311.00	48.3 PK	74.0	-25.7	1.50 V	332	39.9	8.4
8	7311.00	36.2 AV	54.0	-17.8	1.50 V	332	27.8	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.5 PK			1.00 H	177	111.3	-1.8
2	*2462.00	99.2 AV			1.00 H	177	101.0	-1.8
3	2483.50	50.9 PK	74.0	-23.1	1.00 H	177	52.6	-1.7
4	2483.50	43.4 AV	54.0	-10.6	1.00 H	177	45.1	-1.7
5	4924.00	42.4 PK	74.0	-31.6	1.08 H	5	40.0	2.4
6	4924.00	31.9 AV	54.0	-22.1	1.08 H	5	29.5	2.4
7	7386.00	46.9 PK	74.0	-27.1	2.10 H	17	38.4	8.5
8	7386.00	36.5 AV	54.0	-17.5	2.10 H	17	28.0	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.3 PK			1.00 V	29	121.1	-1.8
2	*2462.00	109.1 AV			1.00 V	29	110.9	-1.8
3	2483.50	72.9 PK	74.0	-1.1	1.00 V	29	74.6	-1.7
4	2483.50	53.7 AV	54.0	-0.3	1.00 V	29	55.4	-1.7
5	4924.00	46.6 PK	74.0	-27.4	1.09 V	153	44.2	2.4
6	4924.00	34.4 AV	54.0	-19.6	1.09 V	153	32.0	2.4
7	7386.00	46.7 PK	74.0	-27.3	1.57 V	172	38.2	8.5
8	7386.00	36.4 AV	54.0	-17.6	1.57 V	172	27.9	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.3 PK	74.0	-22.7	1.14 H	106	53.4	-2.1
2	2390.00	43.5 AV	54.0	-10.5	1.14 H	106	45.6	-2.1
3	*2412.00	103.9 PK			1.14 H	106	105.9	-2.0
4	*2412.00	92.2 AV			1.14 H	106	94.2	-2.0
5	4824.00	42.9 PK	74.0	-31.1	1.19 H	9	40.7	2.2
6	4824.00	32.0 AV	54.0	-22.0	1.19 H	9	29.8	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.45 V	27	72.8	-2.1
2	2390.00	53.7 AV	54.0	-0.3	1.45 V	27	55.8	-2.1
3	*2412.00	110.5 PK			1.45 V	27	112.5	-2.0
4	*2412.00	100.9 AV			1.45 V	27	102.9	-2.0
5	4824.00	46.8 PK	74.0	-27.2	1.02 V	155	44.6	2.2
6	4824.00	34.5 AV	54.0	-19.5	1.02 V	155	32.3	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.8 PK			1.14 H	102	108.7	-1.9
2	*2437.00	96.9 AV			1.14 H	102	98.8	-1.9
3	2483.50	50.5 PK	74.0	-23.5	1.14 H	102	52.2	-1.7
4	2483.50	42.6 AV	54.0	-11.4	1.14 H	102	44.3	-1.7
5	4874.00	43.9 PK	74.0	-30.1	1.48 H	47	41.6	2.3
6	4874.00	32.3 AV	54.0	-21.7	1.48 H	47	30.0	2.3
7	7311.00	48.1 PK	74.0	-25.9	1.54 H	293	39.7	8.4
8	7311.00	36.2 AV	54.0	-17.8	1.54 H	293	27.8	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.2 PK			2.05 V	27	118.1	-1.9
2	*2437.00	106.7 AV			2.05 V	27	108.6	-1.9
3	2483.50	70.9 PK	74.0	-3.1	2.05 V	27	72.6	-1.7
4	2483.50	52.7 AV	54.0	-1.3	2.05 V	27	54.4	-1.7
5	4874.00	47.5 PK	74.0	-26.5	1.27 V	142	45.2	2.3
6	4874.00	35.6 AV	54.0	-18.4	1.27 V	142	33.3	2.3
7	7311.00	48.3 PK	74.0	-25.7	1.53 V	323	39.9	8.4
8	7311.00	36.1 AV	54.0	-17.9	1.53 V	323	27.7	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.8 PK			1.08 H	95	102.6	-1.8
2	*2462.00	91.9 AV			1.08 H	95	93.7	-1.8
3	2483.50	50.5 PK	74.0	-23.5	1.08 H	95	52.2	-1.7
4	2483.50	42.1 AV	54.0	-11.9	1.08 H	95	43.8	-1.7
5	4924.00	43.5 PK	74.0	-30.5	1.44 H	57	41.1	2.4
6	4924.00	31.8 AV	54.0	-22.2	1.44 H	57	29.4	2.4
7	7386.00	48.0 PK	74.0	-26.0	1.56 H	290	39.5	8.5
8	7386.00	36.2 AV	54.0	-17.8	1.56 H	290	27.7	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.4 PK			2.12 V	20	112.2	-1.8
2	*2462.00	101.5 AV			2.12 V	20	103.3	-1.8
3	2483.50	71.7 PK	74.0	-2.3	2.12 V	20	73.4	-1.7
4	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>2.12 V</b>	<b>20</b>	<b>55.6</b>	<b>-1.7</b>
5	4924.00	45.6 PK	74.0	-28.4	1.33 V	147	43.2	2.4
6	4924.00	34.3 AV	54.0	-19.7	1.33 V	147	31.9	2.4
7	7386.00	48.8 PK	74.0	-25.2	1.56 V	312	40.3	8.5
8	7386.00	36.4 AV	54.0	-17.6	1.56 V	312	27.9	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.6 PK	74.0	-23.4	1.10 H	92	52.7	-2.1
2	2390.00	42.1 AV	54.0	-11.9	1.10 H	92	44.2	-2.1
3	*2422.00	95.1 PK			1.10 H	92	97.2	-2.1
4	*2422.00	86.8 AV			1.10 H	92	88.9	-2.1
5	4844.00	43.1 PK	74.0	-30.9	1.45 H	43	40.8	2.3
6	4844.00	30.5 AV	54.0	-23.5	1.45 H	43	28.2	2.3
7	7266.00	47.4 PK	74.0	-26.6	1.58 H	277	39.0	8.4
8	7266.00	36.5 AV	54.0	-17.5	1.58 H	277	28.1	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.00 V	26	72.8	-2.1
2	2390.00	53.8 AV	54.0	-0.2	1.00 V	26	55.9	-2.1
3	*2422.00	104.5 PK			1.00 V	26	106.6	-2.1
4	*2422.00	96.5 AV			1.00 V	26	98.6	-2.1
5	4844.00	48.0 PK	74.0	-26.0	1.32 V	138	45.7	2.3
6	4844.00	35.4 AV	54.0	-18.6	1.32 V	138	33.1	2.3
7	7266.00	48.1 PK	74.0	-25.9	1.57 V	321	39.7	8.4
8	7266.00	36.8 AV	54.0	-17.2	1.57 V	321	28.4	8.4

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.7 PK	74.0	-23.3	1.11 H	99	52.8	-2.1
2	2390.00	42.6 AV	54.0	-11.4	1.11 H	99	44.7	-2.1
3	*2437.00	104.5 PK			1.11 H	99	106.4	-1.9
4	*2437.00	92.3 AV			1.11 H	99	94.2	-1.9
5	2483.50	51.0 PK	74.0	-23.0	1.11 H	99	52.7	-1.7
6	2483.50	43.3 AV	54.0	-10.7	1.11 H	99	45.0	-1.7
7	4874.00	42.8 PK	74.0	-31.2	1.47 H	52	40.5	2.3
8	4874.00	31.6 AV	54.0	-22.4	1.47 H	52	29.3	2.3
9	7311.00	46.7 PK	74.0	-27.3	1.57 H	265	38.3	8.4
10	7311.00	36.3 AV	54.0	-17.7	1.57 H	265	27.9	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	1.36 V	311	70.1	-2.1
2	2390.00	52.8 AV	54.0	-1.2	1.36 V	311	54.9	-2.1
3	*2437.00	114.1 PK			1.36 V	311	116.0	-1.9
4	*2437.00	102.5 AV			1.36 V	311	104.4	-1.9
5	2483.50	66.9 PK	74.0	-7.1	1.36 V	311	68.6	-1.7
6	2483.50	53.8 AV	54.0	-0.2	1.36 V	311	55.5	-1.7
7	4874.00	49.8 PK	74.0	-24.2	1.35 V	131	47.5	2.3
8	4874.00	36.9 AV	54.0	-17.1	1.35 V	131	34.6	2.3
9	7311.00	48.2 PK	74.0	-25.8	1.64 V	322	39.8	8.4
10	7311.00	37.5 AV	54.0	-16.5	1.64 V	322	29.1	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.3 PK			1.08 H	80	97.1	-1.8
2	*2452.00	86.9 AV			1.08 H	80	88.7	-1.8
3	2483.50	50.6 PK	74.0	-23.4	1.08 H	80	52.3	-1.7
4	2483.50	42.2 AV	54.0	-11.8	1.08 H	80	43.9	-1.7
5	4904.00	43.0 PK	74.0	-31.0	1.47 H	61	40.6	2.4
6	4904.00	30.8 AV	54.0	-23.2	1.47 H	61	28.4	2.4
7	7356.00	47.2 PK	74.0	-26.8	1.51 H	300	38.7	8.5
8	7356.00	36.3 AV	54.0	-17.7	1.51 H	300	27.8	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.9 PK			1.00 V	30	106.7	-1.8
2	*2452.00	96.6 AV			1.00 V	30	98.4	-1.8
3	2483.50	71.3 PK	74.0	-2.7	1.00 V	30	73.0	-1.7
4	2483.50	51.0 AV	54.0	-3.0	1.00 V	30	52.7	-1.7
5	4904.00	48.3 PK	74.0	-25.7	1.34 V	127	45.9	2.4
6	4904.00	35.7 AV	54.0	-18.3	1.34 V	127	33.3	2.4
7	7356.00	47.9 PK	74.0	-26.1	1.59 V	310	39.4	8.5
8	7356.00	36.5 AV	54.0	-17.5	1.59 V	310	28.0	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

## 4.1.8 Test Results (Mode 2)

## Above 1GHz Data :

## 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2374.00	48.6 PK	74.0	-25.4	2.71 H	79	50.8	-2.2
2	2374.00	41.3 AV	54.0	-12.7	2.71 H	79	43.5	-2.2
3	2386.00	49.5 PK	74.0	-24.5	2.71 H	79	51.6	-2.1
4	2386.00	41.8 AV	54.0	-12.2	2.71 H	79	43.9	-2.1
5	*2412.00	112.2 PK			2.71 H	79	114.2	-2.0
6	*2412.00	108.4 AV			2.71 H	79	110.4	-2.0
7	4824.00	46.1 PK	74.0	-27.9	1.08 H	20	43.9	2.2
8	4824.00	40.8 AV	54.0	-13.2	1.08 H	20	38.6	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2374.00	59.6 PK	74.0	-14.4	1.00 V	130	61.8	-2.2
2	2374.00	52.5 AV	54.0	-1.5	1.00 V	130	54.7	-2.2
3	2386.00	60.6 PK	74.0	-13.4	1.00 V	130	62.7	-2.1
4	2386.00	53.0 AV	54.0	-1.0	1.00 V	130	55.1	-2.1
5	*2412.00	120.4 PK			1.00 V	130	122.4	-2.0
6	*2412.00	118.3 AV			1.00 V	130	120.3	-2.0
7	4824.00	48.3 PK	74.0	-25.7	1.00 V	118	46.1	2.2
8	4824.00	43.5 AV	54.0	-10.5	1.00 V	118	41.3	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.2 PK	74.0	-26.8	2.66 H	75	49.3	-2.1
2	2390.00	38.1 AV	54.0	-15.9	2.66 H	75	40.2	-2.1
3	*2437.00	114.4 PK			2.66 H	75	116.3	-1.9
4	*2437.00	110.6 AV			2.66 H	75	112.5	-1.9
5	2483.50	50.4 PK	74.0	-23.6	2.66 H	75	52.1	-1.7
6	2483.50	42.4 AV	54.0	-11.6	2.66 H	75	44.1	-1.7
7	4874.00	46.2 PK	74.0	-27.8	1.00 H	18	43.9	2.3
8	4874.00	40.9 AV	54.0	-13.1	1.00 H	18	38.6	2.3
9	7311.00	48.3 PK	74.0	-25.7	1.56 H	325	39.9	8.4
10	7311.00	35.3 AV	54.0	-18.7	1.56 H	325	26.9	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.00 V	131	61.0	-2.1
2	2390.00	49.8 AV	54.0	-4.2	1.00 V	131	51.9	-2.1
3	*2437.00	122.7 PK			1.00 V	131	124.6	-1.9
4	*2437.00	120.7 AV			1.00 V	131	122.6	-1.9
5	2483.50	61.8 PK	74.0	-12.2	1.00 V	131	63.5	-1.7
<b>6</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.00 V</b>	<b>131</b>	<b>55.6</b>	<b>-1.7</b>
7	4874.00	49.8 PK	74.0	-24.2	1.00 V	123	47.5	2.3
8	4874.00	46.3 AV	54.0	-7.7	1.00 V	123	44.0	2.3
9	7311.00	48.1 PK	74.0	-25.9	1.00 V	338	39.7	8.4
10	7311.00	36.4 AV	54.0	-17.6	1.00 V	338	28.0	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.1 PK			2.68 H	72	112.9	-1.8
2	*2462.00	107.3 AV			2.68 H	72	109.1	-1.8
3	2483.50	49.7 PK	74.0	-24.3	2.68 H	72	51.4	-1.7
4	2483.50	42.1 AV	54.0	-11.9	2.68 H	72	43.8	-1.7
5	4924.00	46.8 PK	74.0	-27.2	1.03 H	9	44.4	2.4
6	4924.00	40.4 AV	54.0	-13.6	1.03 H	9	38.0	2.4
7	7386.00	48.5 PK	74.0	-25.5	1.51 H	333	40.0	8.5
8	7386.00	34.7 AV	54.0	-19.3	1.51 H	333	26.2	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.2 PK			1.00 V	113	121.0	-1.8
2	*2462.00	117.1 AV			1.00 V	113	118.9	-1.8
3	2483.50	60.9 PK	74.0	-13.1	1.00 V	113	62.6	-1.7
4	2483.50	53.2 AV	54.0	-0.8	1.00 V	113	54.9	-1.7
5	4924.00	48.6 PK	74.0	-25.4	1.09 V	113	46.2	2.4
6	4924.00	43.8 AV	54.0	-10.2	1.09 V	113	41.4	2.4
7	7386.00	47.6 PK	74.0	-26.4	1.05 V	345	39.1	8.5
8	7386.00	36.2 AV	54.0	-17.8	1.05 V	345	27.7	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

## 802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.7 PK	74.0	-24.3	2.63 H	68	51.8	-2.1
2	2390.00	42.1 AV	54.0	-11.9	2.63 H	68	44.2	-2.1
3	*2412.00	111.7 PK			2.63 H	68	113.7	-2.0
4	*2412.00	100.7 AV			2.63 H	68	102.7	-2.0
5	4824.00	42.9 PK	74.0	-31.1	1.01 H	19	40.7	2.2
6	4824.00	31.9 AV	54.0	-22.1	1.01 H	19	29.7	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.00 V	132	71.5	-2.1
2	<b>2390.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.00 V</b>	<b>132</b>	<b>56.0</b>	<b>-2.1</b>
3	*2412.00	118.9 PK			1.00 V	132	120.9	-2.0
4	*2412.00	109.3 AV			1.00 V	132	111.3	-2.0
5	4824.00	46.8 PK	74.0	-27.2	1.00 V	139	44.6	2.2
6	4824.00	34.8 AV	54.0	-19.2	1.00 V	139	32.6	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.0 PK			2.67 H	78	113.9	-1.9
2	*2437.00	100.9 AV			2.67 H	78	102.8	-1.9
3	2483.50	50.2 PK	74.0	-23.8	2.67 H	78	51.9	-1.7
4	2483.50	42.1 AV	54.0	-11.9	2.67 H	78	43.8	-1.7
5	4817.00	46.7 PK	74.0	-27.3	2.67 H	78	44.5	2.2
6	4817.00	37.8 AV	54.0	-16.2	2.67 H	78	35.6	2.2
7	4874.00	43.1 PK	74.0	-30.9	1.00 H	17	40.8	2.3
8	4874.00	32.0 AV	54.0	-22.0	1.00 H	17	29.7	2.3
9	7311.00	47.0 PK	74.0	-27.0	2.06 H	26	38.6	8.4
10	7311.00	36.4 AV	54.0	-17.6	2.06 H	26	28.0	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	125.3 PK			1.00 V	122	127.2	-1.9
2	*2437.00	115.4 AV			1.00 V	122	117.3	-1.9
3	2483.50	69.9 PK	74.0	-4.1	1.00 V	122	71.6	-1.7
4	2483.50	52.2 AV	54.0	-1.8	1.00 V	122	53.9	-1.7
5	4817.00	63.7 PK	74.0	-10.3	1.00 V	122	61.5	2.2
6	4817.00	48.6 AV	54.0	-5.4	1.00 V	122	46.4	2.2
7	4874.00	47.6 PK	74.0	-26.4	1.00 V	138	45.3	2.3
8	4874.00	35.5 AV	54.0	-18.5	1.00 V	138	33.2	2.3
9	7311.00	47.2 PK	74.0	-26.8	1.59 V	182	38.8	8.4
10	7311.00	36.7 AV	54.0	-17.3	1.59 V	182	28.3	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.7 PK			2.72 H	78	113.5	-1.8
2	*2462.00	100.7 AV			2.72 H	78	102.5	-1.8
3	2483.50	49.5 PK	74.0	-24.5	2.72 H	78	51.2	-1.7
4	2483.50	42.0 AV	54.0	-12.0	2.72 H	78	43.7	-1.7
5	4924.00	42.1 PK	74.0	-31.9	1.00 H	3	39.7	2.4
6	4924.00	31.5 AV	54.0	-22.5	1.00 H	3	29.1	2.4
7	7386.00	46.6 PK	74.0	-27.4	2.05 H	31	38.1	8.5
8	7386.00	36.0 AV	54.0	-18.0	2.05 H	31	27.5	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.4 PK			1.00 V	130	120.2	-1.8
2	*2462.00	109.2 AV			1.00 V	130	111.0	-1.8
3	2483.50	73.6 PK	74.0	-0.4	1.00 V	130	75.3	-1.7
4	2483.50	52.6 AV	54.0	-1.4	1.00 V	130	54.3	-1.7
5	4924.00	46.5 PK	74.0	-27.5	1.00 V	151	44.1	2.4
6	4924.00	34.2 AV	54.0	-19.8	1.00 V	151	31.8	2.4
7	7386.00	46.7 PK	74.0	-27.3	1.58 V	177	38.2	8.5
8	7386.00	36.4 AV	54.0	-17.6	1.58 V	177	27.9	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.8 PK	74.0	-23.2	2.73 H	68	52.9	-2.1
2	2390.00	42.5 AV	54.0	-11.5	2.73 H	68	44.6	-2.1
3	*2412.00	103.7 PK			2.73 H	68	105.7	-2.0
4	*2412.00	92.2 AV			2.73 H	68	94.2	-2.0
5	4824.00	42.3 PK	74.0	-31.7	1.01 H	44	40.1	2.2
6	4824.00	30.4 AV	54.0	-23.6	1.01 H	44	28.2	2.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.0 PK	74.0	-5.0	1.00 V	128	71.1	-2.1
2	2390.00	53.6 AV	54.0	-0.4	1.00 V	128	55.7	-2.1
3	*2412.00	110.8 PK			1.00 V	128	112.8	-2.0
4	*2412.00	100.5 AV			1.00 V	128	102.5	-2.0
5	4824.00	47.1 PK	74.0	-26.9	1.07 V	163	44.9	2.2
6	4824.00	34.8 AV	54.0	-19.2	1.07 V	163	32.6	2.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.0 PK			2.65 H	56	110.9	-1.9
2	*2437.00	97.8 AV			2.65 H	56	99.7	-1.9
3	2483.50	50.2 PK	74.0	-23.8	2.65 H	56	51.9	-1.7
4	2483.50	42.3 AV	54.0	-11.7	2.65 H	56	44.0	-1.7
5	4874.00	43.1 PK	74.0	-30.9	1.00 H	28	40.8	2.3
6	4874.00	31.8 AV	54.0	-22.2	1.00 H	28	29.5	2.3
7	7311.00	47.7 PK	74.0	-26.3	2.10 H	40	39.3	8.4
8	7311.00	36.8 AV	54.0	-17.2	2.10 H	40	28.4	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.0 PK			1.00 V	133	117.9	-1.9
2	*2437.00	106.1 AV			1.00 V	133	108.0	-1.9
3	2483.50	70.7 PK	74.0	-3.3	1.00 V	133	72.4	-1.7
4	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.00 V</b>	<b>133</b>	<b>55.6</b>	<b>-1.7</b>
5	4874.00	47.2 PK	74.0	-26.8	1.01 V	152	44.9	2.3
6	4874.00	35.1 AV	54.0	-18.9	1.01 V	152	32.8	2.3
7	7311.00	47.2 PK	74.0	-26.8	1.61 V	192	38.8	8.4
8	7311.00	37.0 AV	54.0	-17.0	1.61 V	192	28.6	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.8 PK			2.79 H	77	104.6	-1.8
2	*2462.00	92.0 AV			2.79 H	77	93.8	-1.8
3	2483.50	50.3 PK	74.0	-23.7	2.79 H	77	52.0	-1.7
4	2483.50	41.9 AV	54.0	-12.1	2.79 H	77	43.6	-1.7
5	4924.00	42.8 PK	74.0	-31.2	1.06 H	28	40.4	2.4
6	4924.00	30.9 AV	54.0	-23.1	1.06 H	28	28.5	2.4
7	7386.00	47.3 PK	74.0	-26.7	2.05 H	14	38.8	8.5
8	7386.00	36.9 AV	54.0	-17.1	2.05 H	14	28.4	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.8 PK			1.00 V	131	111.6	-1.8
2	*2462.00	100.1 AV			1.00 V	131	101.9	-1.8
3	2483.50	71.2 PK	74.0	-2.8	1.00 V	131	72.9	-1.7
4	2483.50	53.7 AV	54.0	-0.3	1.00 V	131	55.4	-1.7
5	4924.00	48.3 PK	74.0	-25.7	1.00 V	150	45.9	2.4
6	4924.00	36.0 AV	54.0	-18.0	1.00 V	150	33.6	2.4
7	7386.00	47.1 PK	74.0	-26.9	1.55 V	188	38.6	8.5
8	7386.00	36.6 AV	54.0	-17.4	1.55 V	188	28.1	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.0 PK	74.0	-24.0	2.79 H	75	52.1	-2.1
2	2390.00	41.5 AV	54.0	-12.5	2.79 H	75	43.6	-2.1
3	*2422.00	98.8 PK			2.79 H	75	100.9	-2.1
4	*2422.00	89.4 AV			2.79 H	75	91.5	-2.1
5	4844.00	42.8 PK	74.0	-31.2	1.03 H	30	40.5	2.3
6	4844.00	30.4 AV	54.0	-23.6	1.03 H	30	28.1	2.3
7	7266.00	47.3 PK	74.0	-26.7	2.01 H	22	38.9	8.4
8	7266.00	36.6 AV	54.0	-17.4	2.01 H	22	28.2	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	1.00 V	193	71.4	-2.1
2	2390.00	53.7 AV	54.0	-0.3	1.00 V	193	55.8	-2.1
3	*2422.00	105.1 PK			1.00 V	193	107.2	-2.1
4	*2422.00	96.9 AV			1.00 V	193	99.0	-2.1
5	4844.00	47.4 PK	74.0	-26.6	1.00 V	132	45.1	2.3
6	4844.00	35.1 AV	54.0	-18.9	1.00 V	132	32.8	2.3
7	7266.00	46.9 PK	74.0	-27.1	1.60 V	177	38.5	8.4
8	7266.00	36.6 AV	54.0	-17.4	1.60 V	177	28.2	8.4

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.0 PK			2.85 H	74	102.9	-1.9
2	*2437.00	91.4 AV			2.85 H	74	93.3	-1.9
3	2483.50	50.5 PK	74.0	-23.5	2.85 H	74	52.2	-1.7
4	2483.50	42.8 AV	54.0	-11.2	2.85 H	74	44.5	-1.7
5	4874.00	42.8 PK	74.0	-31.2	1.05 H	3	40.5	2.3
6	4874.00	31.7 AV	54.0	-22.3	1.05 H	3	29.4	2.3
7	7311.00	46.5 PK	74.0	-27.5	2.03 H	37	38.1	8.4
8	7311.00	36.1 AV	54.0	-17.9	2.03 H	37	27.7	8.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.6 PK			1.00 V	192	109.5	-1.9
2	*2437.00	99.2 AV			1.00 V	192	101.1	-1.9
3	2483.50	68.7 PK	74.0	-5.3	1.00 V	192	70.4	-1.7
4	2483.50	53.7 AV	54.0	-0.3	1.00 V	192	55.4	-1.7
5	4874.00	47.6 PK	74.0	-26.4	1.00 V	154	45.3	2.3
6	4874.00	35.8 AV	54.0	-18.2	1.00 V	154	33.5	2.3
7	7311.00	46.8 PK	74.0	-27.2	1.53 V	191	38.4	8.4
8	7311.00	36.5 AV	54.0	-17.5	1.53 V	191	28.1	8.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.8 PK			2.81 H	84	101.6	-1.8
2	*2452.00	89.9 AV			2.81 H	84	91.7	-1.8
3	2483.50	50.1 PK	74.0	-23.9	2.81 H	84	51.8	-1.7
4	2483.50	42.1 AV	54.0	-11.9	2.81 H	84	43.8	-1.7
5	4904.00	43.4 PK	74.0	-30.6	1.00 H	13	41.0	2.4
6	4904.00	30.9 AV	54.0	-23.1	1.00 H	13	28.5	2.4
7	7356.00	46.6 PK	74.0	-27.4	2.00 H	37	38.1	8.5
8	7356.00	35.9 AV	54.0	-18.1	2.00 H	37	27.4	8.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.3 PK			1.00 V	192	107.1	-1.8
2	*2452.00	97.0 AV			1.00 V	192	98.8	-1.8
3	2483.50	72.5 PK	74.0	-1.5	1.00 V	192	74.2	-1.7
4	2483.50	53.5 AV	54.0	-0.5	1.00 V	192	55.2	-1.7
5	4904.00	47.6 PK	74.0	-26.4	1.03 V	123	45.2	2.4
6	4904.00	35.4 AV	54.0	-18.6	1.03 V	123	33.0	2.4
7	7356.00	47.7 PK	74.0	-26.3	1.65 V	183	39.2	8.5
8	7356.00	37.1 AV	54.0	-16.9	1.65 V	183	28.6	8.5

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**Below 1GHz Data:**

**802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	82.09	28.4 QP	40.0	-11.6	2.00 H	95	42.4	-14.0
2	108.81	32.3 QP	43.5	-11.2	3.00 H	117	43.8	-11.5
3	147.47	33.0 QP	43.5	-10.5	2.00 H	282	41.5	-8.5
4	250.02	27.8 QP	46.0	-18.2	1.00 H	54	37.8	-10.0
5	500.04	31.9 QP	46.0	-14.1	1.00 H	329	34.6	-2.7
6	750.01	32.1 QP	46.0	-13.9	2.00 H	262	30.2	1.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.83	31.9 QP	40.0	-8.1	1.00 V	138	40.7	-8.8
2	97.80	29.4 QP	43.5	-14.1	1.00 V	259	42.7	-13.3
3	106.78	34.1 QP	43.5	-9.4	1.00 V	167	45.9	-11.8
4	147.44	31.3 QP	43.5	-12.2	2.00 V	360	39.8	-8.5
5	500.01	33.5 QP	46.0	-12.5	2.00 V	360	36.2	-2.7
6	750.03	30.3 QP	46.0	-15.7	2.00 V	216	28.4	1.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
RF Cable	5D-FB	COCCAB-001	Sep. 30, 2016	Sep. 29, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 20, 2016	June 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

#### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Mar. 20, 2017

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

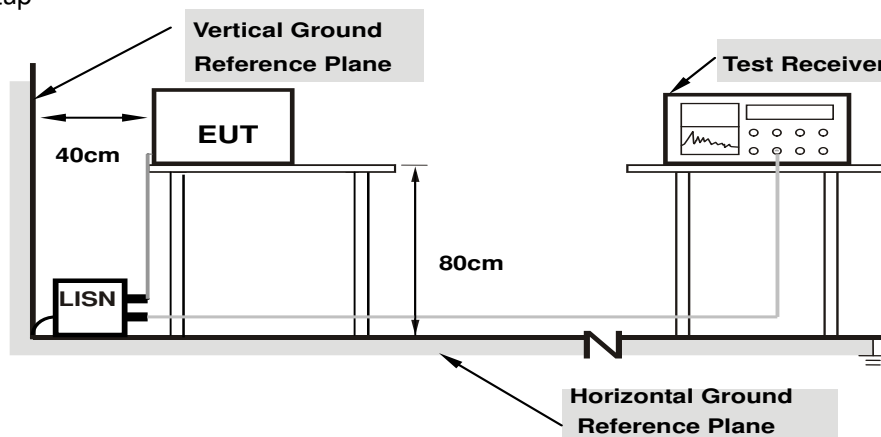

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.20	32.87	21.85	43.07	32.05	65.58	55.58	-22.51	-23.53
2	0.25547	10.21	23.42	8.14	33.63	18.35	61.58	51.58	-27.95	-33.23
3	0.33750	10.23	29.70	19.78	39.93	30.01	59.26	49.26	-19.33	-19.25
<b>4</b>	<b>0.41953</b>	<b>10.24</b>	<b>34.17</b>	<b>27.38</b>	<b>44.41</b>	<b>37.62</b>	<b>57.46</b>	<b>47.46</b>	<b>-13.05</b>	<b>-9.84</b>
5	3.91406	10.31	21.36	15.48	31.67	25.79	56.00	46.00	-24.33	-20.21
6	7.82813	10.58	22.04	16.37	32.62	26.95	60.00	50.00	-27.38	-23.05

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

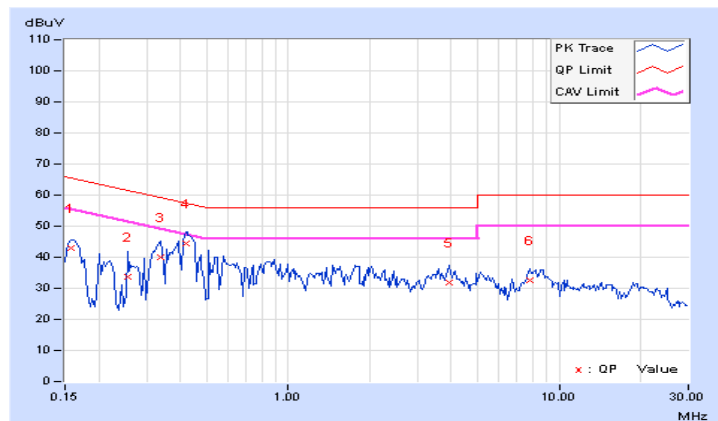


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.19	33.29	21.42	43.48	31.61	65.58	55.58	-22.10	-23.97
2	0.26328	10.19	24.43	14.34	34.62	24.53	61.33	51.33	-26.71	-26.80
3	0.39219	10.24	25.58	16.13	35.82	26.37	58.02	48.02	-22.20	-21.65
4	0.41563	10.24	28.96	21.06	39.20	31.30	57.54	47.54	-18.34	-16.24
5	4.11719	10.23	20.29	12.01	30.52	22.24	56.00	46.00	-25.48	-23.76
6	9.35156	10.59	15.76	9.89	26.35	20.48	60.00	50.00	-33.65	-29.52

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

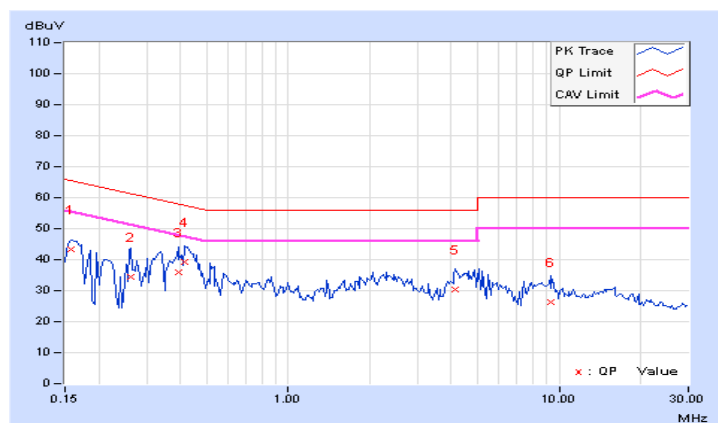


#### 4.2.8 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.20	42.31	29.30	52.51	39.50	65.38	55.38	-12.87	-15.88
2	0.19687	10.20	32.13	8.88	42.33	19.08	63.74	53.74	-21.41	-34.66
3	0.41172	10.24	28.48	19.64	38.72	29.88	57.61	47.61	-18.89	-17.73
4	0.50547	10.25	24.79	16.79	35.04	27.04	56.00	46.00	-20.96	-18.96
5	7.18359	10.53	29.80	23.90	40.33	34.43	60.00	50.00	-19.67	-15.57
6	12.92969	11.06	27.61	21.85	38.67	32.91	60.00	50.00	-21.33	-17.09

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

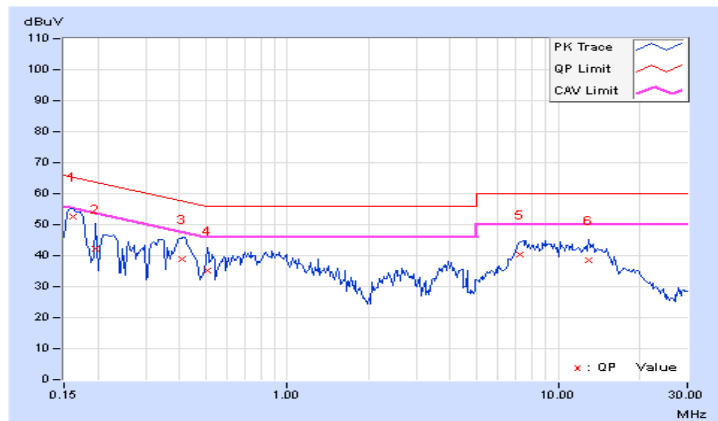


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.19	42.85	29.12	53.04	39.31	65.38	55.38	-12.34	-16.07
2	0.19297	10.17	33.18	8.86	43.35	19.03	63.91	53.91	-20.56	-34.88
3	0.26719	10.19	28.83	16.02	39.02	26.21	61.20	51.20	-22.18	-24.99
4	0.39609	10.24	33.58	26.94	43.82	37.18	57.93	47.93	-14.11	-10.75
5	0.87656	10.26	24.66	16.80	34.92	27.06	56.00	46.00	-21.08	-18.94
6	7.20703	10.44	30.80	24.76	41.24	35.20	60.00	50.00	-18.76	-14.80

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

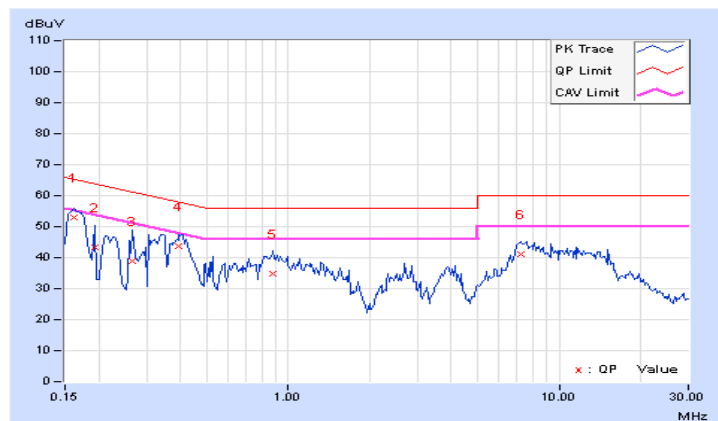


## 4.2.9 Test Results (Mode 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.20	29.85	20.33	40.05	30.53	65.79	55.79	-25.74	-25.26
2	0.19297	10.20	27.79	18.52	37.99	28.72	63.91	53.91	-25.92	-25.19
3	0.34141	10.23	24.43	21.52	34.66	31.75	59.17	49.17	-24.51	-17.42
4	3.41406	10.30	21.71	11.31	32.01	21.61	56.00	46.00	-23.99	-24.39
5	3.77734	10.31	17.39	6.14	27.70	16.45	56.00	46.00	-28.30	-29.55
6	13.64453	11.15	17.04	11.70	28.19	22.85	60.00	50.00	-31.81	-27.15

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

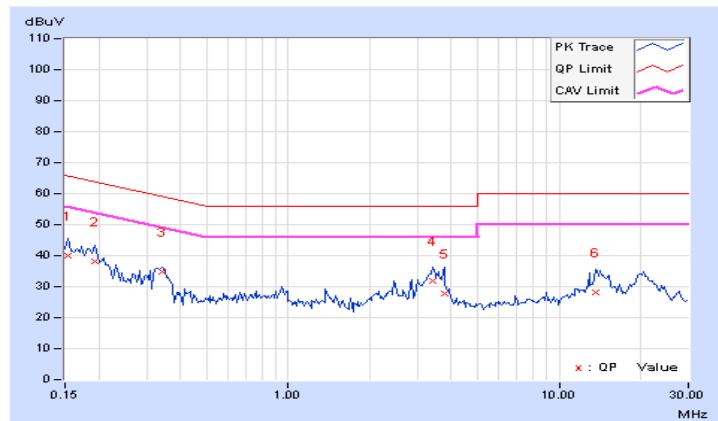


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	10.18	28.89	19.60	39.07	29.78	64.79	54.79	-25.72	-25.01
2	0.33750	10.22	22.82	15.42	33.04	25.64	59.26	49.26	-26.22	-23.62
3	2.69922	10.28	16.37	7.13	26.65	17.41	56.00	46.00	-29.35	-28.59
4	3.33984	10.25	21.28	12.21	31.53	22.46	56.00	46.00	-24.47	-23.54
5	13.93359	10.99	19.12	13.63	30.11	24.62	60.00	50.00	-29.89	-25.38
6	20.38672	11.38	17.63	10.26	29.01	21.64	60.00	50.00	-30.99	-28.36

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

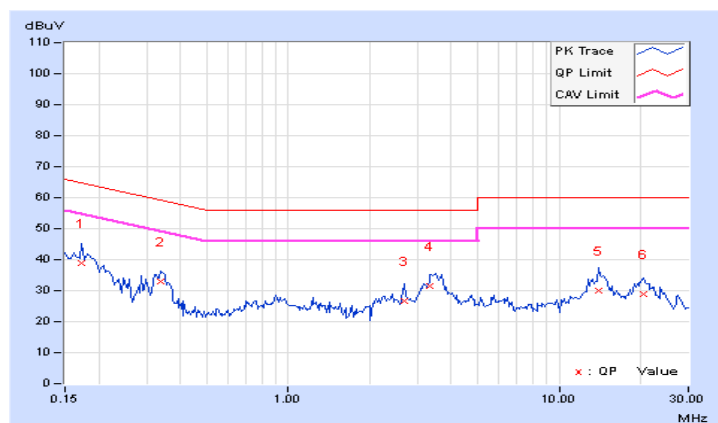




### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	9.08	8.12	8.60	8.62	0.5	PASS
6	2437	9.11	9.10	9.57	10.09	0.5	PASS
11	2462	8.13	8.59	9.05	9.11	0.5	PASS

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.40	16.41	16.40	16.40	0.5	PASS
6	2437	16.42	16.41	16.42	16.43	0.5	PASS
11	2462	16.35	16.38	16.40	16.40	0.5	PASS

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	17.62	17.62	17.62	17.64	0.5	PASS
6	2437	17.67	17.61	17.64	17.65	0.5	PASS
11	2462	17.63	17.64	17.64	17.66	0.5	PASS

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	35.86	35.87	35.80	35.63	0.5	Pass
6	2437	36.16	35.49	35.60	35.81	0.5	Pass
9	2452	34.89	35.87	35.14	36.10	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b / Chain 1 : CH1

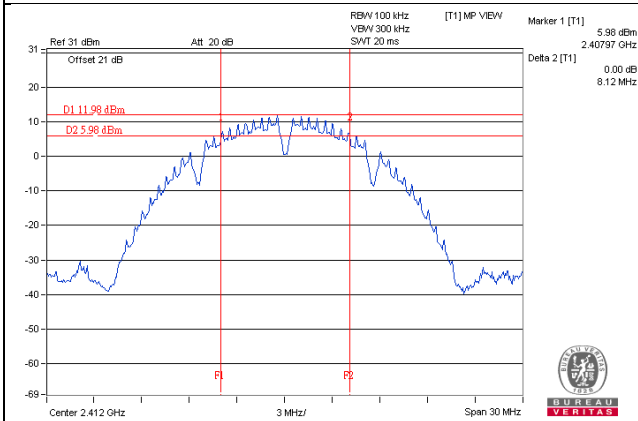


#### 802.11g / Chain 0 : CH11

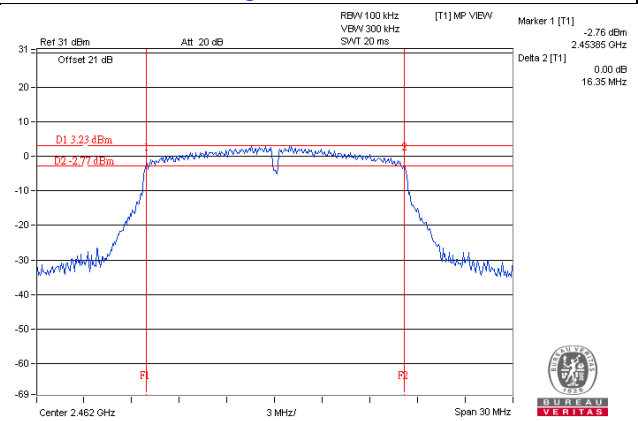

#### 802.11n (HT20) / Chain 1 : CH6

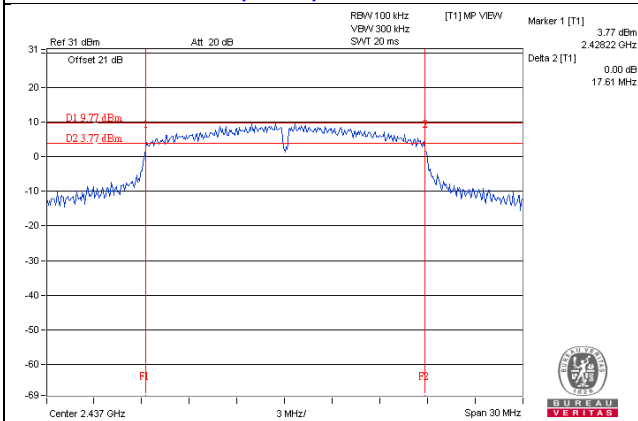

#### 802.11n (HT40) / Chain 0 : CH9

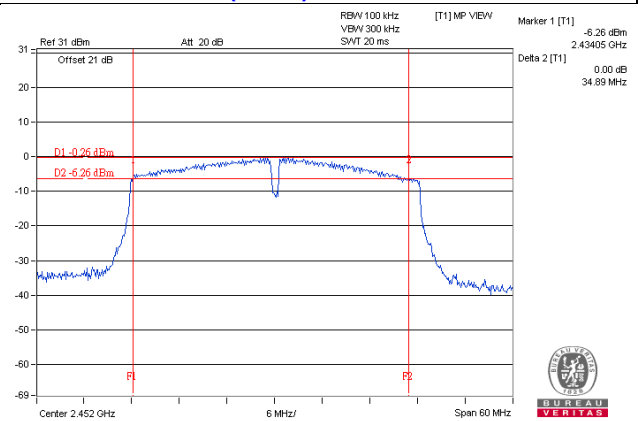

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results (Mode 1)

##### 802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.02	20.98	20.60	21.30	501.499	27.00	30	Pass
6	2437	23.18	23.05	22.81	22.74	788.724	28.97	30	Pass
11	2462	20.34	20.03	20.01	20.96	433.805	26.37	30	Pass

##### 802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	15.21	15.31	14.55	15.79	133.593	21.26	30	Pass
6	2437	22.70	22.07	22.26	21.97	672.939	28.28	30	Pass
11	2462	15.85	15.61	15.55	17.12	162.266	22.10	30	Pass

##### 802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.81	16.79	16.22	17.35	191.93	22.83	30	Pass
6	2437	22.65	22.04	22.13	21.89	661.863	28.21	30	Pass
11	2462	18.43	18.12	18.14	19.19	282.674	24.51	30	Pass

##### 802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.26	15.27	14.43	15.85	133.417	21.25	30	Pass
6	2437	17.13	16.37	16.85	16.37	186.761	22.71	30	Pass
9	2452	15.83	15.49	15.00	16.45	149.462	21.75	30	Pass

#### 4.4.8 Test Results (Mode 2)

##### 802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.02	20.98	20.60	21.30	501.499	27.00	30	Pass
6	2437	23.18	23.05	22.81	22.74	788.724	28.97	30	Pass
11	2462	20.34	20.03	20.01	20.96	433.805	26.37	30	Pass

##### 802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	15.21	15.31	14.55	15.79	133.593	21.26	30	Pass
6	2437	22.70	22.07	22.26	21.97	672.939	28.28	30	Pass
11	2462	15.08	15.02	14.30	15.40	125.569	20.99	30	Pass

##### 802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.81	16.79	16.22	17.35	191.93	22.83	30	Pass
6	2437	22.65	22.04	22.13	21.89	661.863	28.21	30	Pass
11	2462	16.38	16.08	15.62	16.52	165.352	22.18	30	Pass

##### 802.11n (HT40)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	14.57	14.30	13.89	14.98	111.525	20.47	30	Pass
6	2437	16.69	16.75	16.05	17.51	190.617	22.80	30	Pass
9	2452	15.83	15.49	15.00	16.45	149.462	21.75	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results (Mode 1)

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-9.79	6.02	-3.77	6.61	Pass
	6	2437	-8.40	6.02	-2.38	6.61	Pass
	11	2462	-10.83	6.02	-4.81	6.61	Pass
1	1	2412	-10.82	6.02	-4.80	6.61	Pass
	6	2437	-7.99	6.02	-1.97	6.61	Pass
	11	2462	-11.02	6.02	-5.00	6.61	Pass
2	1	2412	-9.62	6.02	-3.60	6.61	Pass
	6	2437	-7.99	6.02	-1.97	6.61	Pass
	11	2462	-9.74	6.02	-3.72	6.61	Pass
3	1	2412	-9.66	6.02	-3.64	6.61	Pass
	6	2437	-8.34	6.02	-2.32	6.61	Pass
	11	2462	-9.88	6.02	-3.86	6.61	Pass

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-16.66	6.02	-10.64	6.61	Pass
	6	2437	-8.93	6.02	-2.91	6.61	Pass
	11	2462	-15.61	6.02	-9.59	6.61	Pass
1	1	2412	-16.79	6.02	-10.77	6.61	Pass
	6	2437	-9.77	6.02	-3.75	6.61	Pass
	11	2462	-15.25	6.02	-9.23	6.61	Pass
2	1	2412	-16.42	6.02	-10.40	6.61	Pass
	6	2437	-10.90	6.02	-4.88	6.61	Pass
	11	2462	-16.02	6.02	-10.00	6.61	Pass
3	1	2412	-15.62	6.02	-9.60	6.61	Pass
	6	2437	-10.22	6.02	-4.20	6.61	Pass
	11	2462	-14.88	6.02	-8.86	6.61	Pass

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.



### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.15	6.02	-9.13	6.61	Pass
	6	2437	-10.01	6.02	-3.99	6.61	Pass
	11	2462	-13.44	6.02	-7.42	6.61	Pass
1	1	2412	-16.16	6.02	-10.14	6.61	Pass
	6	2437	-9.84	6.02	-3.82	6.61	Pass
	11	2462	-13.18	6.02	-7.16	6.61	Pass
2	1	2412	-14.78	6.02	-8.76	6.61	Pass
	6	2437	-9.83	6.02	-3.81	6.61	Pass
	11	2462	-13.80	6.02	-7.78	6.61	Pass
3	1	2412	-14.39	6.02	-8.37	6.61	Pass
	6	2437	-11.39	6.02	-5.37	6.61	Pass
	11	2462	-13.03	6.02	-7.01	6.61	Pass

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.

### 802.11n (HT40)



TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2412	-19.06	6.02	-13.04	6.61	Pass
	6	2437	-16.68	6.02	-10.66	6.61	Pass
	9	2462	-18.78	6.02	-12.76	6.61	Pass
1	3	2412	-20.05	6.02	-14.03	6.61	Pass
	6	2437	-16.67	6.02	-10.65	6.61	Pass
	9	2462	-19.48	6.02	-13.46	6.61	Pass
2	3	2412	-19.75	6.02	-13.73	6.61	Pass
	6	2437	-17.27	6.02	-11.25	6.61	Pass
	9	2462	-19.19	6.02	-13.17	6.61	Pass
3	3	2412	-18.80	6.02	-12.78	6.61	Pass
	6	2437	-18.72	6.02	-12.70	6.61	Pass
	9	2462	-18.66	6.02	-12.64	6.61	Pass

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.

### Spectrum Plot of Worst Value



**802.11b / Chain 1 : CH6**

**802.11g / Chain 0 : CH6**

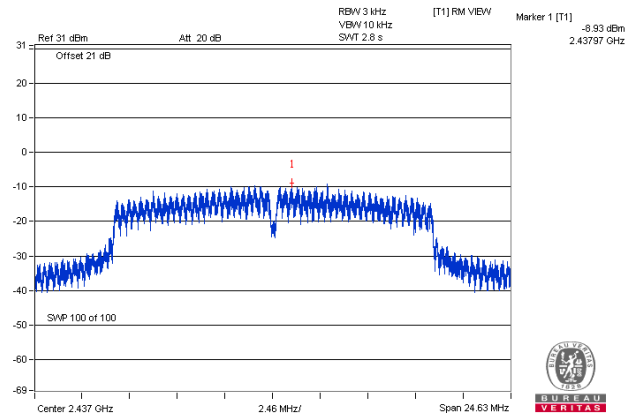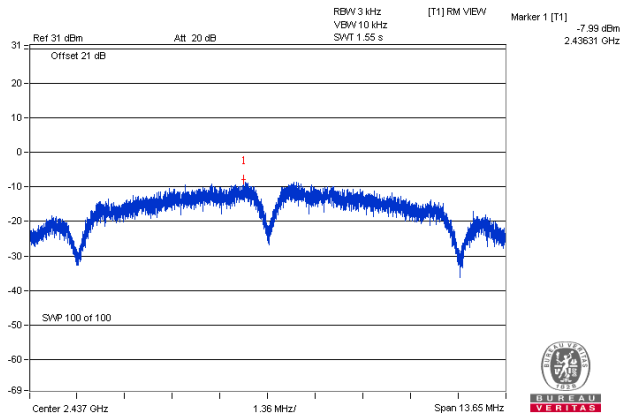

**802.11n (HT20) / Chain 2 : CH6**

**802.11n (HT40) / Chain 1 : CH6**

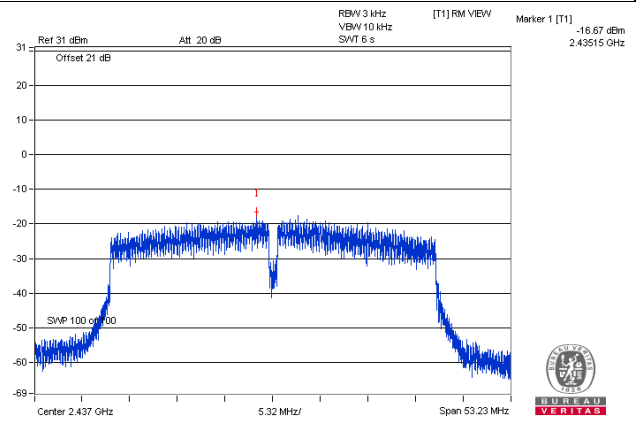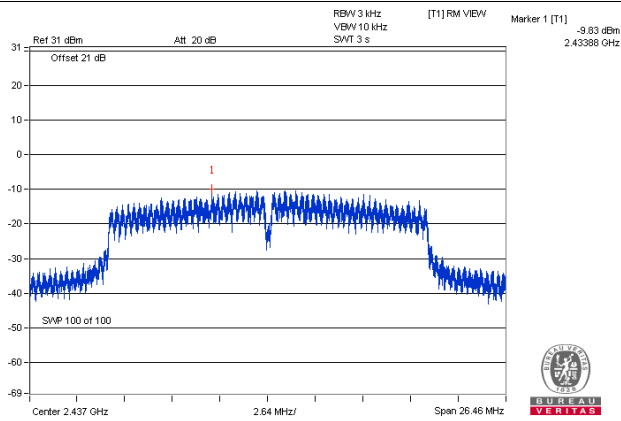

#### 4.5.8 Test Results (Mode 2)

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-9.79	6.02	-3.77	3.94	Pass
	6	2437	-8.40	6.02	-2.38	3.94	Pass
	11	2462	-10.83	6.02	-4.81	3.94	Pass
1	1	2412	-10.82	6.02	-4.80	3.94	Pass
	6	2437	-7.99	6.02	-1.97	3.94	Pass
	11	2462	-11.02	6.02	-5.00	3.94	Pass
2	1	2412	-9.62	6.02	-3.60	3.94	Pass
	6	2437	-7.99	6.02	-1.97	3.94	Pass
	11	2462	-9.74	6.02	-3.72	3.94	Pass
3	1	2412	-9.66	6.02	-3.64	3.94	Pass
	6	2437	-8.34	6.02	-2.32	3.94	Pass
	11	2462	-9.88	6.02	-3.86	3.94	Pass

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-16.66	6.02	-10.64	3.94	Pass
	6	2437	-8.93	6.02	-2.91	3.94	Pass
	11	2462	-16.89	6.02	-10.87	3.94	Pass
1	1	2412	-16.79	6.02	-10.77	3.94	Pass
	6	2437	-9.77	6.02	-3.75	3.94	Pass
	11	2462	-17.60	6.02	-11.58	3.94	Pass
2	1	2412	-16.42	6.02	-10.40	3.94	Pass
	6	2437	-10.90	6.02	-4.88	3.94	Pass
	11	2462	-18.17	6.02	-12.15	3.94	Pass
3	1	2412	-15.62	6.02	-9.60	3.94	Pass
	6	2437	-10.22	6.02	-4.20	3.94	Pass
	11	2462	-17.22	6.02	-11.20	3.94	Pass

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.15	6.02	-9.13	3.94	Pass
	6	2437	-10.01	6.02	-3.99	3.94	Pass
	11	2462	-15.96	6.02	-9.94	3.94	Pass
1	1	2412	-16.16	6.02	-10.14	3.94	Pass
	6	2437	-9.84	6.02	-3.82	3.94	Pass
	11	2462	-16.03	6.02	-10.01	3.94	Pass
2	1	2412	-14.78	6.02	-8.76	3.94	Pass
	6	2437	-9.83	6.02	-3.81	3.94	Pass
	11	2462	-16.48	6.02	-10.46	3.94	Pass
3	1	2412	-14.39	6.02	-8.37	3.94	Pass
	6	2437	-11.39	6.02	-5.37	3.94	Pass
	11	2462	-15.98	6.02	-9.96	3.94	Pass

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.


### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2412	-20.33	6.02	-14.31	3.94	Pass
	6	2437	-17.63	6.02	-11.61	3.94	Pass
	9	2462	-18.78	6.02	-12.76	3.94	Pass
1	3	2412	-20.18	6.02	-14.16	3.94	Pass
	6	2437	-18.35	6.02	-12.33	3.94	Pass
	9	2462	-19.48	6.02	-13.46	3.94	Pass
2	3	2412	-21.21	6.02	-15.19	3.94	Pass
	6	2437	-17.35	6.02	-11.33	3.94	Pass
	9	2462	-19.19	6.02	-13.17	3.94	Pass
3	3	2412	-19.49	6.02	-13.47	3.94	Pass
	6	2437	-18.04	6.02	-12.02	3.94	Pass
	9	2462	-18.66	6.02	-12.64	3.94	Pass


**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.

### Spectrum Plot of Worst Value


**802.11b / Chain 1 : CH6**

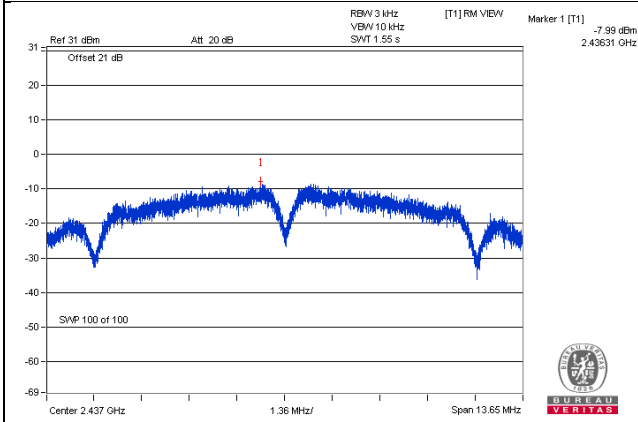


**802.11g / Chain 0 : CH6**

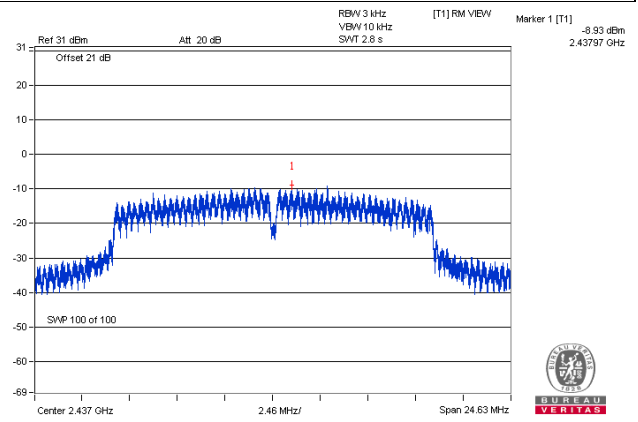

**802.11n (HT20) / Chain 2 : CH6**

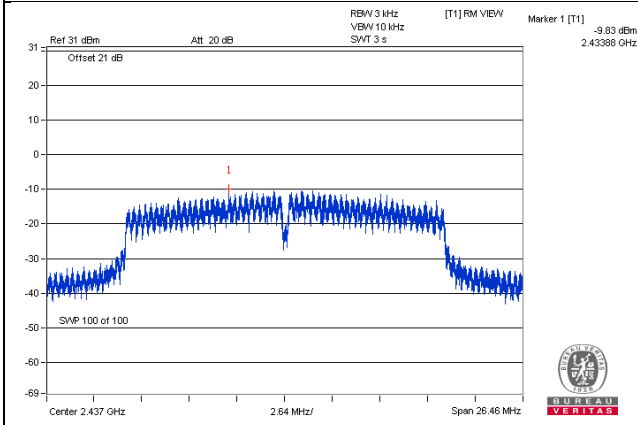

**802.11n (HT40) / Chain 2 : CH6**

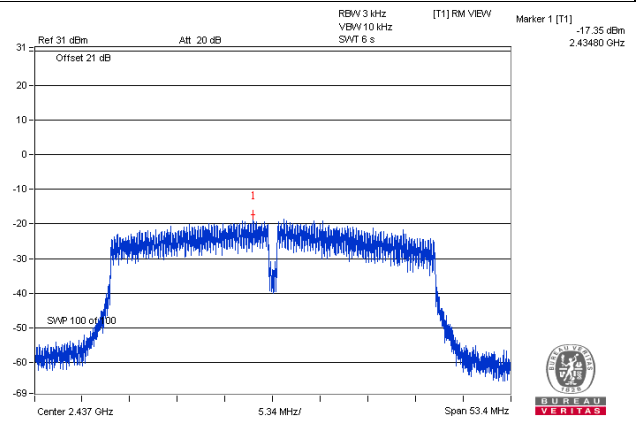


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

Same as Item 4.3.6

### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

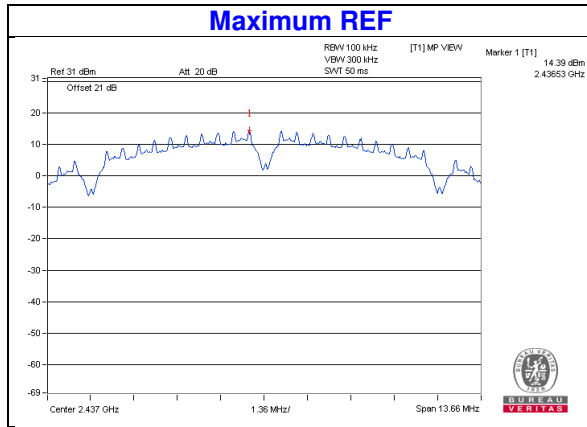


Chain 0



## CH 1      CH 6

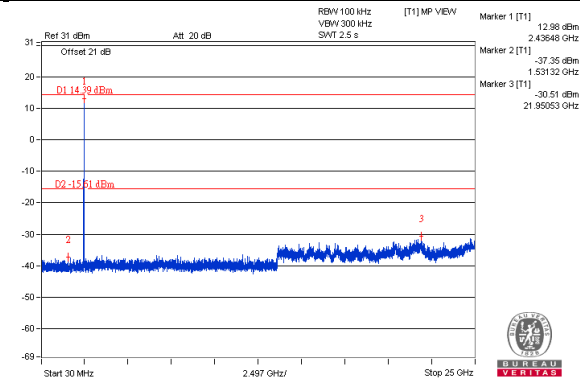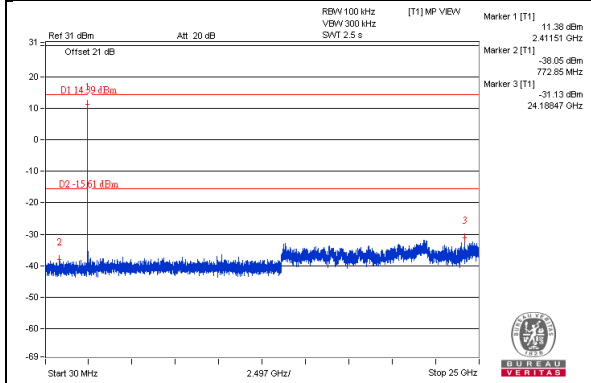




## CH 11

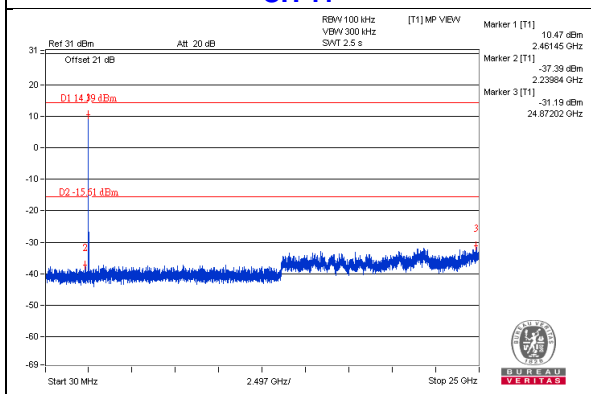

## CH 11 Band edge

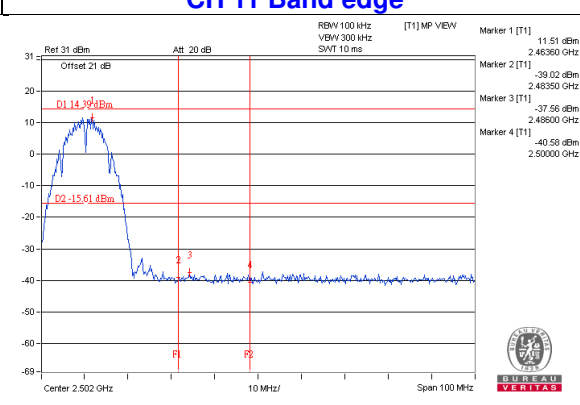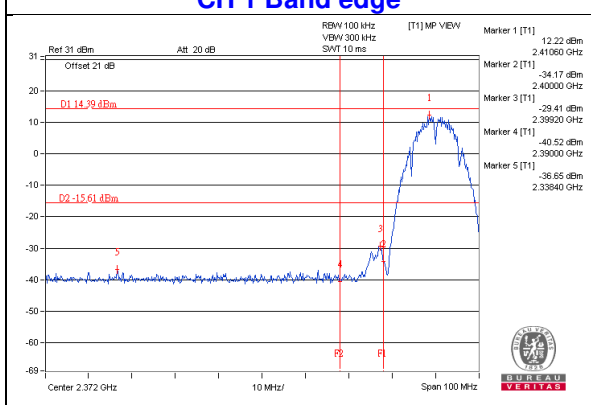


### Chain 1

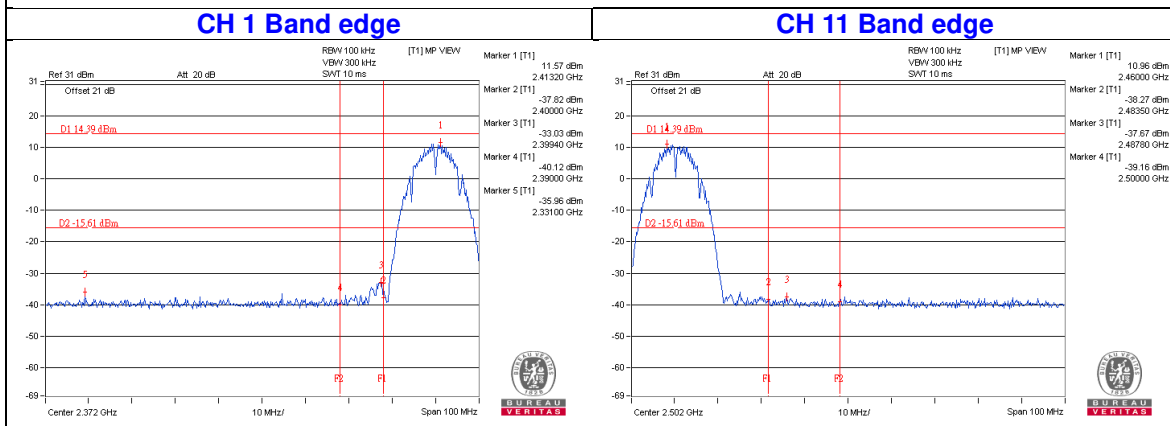
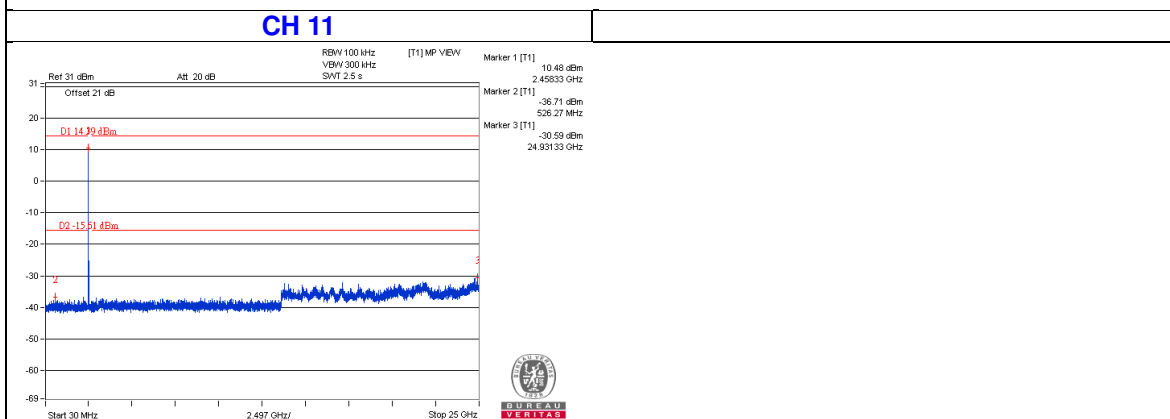
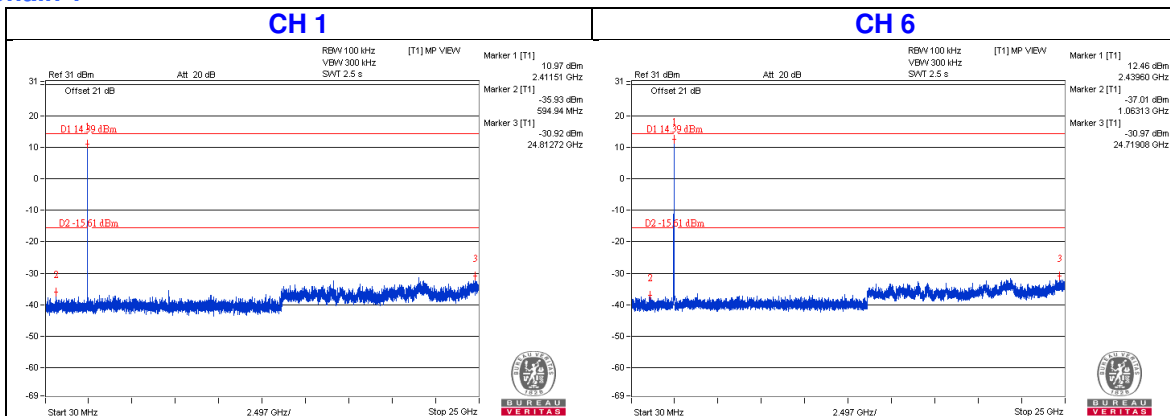





## Chain 2

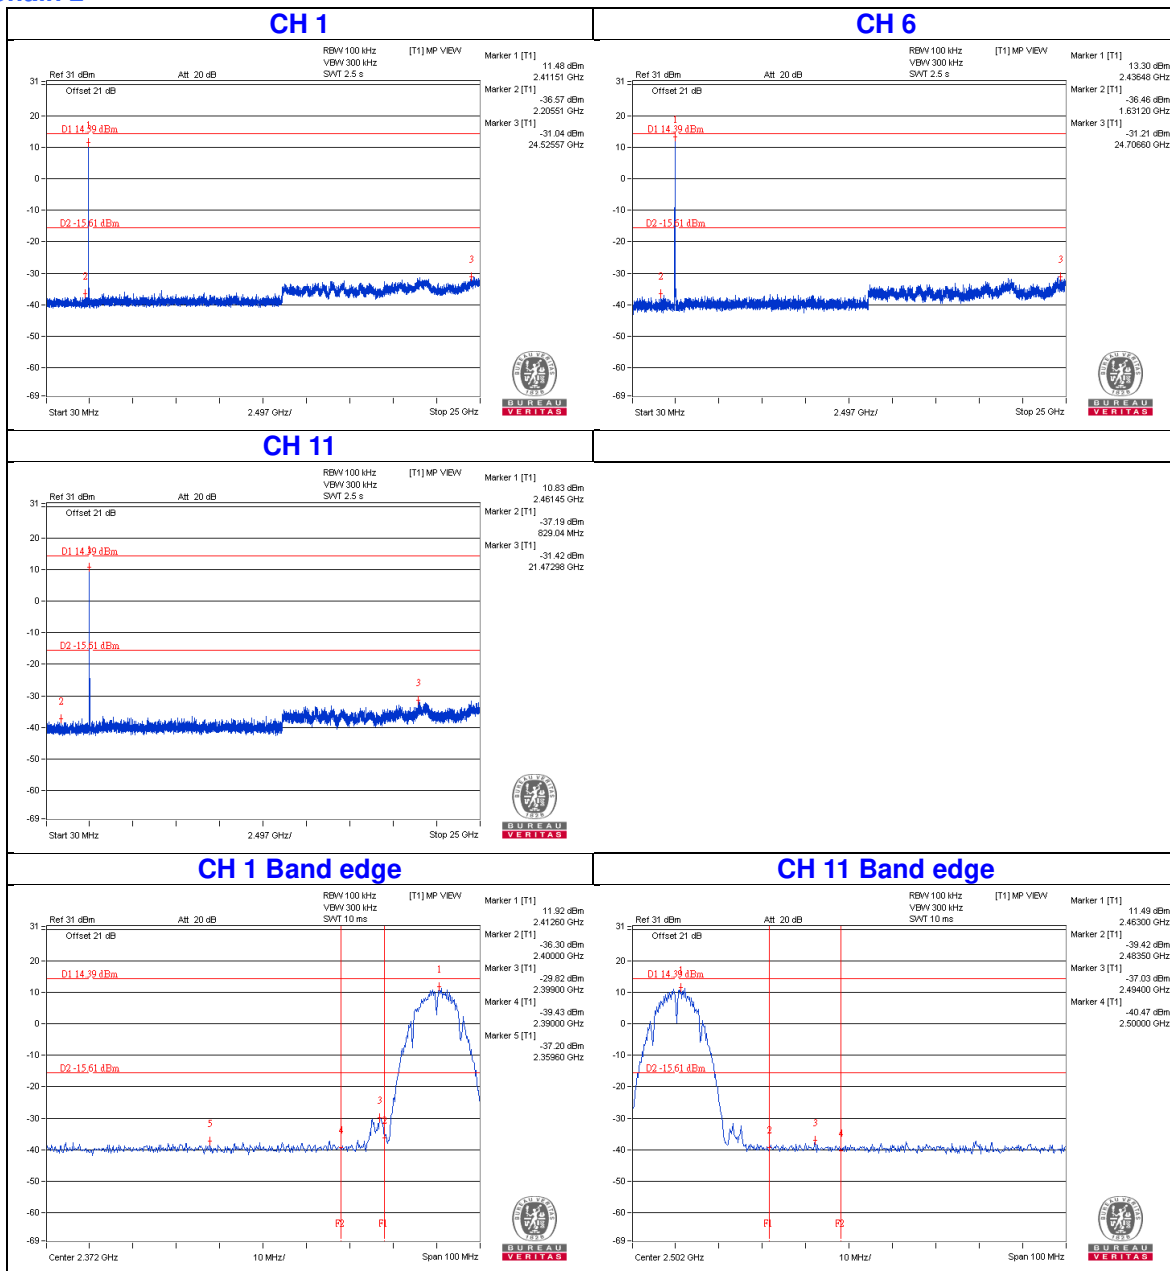




### Chain 3

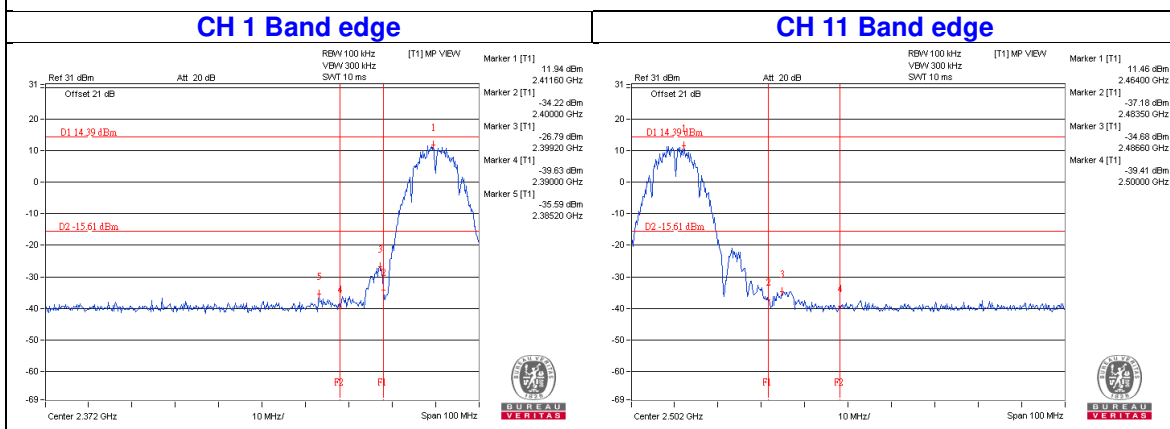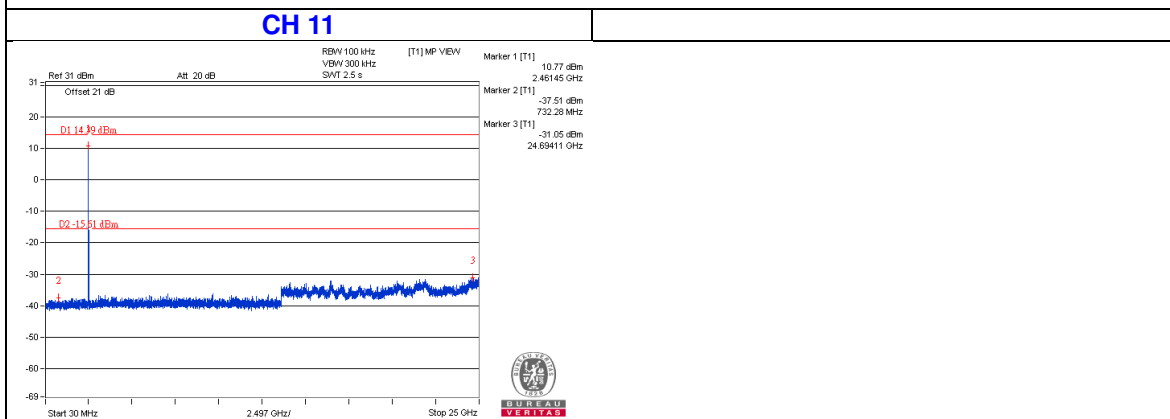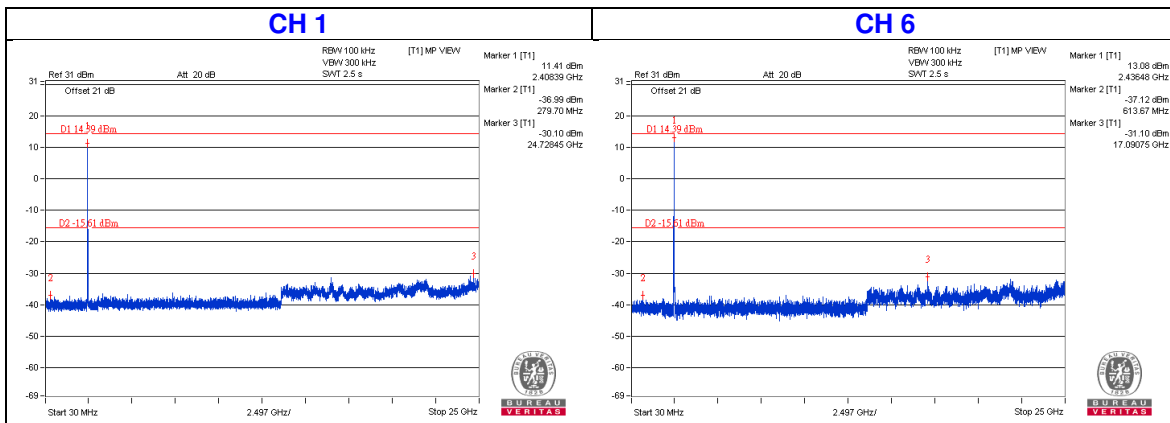




802.11g

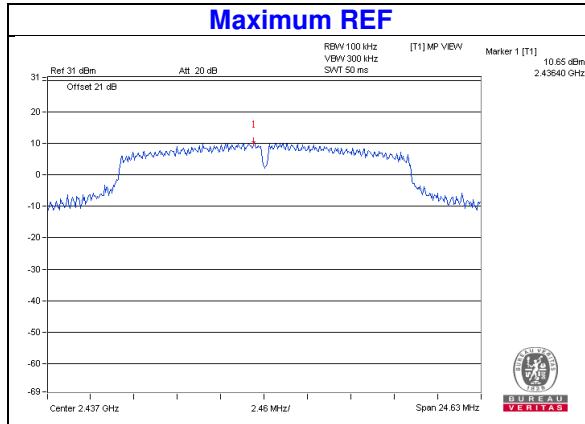




Chain 0

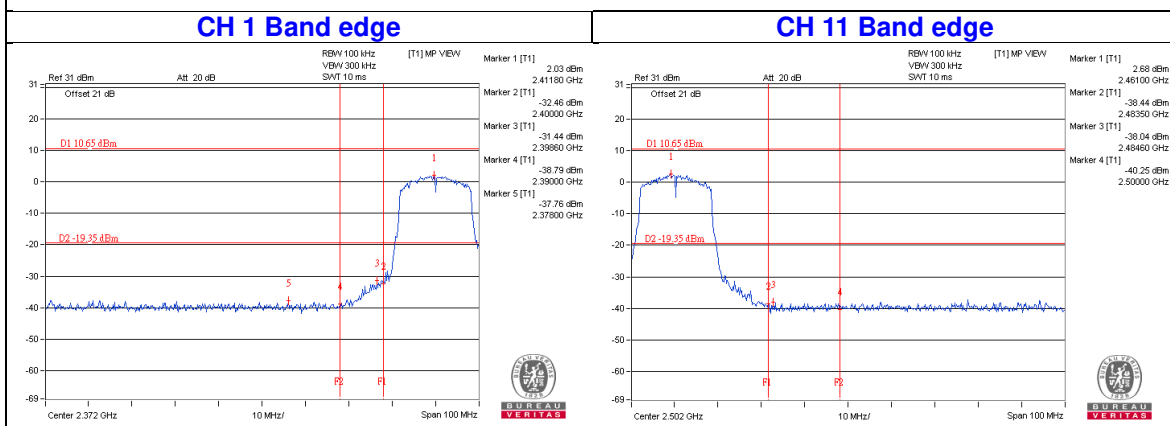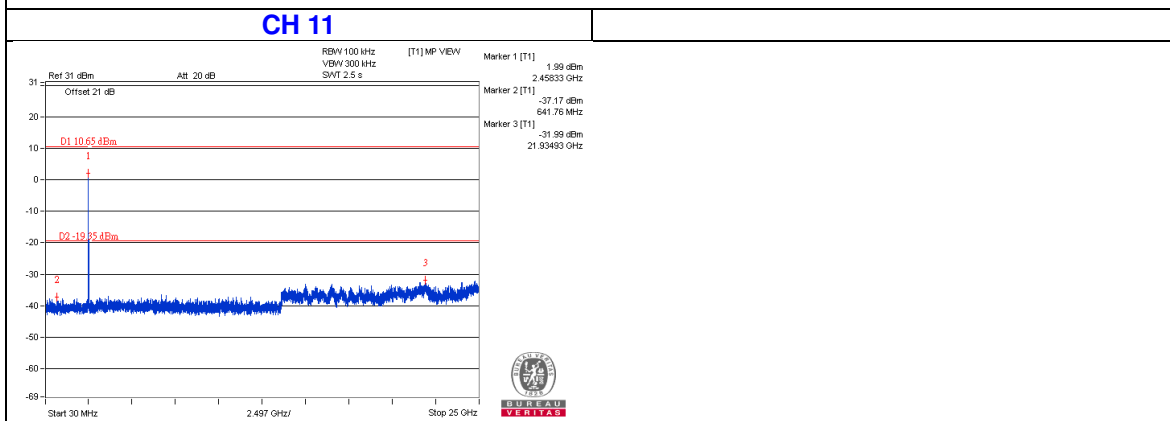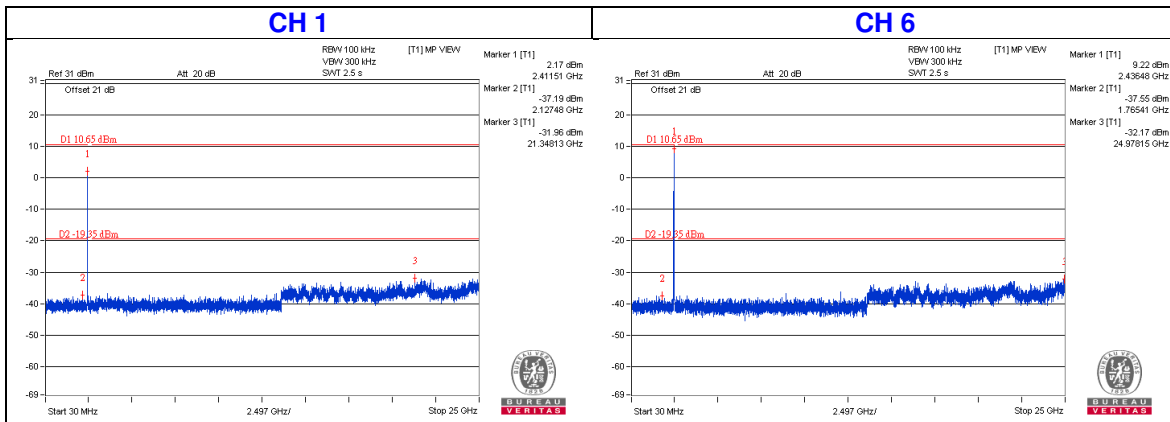





Chain 1

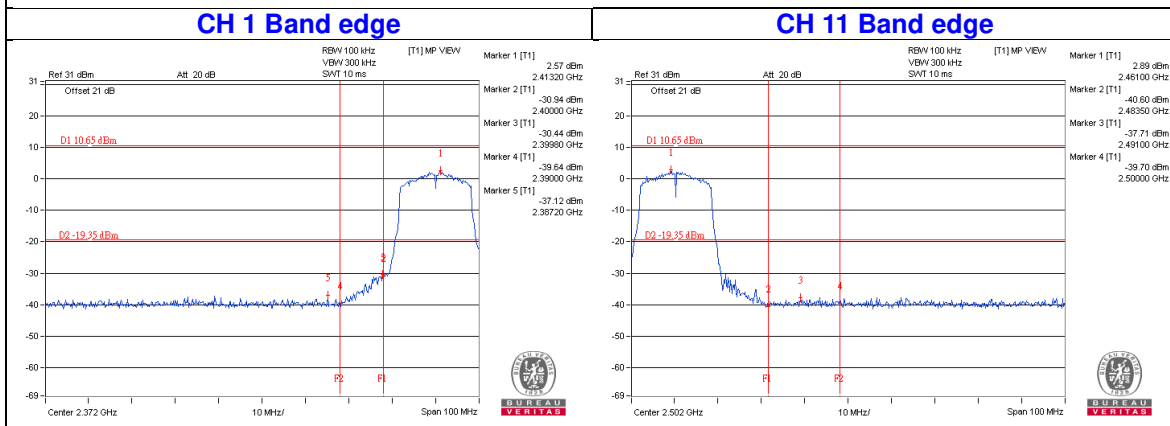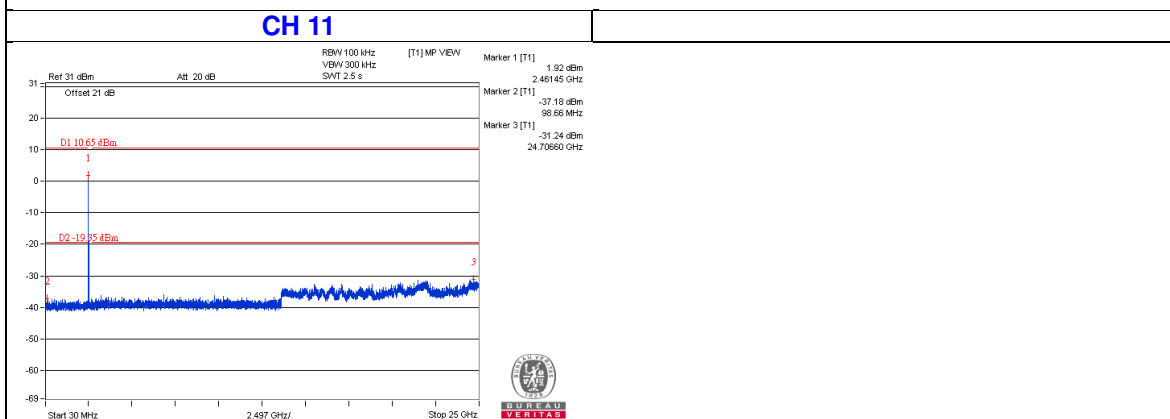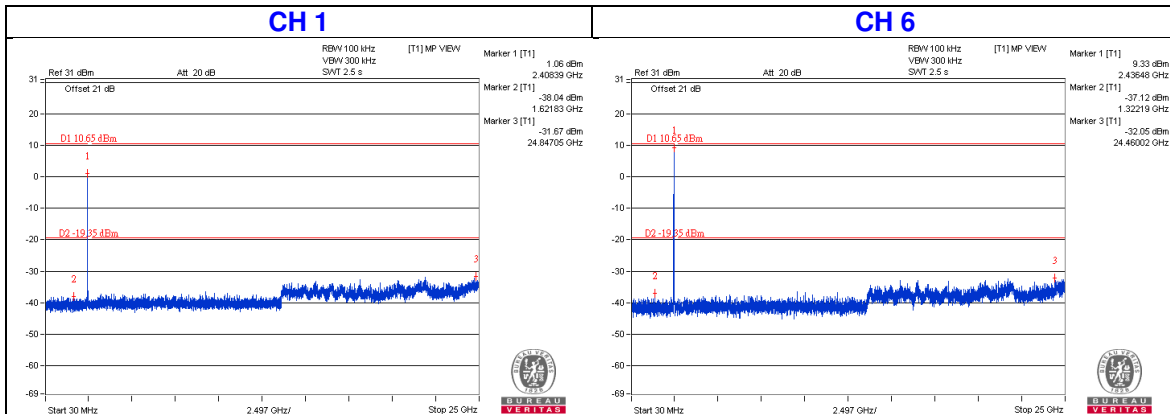


Chain 2

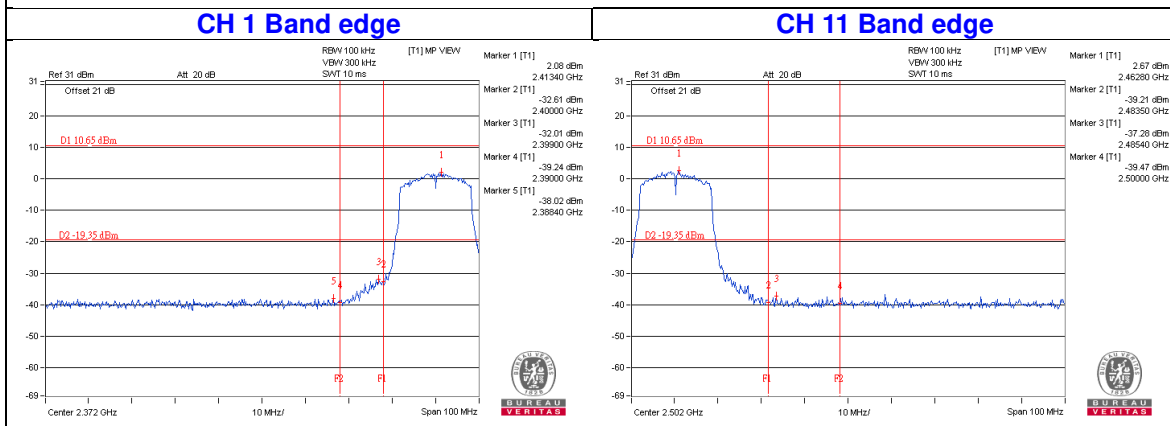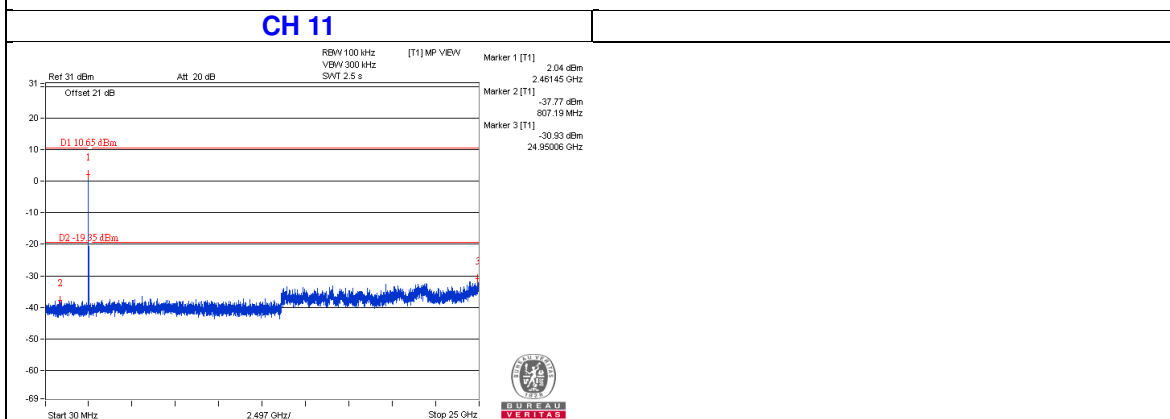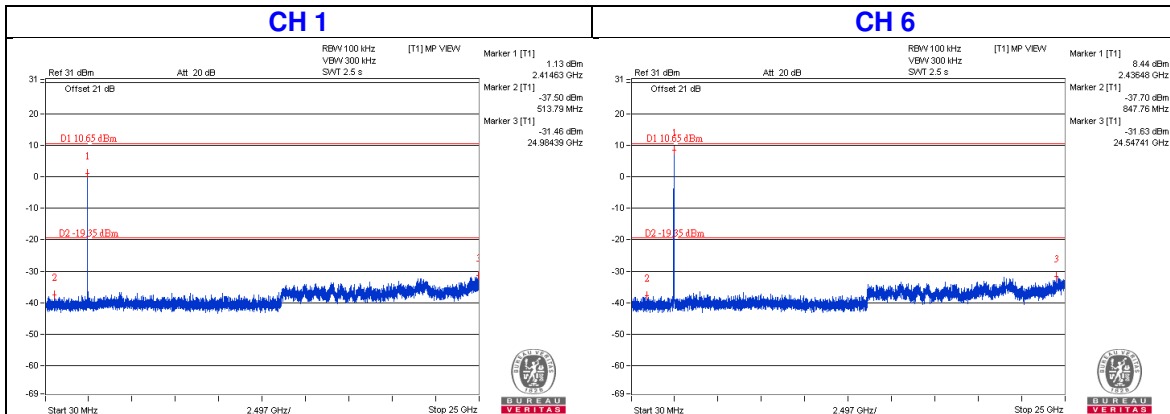

### Chain 3

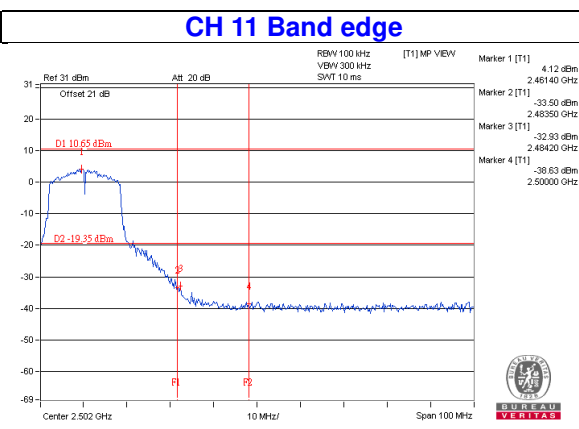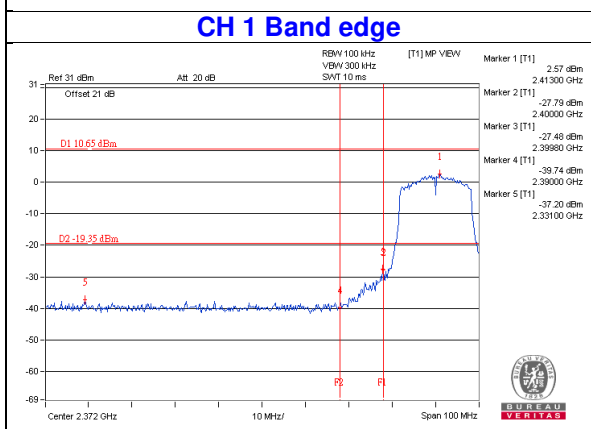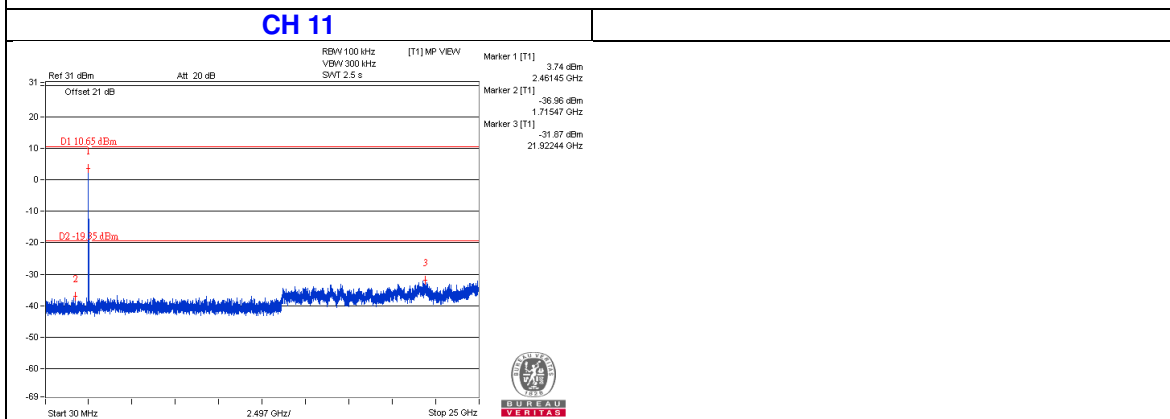
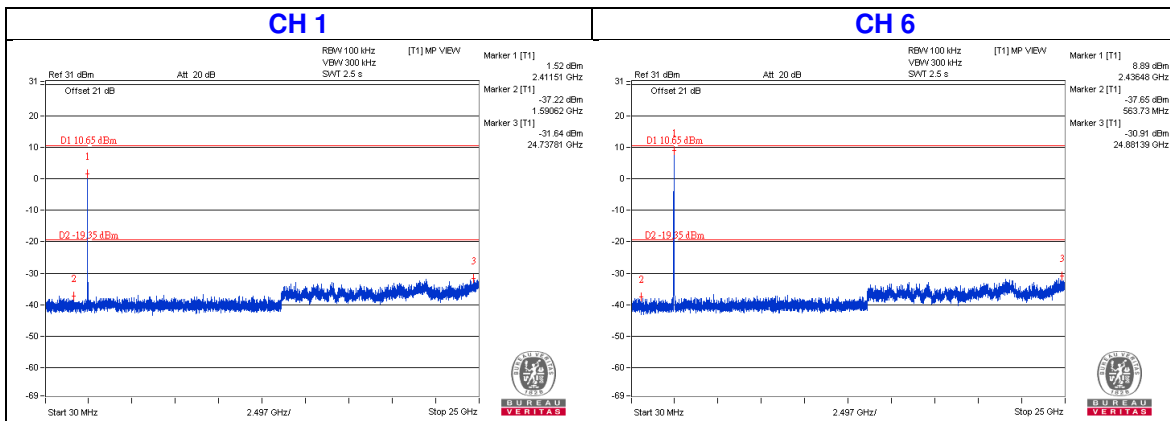


802.11n (HT20)

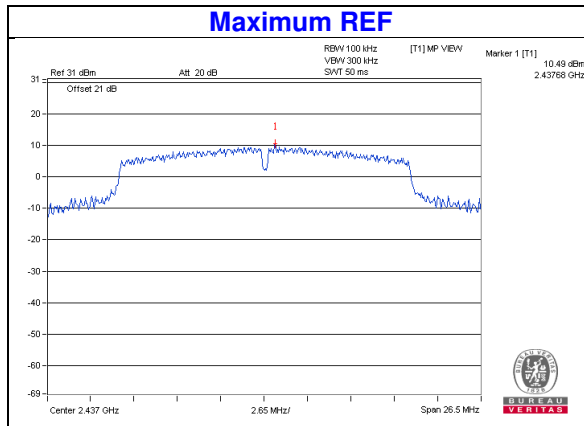


Chain 0



**CH 1** **CH 6**

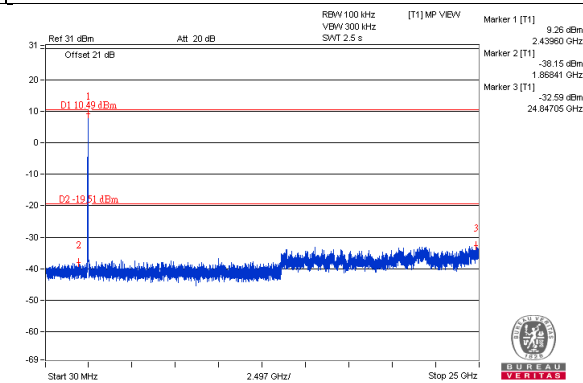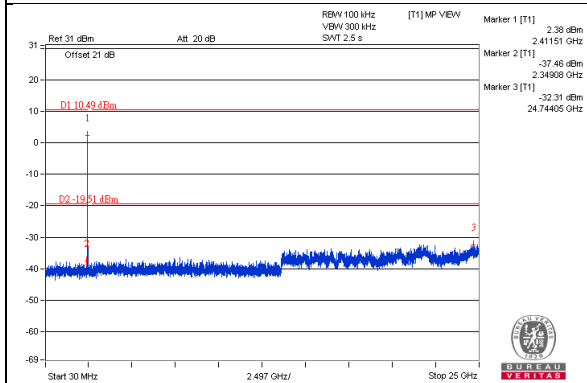




**CH 11**

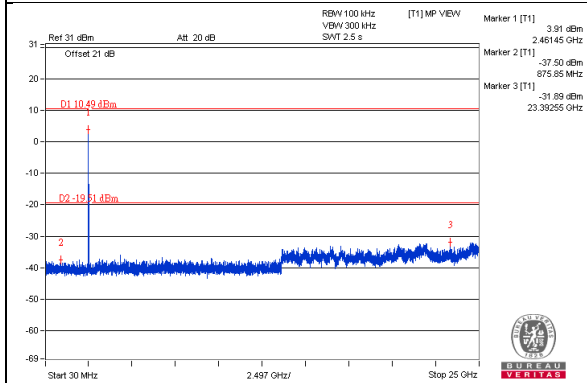

**CH 11 Band edge**


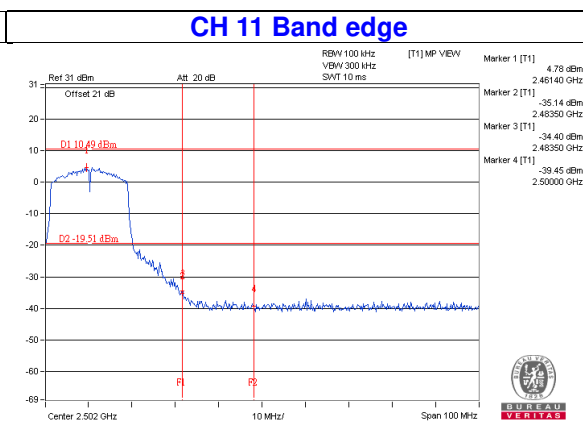
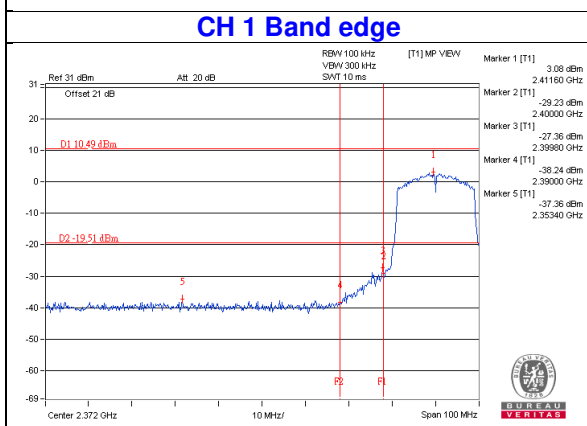


Chain 1

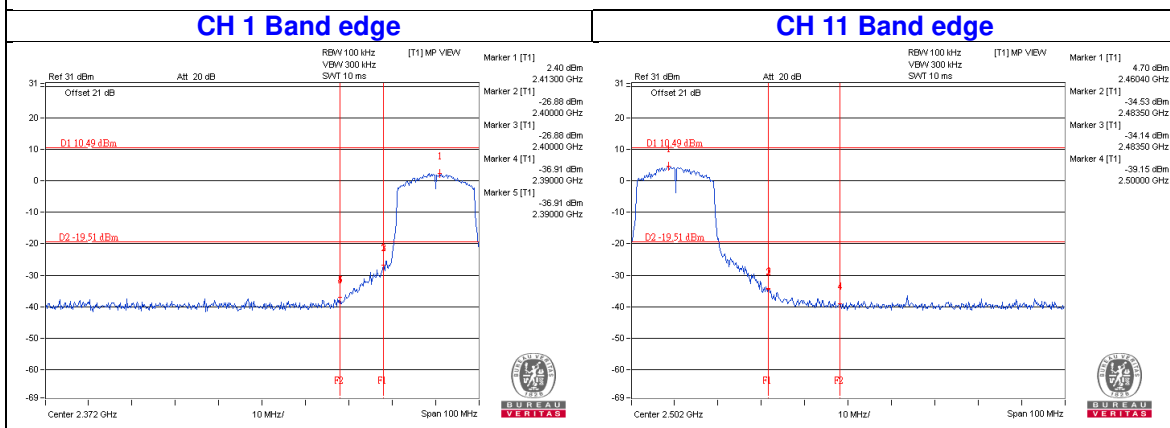
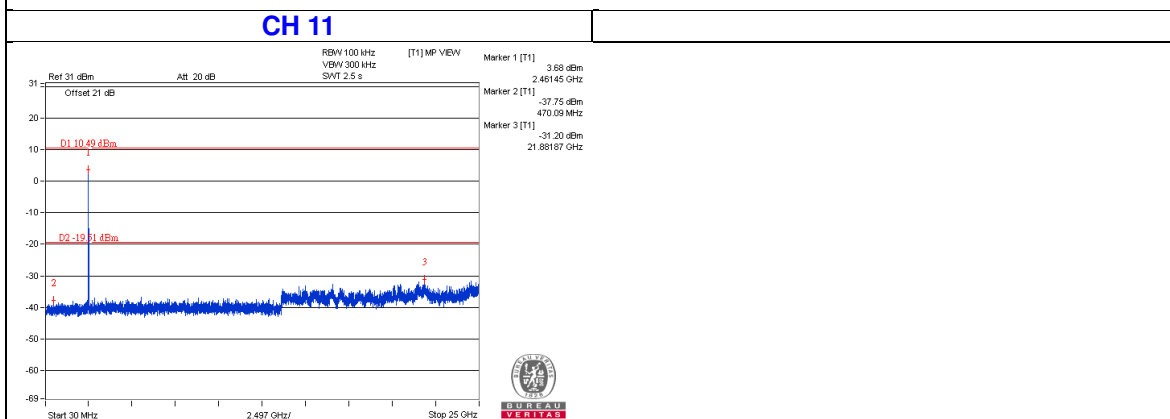
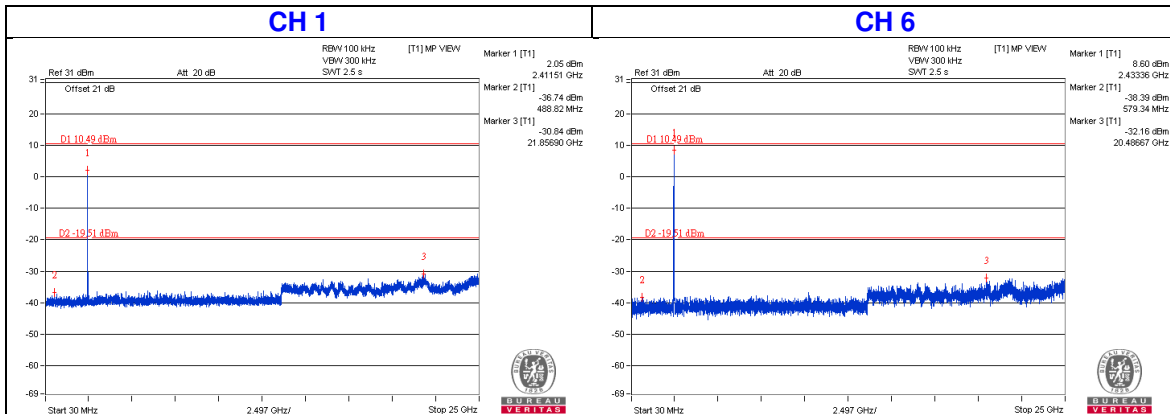





Chain 2

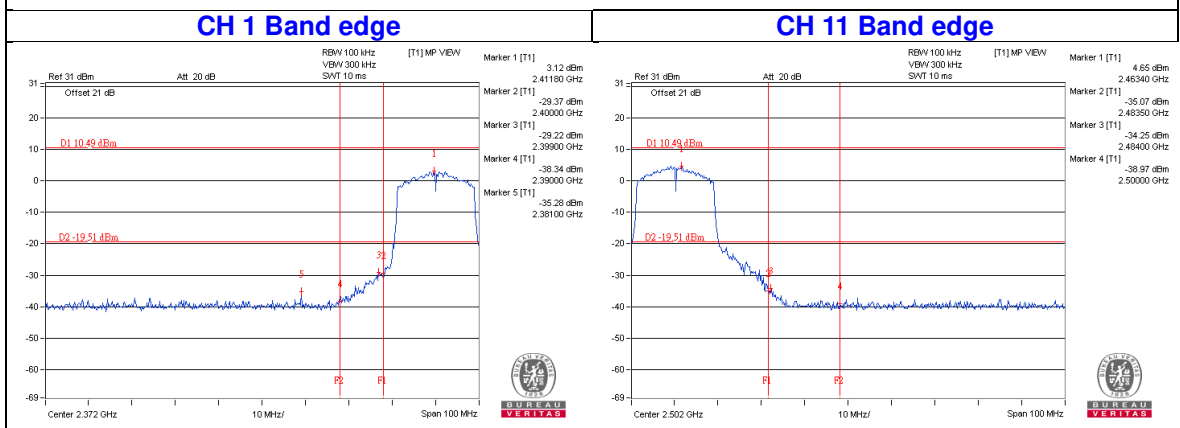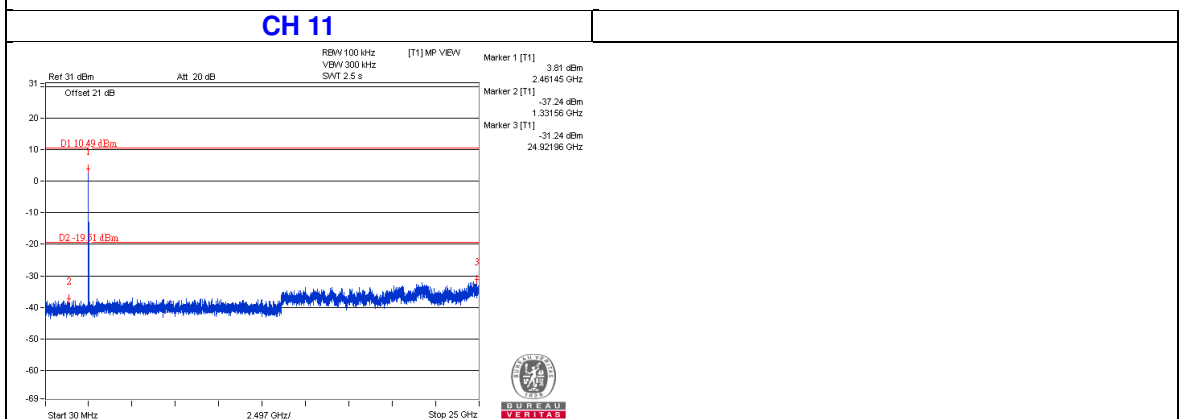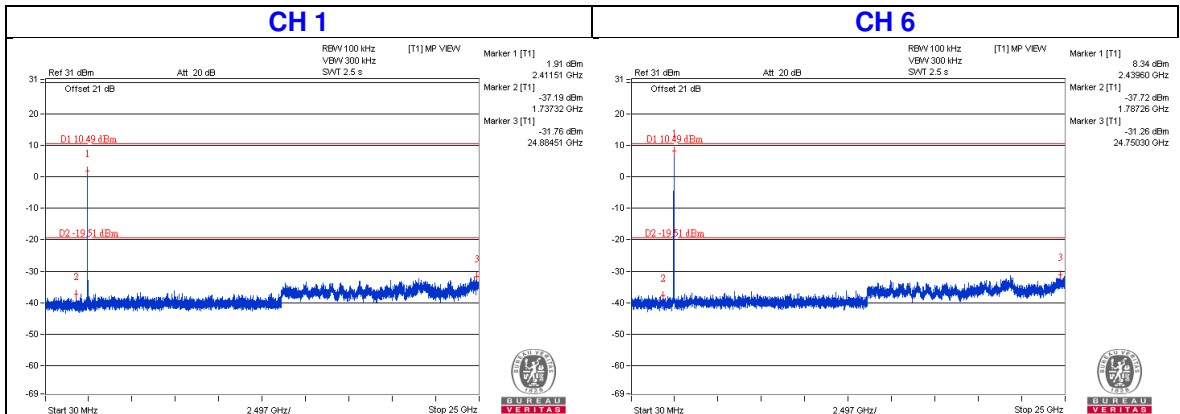

### Chain 3

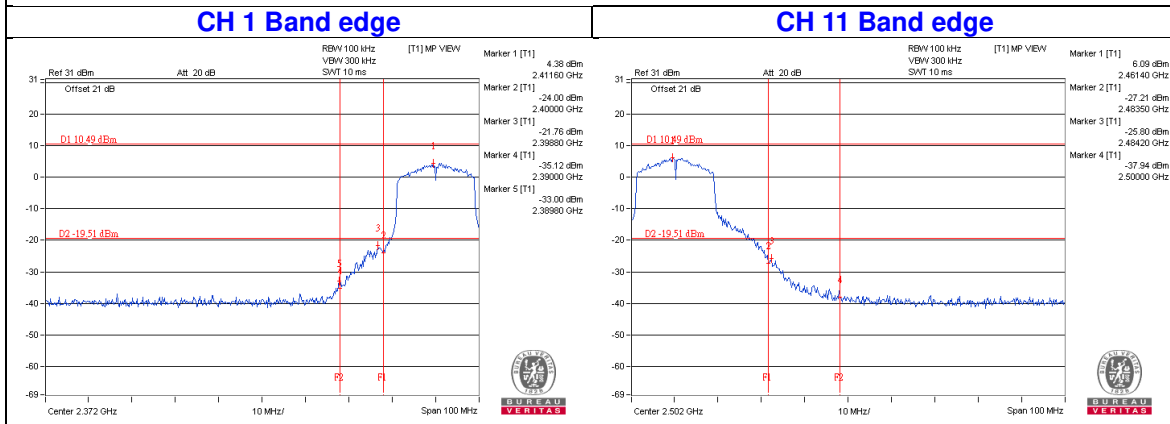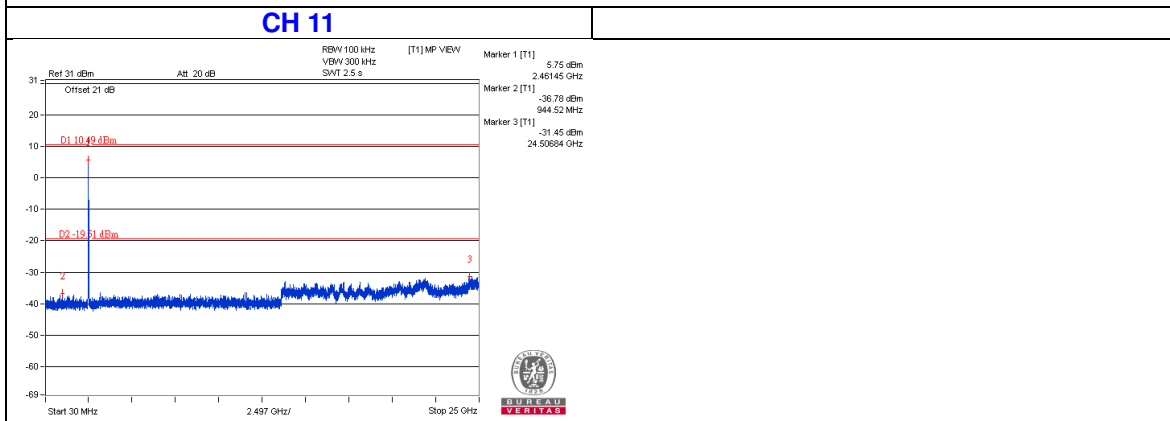
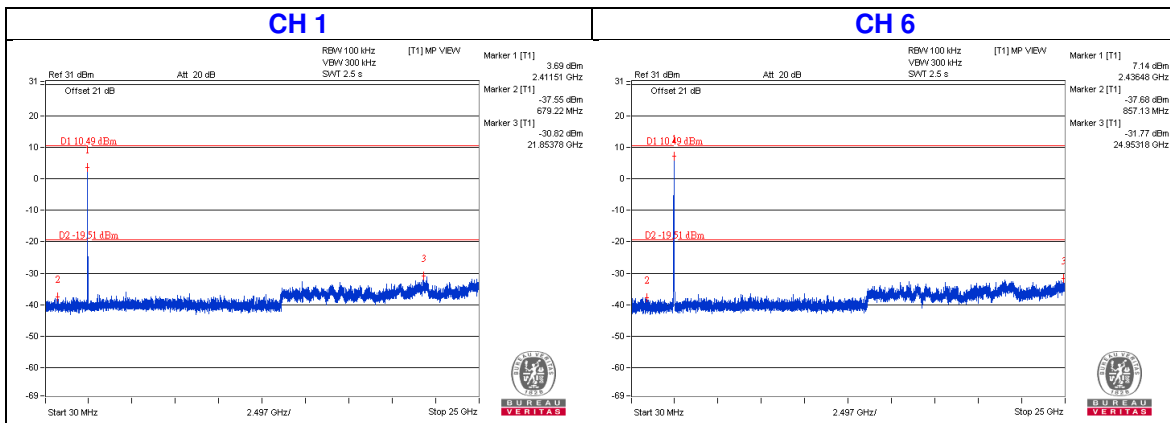


802.11n (HT40)

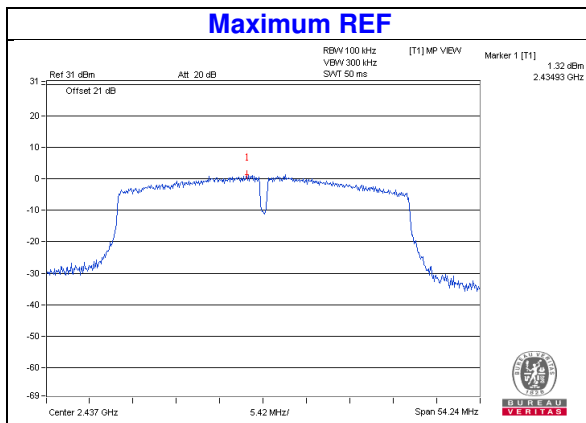


Chain 0


**CH 3** **CH 6**

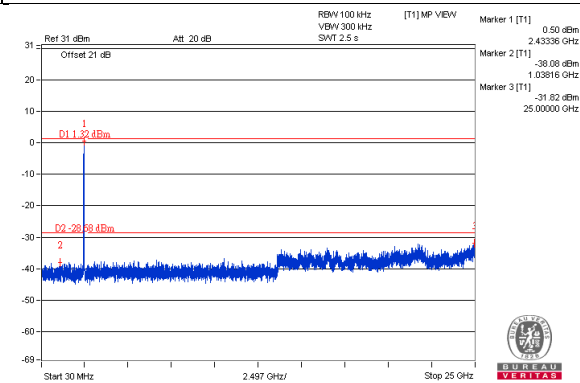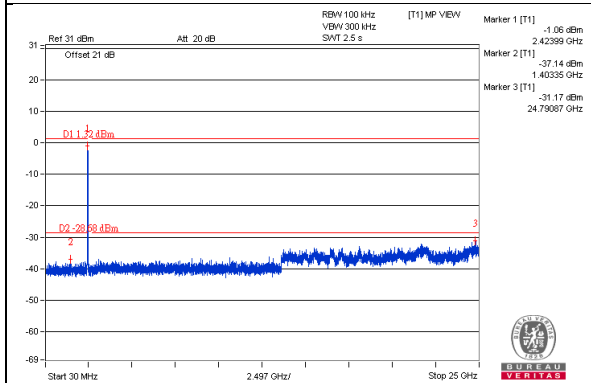


**CH 9**

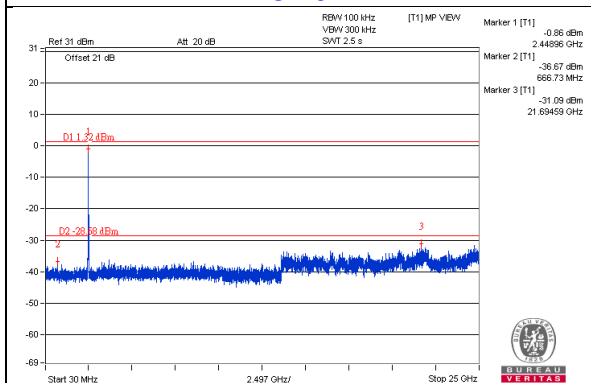




**CH 3 Band edge**

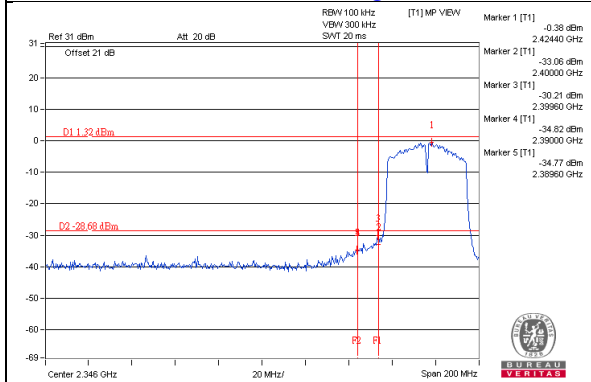


**CH 9 Band edge**

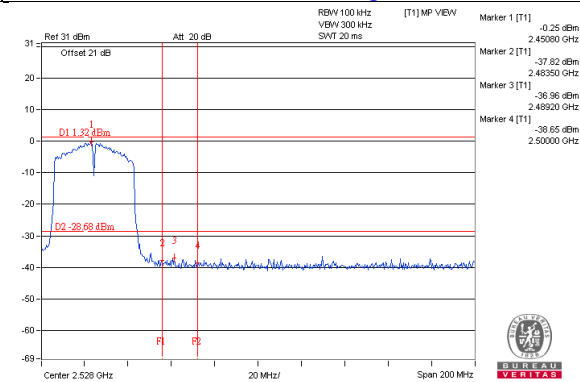




### Chain 1

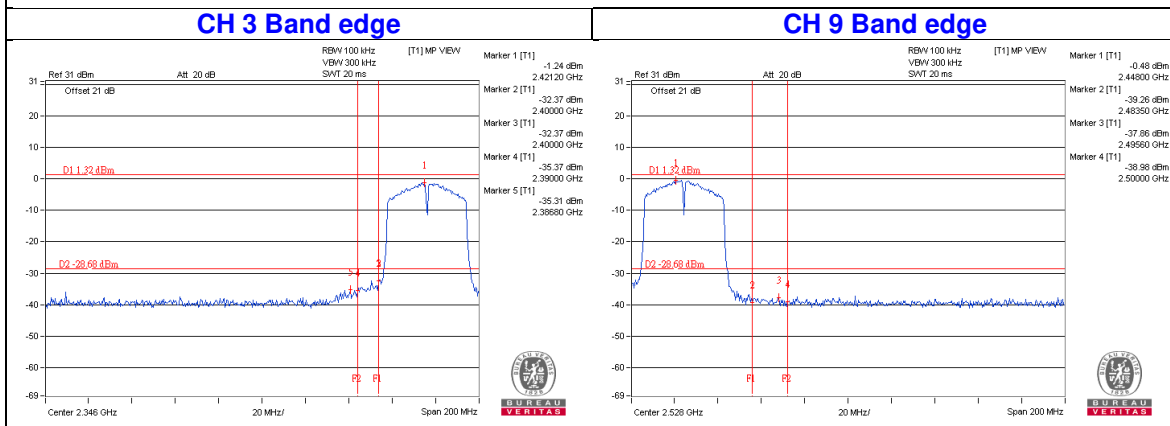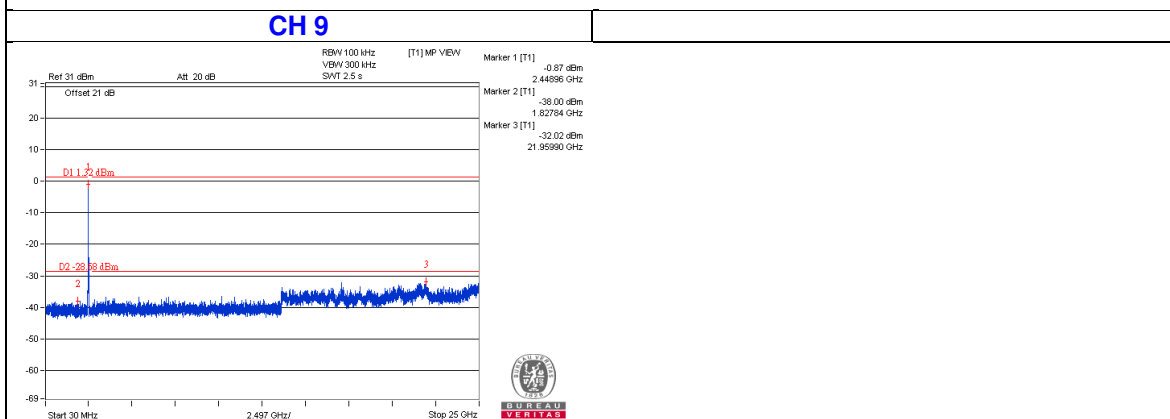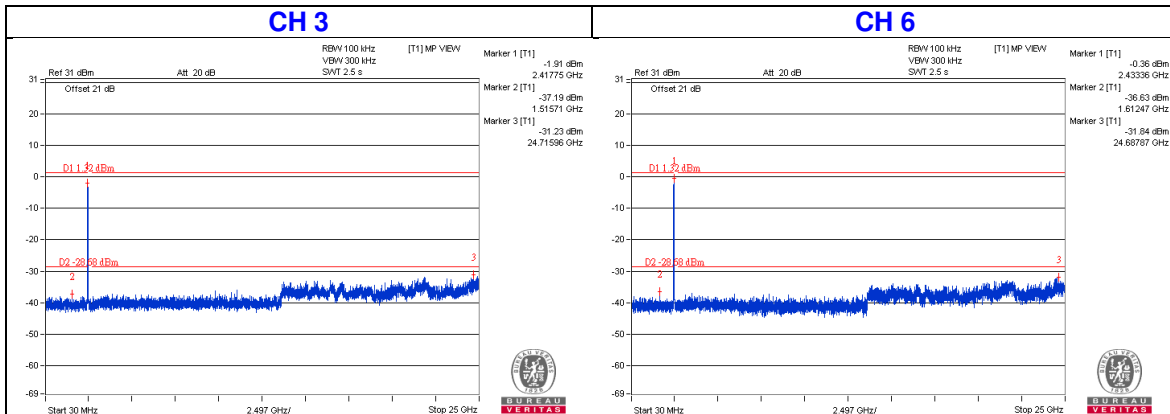

## Chain 2

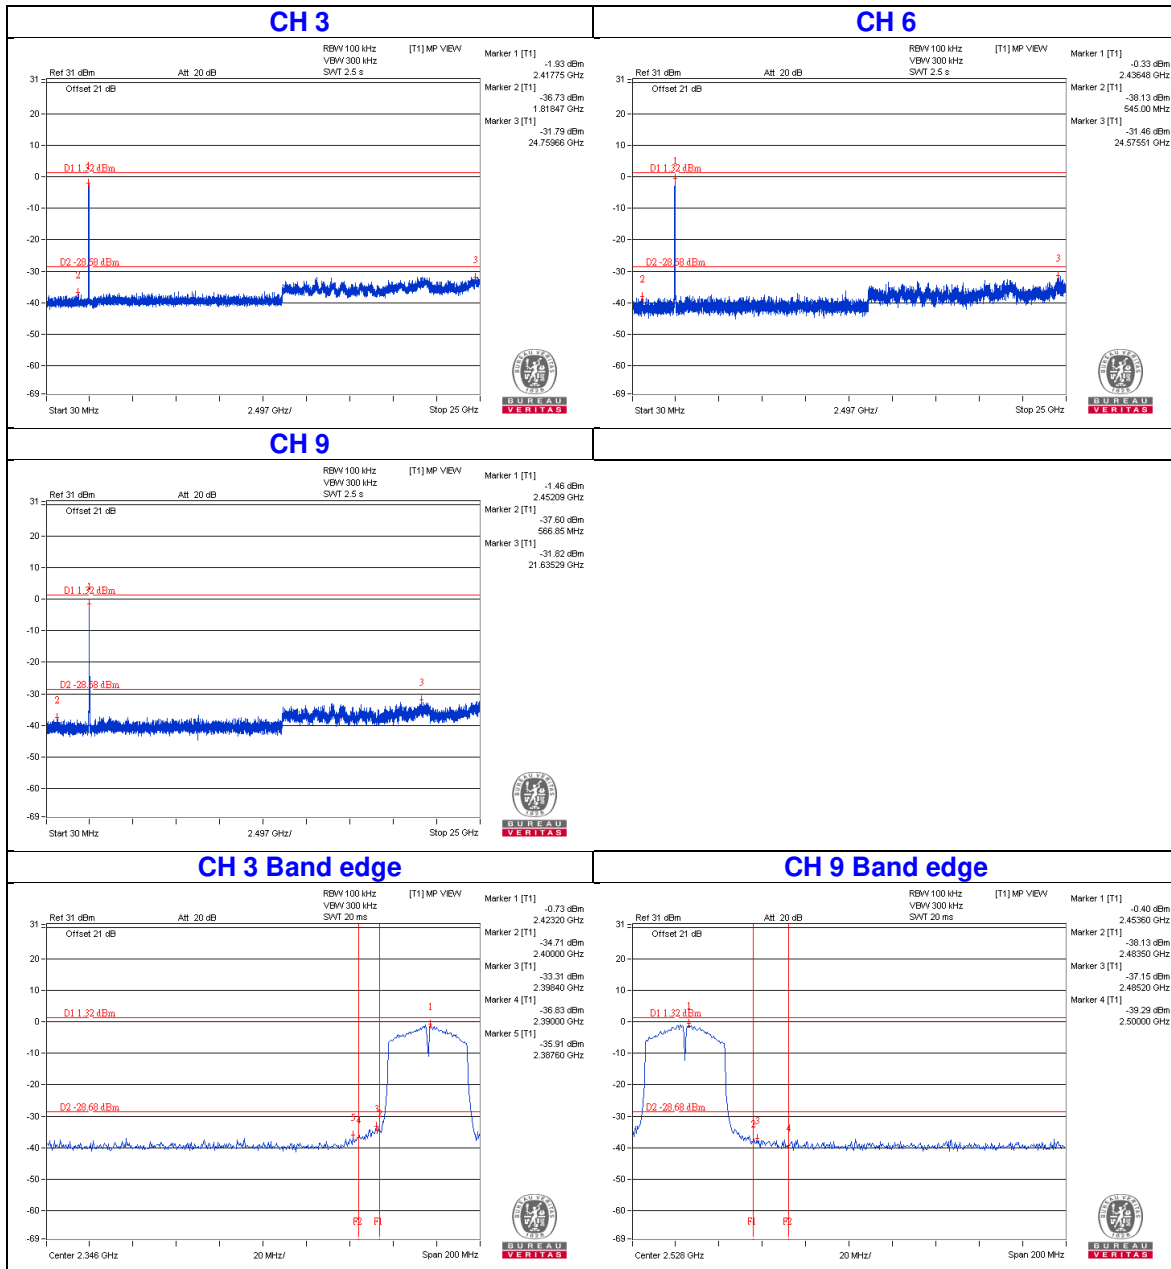

### Chain 3

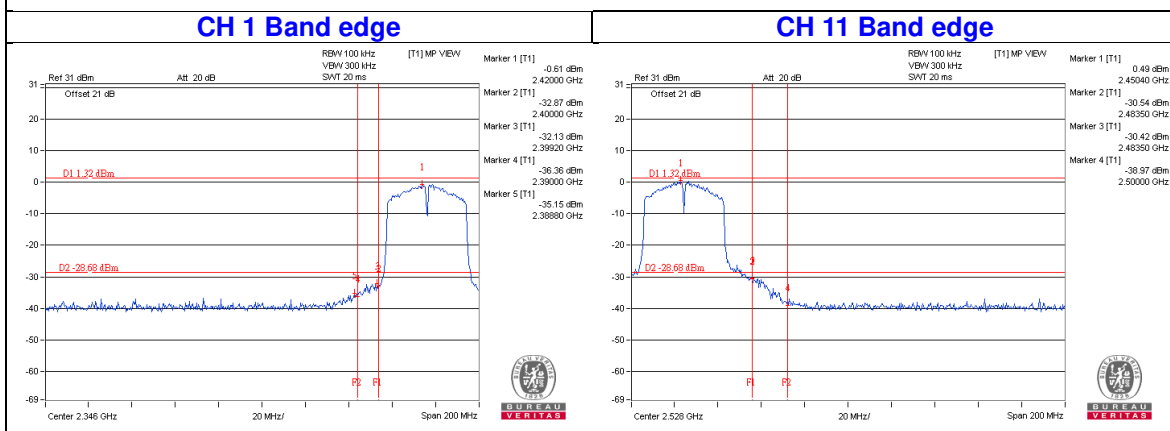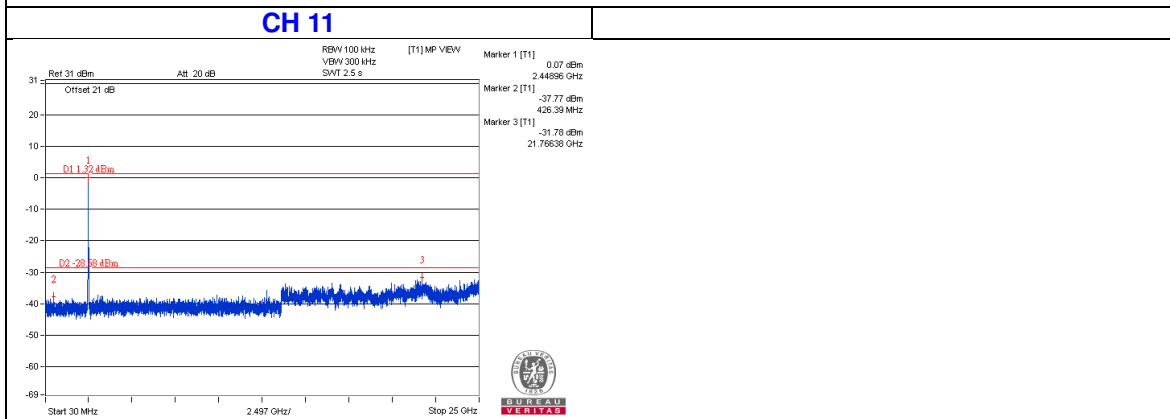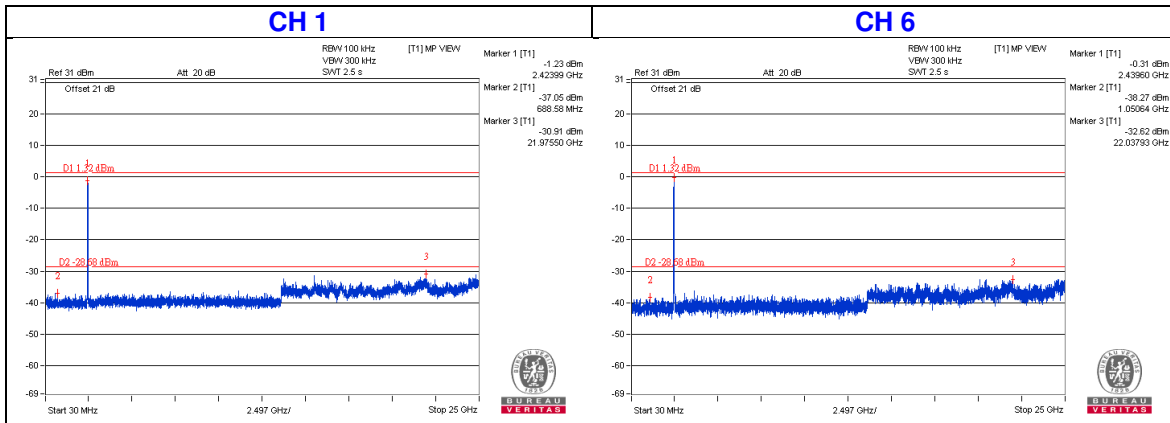

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---