


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	2.4GHz + 5GHz

Horizontal

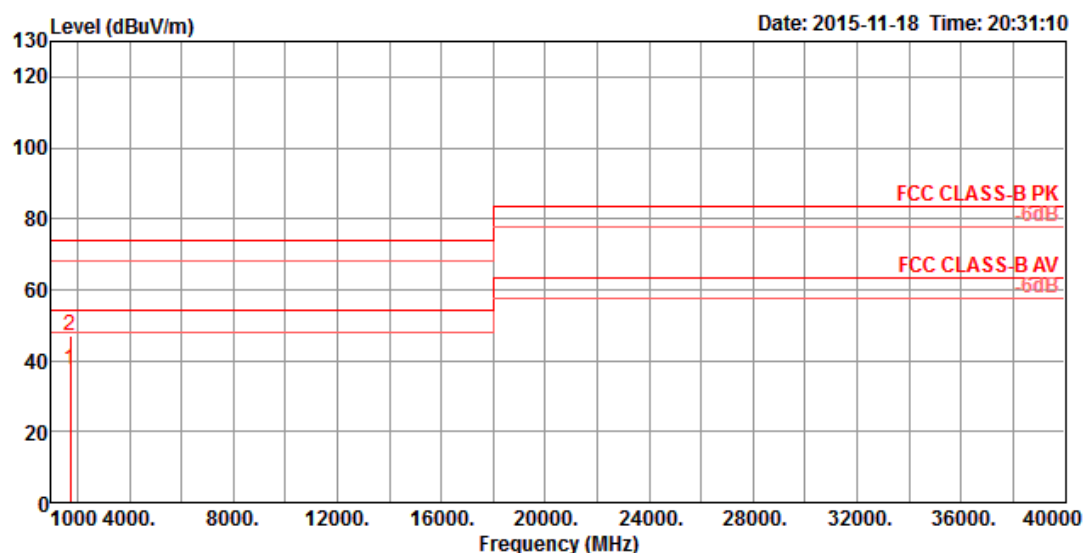

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1739.94	37.59	54.00	-16.41	42.90	4.26	25.82	35.39	100	212	Average	HORIZONTAL
2	1739.94	47.19	74.00	-26.81	52.50	4.26	25.82	35.39	100	212	Peak	HORIZONTAL

Vertical

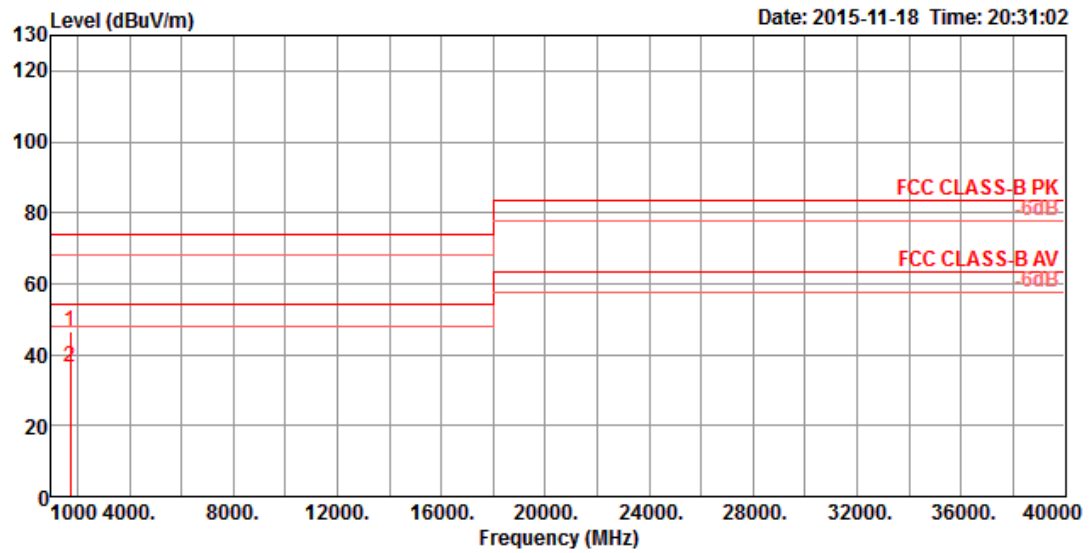

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1739.94	46.74	74.00	-27.26	52.05	4.26	25.82	35.39	100	267	Peak	VERTICAL
2	1739.97	36.35	54.00	-17.65	41.66	4.26	25.82	35.39	100	267	Average	VERTICAL