


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	2.4G + 5G

Horizontal

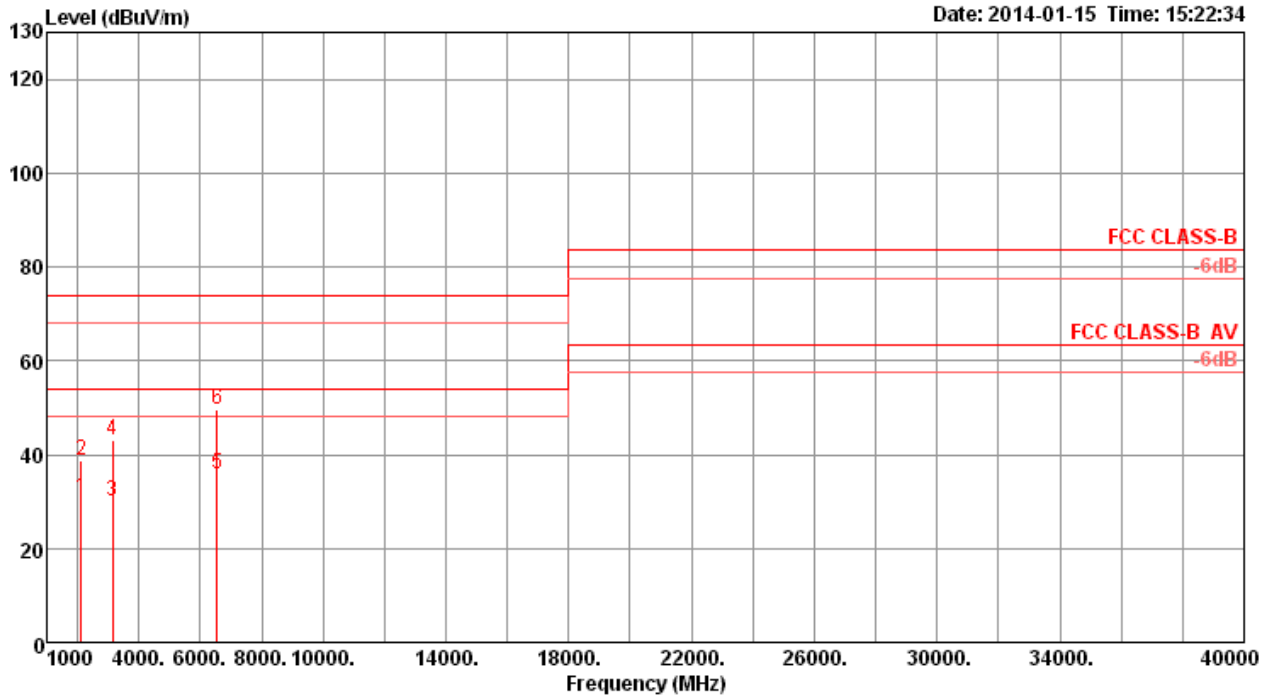

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2133.39	30.85	54.00	-23.15	34.45	3.90	27.43	34.93	Average	100	289	HORIZONTAL
2	2133.47	38.68	74.00	-35.32	42.28	3.90	27.43	34.93	Peak	100	289	HORIZONTAL
3	3134.04	30.23	54.00	-23.77	30.45	4.80	30.18	35.20	Average	100	125	HORIZONTAL
4	3134.11	43.07	74.00	-30.93	43.29	4.80	30.18	35.20	Peak	100	125	HORIZONTAL
5	6533.26	35.90	54.00	-18.10	29.38	6.75	35.07	35.30	Average	100	183	HORIZONTAL
6	6534.28	49.61	74.00	-24.39	43.08	6.76	35.07	35.30	Peak	100	183	HORIZONTAL

Vertical

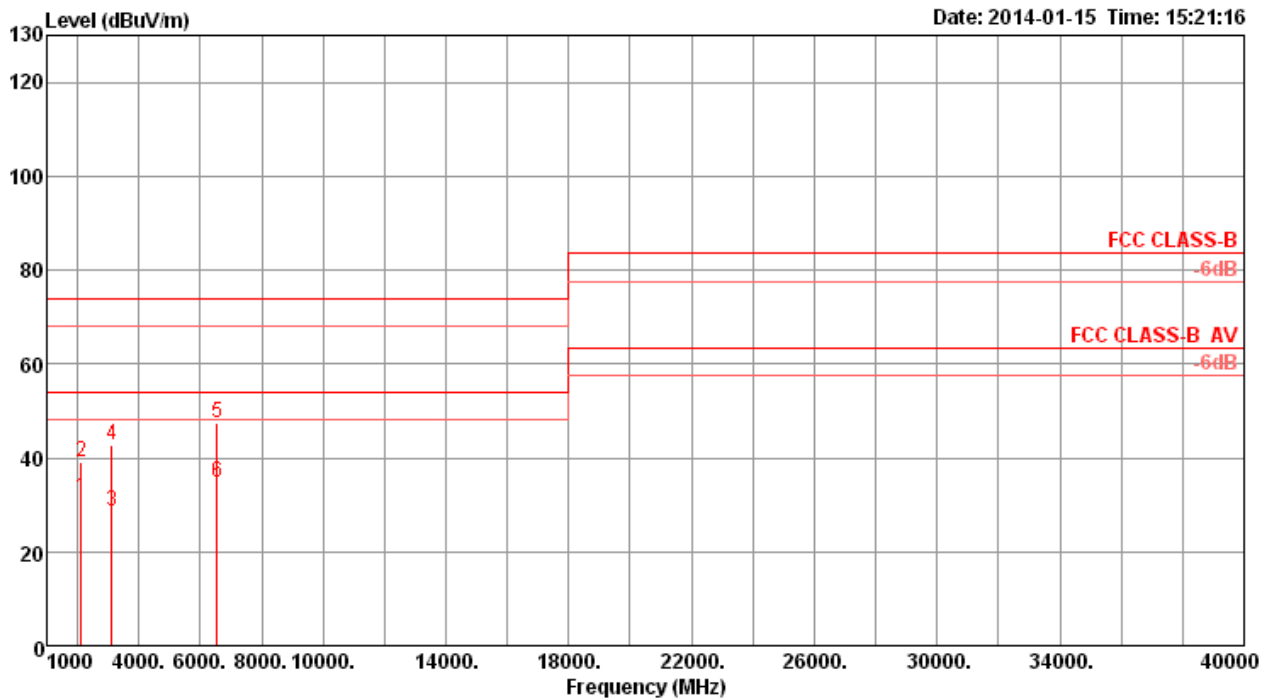

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2133.40	31.39	54.00	-22.61	34.99	3.90	27.43	34.93	100	123	VERTICAL
2	2133.47	39.18	74.00	-34.82	42.78	3.90	27.43	34.93	100	123	VERTICAL
3	3126.59	28.61	54.00	-25.39	28.89	4.78	30.14	35.20	100	179	VERTICAL
4	3127.88	42.77	74.00	-31.23	43.05	4.78	30.14	35.20	100	179	VERTICAL
5	6533.61	47.48	74.00	-26.52	40.95	6.76	35.07	35.30	100	211	VERTICAL
6	6535.10	34.82	54.00	-19.18	28.29	6.76	35.07	35.30	100	211	VERTICAL