


## Appendix C. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	2.4G + 5G B1 + 5G B4

### Horizontal

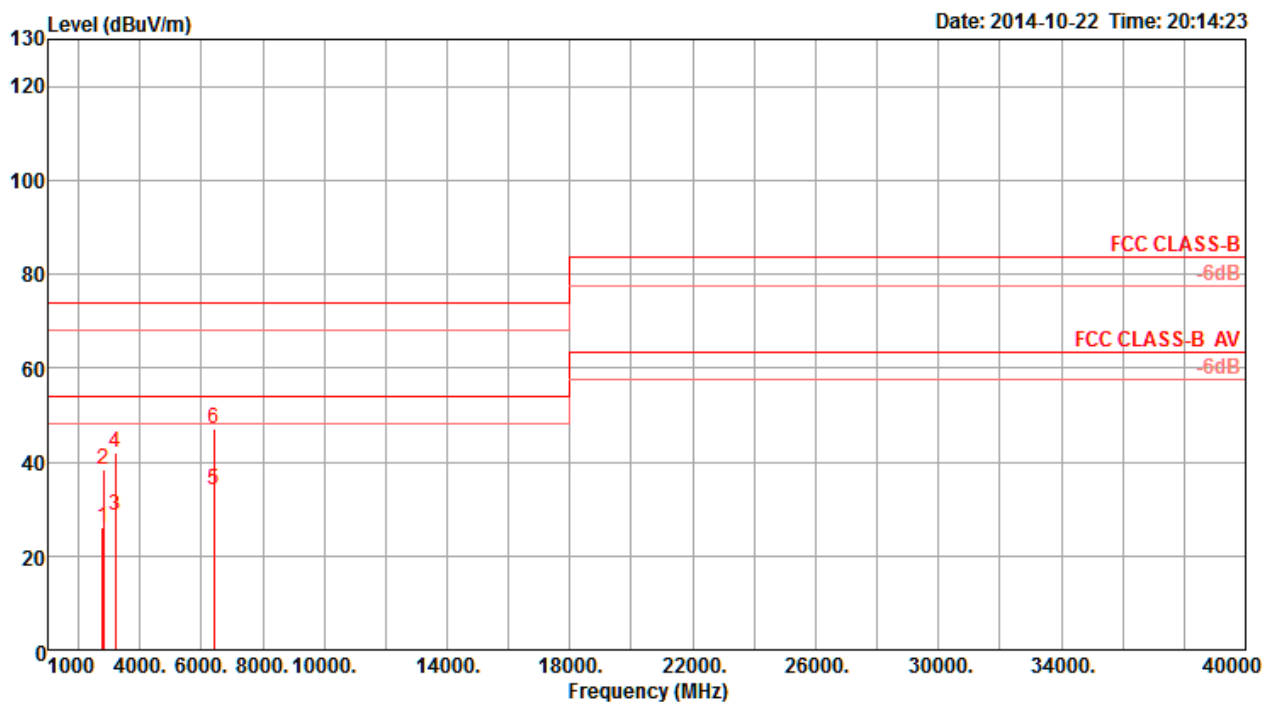

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	2797.25	26.00	54.00	-28.00	28.94	3.14	28.64	34.72	Average	233	100	HORIZONTAL
2	2799.78	38.35	74.00	-35.65	41.29	3.14	28.64	34.72	Peak	233	100	HORIZONTAL
3	3198.02	28.58	54.00	-25.42	30.29	3.38	29.62	34.71	Average	276	100	HORIZONTAL
4	3198.15	41.86	74.00	-32.14	43.57	3.38	29.62	34.71	Peak	276	100	HORIZONTAL
5	6397.38	33.88	54.00	-20.12	27.98	5.01	35.51	34.62	Average	298	100	HORIZONTAL
6	6398.59	47.08	74.00	-26.92	41.17	5.01	35.52	34.62	Peak	298	100	HORIZONTAL

## Vertical

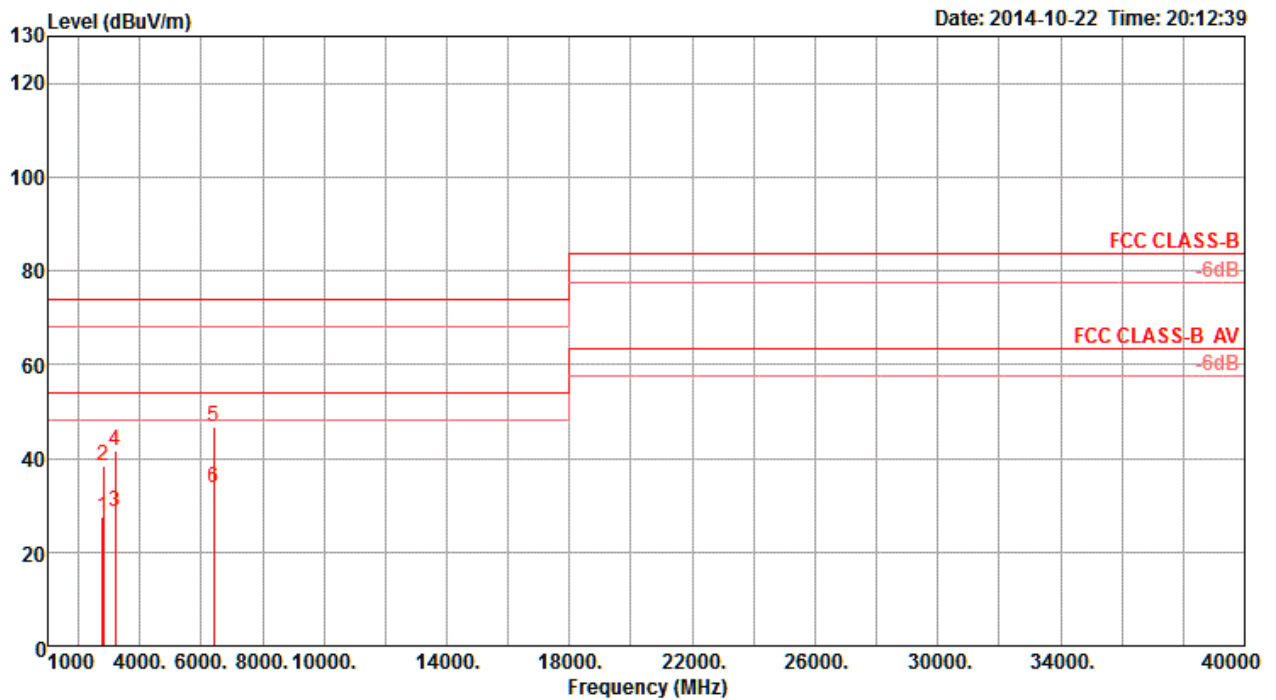

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	2797.83	27.42	54.00	-26.58	30.36	3.14	28.64	34.72	Average	309	100	VERTICAL
2	2799.81	38.54	74.00	-35.46	41.48	3.14	28.64	34.72	Peak	309	100	VERTICAL
3	3197.63	28.67	54.00	-25.33	30.38	3.38	29.62	34.71	Average	206	100	VERTICAL
4	3197.92	41.70	74.00	-32.30	43.41	3.38	29.62	34.71	Peak	206	100	VERTICAL
5	6399.44	46.75	74.00	-27.25	40.84	5.01	35.52	34.62	Peak	298	100	VERTICAL
6	6401.65	33.64	54.00	-20.36	27.73	5.01	35.52	34.62	Average	298	100	VERTICAL