


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	2.4G + 5G

Horizontal

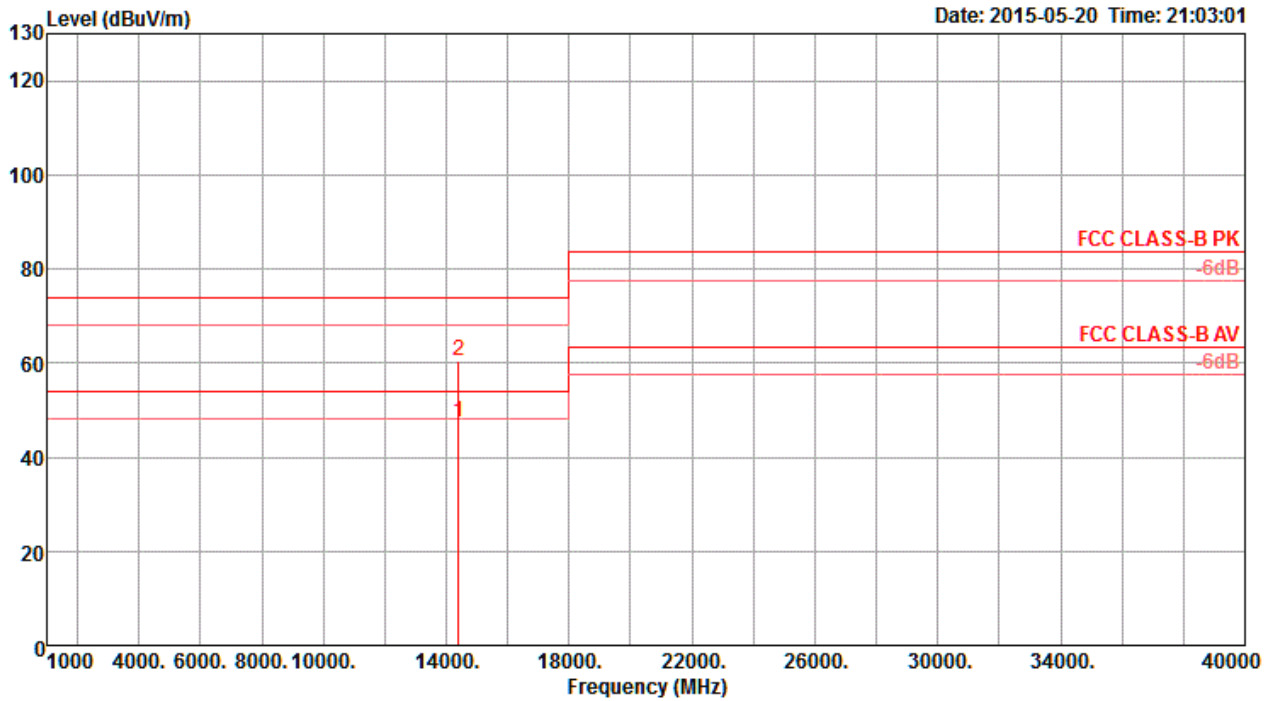

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	14393.69	47.30	54.00	-6.70	32.83	7.27	40.74	33.54	74	112	Average	HORIZONTAL
2	14396.75	60.41	74.00	-13.59	45.94	7.27	40.74	33.54	74	112	Peak	HORIZONTAL

Vertical

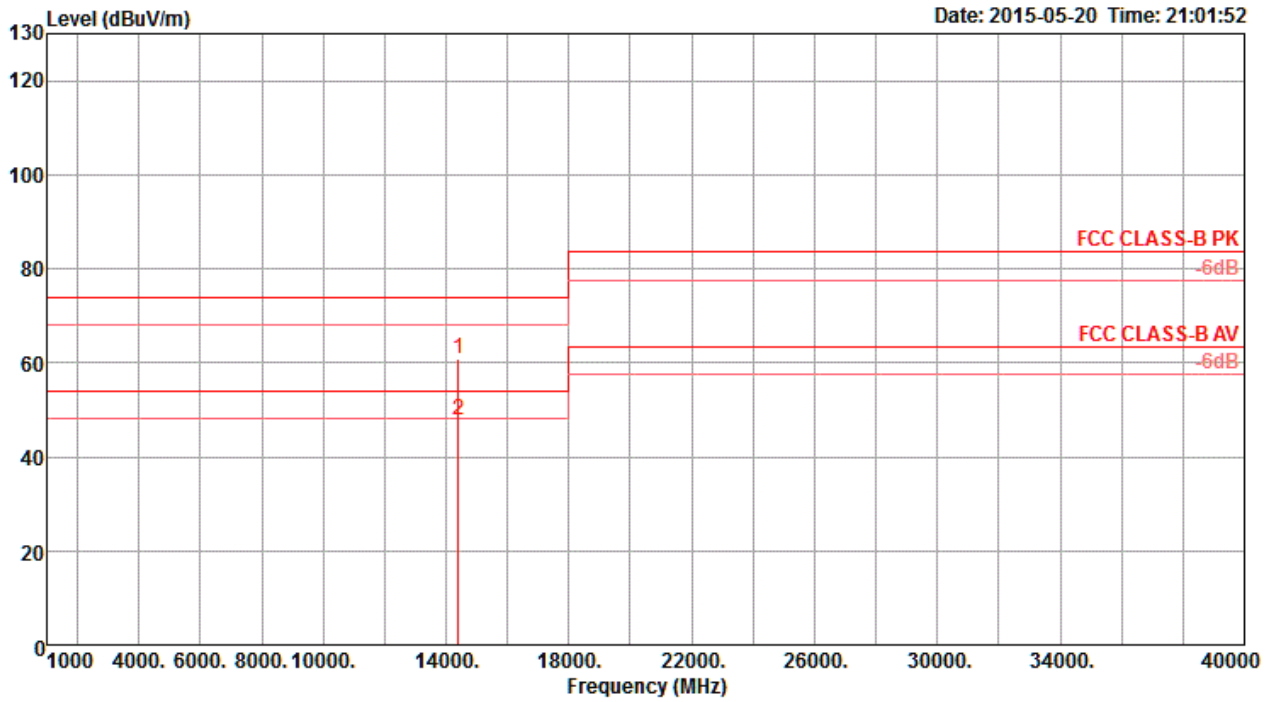

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	14393.73	60.84	74.00	-13.16	46.37	7.27	40.74	33.54	137	115	Peak	VERTICAL
2	14396.00	47.70	54.00	-6.30	33.23	7.27	40.74	33.54	137	115	Average	VERTICAL