


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz_26/0	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

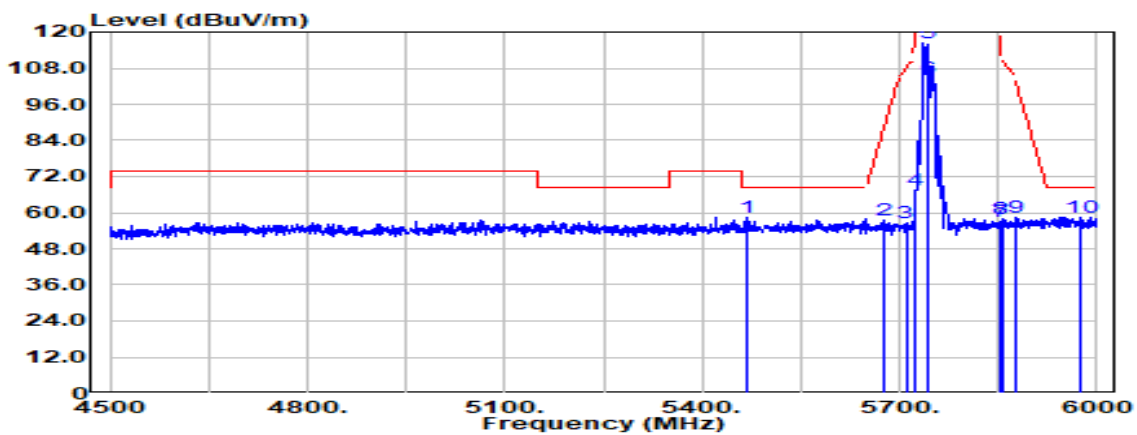

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5467.500	Peak	38.29	20.05	58.35	68.20	-9.85
5675.250	Peak	37.18	20.16	57.34	86.93	-29.59
5709.750	Peak	36.17	20.22	56.39	107.93	-51.54
5724.750	Peak	47.34	20.32	67.66	121.63	-53.97
5745.000	Peak	95.86	20.45	116.30	-	-
5745.000	Average	84.05	20.45	104.50	-	-
5852.250	Peak	36.39	20.74	57.13	117.07	-59.94
5855.250	Peak	37.41	20.75	58.17	110.73	-52.56
5877.000	Peak	37.46	20.85	58.31	103.71	-45.40
5975.250	Peak	37.47	21.17	58.63	68.20	-9.57


Test Mode	IEEE 802.11ax HE20 / 5745MHz_26/0	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5470.500	Peak	37.62	20.05	57.67	68.20	-10.53
5657.250	Peak	37.47	20.15	57.62	73.59	-15.96
5709.000	Peak	36.17	20.22	56.38	107.72	-51.34
5724.750	Peak	35.05	20.32	55.37	121.63	-66.26
5745.000	Peak	86.68	20.45	107.13	-	-
5745.000	Average	75.20	20.45	95.64	-	-
5853.750	Peak	37.17	20.75	57.91	113.65	-55.74
5871.750	Peak	36.62	20.83	57.44	106.11	-48.67
5904.750	Peak	36.89	20.97	57.86	83.15	-25.28
5985.750	Peak	37.71	21.17	58.87	68.20	-9.33

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5745MHz_52/37	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

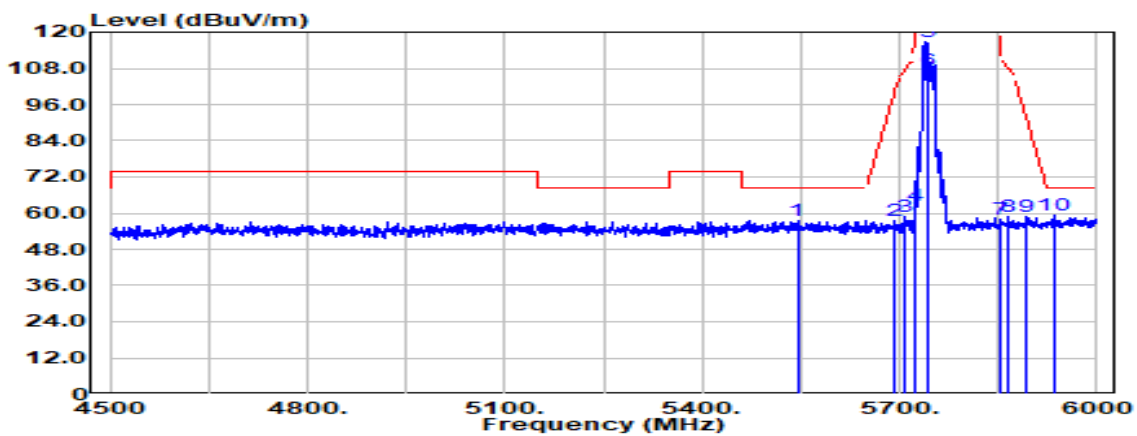

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5544.750	Peak	37.62	20.03	57.65	68.20	-10.55
5692.500	Peak	37.49	20.16	57.65	99.67	-42.02
5706.750	Peak	38.82	20.20	59.02	107.09	-48.07
5724.750	Peak	42.00	20.32	62.32	121.63	-59.31
5745.000	Peak	96.17	20.45	116.62	-	-
5745.000	Average	87.09	20.45	107.54	-	-
5852.250	Peak	37.11	20.74	57.85	117.07	-59.22
5864.250	Peak	38.10	20.79	58.90	108.21	-49.31
5894.250	Peak	38.00	20.92	58.92	90.92	-32.00
5934.000	Peak	38.30	21.09	59.39	68.20	-8.81


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz_52/37	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

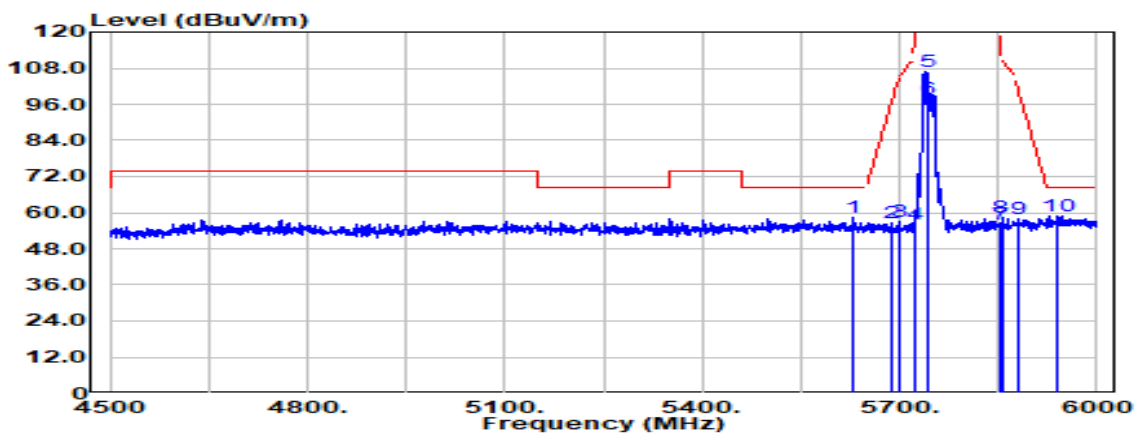

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5629.500	Peak	38.10	20.12	58.22	68.20	-9.98
5688.750	Peak	36.54	20.16	56.70	96.90	-40.20
5700.000	Peak	36.92	20.16	57.08	105.20	-48.12
5722.500	Peak	36.00	20.30	56.30	116.50	-60.20
5745.000	Peak	86.39	20.45	106.84	-	-
5745.000	Average	77.39	20.45	97.84	-	-
5851.500	Peak	35.30	20.74	56.03	118.78	-62.74
5855.250	Peak	37.61	20.75	58.36	110.73	-52.37
5880.000	Peak	36.95	20.86	57.82	101.49	-43.67
5939.250	Peak	37.80	21.11	58.92	68.20	-9.28


Test Mode	IEEE 802.11ax HE20 / 5745MHz_106/53	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

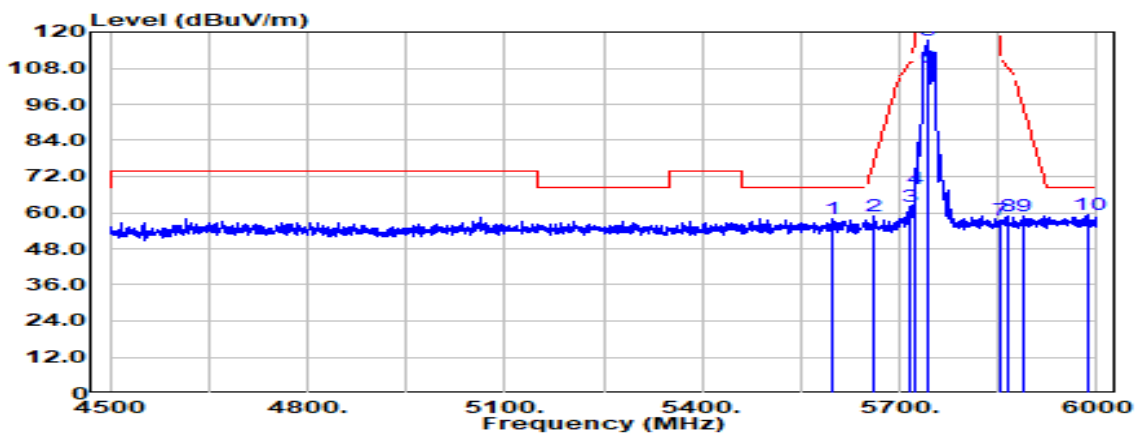

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5599.500	Peak	37.90	20.07	57.97	68.20	-10.23
5662.500	Peak	38.63	20.15	58.79	77.48	-18.69
5714.250	Peak	41.75	20.25	62.00	109.19	-47.19
5724.000	Peak	47.56	20.31	67.87	119.92	-52.05
5745.000	Peak	96.91	20.45	117.36	-	-
5745.000	Average	87.59	20.45	108.04	-	-
5851.500	Peak	36.59	20.74	57.33	118.78	-61.45
5863.500	Peak	37.85	20.79	58.64	108.42	-49.78
5888.250	Peak	37.88	20.90	58.78	95.36	-36.59
5987.250	Peak	38.28	21.17	59.44	68.20	-8.76

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5745MHz_106/53	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

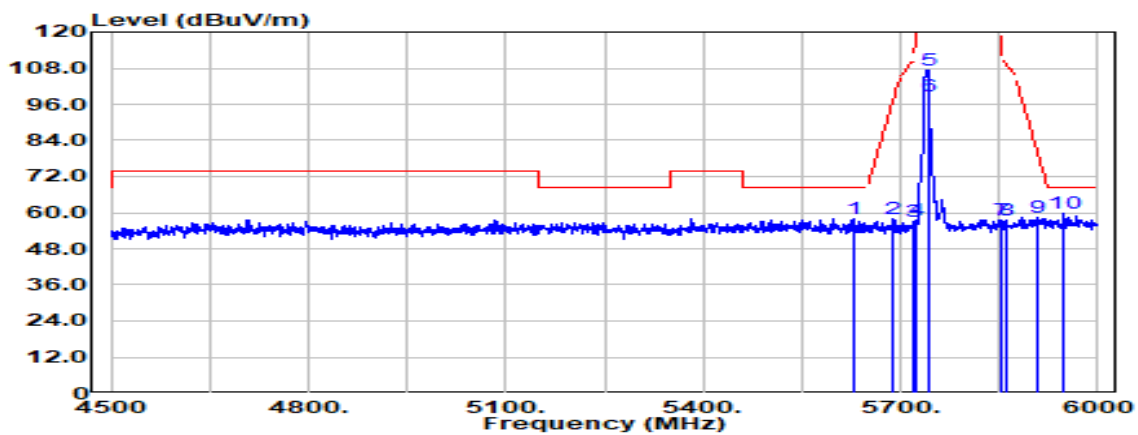

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5628.000	Peak	37.70	20.11	57.81	68.20	-10.39
5689.500	Peak	37.58	20.16	57.74	97.46	-39.72
5718.750	Peak	36.86	20.28	57.14	110.45	-53.32
5721.750	Peak	37.07	20.30	57.37	114.79	-57.42
5745.000	Peak	86.75	20.45	107.20	-	-
5745.000	Average	78.48	20.45	98.93	-	-
5853.750	Peak	36.89	20.75	57.64	113.65	-56.01
5860.500	Peak	36.63	20.78	57.40	109.26	-51.85
5907.000	Peak	37.39	20.98	58.37	81.48	-23.11
5946.750	Peak	38.60	21.15	59.74	68.20	-8.46

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

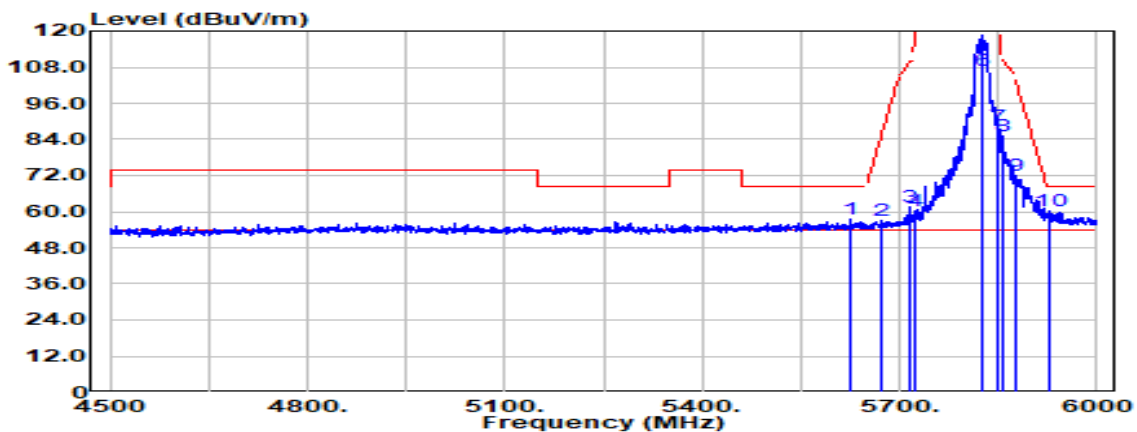

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.500	Peak	37.20	20.11	57.32	68.20	-10.88
5673.000	Peak	36.93	20.15	57.08	85.26	-28.18
5716.500	Peak	41.27	20.27	61.54	109.82	-48.28
5724.000	Peak	39.79	20.31	60.11	119.92	-59.81
5825.000	Peak	97.80	20.64	118.43	-	-
5825.000	Average	86.41	20.64	107.05	-	-
5850.750	Peak	67.74	20.73	88.47	120.49	-32.02
5856.000	Peak	64.23	20.76	84.98	110.52	-25.54
5876.250	Peak	51.07	20.85	71.92	104.27	-32.35
5926.500	Peak	39.33	21.06	60.39	68.20	-7.81

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

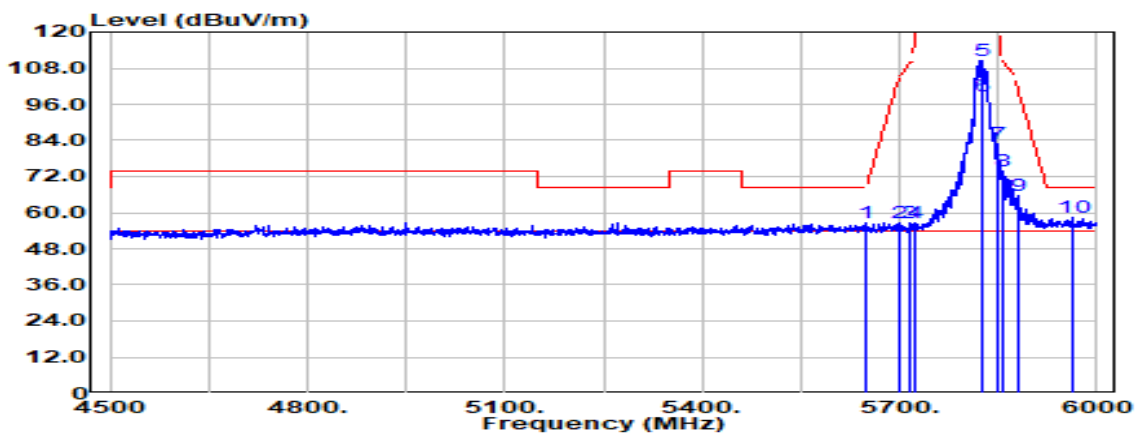


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.750	Peak	36.53	20.15	56.68	68.20	-11.52
5700.000	Peak	36.52	20.16	56.68	105.20	-48.52
5716.500	Peak	36.40	20.27	56.67	109.82	-53.15
5724.000	Peak	36.46	20.31	56.77	119.92	-63.15
5825.000	Peak	90.02	20.64	110.66	-	-
5825.000	Average	77.88	20.64	98.51	-	-
5850.000	Peak	62.01	20.73	82.74	122.20	-39.46
5856.750	Peak	53.15	20.76	73.91	110.31	-36.40
5881.500	Peak	44.85	20.87	65.72	100.37	-34.65
5963.250	Peak	37.16	21.16	58.32	68.20	-9.88



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_26/8	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

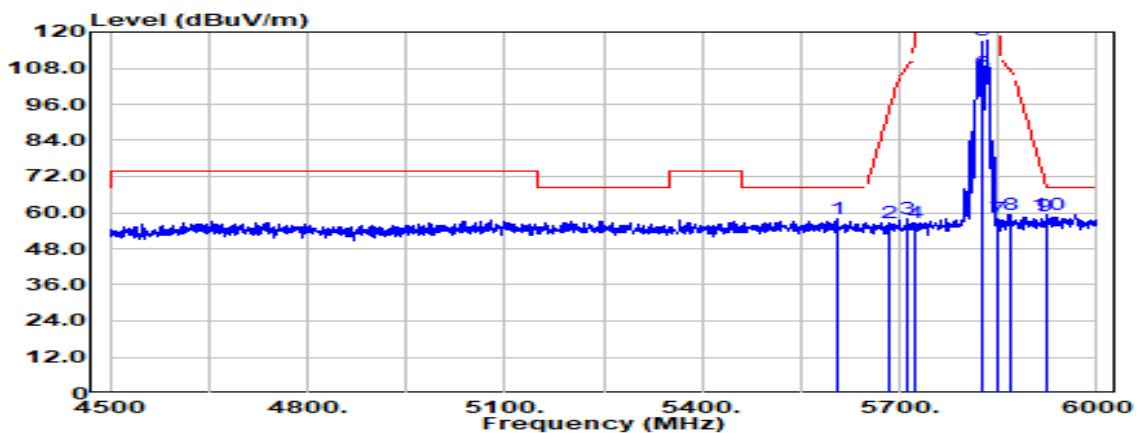

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5605.500	Peak	38.02	20.08	58.10	68.20	-10.10
5685.000	Peak	36.64	20.16	56.80	94.13	-37.34
5710.500	Peak	37.52	20.23	57.75	108.14	-50.39
5724.000	Peak	36.32	20.31	56.64	119.92	-63.28
5825.000	Peak	96.58	20.64	117.22	-	-
5825.000	Average	85.91	20.64	106.54	-	-
5850.000	Peak	37.39	20.73	58.12	122.20	-64.08
5868.000	Peak	38.69	20.81	59.50	107.16	-47.66
5922.000	Peak	37.77	21.04	58.81	70.41	-11.60
5925.750	Peak	38.11	21.06	59.17	68.20	-9.03

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_26/8	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

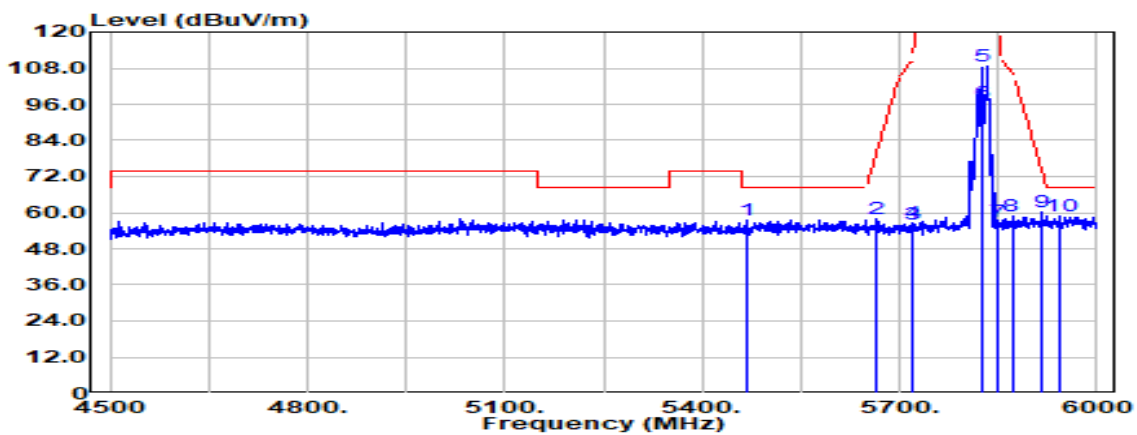

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5469.000	Peak	37.66	20.05	57.71	68.20	-10.49
5666.250	Peak	38.02	20.15	58.17	80.26	-22.09
5718.000	Peak	35.97	20.28	56.24	110.24	-54.00
5721.000	Peak	36.38	20.29	56.67	113.08	-56.41
5825.000	Peak	87.86	20.64	108.49	-	-
5825.000	Average	75.94	20.64	96.58	-	-
5850.000	Peak	36.43	20.73	57.16	122.20	-65.04
5871.000	Peak	37.84	20.82	58.66	106.32	-47.65
5915.250	Peak	39.19	21.01	60.20	75.39	-15.19
5943.750	Peak	37.74	21.13	58.87	68.20	-9.33

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

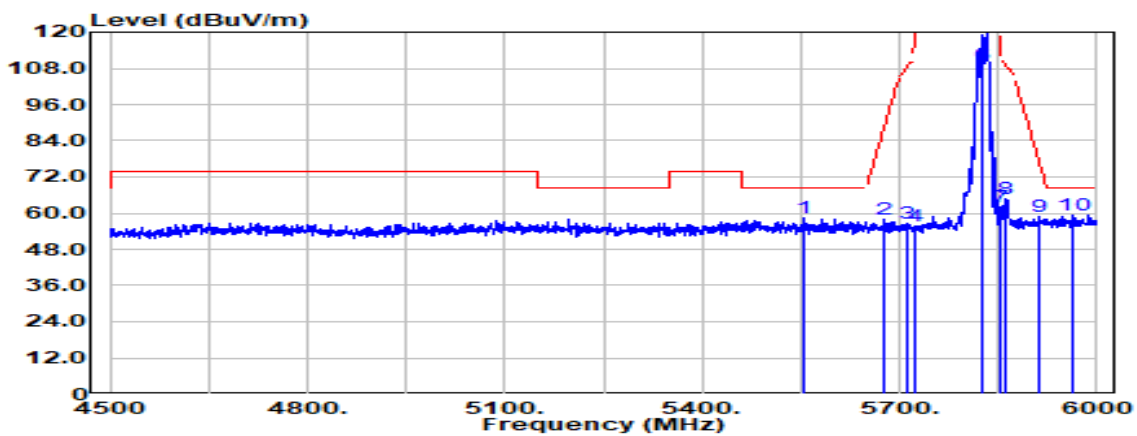

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5553.000	Peak	38.38	20.03	58.41	68.20	-9.79
5678.250	Peak	37.85	20.16	58.00	89.15	-31.14
5712.750	Peak	36.31	20.24	56.55	108.77	-52.22
5721.750	Peak	35.59	20.30	55.89	114.79	-58.90
5825.000	Peak	99.04	20.64	119.67	-	-
5825.000	Average	88.60	20.64	109.24	-	-
5853.000	Peak	41.07	20.74	61.82	115.36	-53.54
5860.500	Peak	44.11	20.78	64.88	109.26	-44.37
5913.750	Peak	37.88	21.01	58.89	76.50	-17.61
5964.750	Peak	38.36	21.16	59.52	68.20	-8.68

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

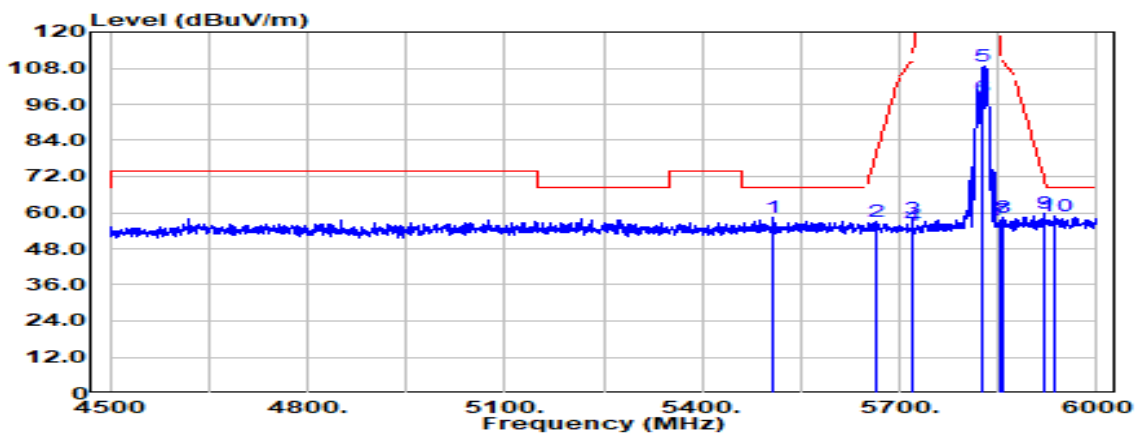

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5506.500	Peak	38.47	20.02	58.49	68.20	-9.71
5664.750	Peak	36.97	20.15	57.12	79.15	-22.03
5718.750	Peak	37.51	20.28	57.79	110.45	-52.66
5720.250	Peak	35.44	20.29	55.73	111.37	-55.64
5825.000	Peak	88.11	20.64	108.75	-	-
5825.000	Average	77.42	20.64	98.06	-	-
5854.500	Peak	36.88	20.75	57.63	111.94	-54.31
5857.500	Peak	37.71	20.76	58.47	110.10	-51.62
5919.000	Peak	38.89	21.03	59.92	72.62	-12.70
5936.250	Peak	37.93	21.10	59.03	68.20	-9.17

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_106/54	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

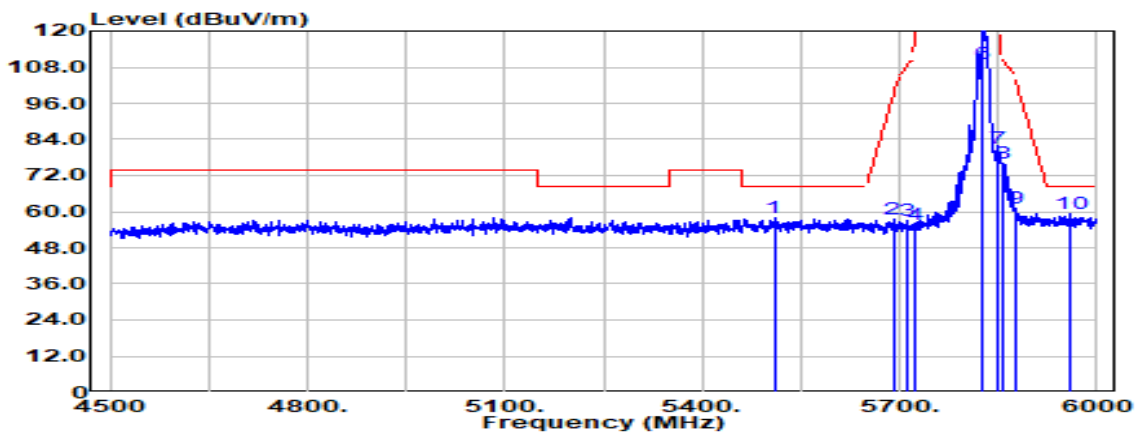

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5509.500	Peak	37.72	20.02	57.74	68.20	-10.46
5690.250	Peak	37.28	20.16	57.44	98.01	-40.57
5711.250	Peak	36.63	20.23	56.86	108.35	-51.49
5724.750	Peak	35.51	20.32	55.82	121.63	-65.81
5825.000	Peak	99.66	20.64	120.30	-	-
5825.000	Average	88.39	20.64	109.02	-	-
5850.750	Peak	60.11	20.73	80.84	120.49	-39.65
5858.250	Peak	55.39	20.77	76.16	109.89	-33.73
5878.500	Peak	40.10	20.86	60.95	102.60	-41.65
5958.000	Peak	38.20	21.16	59.36	68.20	-8.84

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz_106/54	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

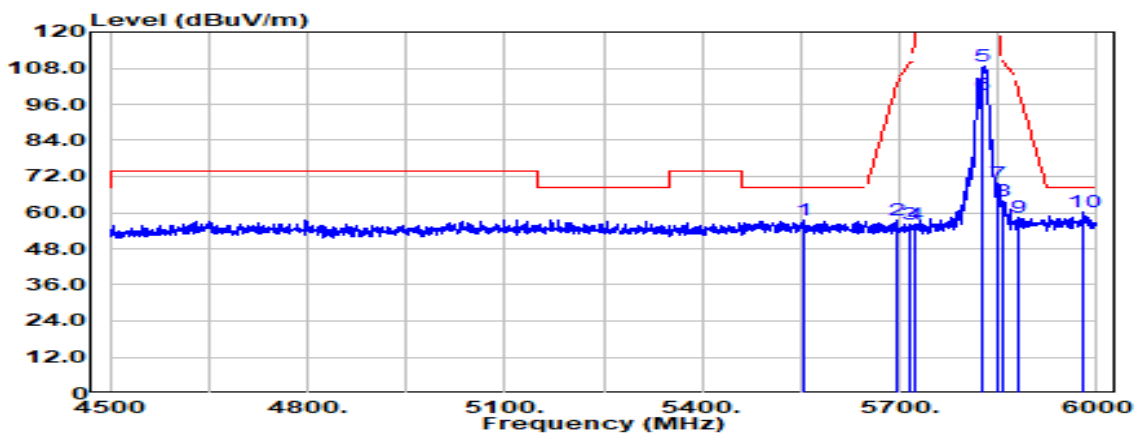

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5553.000	Peak	37.64	20.03	57.68	68.20	-10.52
5694.750	Peak	37.29	20.16	57.45	101.33	-43.88
5716.500	Peak	35.77	20.27	56.03	109.82	-53.79
5721.750	Peak	36.01	20.30	56.31	114.79	-58.48
5825.000	Peak	88.09	20.64	108.73	-	-
5825.000	Average	78.55	20.64	99.19	-	-
5850.000	Peak	49.08	20.73	69.81	122.20	-52.39
5857.500	Peak	43.28	20.76	64.04	110.10	-46.06
5882.250	Peak	37.37	20.87	58.25	99.82	-41.57
5979.750	Peak	38.84	21.17	60.00	68.20	-8.20

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

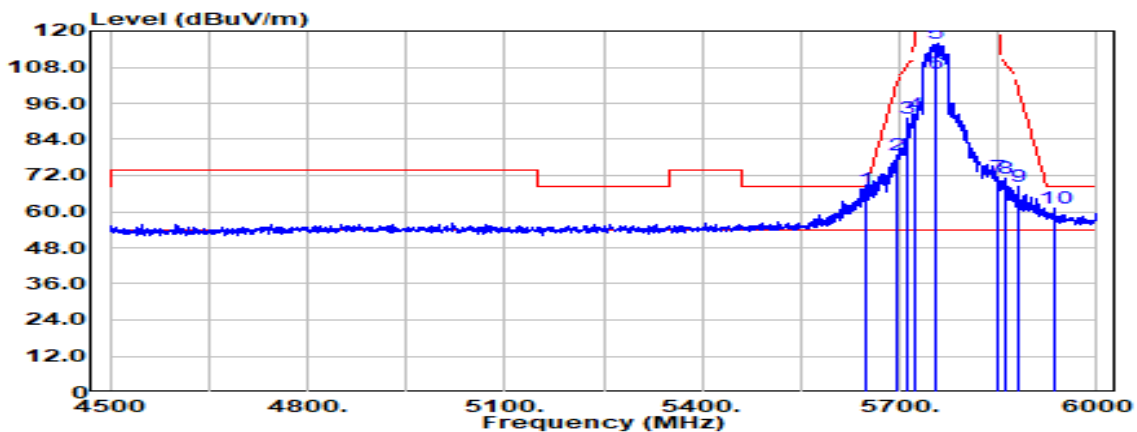

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5648.250	Peak	47.44	20.15	67.58	68.20	-0.62
5695.500	Peak	58.61	20.16	78.77	101.88	-23.12
5712.750	Peak	70.71	20.24	90.95	108.77	-17.82
5722.500	Peak	71.92	20.30	92.23	116.50	-24.27
5755.000	Peak	95.65	20.49	116.13	-	-
5755.000	Average	85.54	20.49	106.03	-	-
5850.750	Peak	50.68	20.73	71.41	120.49	-49.08
5862.750	Peak	50.37	20.79	71.16	108.63	-37.47
5880.000	Peak	47.66	20.86	68.53	101.49	-32.96
5935.500	Peak	40.08	21.10	61.18	68.20	-7.02

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

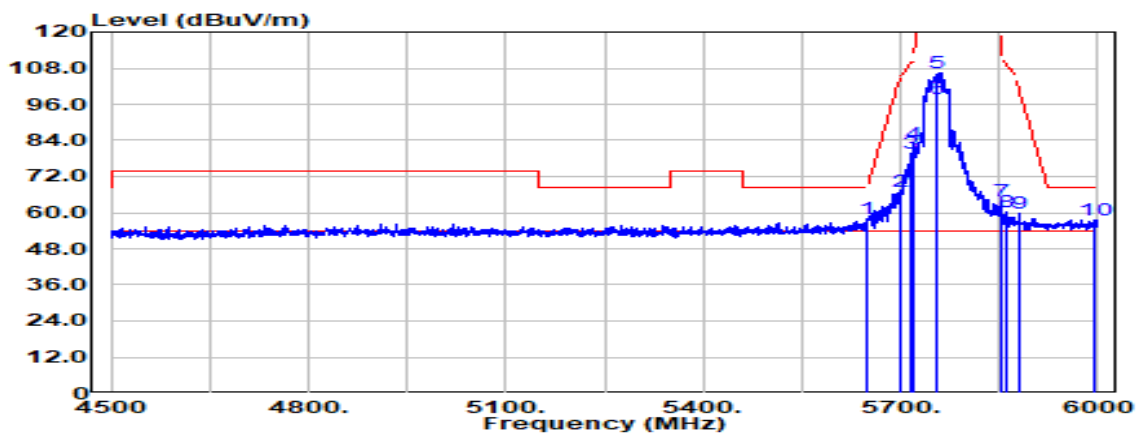


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.750	Peak	37.81	20.15	57.96	68.20	-10.24
5699.250	Peak	46.82	20.16	66.98	104.65	-37.67
5715.000	Peak	59.50	20.26	79.76	109.40	-29.65
5720.250	Peak	62.37	20.29	82.66	111.37	-28.71
5755.000	Peak	86.11	20.49	106.60	-	-
5755.000	Average	77.21	20.49	97.70	-	-
5851.500	Peak	43.28	20.74	64.02	118.78	-54.76
5859.750	Peak	39.57	20.77	60.34	109.47	-49.12
5880.000	Peak	38.97	20.86	59.83	101.49	-41.66
5994.000	Peak	36.42	21.17	57.59	68.20	-10.61



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_242/61	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

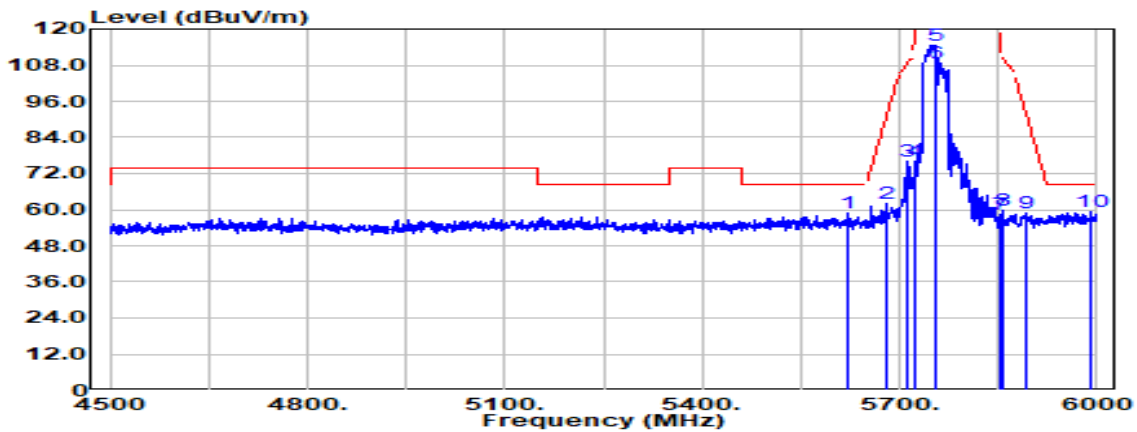

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5620.500	Peak	38.64	20.10	58.74	68.20	-9.46
5679.000	Peak	41.86	20.16	62.01	89.70	-27.69
5713.500	Peak	55.72	20.25	75.97	108.98	-33.01
5723.250	Peak	55.60	20.31	75.91	118.21	-42.30
5755.000	Peak	94.25	20.49	114.74	-	-
5755.000	Average	88.23	20.49	108.72	-	-
5852.250	Peak	37.48	20.74	58.22	117.07	-58.85
5856.750	Peak	39.19	20.76	59.95	110.31	-50.36
5892.750	Peak	37.86	20.92	58.78	92.03	-33.25
5989.500	Peak	38.05	21.17	59.22	68.20	-8.98

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_242/61	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

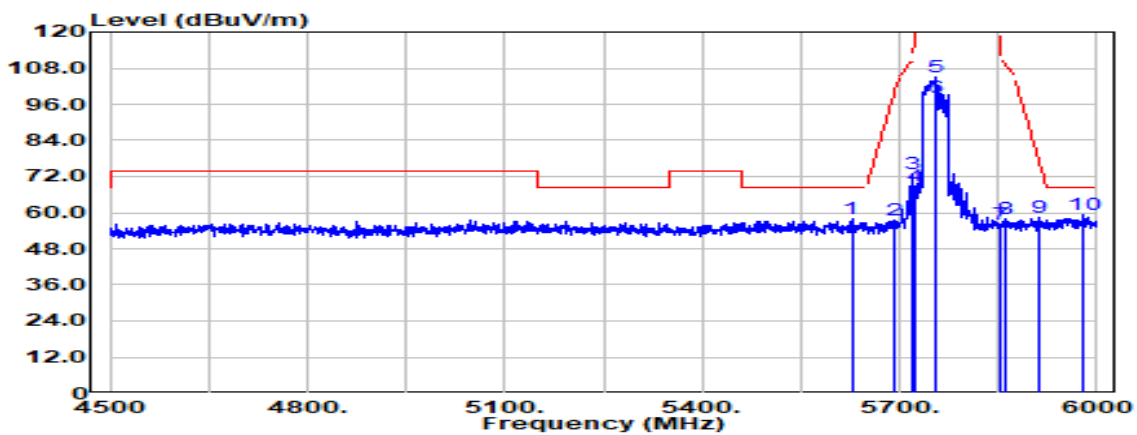

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5627.250	Peak	37.70	20.11	57.82	68.20	-10.38
5694.000	Peak	37.26	20.16	57.42	100.78	-43.36
5718.000	Peak	52.47	20.28	72.75	110.24	-37.50
5721.750	Peak	48.49	20.30	68.79	114.79	-46.00
5755.000	Peak	84.48	20.49	104.96	-	-
5755.000	Average	77.73	20.49	98.22	-	-
5853.750	Peak	35.52	20.75	56.27	113.65	-57.38
5862.750	Peak	37.26	20.79	58.04	108.63	-50.59
5910.750	Peak	37.29	21.00	58.29	78.71	-20.42
5978.250	Peak	38.15	21.17	59.32	68.20	-8.88

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

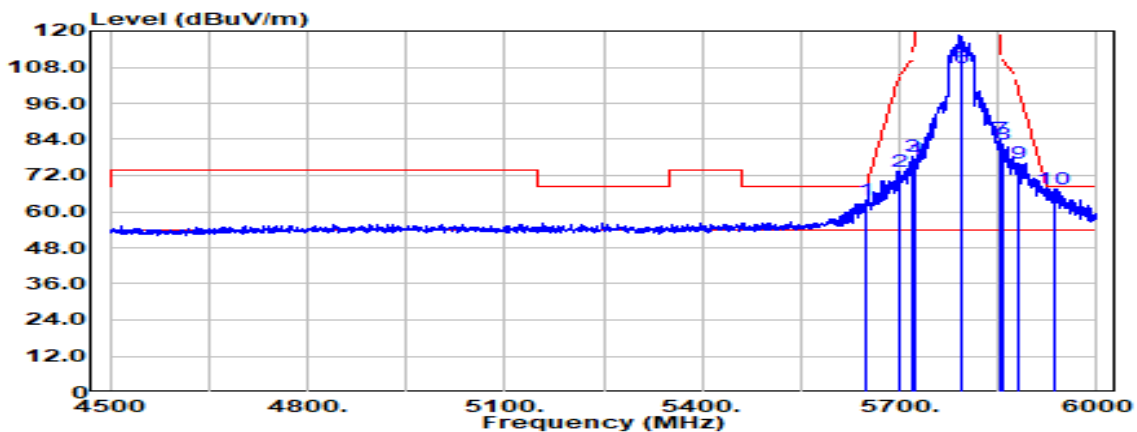

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.000	Peak	43.60	20.15	63.75	68.20	-4.45
5698.500	Peak	53.07	20.16	73.23	104.09	-30.86
5718.750	Peak	57.96	20.28	78.24	110.45	-32.21
5724.000	Peak	57.22	20.31	77.53	119.92	-42.39
5795.000	Peak	98.29	20.53	118.82	-	-
5795.000	Average	87.11	20.53	107.64	-	-
5853.000	Peak	63.62	20.74	84.36	115.36	-30.99
5856.000	Peak	61.69	20.76	82.45	110.52	-28.07
5879.250	Peak	55.39	20.86	76.24	102.04	-25.80
5934.000	Peak	46.58	21.09	67.67	68.20	-0.53

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

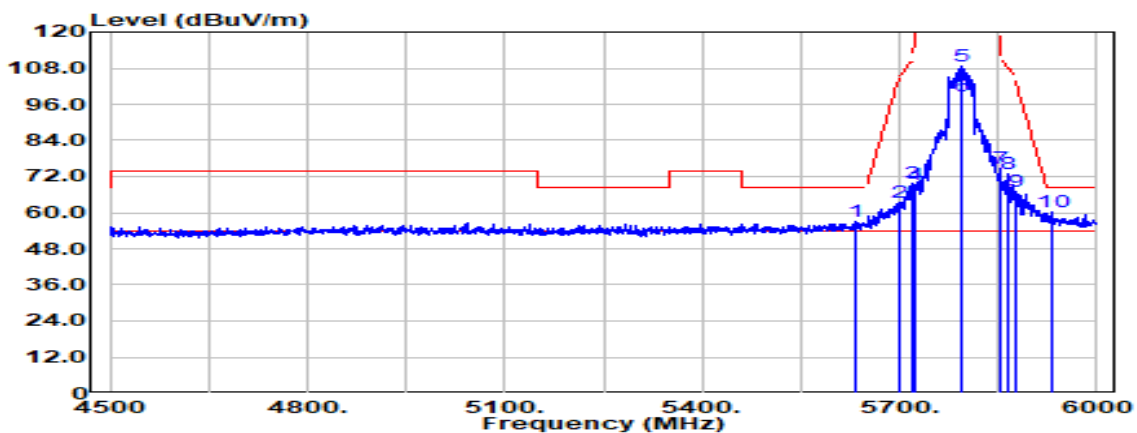

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5631.750	Peak	37.02	20.12	57.14	68.20	-11.06
5698.500	Peak	43.41	20.16	63.57	104.09	-40.52
5718.000	Peak	49.53	20.28	69.80	110.24	-40.44
5724.000	Peak	48.86	20.31	69.17	119.92	-50.75
5795.000	Peak	88.07	20.53	108.61	-	-
5795.000	Average	78.37	20.53	98.90	-	-
5853.750	Peak	53.85	20.75	74.60	113.65	-39.05
5863.500	Peak	51.94	20.79	72.73	108.42	-35.69
5877.000	Peak	46.37	20.85	67.22	103.71	-36.50
5931.750	Peak	38.92	21.08	60.01	68.20	-8.19

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_242/62	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

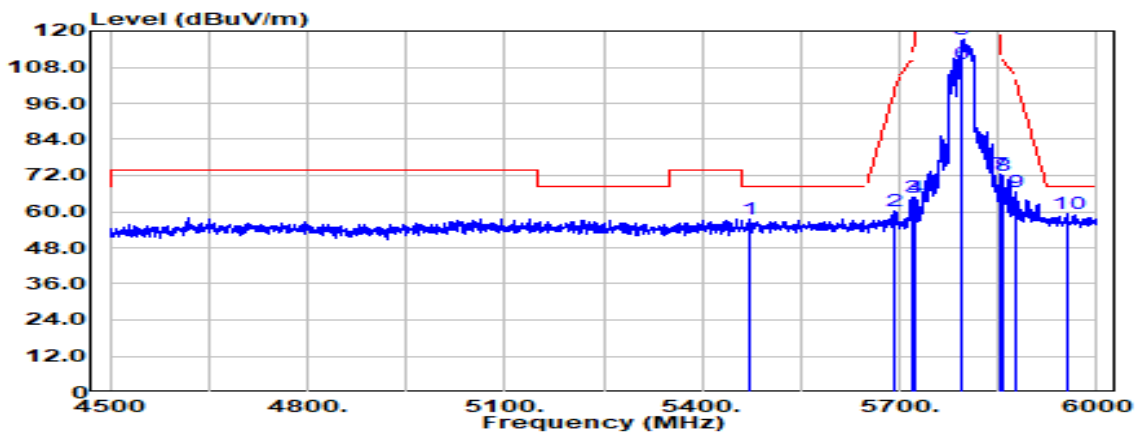

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5471.250	Peak	37.64	20.05	57.69	68.20	-10.51
5693.250	Peak	40.13	20.16	60.29	100.22	-39.93
5718.000	Peak	44.57	20.28	64.84	110.24	-45.40
5724.000	Peak	44.23	20.31	64.55	119.92	-55.38
5795.000	Peak	96.67	20.53	117.21	-	-
5795.000	Average	88.73	20.53	109.27	-	-
5853.000	Peak	51.54	20.74	72.28	115.36	-43.08
5856.750	Peak	51.11	20.76	71.87	110.31	-38.44
5877.750	Peak	45.76	20.85	66.61	103.16	-36.54
5955.000	Peak	38.12	21.16	59.29	68.20	-8.91

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_242/62	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

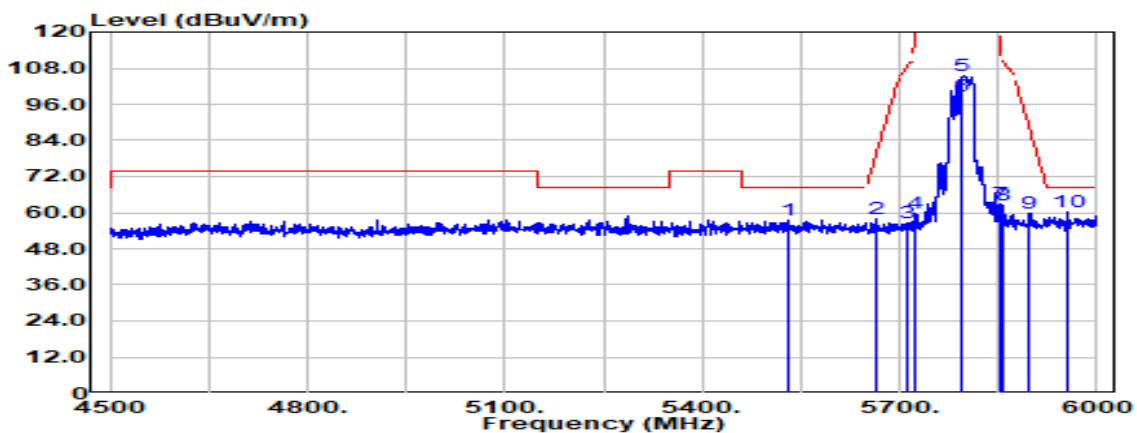

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5532.000	Peak	37.43	20.03	57.46	68.20	-10.74
5664.000	Peak	37.84	20.15	58.00	78.59	-20.60
5710.500	Peak	36.29	20.23	56.52	108.14	-51.63
5724.000	Peak	39.66	20.31	59.98	119.92	-59.94
5795.000	Peak	85.02	20.53	105.56	-	-
5795.000	Average	78.38	20.53	98.92	-	-
5852.250	Peak	42.32	20.74	63.06	117.07	-54.01
5859.000	Peak	41.69	20.77	62.46	109.68	-47.22
5898.000	Peak	38.68	20.94	59.62	88.14	-28.52
5954.250	Peak	39.25	21.16	60.42	68.20	-7.78

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	20.9(°C) / 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

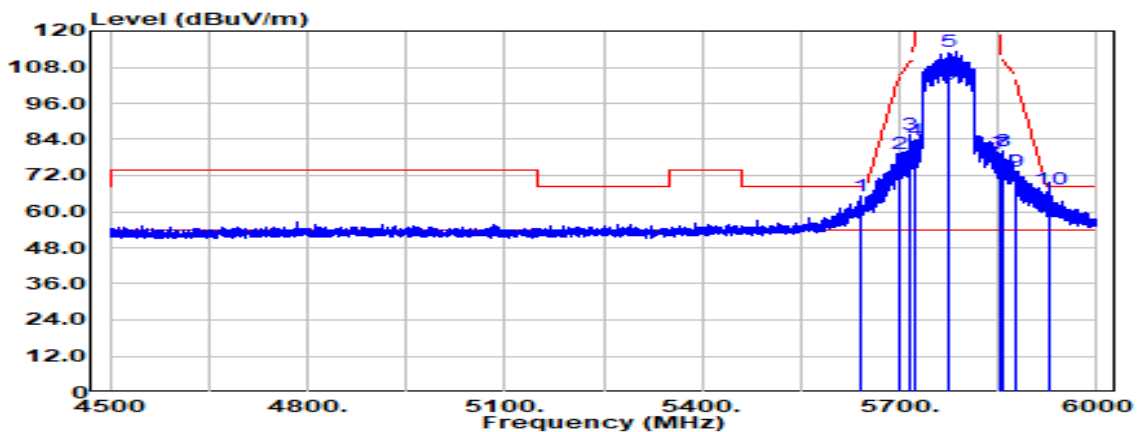

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5641.875	Peak	44.99	20.14	65.12	68.20	-3.08
5699.250	Peak	58.95	20.16	79.11	104.65	-25.53
5717.063	Peak	65.17	20.27	85.44	109.98	-24.54
5724.000	Peak	63.45	20.31	83.77	119.92	-36.15
5775.000	Peak	92.78	20.51	113.29	-	-
5775.000	Average	81.63	20.51	102.14	-	-
5854.313	Peak	58.38	20.75	79.13	112.37	-33.24
5856.563	Peak	59.21	20.76	79.97	110.36	-30.39
5876.438	Peak	52.59	20.85	73.44	104.13	-30.70
5926.500	Peak	46.55	21.06	67.61	68.20	-0.59

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

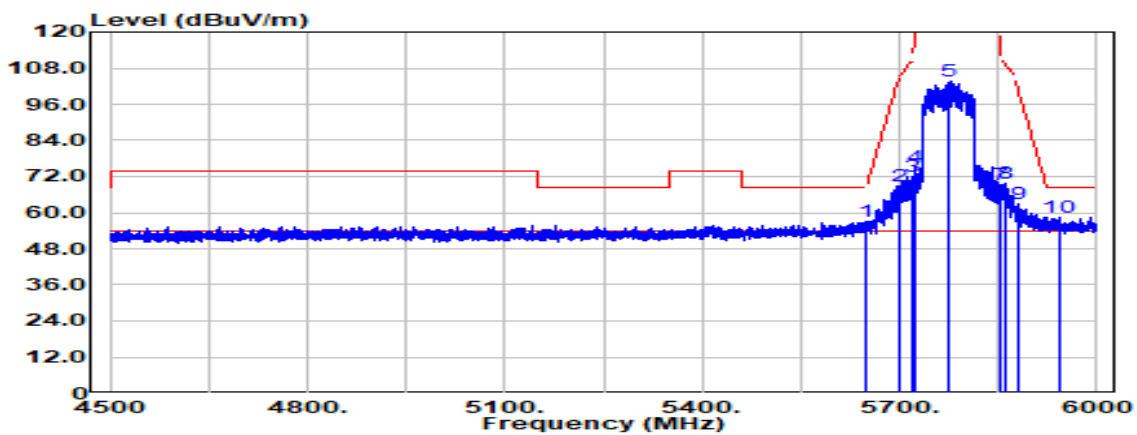


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.000	Peak	37.05	20.15	57.20	68.20	-11.00
5699.625	Peak	48.75	20.16	68.91	104.92	-36.01
5718.000	Peak	51.66	20.28	71.94	110.24	-38.30
5724.375	Peak	54.82	20.32	75.14	120.78	-45.64
5775.000	Peak	83.21	20.51	103.72	-	-
5775.000	Average	74.50	20.51	95.01	-	-
5852.250	Peak	48.73	20.74	69.47	117.07	-47.60
5862.000	Peak	48.92	20.78	69.70	108.84	-39.13
5879.250	Peak	42.12	20.86	62.98	102.04	-39.06
5941.688	Peak	37.50	21.13	58.63	68.20	-9.57



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5775MHz_484/65	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

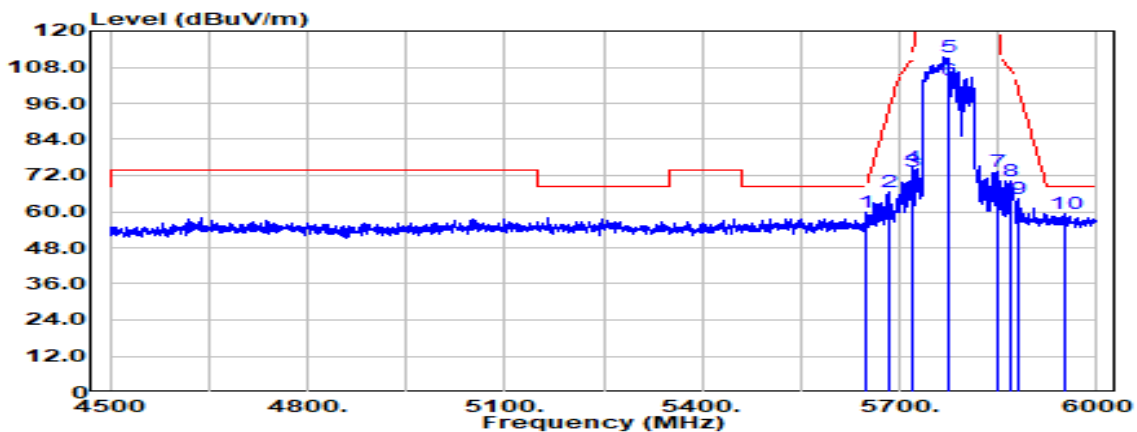

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.750	Peak	39.54	20.15	59.69	68.20	-8.51
5684.250	Peak	46.38	20.16	66.54	93.58	-27.04
5719.500	Peak	52.92	20.28	73.20	110.66	-37.46
5720.250	Peak	54.61	20.29	74.90	111.37	-36.47
5775.000	Peak	90.82	20.51	111.33	-	-
5775.000	Average	83.29	20.51	103.80	-	-
5850.000	Peak	52.65	20.73	73.38	122.20	-48.82
5868.750	Peak	49.59	20.81	70.41	106.95	-36.54
5879.250	Peak	43.50	20.86	64.36	102.04	-37.68
5951.250	Peak	38.10	21.16	59.26	68.20	-8.94

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5775MHz_484/65	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

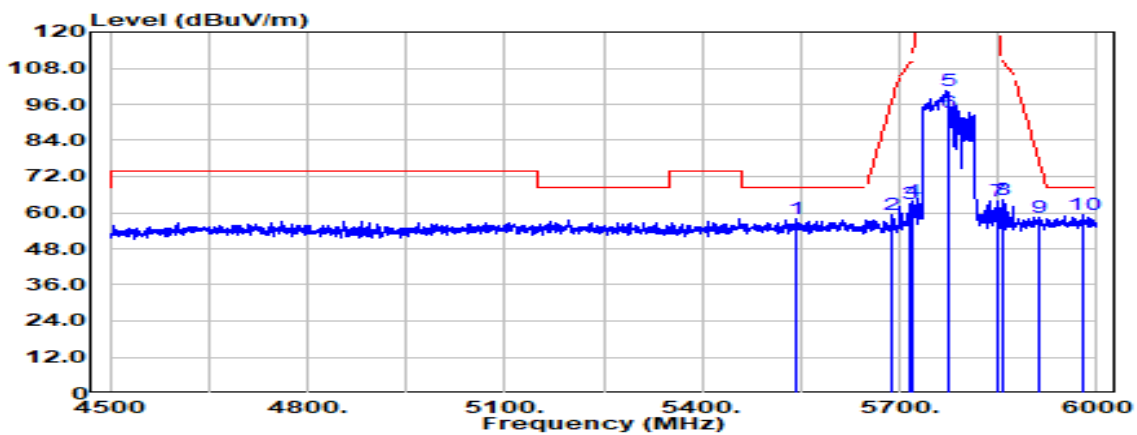

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5543.250	Peak	37.83	20.03	57.85	68.20	-10.35
5687.250	Peak	39.31	20.16	59.46	95.80	-36.33
5717.250	Peak	42.81	20.27	63.08	110.03	-46.95
5721.000	Peak	43.45	20.29	63.75	113.08	-49.33
5775.000	Peak	80.19	20.51	100.70	-	-
5775.000	Average	72.72	20.51	93.23	-	-
5850.000	Peak	43.29	20.73	64.02	122.20	-58.18
5856.750	Peak	43.52	20.76	64.28	110.31	-46.03
5912.250	Peak	37.35	21.00	58.35	77.61	-19.25
5979.750	Peak	38.07	21.17	59.24	68.20	-8.96

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5775MHz_484/66	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

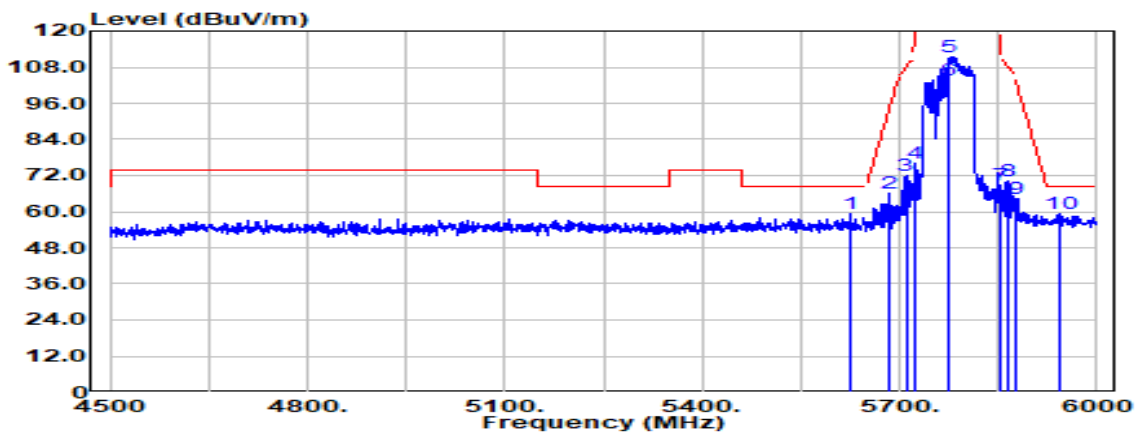

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5625.000	Peak	39.30	20.11	59.41	68.20	-8.79
5684.250	Peak	46.03	20.16	66.19	93.58	-27.39
5709.750	Peak	51.72	20.22	71.95	107.93	-35.99
5724.000	Peak	55.79	20.31	76.11	119.92	-43.81
5775.000	Peak	90.94	20.51	111.45	-	-
5775.000	Average	83.29	20.51	103.80	-	-
5853.000	Peak	48.12	20.74	68.86	115.36	-46.50
5864.250	Peak	49.48	20.79	70.28	108.21	-37.93
5876.250	Peak	43.66	20.85	64.50	104.27	-39.77
5943.000	Peak	38.01	21.13	59.14	68.20	-9.06

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5775MHz_484/66	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

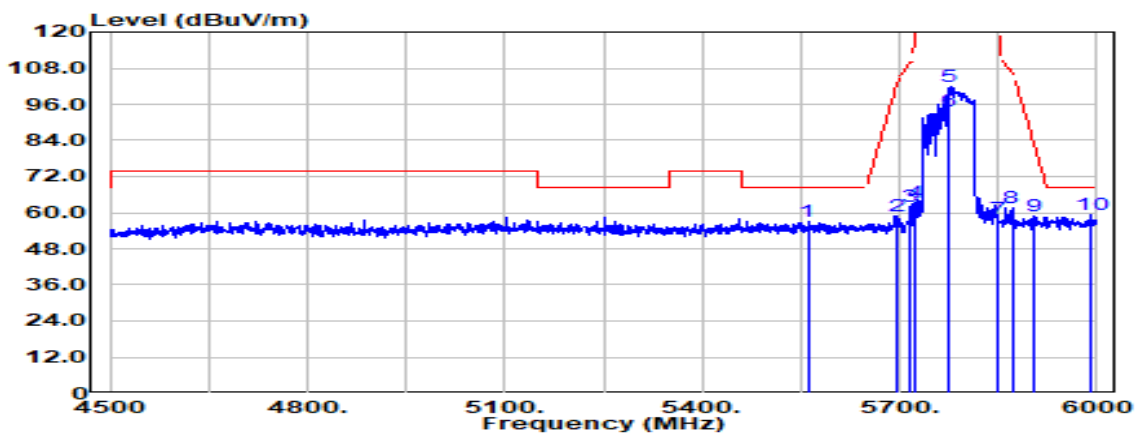

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5560.500	Peak	36.98	20.04	57.02	68.20	-11.18
5696.250	Peak	38.71	20.16	58.87	102.44	-43.57
5715.750	Peak	41.74	20.26	62.00	109.61	-47.62
5721.750	Peak	43.20	20.30	63.50	114.79	-51.29
5775.000	Peak	81.23	20.51	101.74	-	-
5775.000	Average	73.06	20.51	93.57	-	-
5850.750	Peak	37.31	20.73	58.04	120.49	-62.45
5871.000	Peak	40.77	20.82	61.59	106.32	-44.73
5902.500	Peak	37.94	20.96	58.90	84.81	-25.91
5991.000	Peak	37.96	21.17	59.13	68.20	-9.07


Report No.: TMWK2201000111KR

### Band Edge Test Data

**BFM ON**

#### Test Data for UNII-1


Test Mode	IEEE 802.11ac VHT20 / 5180MHZ	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

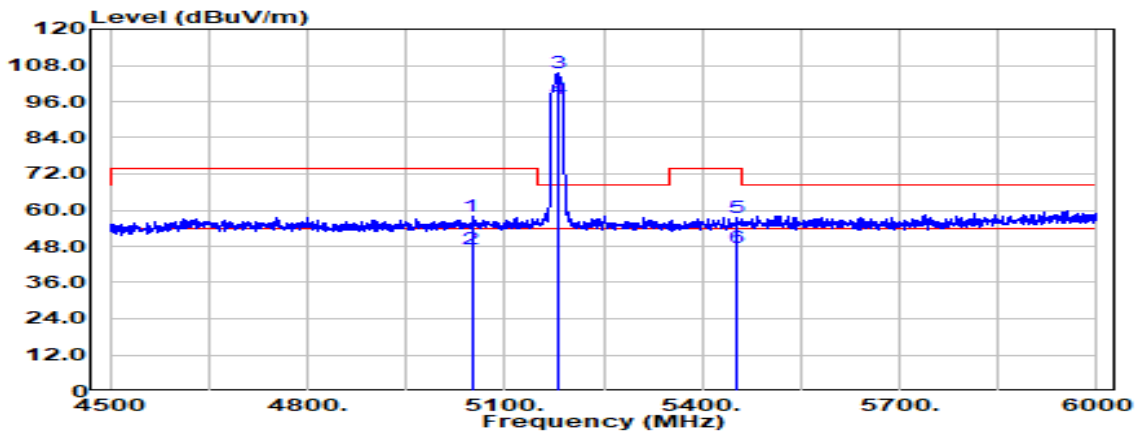

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5049.750	Peak	38.87	18.90	57.77	74.00	-16.23
5049.750	Average	28.29	18.90	47.19	54.00	-6.81
5180.000	Peak	86.22	19.19	105.41	--	--
5180.000	Average	77.49	19.19	96.69	--	--
5454.000	Peak	37.42	20.07	57.48	74.00	-16.52
5454.000	Average	27.29	20.07	47.36	54.00	-6.64

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11 ac VHT 20 / 5180MHZ	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

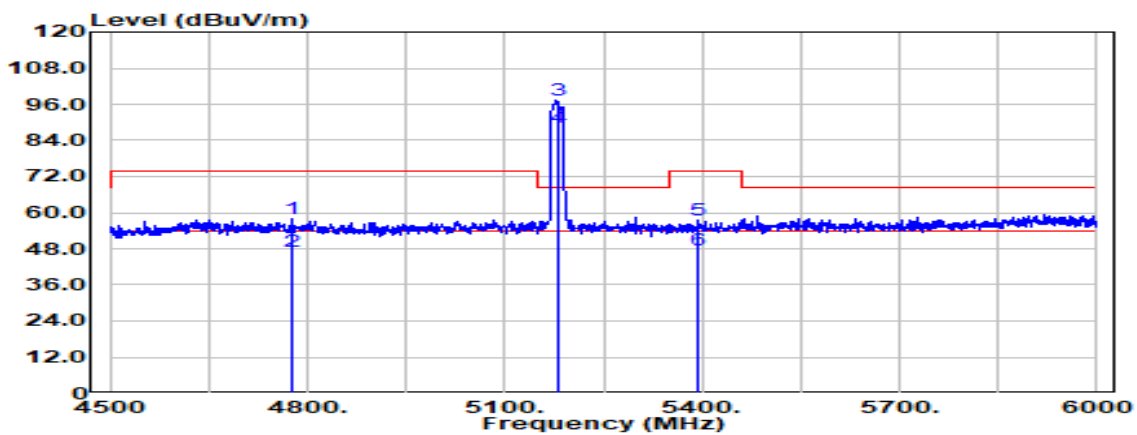

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4777.500	Peak	39.28	18.47	57.75	74.00	-16.25
4777.500	Average	28.68	18.47	47.15	54.00	-6.85
5180.000	Peak	78.26	19.19	97.46	--	--
5180.000	Average	68.90	19.19	88.09	--	--
5394.750	Peak	37.54	20.03	57.58	74.00	-16.42
5394.750	Average	27.33	20.03	47.37	54.00	-6.63

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11 ac VHT 40 / 5190MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

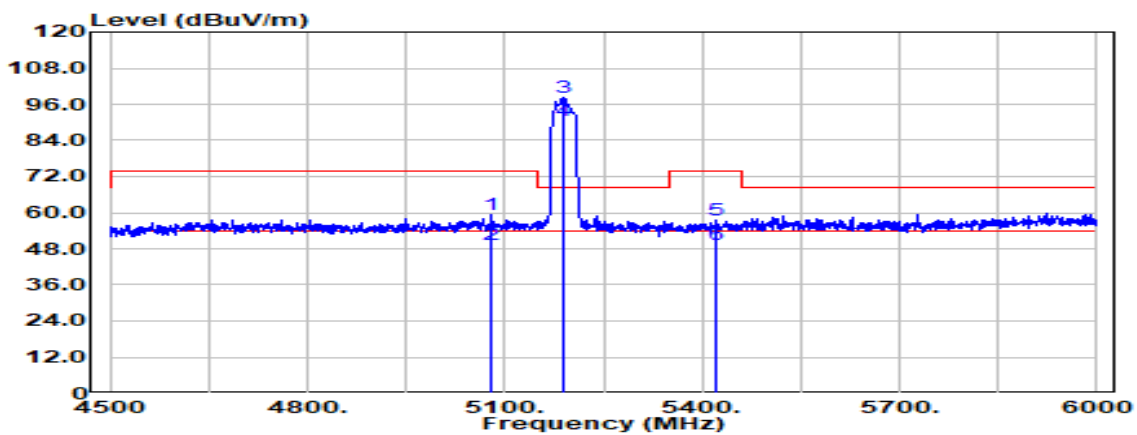

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5079.000	Peak	40.39	18.87	59.25	74.00	-14.75
5079.000	Average	30.62	18.87	49.48	54.00	-4.52
5190.000	Peak	79.21	19.26	98.47	--	--
5190.000	Average	71.18	19.26	90.44	--	--
5421.750	Peak	37.35	20.06	57.42	74.00	-16.58
5421.750	Average	29.38	20.06	49.44	54.00	-4.56

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11 ac VHT 40 / 5190MHZ	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

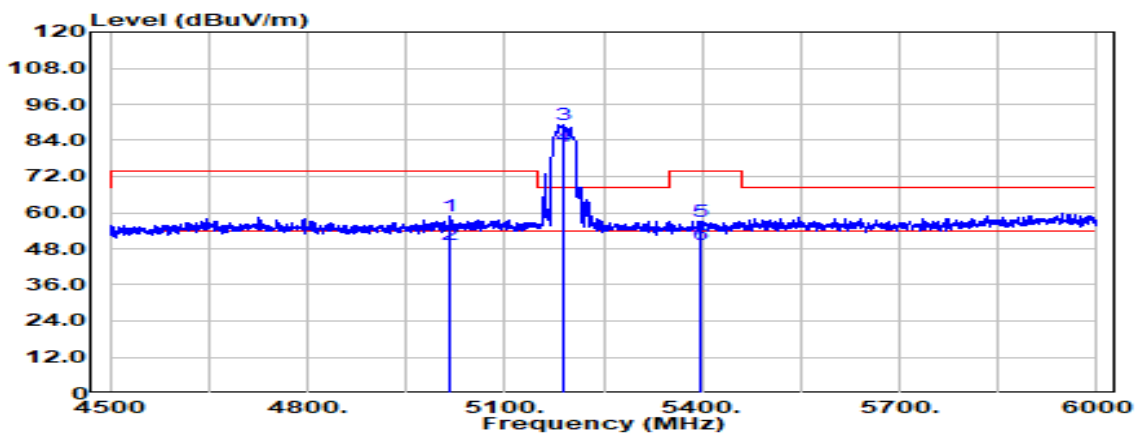


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5017.500	Peak	40.03	18.85	58.88	74.00	-15.12
5017.500	Average	30.59	18.85	49.44	54.00	-4.56
5190.000	Peak	70.06	19.26	89.31	--	--
5190.000	Average	62.63	19.26	81.88	--	--
5397.000	Peak	37.22	20.05	57.26	74.00	-16.74
5397.000	Average	29.34	20.05	49.39	54.00	-4.61




Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

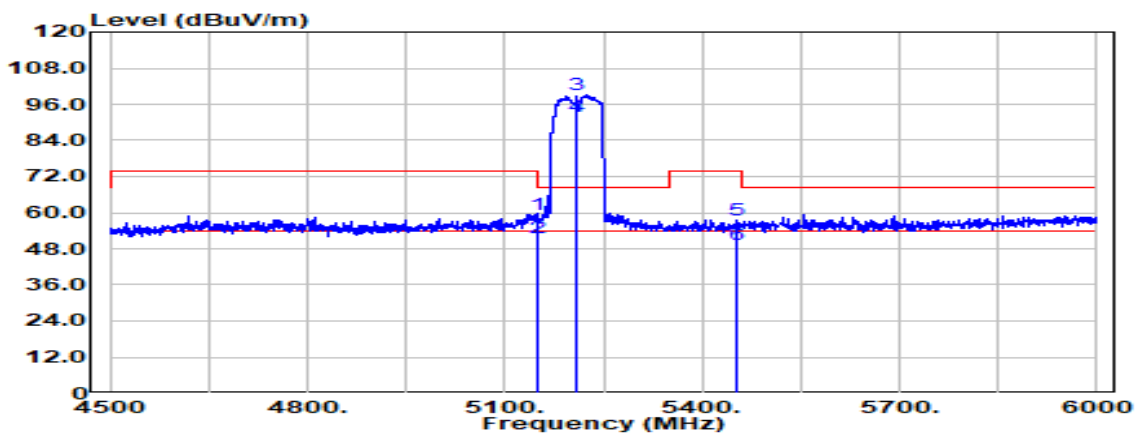

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5149.500	Peak	40.48	19.00	59.48	74.00	-14.52
5149.500	Average	32.41	19.00	51.41	54.00	-2.59
5210.000	Peak	79.97	19.39	99.36	--	--
5210.000	Average	72.71	19.39	92.10	--	--
5454.000	Peak	37.62	20.07	57.69	74.00	-16.31
5454.000	Average	29.40	20.07	49.46	54.00	-4.54


Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

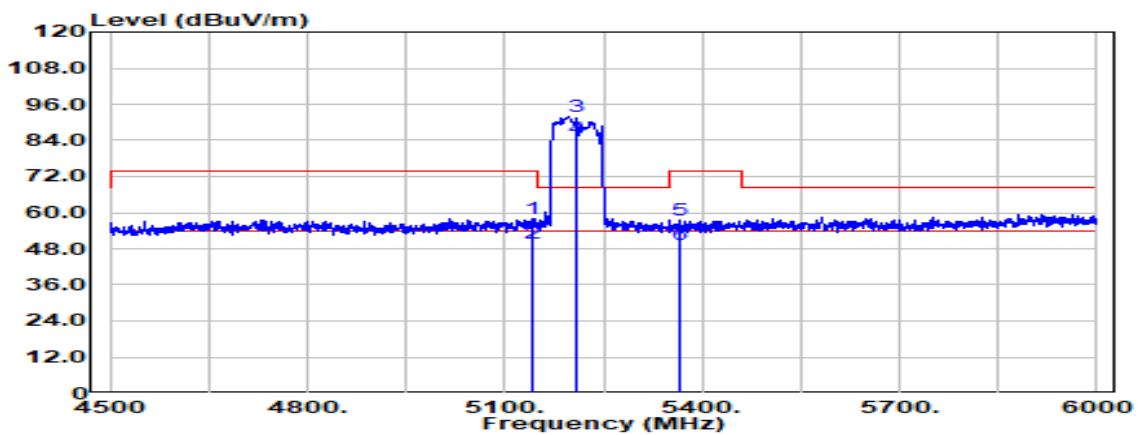

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5143.500	Peak	39.06	18.98	58.04	74.00	-15.96
5143.500	Average	30.89	18.98	49.87	54.00	-4.13
5210.000	Peak	72.34	19.39	91.73	--	--
5210.000	Average	65.22	19.39	84.60	--	--
5366.250	Peak	37.64	19.90	57.53	74.00	-16.47
5366.250	Average	29.65	19.90	49.54	54.00	-4.46

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5180MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

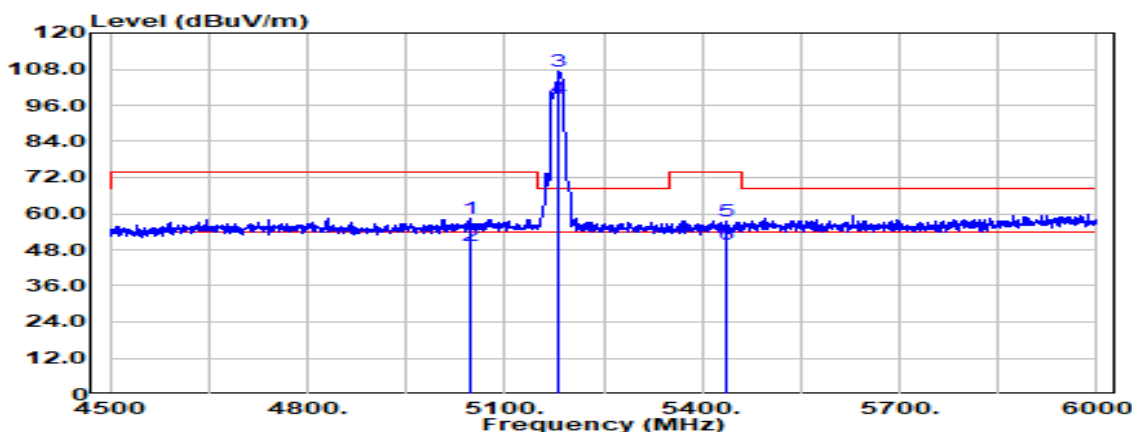

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5046.000	Peak	39.74	18.89	58.63	74.00	-15.37
5046.000	Average	30.52	18.89	49.42	54.00	-4.58
5180.000	Peak	88.17	19.19	107.36	--	--
5180.000	Average	79.10	19.19	98.29	--	--
5436.750	Peak	37.54	20.07	57.60	74.00	-16.40
5436.750	Average	29.73	20.07	49.80	54.00	-4.20


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5180MHz	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

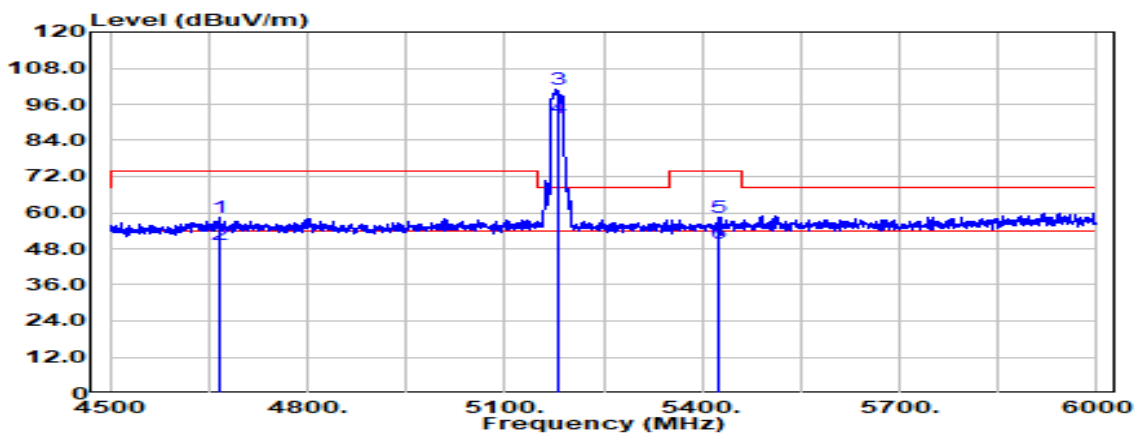

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4665.000	Peak	39.79	18.42	58.21	74.00	-15.79
4665.000	Average	31.01	18.42	49.43	54.00	-4.57
5180.000	Peak	81.83	19.19	101.02	--	--
5180.000	Average	72.37	19.19	91.56	--	--
5426.250	Peak	38.36	20.07	58.42	74.00	-15.58
5426.250	Average	29.64	20.07	49.70	54.00	-4.30


Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

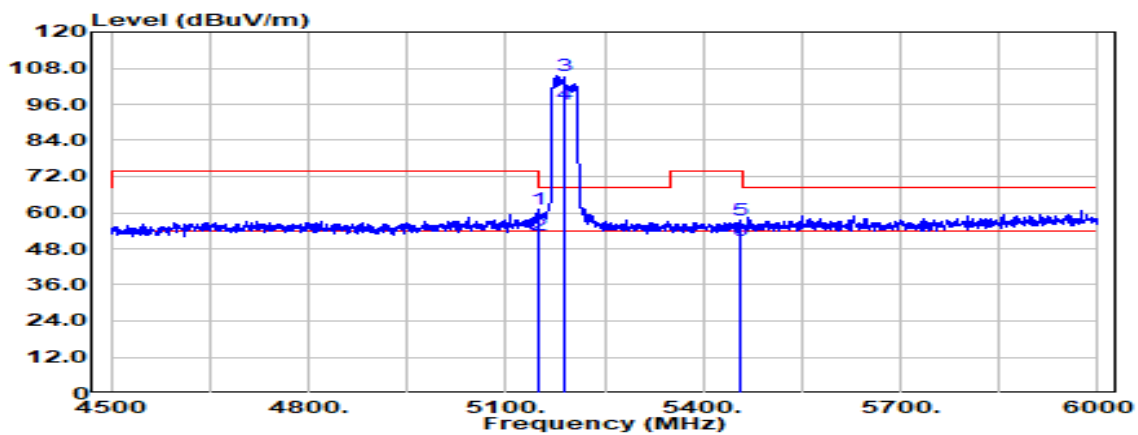

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5148.750	Peak	42.19	19.00	61.18	74.00	-12.82
5148.750	Average	33.40	19.00	52.39	54.00	-1.61
5190.000	Peak	86.39	19.26	105.65	--	--
5190.000	Average	76.83	19.26	96.08	--	--
5456.250	Peak	37.29	20.06	57.35	74.00	-16.65
5456.250	Average	30.50	20.06	50.57	54.00	-3.43

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

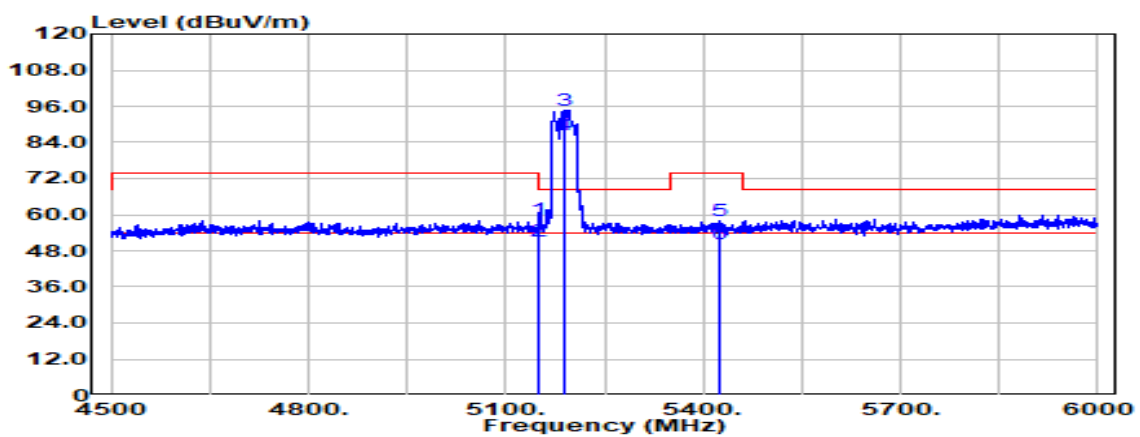

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.500	Peak	39.30	19.00	58.30	74.00	-15.70
5149.500	Average	32.09	19.00	51.09	54.00	-2.91
5190.000	Peak	75.40	19.26	94.66	--	--
5190.000	Average	67.42	19.26	86.67	--	--
5425.500	Peak	37.76	20.07	57.82	74.00	-16.18
5425.500	Average	30.42	20.07	50.49	54.00	-3.51


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5210MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

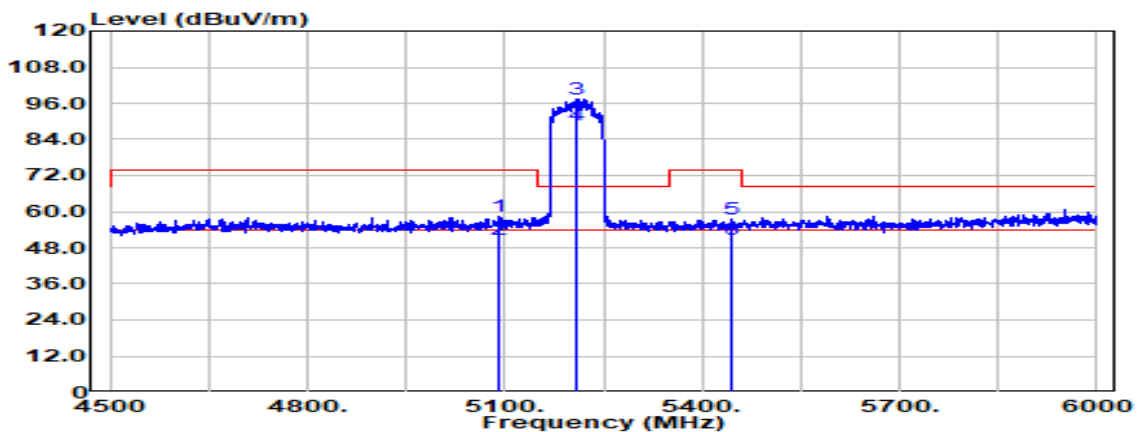

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5092.500	Peak	39.57	18.85	58.42	74.00	-15.58
5092.500	Average	31.74	18.85	50.59	54.00	-3.41
5210.000	Peak	78.09	19.39	97.48	--	--
5210.000	Average	69.34	19.39	88.72	--	--
5445.000	Peak	37.25	20.07	57.32	74.00	-16.68
5445.000	Average	30.53	20.07	50.60	54.00	-3.40

Test Mode	IEEE 802.11ax HE80 / 5210MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

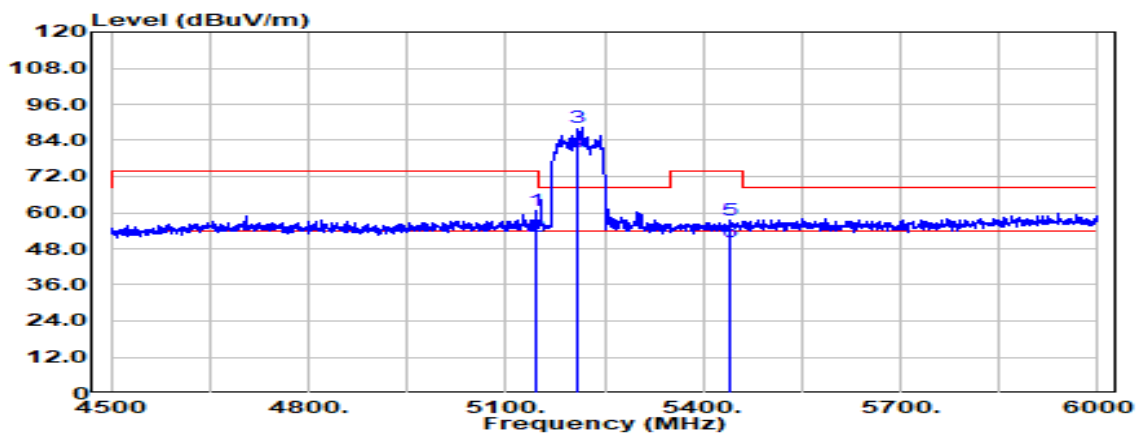


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5145.750	Peak	41.73	18.99	60.72	74.00	-13.28
5145.750	Average	32.99	18.99	51.98	54.00	-2.02
5210.000	Peak	69.13	19.39	88.52	--	--
5210.000	Average	60.90	19.39	80.29	--	--
5439.750	Peak	37.29	20.07	57.36	74.00	-16.64
5439.750	Average	30.33	20.07	50.40	54.00	-3.60



Report No.: TMWK2201000111KR

**Test Data for UNII-2a**


Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

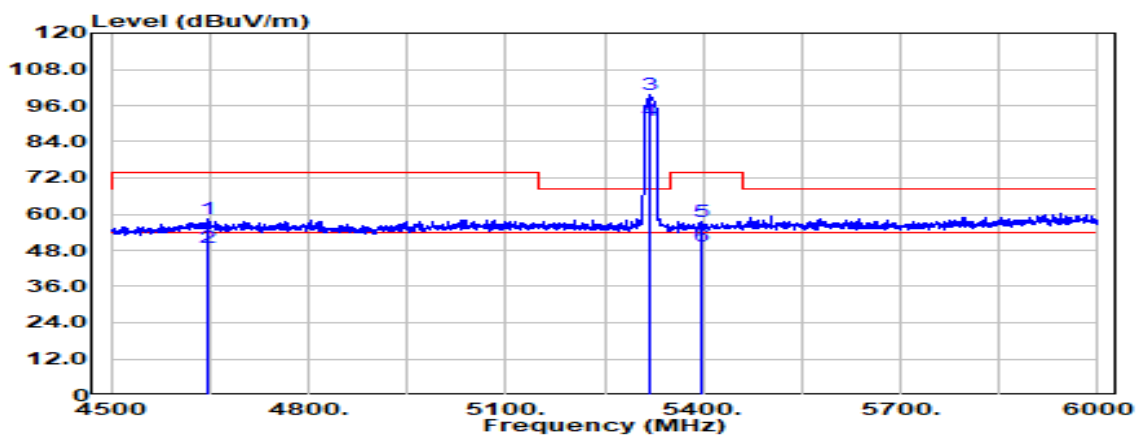

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4646.250	Peak	40.00	18.40	58.39	74.00	-15.61
4646.250	Average	30.60	18.40	48.99	54.00	-5.01
5320.000	Peak	79.83	19.81	99.65	--	--
5320.000	Average	71.17	19.81	90.98	--	--
5398.500	Peak	37.66	20.05	57.71	74.00	-16.29
5398.500	Average	29.33	20.05	49.39	54.00	-4.61

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

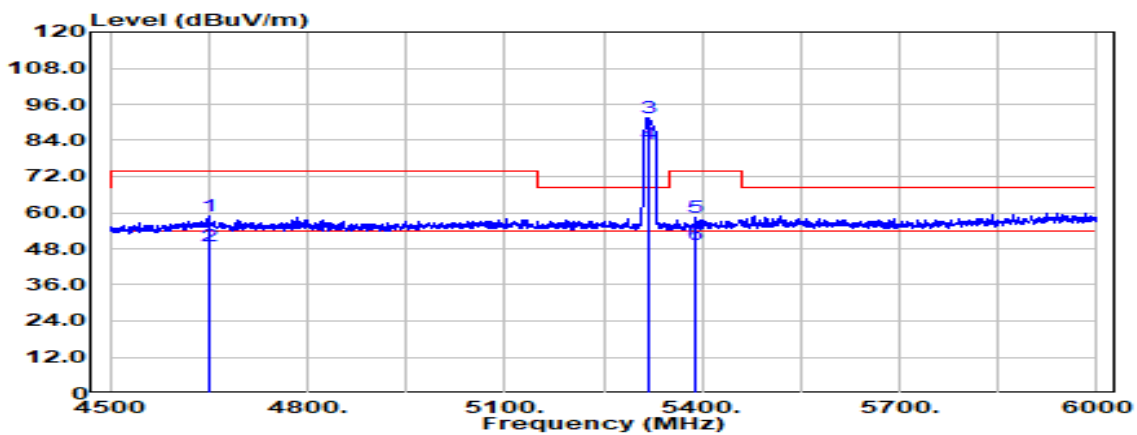

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4651.500	Peak	40.24	18.41	58.65	74.00	-15.35
4651.500	Average	30.53	18.41	48.94	54.00	-5.06
5320.000	Peak	71.83	19.81	91.65	--	--
5320.000	Average	63.20	19.81	83.01	--	--
5390.250	Peak	38.24	20.01	58.25	74.00	-15.75
5390.250	Average	29.15	20.01	49.16	54.00	-4.84


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

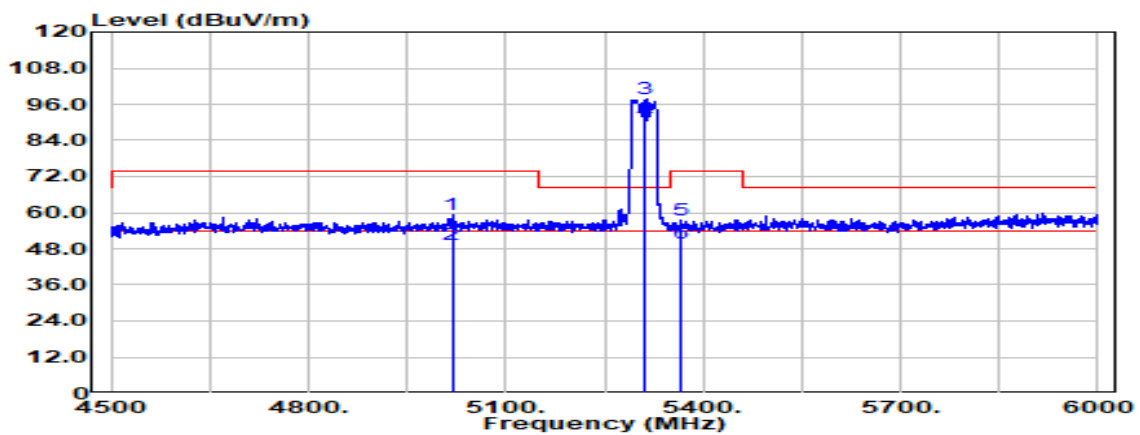


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5018.250	Peak	40.29	18.85	59.14	74.00	-14.86
5018.250	Average	30.42	18.85	49.27	54.00	-4.73
5310.000	Peak	77.89	19.81	97.70	--	--
5310.000	Average	70.70	19.81	90.51	--	--
5364.750	Peak	37.66	19.89	57.55	74.00	-16.45
5364.750	Average	29.79	19.89	49.68	54.00	-4.32

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

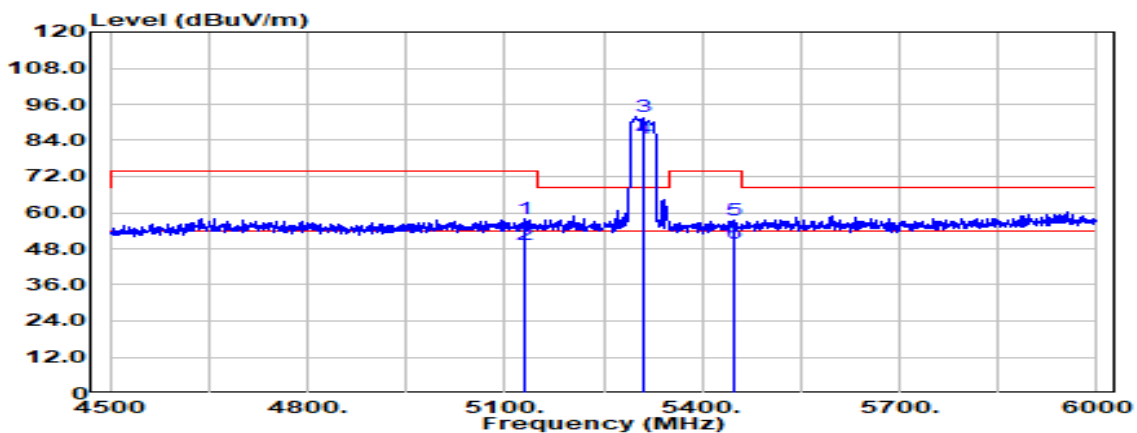


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5130.000	Peak	39.17	18.94	58.11	74.00	-15.89
5130.000	Average	30.46	18.94	49.40	54.00	-4.60
5310.000	Peak	71.94	19.81	91.76	--	--
5310.000	Average	65.08	19.81	84.89	--	--
5447.250	Peak	37.61	20.07	57.67	74.00	-16.33
5447.250	Average	29.70	20.07	49.77	54.00	-4.23

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

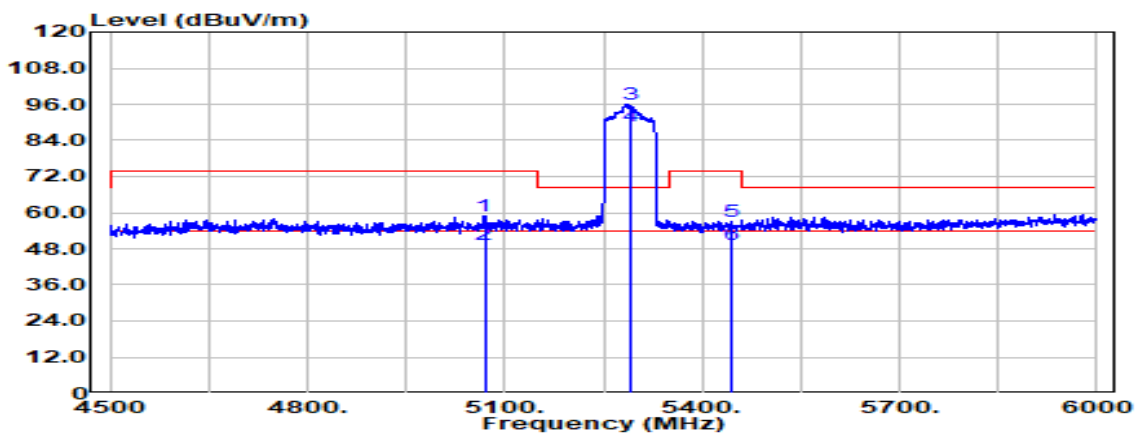

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5069.250	Peak	39.89	18.88	58.76	74.00	-15.24
5069.250	Average	30.35	18.88	49.22	54.00	-4.78
5290.000	Peak	76.29	19.78	96.07	--	--
5290.000	Average	69.05	19.78	88.83	--	--
5445.000	Peak	37.19	20.07	57.26	74.00	-16.74
5445.000	Average	29.39	20.07	49.46	54.00	-4.54


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

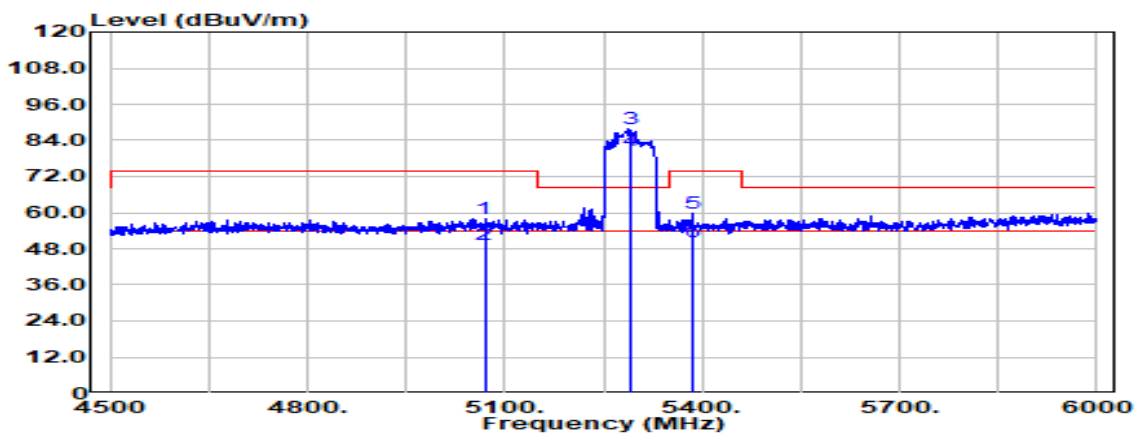

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5069.250	Peak	39.25	18.88	58.12	74.00	-15.88
5069.250	Average	30.37	18.88	49.25	54.00	-4.75
5290.000	Peak	68.23	19.78	88.01	--	--
5290.000	Average	60.93	19.78	80.71	--	--
5384.250	Peak	39.99	19.98	59.98	74.00	-14.02
5384.250	Average	30.26	19.98	50.25	54.00	-3.75

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

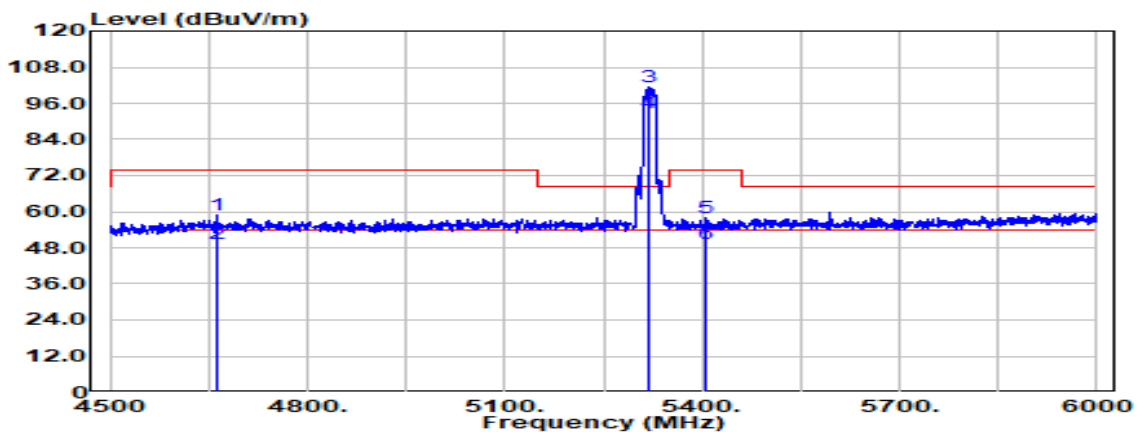

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4661.250	Peak	40.31	18.42	58.73	74.00	-15.27
4661.250	Average	30.98	18.42	49.40	54.00	-4.60
5320.000	Peak	81.59	19.81	101.41	--	--
5320.000	Average	73.01	19.81	92.82	--	--
5406.750	Peak	37.80	20.06	57.86	74.00	-16.14
5406.750	Average	29.47	20.06	49.53	54.00	-4.47

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

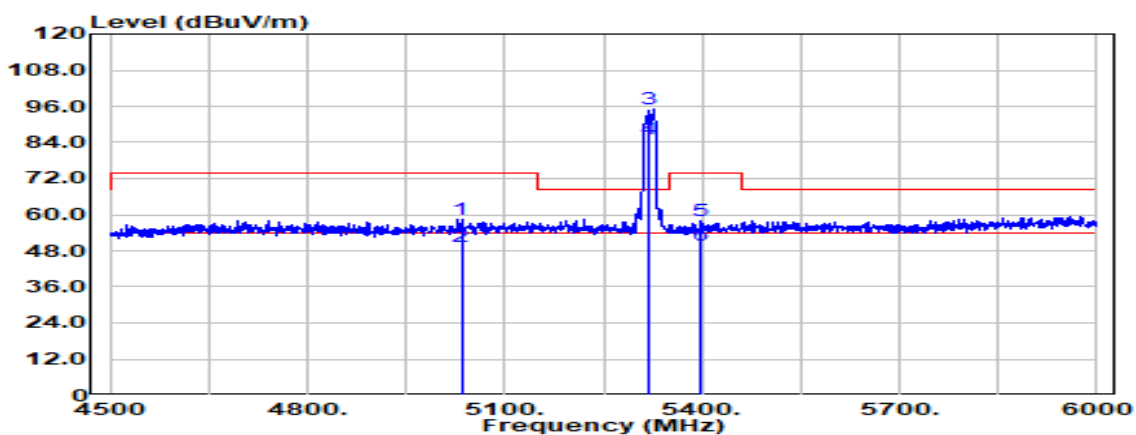


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5034.000	Peak	39.39	18.87	58.27	74.00	-15.73
5034.000	Average	30.51	18.87	49.38	54.00	-4.62
5320.000	Peak	75.41	19.81	95.22	--	--
5320.000	Average	65.21	19.81	85.03	--	--
5398.500	Peak	38.02	20.05	58.07	74.00	-15.93
5398.500	Average	29.55	20.05	49.60	54.00	-4.40




Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

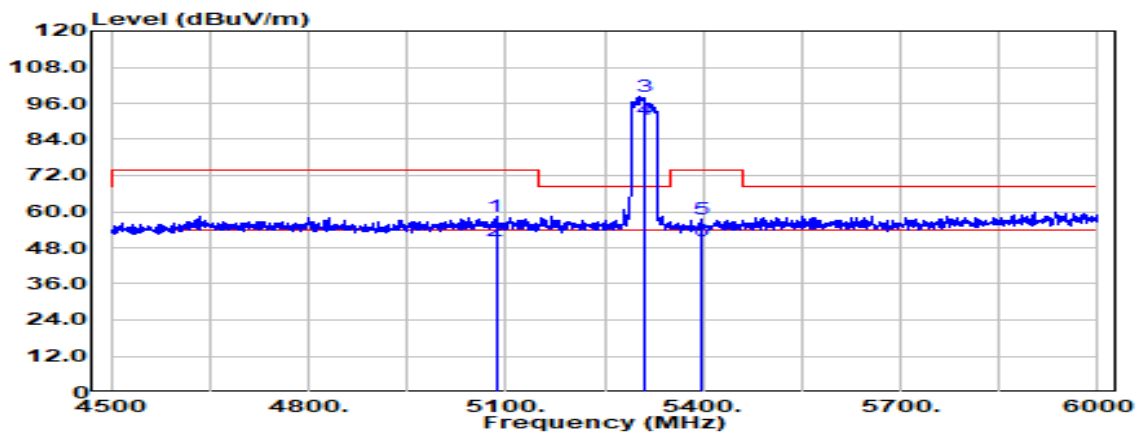


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5085.000	Peak	39.52	18.86	58.38	74.00	-15.62
5085.000	Average	31.53	18.86	50.39	54.00	-3.61
5310.000	Peak	78.66	19.81	98.47	--	--
5310.000	Average	70.53	19.81	90.34	--	--
5399.250	Peak	37.28	20.06	57.33	74.00	-16.67
5399.250	Average	30.42	20.06	50.47	54.00	-3.53

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

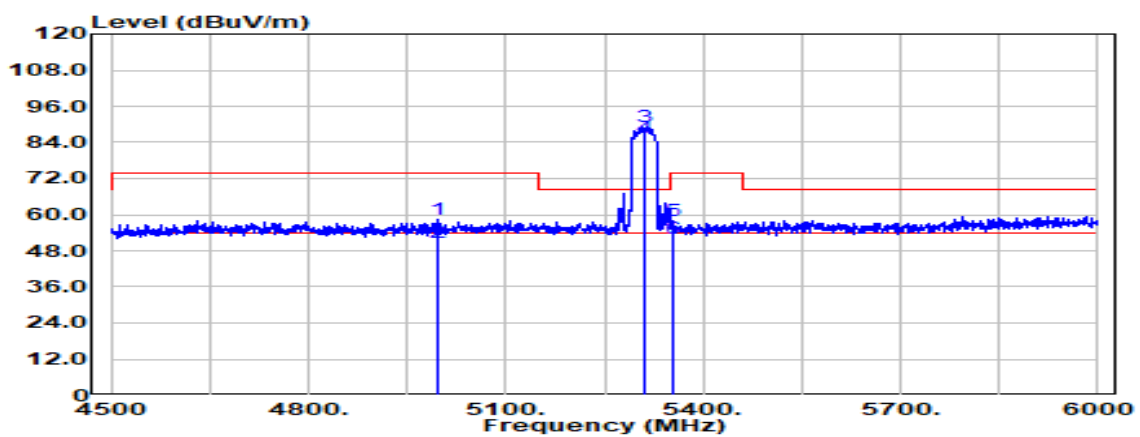


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.000	Peak	39.42	18.81	58.24	74.00	-15.76
4998.000	Average	31.93	18.81	50.74	54.00	-3.26
5310.000	Peak	69.57	19.81	89.38	--	--
5310.000	Average	65.59	19.81	85.40	--	--
5352.750	Peak	38.32	19.83	58.15	74.00	-15.85
5352.750	Average	32.33	19.83	52.16	54.00	-1.84

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

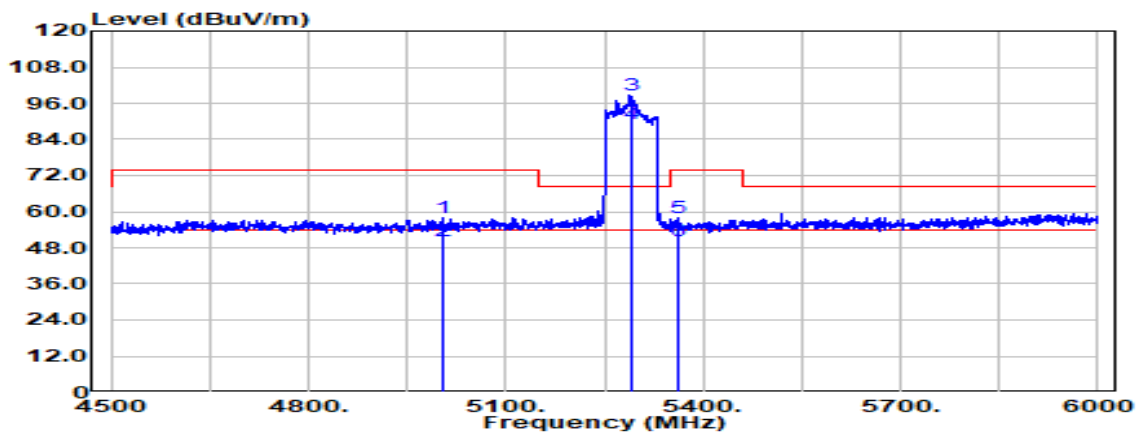

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5004.750	Peak	39.27	18.83	58.09	74.00	-15.91
5004.750	Average	31.44	18.83	50.27	54.00	-3.73
5290.000	Peak	78.90	19.78	98.68	--	--
5290.000	Average	69.49	19.78	89.27	--	--
5362.500	Peak	38.26	19.88	58.14	74.00	-15.86
5362.500	Average	30.50	19.88	50.38	54.00	-3.62

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

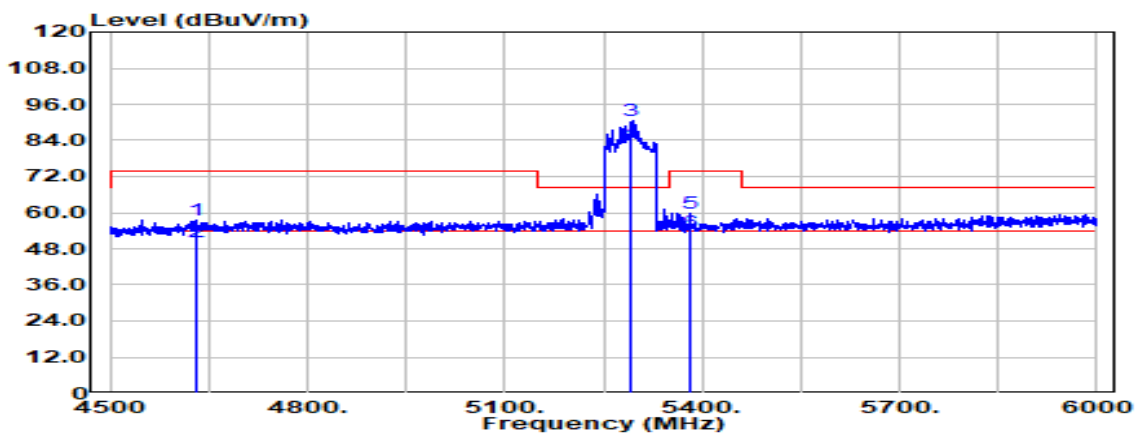


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4631.250	Peak	39.34	18.34	57.69	74.00	-16.31
4631.250	Average	32.00	18.34	50.34	54.00	-3.66
5290.000	Peak	70.63	19.78	90.41	--	--
5290.000	Average	63.75	19.78	83.53	--	--
5380.500	Peak	39.88	19.97	59.85	74.00	-14.15
5380.500	Average	33.28	19.97	53.25	54.00	-0.75

Report No.: TMWK2201000111KR


**Test Data for UNII-2c**

Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

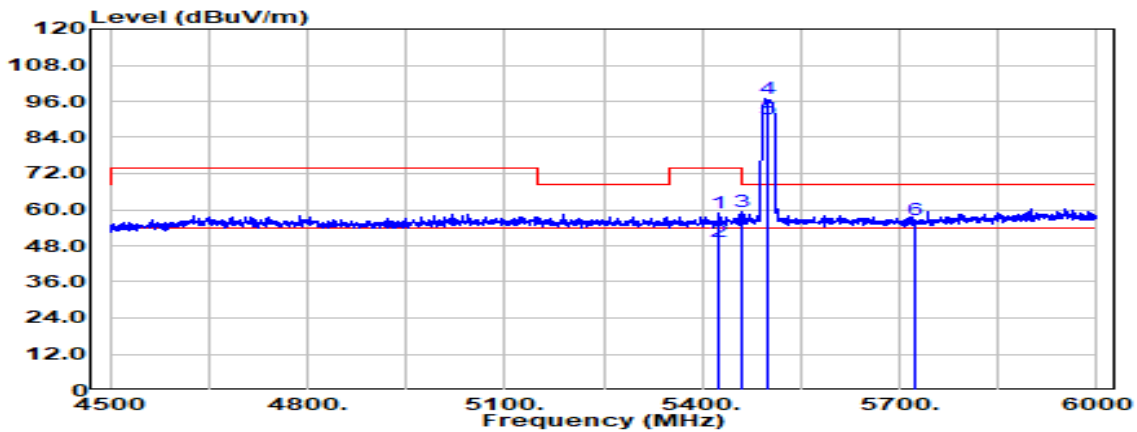

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5424.000	Peak	38.99	20.06	59.06	74.00	-14.94
5424.000	Average	29.16	20.06	49.23	54.00	-4.77
5460.750	Peak	39.16	20.06	59.22	68.20	-8.98
5500.000	Peak	77.11	20.02	97.13	--	--
5500.000	Average	70.07	20.02	90.09	--	--
5725.000	Peak	36.24	20.32	56.56	68.20	-11.64


Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

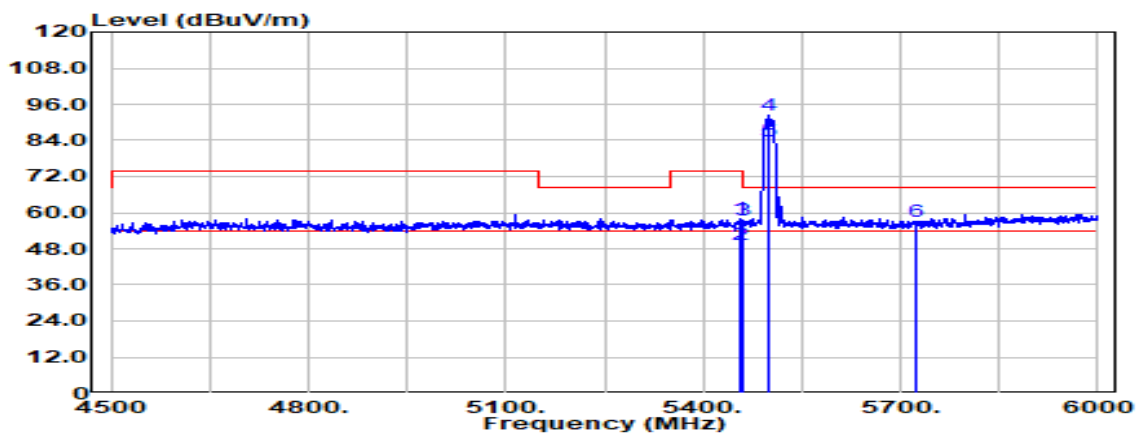

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.750	Peak	38.02	20.06	58.08	74.00	-15.92
5457.750	Average	29.10	20.06	49.17	54.00	-4.83
5460.750	Peak	37.30	20.06	57.36	68.20	-10.84
5500.000	Peak	72.45	20.02	92.47	--	--
5500.000	Average	63.87	20.02	83.89	--	--
5725.000	Peak	36.84	20.32	57.16	68.20	-11.04

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

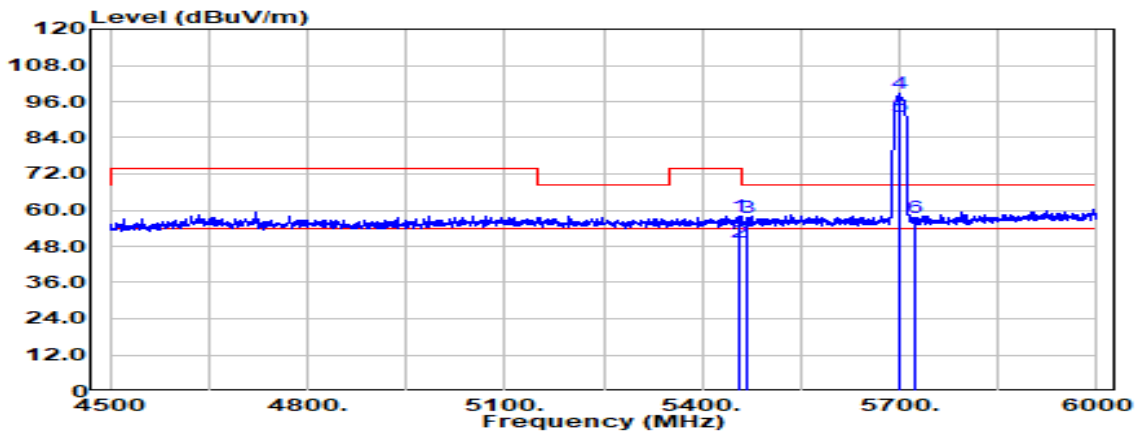

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5457.750	Peak	38.07	20.06	58.14	74.00	-15.86
5457.750	Average	29.44	20.06	49.51	54.00	-4.49
5469.750	Peak	37.38	20.05	57.43	68.20	-10.77
5700.000	Peak	78.39	20.16	98.55	--	--
5700.000	Average	70.76	20.16	90.92	--	--
5725.000	Peak	37.12	20.32	57.44	68.20	-10.76

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

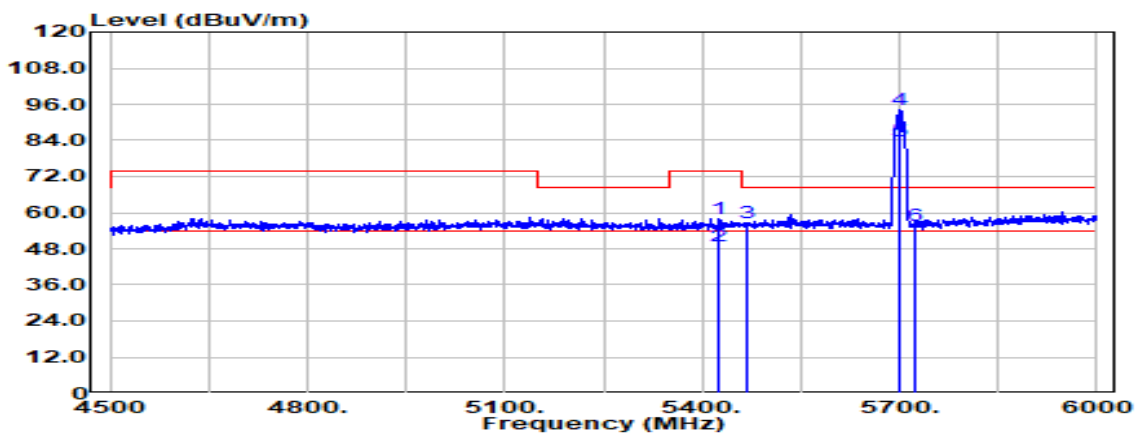

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5426.250	Peak	37.71	20.07	57.77	74.00	-16.23
5426.250	Average	29.05	20.07	49.12	54.00	-4.88
5467.500	Peak	36.50	20.05	56.55	68.20	-11.65
5700.000	Peak	74.11	20.16	94.27	--	--
5700.000	Average	63.75	20.16	83.91	--	--
5725.000	Peak	35.43	20.32	55.75	68.20	-12.45




Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

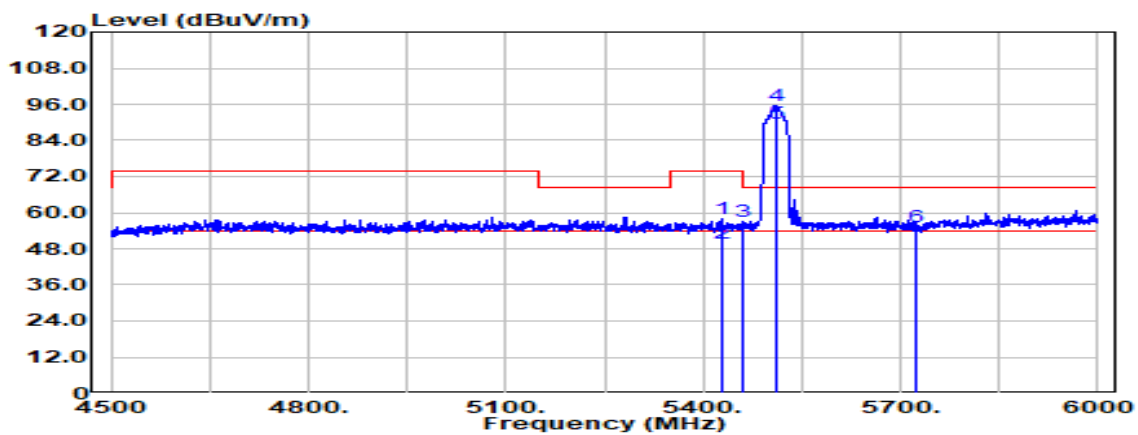

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5427.000	Peak	37.93	20.07	58.00	74.00	-16.00
5427.000	Average	29.59	20.07	49.65	54.00	-4.35
5460.750	Peak	37.01	20.06	57.07	68.20	-11.13
5510.000	Peak	75.59	20.02	95.62	--	--
5510.000	Average	69.46	20.02	89.48	--	--
5725.000	Peak	35.07	20.32	55.39	68.20	-12.81

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

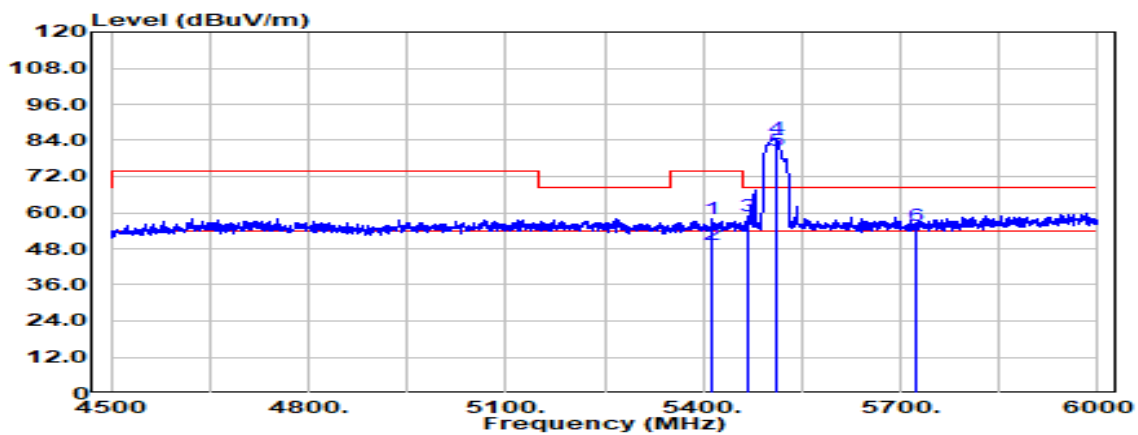

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5412.750	Peak	37.84	20.06	57.91	74.00	-16.09
5412.750	Average	29.46	20.06	49.53	54.00	-4.47
5469.750	Peak	38.83	20.05	58.88	68.20	-9.32
5510.000	Peak	64.77	20.02	84.79	--	--
5510.000	Average	60.67	20.02	80.69	--	--
5725.000	Peak	35.39	20.32	55.71	68.20	-12.49

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

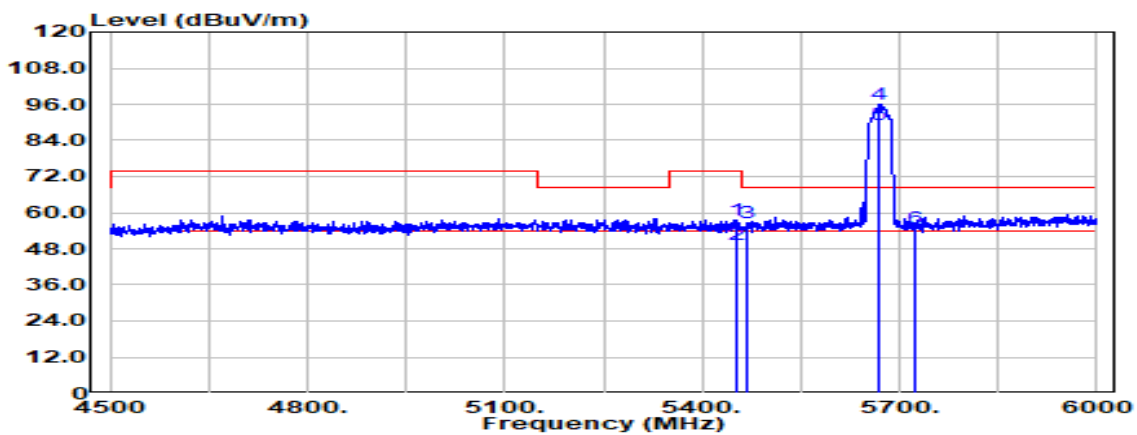

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.500	Peak	37.66	20.07	57.73	74.00	-16.27
5452.500	Average	29.42	20.07	49.49	54.00	-4.51
5469.750	Peak	36.71	20.05	56.76	68.20	-11.44
5670.000	Peak	75.86	20.15	96.02	--	--
5670.000	Average	69.28	20.15	89.43	--	--
5725.000	Peak	34.47	20.32	54.79	68.20	-13.41

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.750	Peak	37.33	20.07	57.40	74.00	-16.60
5451.750	Average	29.36	20.07	49.43	54.00	-4.57
5469.750	Peak	37.04	20.05	57.09	68.20	-11.11
5670.000	Peak	71.50	20.15	91.66	--	--
5670.000	Average	62.02	20.15	82.18	--	--
5725.000	Peak	35.30	20.32	55.62	68.20	-12.58

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

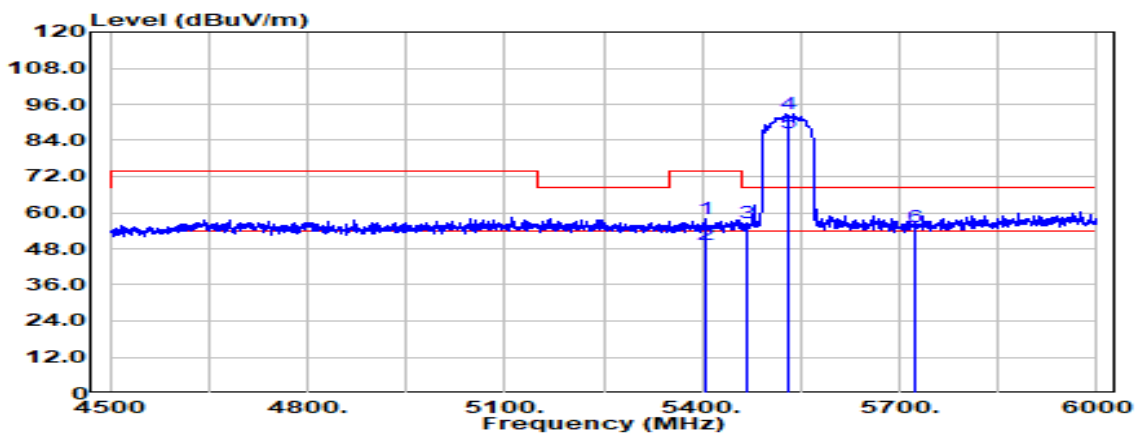

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5403.750	Peak	37.72	20.06	57.78	74.00	-16.22
5403.750	Average	29.51	20.06	49.57	54.00	-4.43
5467.500	Peak	36.63	20.05	56.68	68.20	-11.52
5530.000	Peak	72.64	20.03	92.67	--	--
5530.000	Average	66.60	20.03	86.63	--	--
5725.000	Peak	35.09	20.32	55.41	68.20	-12.79

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

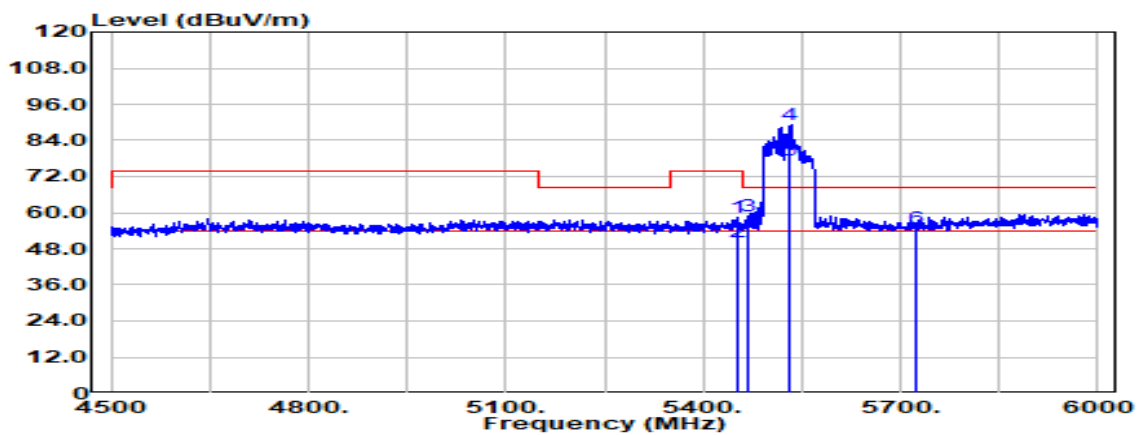

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.750	Peak	38.26	20.07	58.33	74.00	-15.67
5451.750	Average	30.04	20.07	50.11	54.00	-3.89
5468.250	Peak	38.68	20.05	58.74	68.20	-9.46
5530.000	Peak	69.34	20.03	89.36	--	--
5530.000	Average	57.46	20.03	77.48	--	--
5725.000	Peak	34.63	20.32	54.95	68.20	-13.25

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

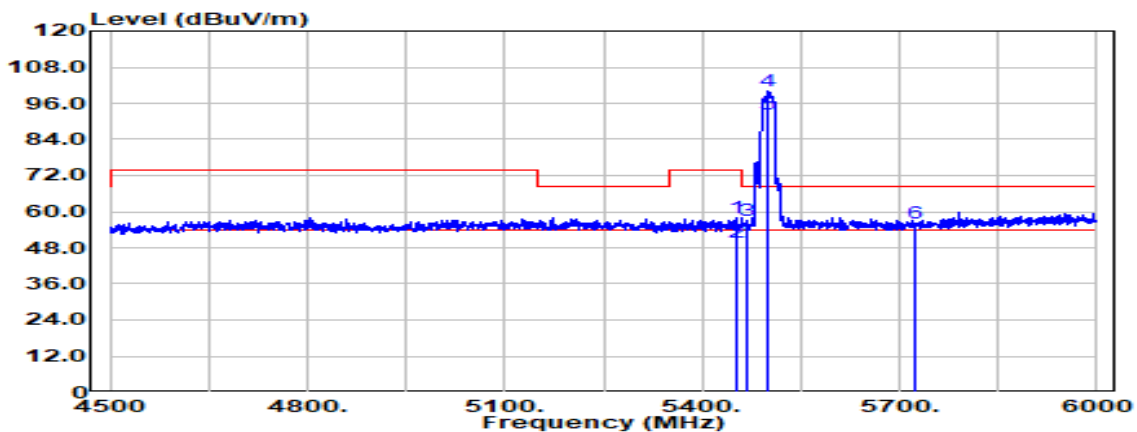

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5451.750	Peak	38.03	20.07	58.09	74.00	-15.91
5451.750	Average	29.53	20.07	49.60	54.00	-4.40
5469.750	Peak	37.06	20.05	57.11	68.20	-11.09
5500.000	Peak	79.83	20.02	99.85	--	--
5500.000	Average	72.21	20.02	92.23	--	--
5725.000	Peak	35.62	20.32	55.94	68.20	-12.26

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

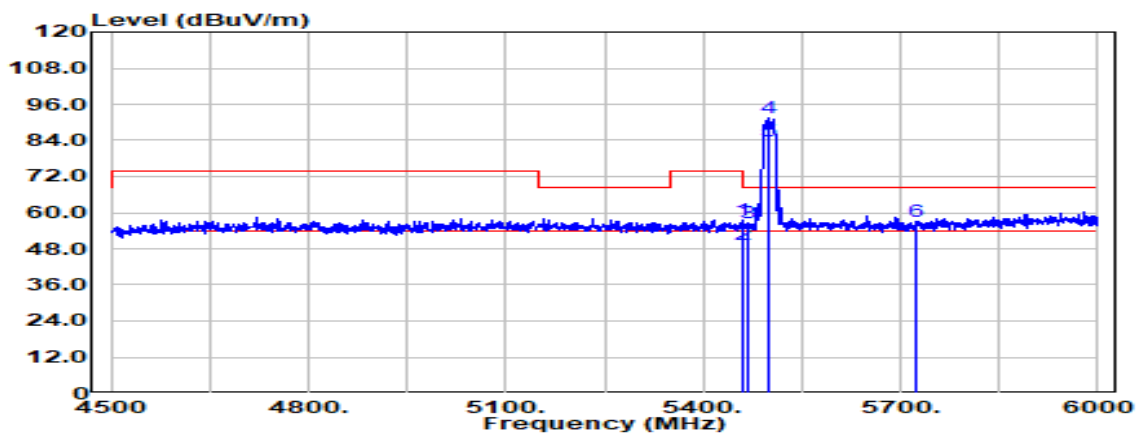


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.500	Peak	37.67	20.06	57.74	74.00	-16.26
5458.500	Average	29.39	20.06	49.45	54.00	-4.55
5467.500	Peak	36.35	20.05	56.40	68.20	-11.80
5500.000	Peak	71.28	20.02	91.30	--	--
5500.000	Average	63.71	20.02	83.73	--	--
5725.000	Peak	36.57	20.32	56.89	68.20	-11.31



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

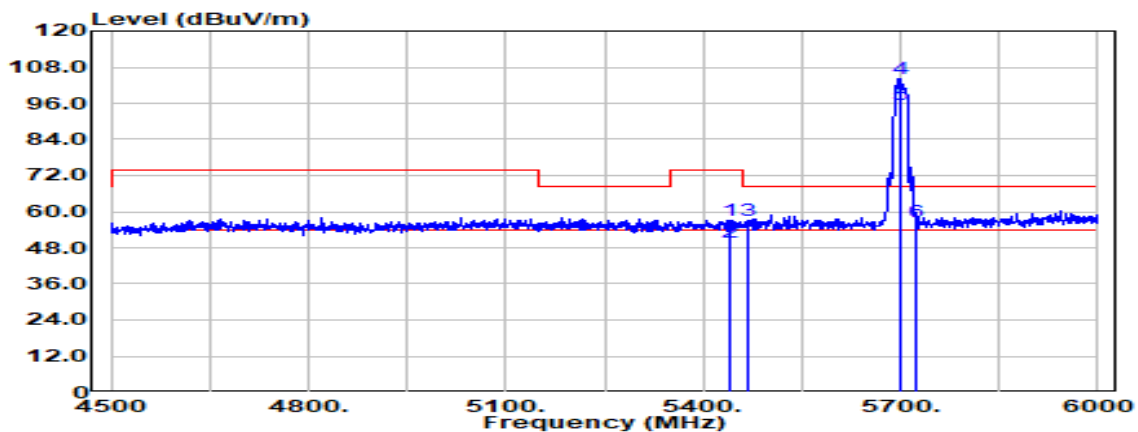

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5439.750	Peak	37.10	20.07	57.17	74.00	-16.83
5439.750	Average	29.67	20.07	49.73	54.00	-4.27
5469.750	Peak	36.93	20.05	56.98	68.20	-11.22
5700.000	Peak	83.98	20.16	104.14	--	--
5700.000	Average	75.58	20.16	95.74	--	--
5725.000	Peak	36.49	20.32	56.81	68.20	-11.39

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

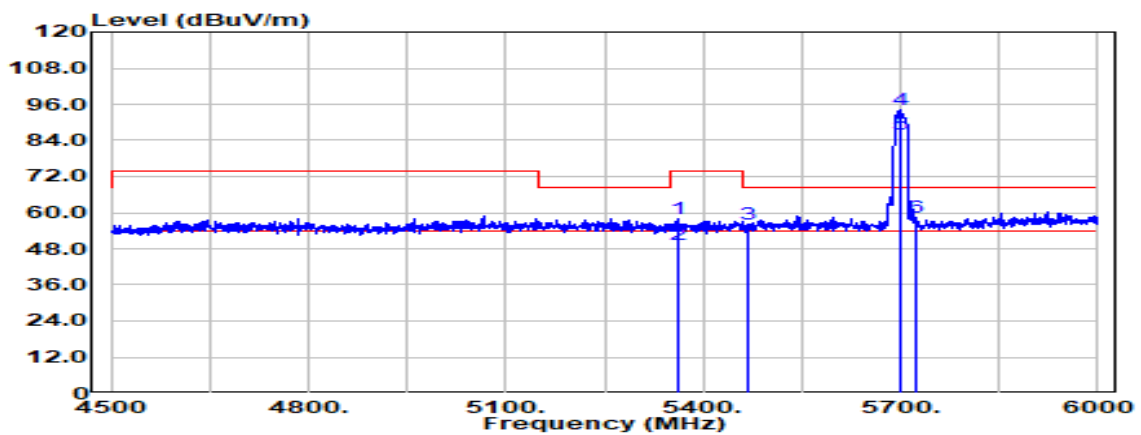

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5360.250	Peak	37.92	19.87	57.79	74.00	-16.21
5360.250	Average	29.68	19.87	49.55	54.00	-4.45
5469.750	Peak	36.14	20.05	56.19	68.20	-12.01
5700.000	Peak	73.99	20.16	94.15	--	--
5700.000	Average	66.09	20.16	86.25	--	--
5725.000	Peak	37.87	20.32	58.19	68.20	-10.01

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	24.5(°C)/ 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

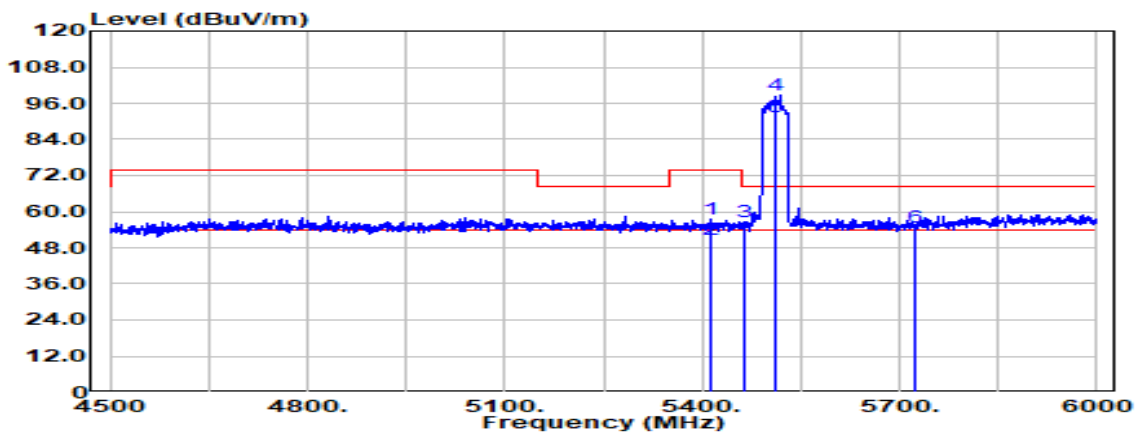

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5414.250	Peak	37.37	20.06	57.43	74.00	-16.57
5414.250	Average	30.48	20.06	50.54	54.00	-3.46
5463.750	Peak	36.69	20.06	56.75	68.20	-11.45
5510.000	Peak	78.83	20.02	98.86	--	--
5510.000	Average	71.41	20.02	91.43	--	--
5725.000	Peak	34.31	20.32	54.63	68.20	-13.57