



Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

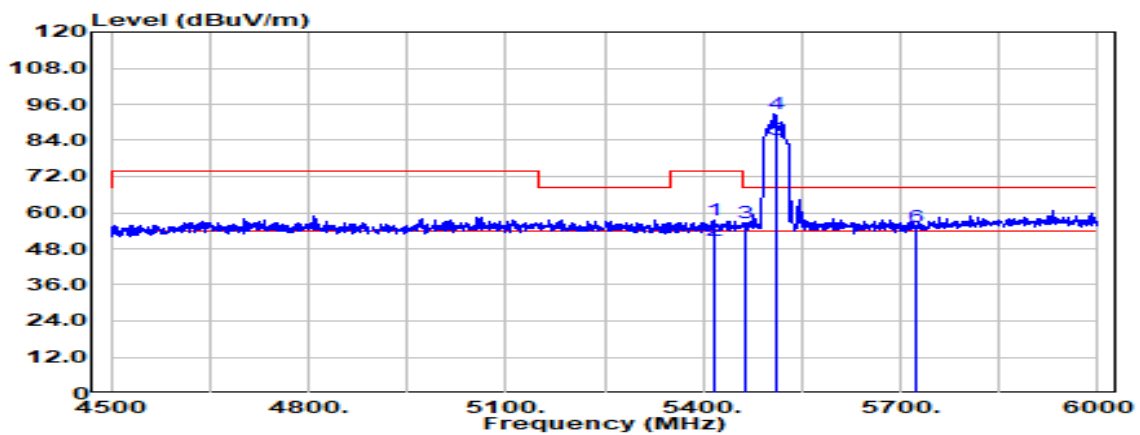

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5417.250	Peak	37.28	20.06	57.34	74.00	-16.66
5417.250	Average	30.61	20.06	50.68	54.00	-3.32
5465.250	Peak	36.40	20.05	56.46	68.20	-11.74
5510.000	Peak	73.01	20.02	93.03	--	--
5510.000	Average	64.39	20.02	84.41	--	--
5725.000	Peak	35.10	20.32	55.42	68.20	-12.78

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

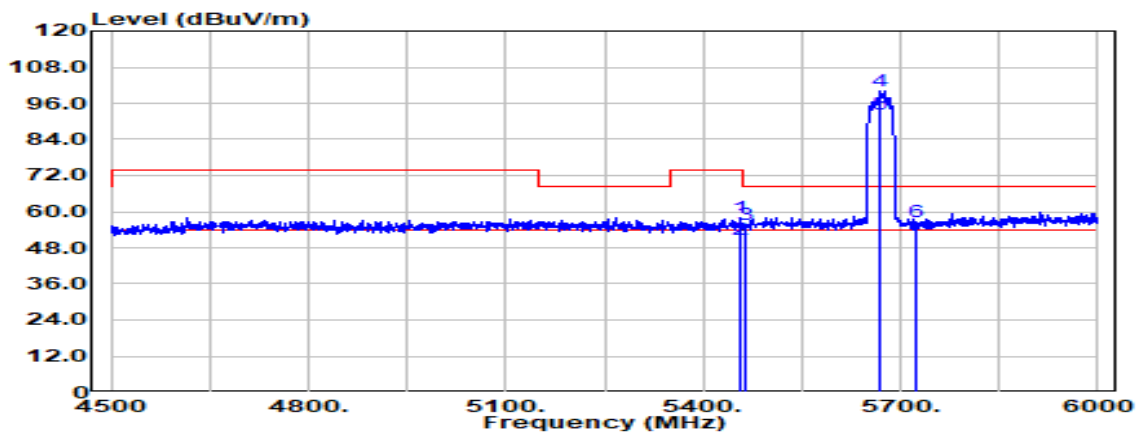

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5455.500	Peak	37.69	20.06	57.75	74.00	-16.25
5455.500	Average	30.61	20.06	50.67	54.00	-3.33
5466.000	Peak	35.82	20.05	55.87	68.20	-12.33
5670.000	Peak	80.05	20.15	100.20	--	--
5670.000	Average	72.13	20.15	92.28	--	--
5725.000	Peak	36.46	20.32	56.78	68.20	-11.42


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

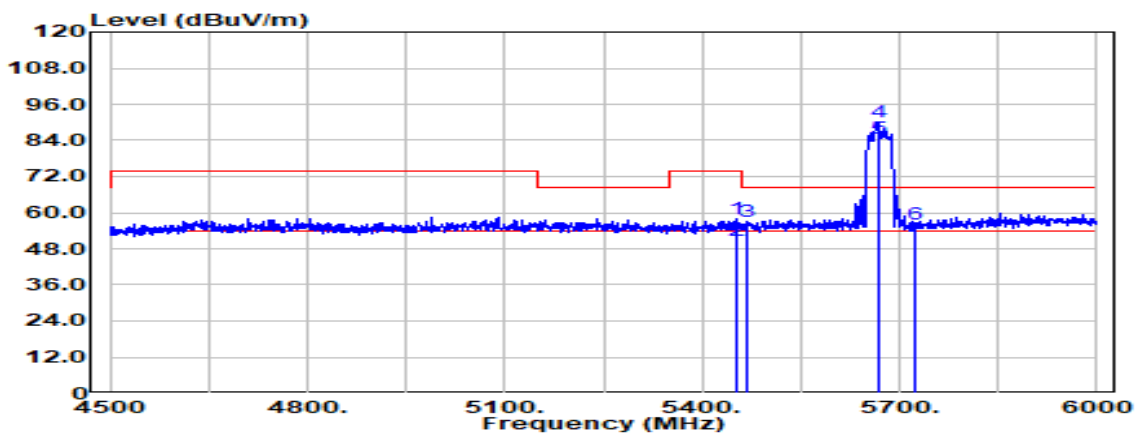

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.000	Peak	37.79	20.07	57.86	74.00	-16.14
5451.000	Average	30.77	20.07	50.84	54.00	-3.16
5467.500	Peak	36.95	20.05	57.00	68.20	-11.20
5670.000	Peak	69.78	20.15	89.94	--	--
5670.000	Average	64.65	20.15	84.80	--	--
5725.000	Peak	35.67	20.32	55.99	68.20	-12.21


Test Mode	IEEE 802.11ax HE80 / 5530 MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

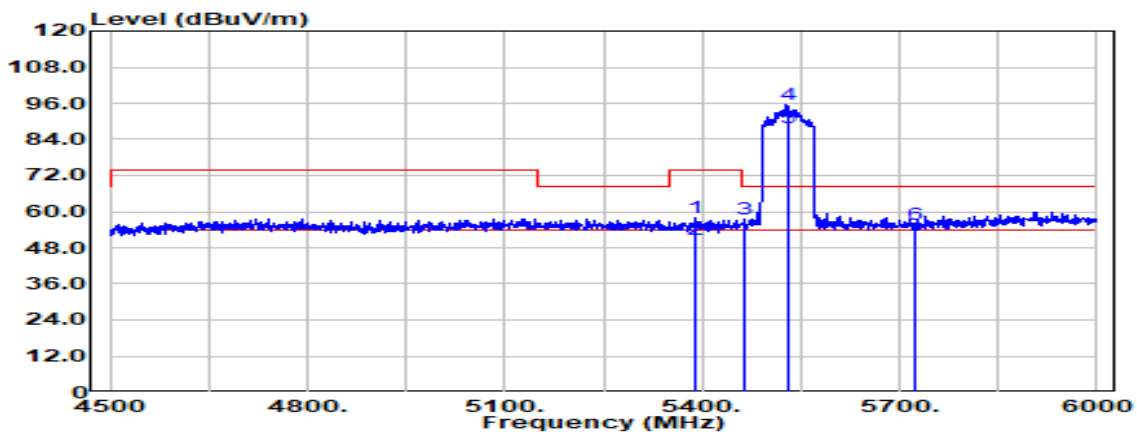

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5388.750	Peak	37.76	20.01	57.77	74.00	-16.23
5388.750	Average	30.57	20.01	50.58	54.00	-3.42
5463.750	Peak	37.45	20.06	57.50	68.20	-10.70
5530.000	Peak	75.73	20.03	95.76	--	--
5530.000	Average	67.74	20.03	87.76	--	--
5725.000	Peak	35.19	20.32	55.51	68.20	-12.69

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

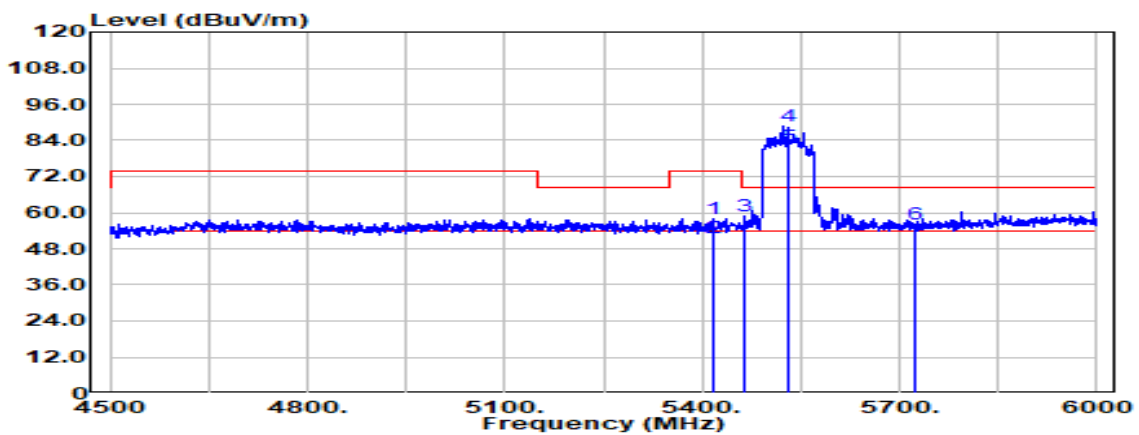


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5415.750	Peak	38.06	20.06	58.12	74.00	-15.88
5415.750	Average	31.54	20.06	51.60	54.00	-2.40
5463.000	Peak	38.70	20.06	58.76	68.20	-9.44
5530.000	Peak	68.50	20.03	88.53	--	--
5530.000	Average	61.74	20.03	81.76	--	--
5725.000	Peak	35.75	20.32	56.07	68.20	-12.13

Report No.: TMWK2201000111KR

Test Data for UNII-3

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

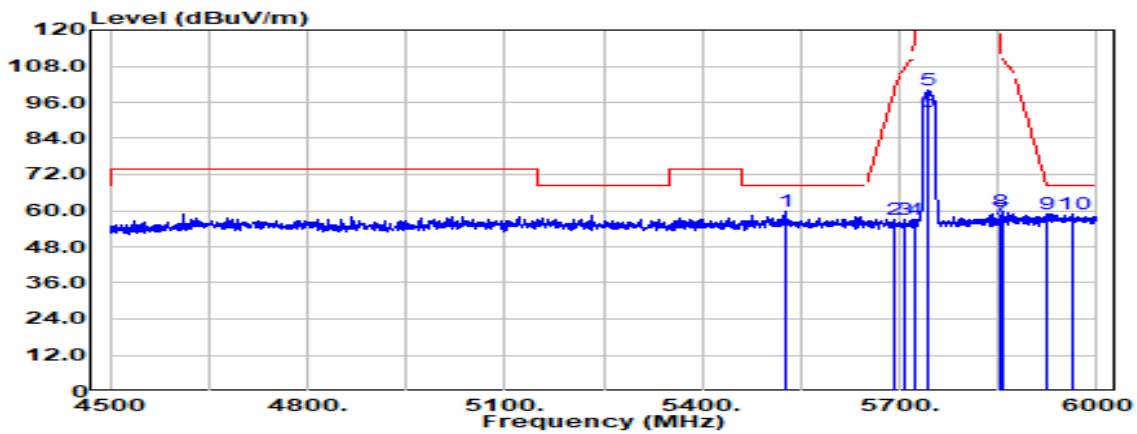

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5525.250	Peak	39.56	20.03	59.59	68.20	-8.61
5691.750	Peak	37.02	20.16	57.18	99.12	-41.93
5708.250	Peak	36.66	20.21	56.87	107.51	-50.64
5724.750	Peak	36.92	20.32	57.24	121.63	-64.39
5745.000	Peak	79.43	20.45	99.88	--	--
5745.000	Average	72.44	20.45	92.89	--	--
5854.500	Peak	36.52	20.75	57.27	111.94	-54.66
5855.250	Peak	39.13	20.75	59.88	110.73	-50.85
5923.500	Peak	37.89	21.05	58.94	69.31	-10.36
5962.500	Peak	37.74	21.16	58.91	68.20	-9.29

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5507.250	Peak	37.76	20.02	57.78	68.20	-10.42
5680.500	Peak	36.66	20.16	56.81	90.81	-33.99
5703.750	Peak	37.83	20.18	58.01	106.25	-48.24
5724.000	Peak	36.61	20.31	56.92	119.92	-63.00
5745.000	Peak	70.23	20.45	90.68	--	--
5745.000	Average	63.37	20.45	83.82	--	--
5853.750	Peak	37.67	20.75	58.41	113.65	-55.24
5861.250	Peak	36.78	20.78	57.56	109.05	-51.49
5901.750	Peak	37.99	20.96	58.95	85.37	-26.41
5939.250	Peak	38.35	21.11	59.46	68.20	-8.74

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

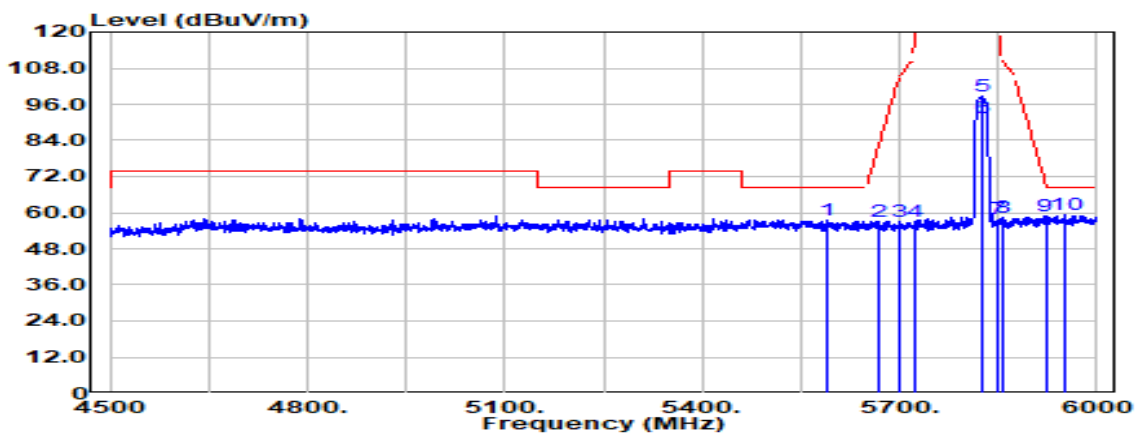

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5588.250	Peak	37.63	20.06	57.69	68.20	-10.51
5670.000	Peak	37.02	20.15	57.18	83.04	-25.86
5700.750	Peak	36.70	20.16	56.86	105.41	-48.55
5723.250	Peak	36.89	20.31	57.20	118.21	-61.01
5825.000	Peak	78.07	20.64	98.70	--	--
5825.000	Average	70.76	20.64	91.40	--	--
5850.000	Peak	37.29	20.73	58.02	122.20	-64.18
5856.750	Peak	37.51	20.76	58.27	110.31	-52.04
5922.000	Peak	37.96	21.04	59.00	70.41	-11.41
5951.250	Peak	38.10	21.16	59.26	68.20	-8.94

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

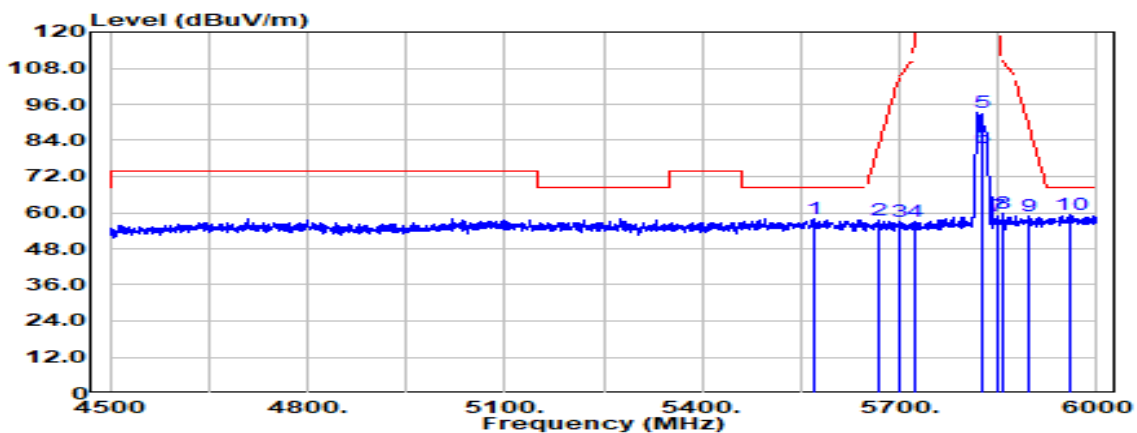

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5568.750	Peak	38.05	20.05	58.10	68.20	-10.10
5667.000	Peak	37.13	20.15	57.29	80.82	-23.53
5700.750	Peak	36.90	20.16	57.07	105.41	-48.34
5724.000	Peak	36.65	20.31	56.96	119.92	-62.96
5825.000	Peak	72.67	20.64	93.31	--	--
5825.000	Average	60.86	20.64	81.49	--	--
5850.000	Peak	38.15	20.73	58.88	122.20	-63.32
5857.500	Peak	38.91	20.76	59.68	110.10	-50.42
5898.000	Peak	37.92	20.94	58.86	88.14	-29.28
5958.750	Peak	38.11	21.16	59.27	68.20	-8.93

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

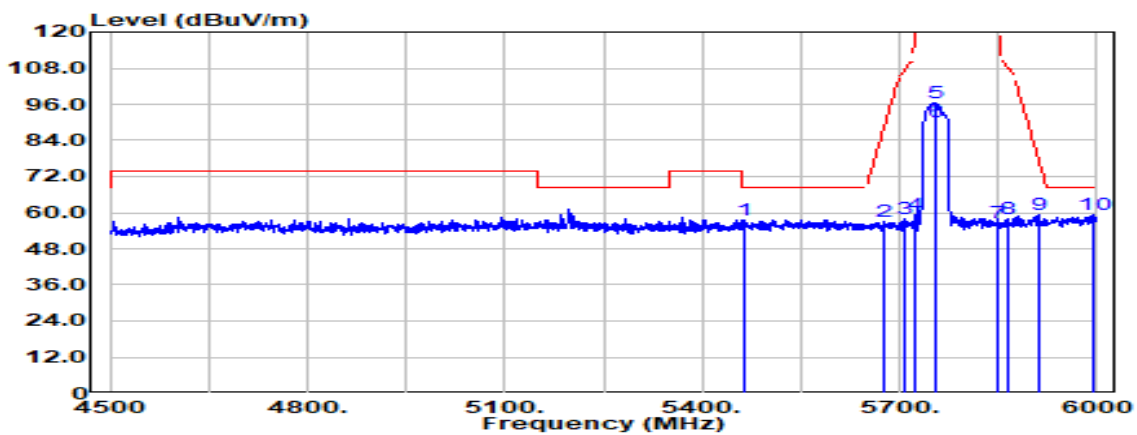

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5463.750	Peak	37.66	20.06	57.72	68.20	-10.48
5677.500	Peak	36.96	20.16	57.11	88.59	-31.48
5706.000	Peak	37.61	20.20	57.81	106.88	-49.07
5724.750	Peak	39.22	20.32	59.54	121.63	-62.09
5755.000	Peak	76.08	20.49	96.57	--	--
5755.000	Average	69.51	20.49	89.99	--	--
5850.750	Peak	35.87	20.73	56.61	120.49	-63.88
5866.500	Peak	37.23	20.80	58.03	107.58	-49.55
5910.750	Peak	38.27	21.00	59.26	78.71	-19.45
5994.750	Peak	38.26	21.17	59.42	68.20	-8.78

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	22.9(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

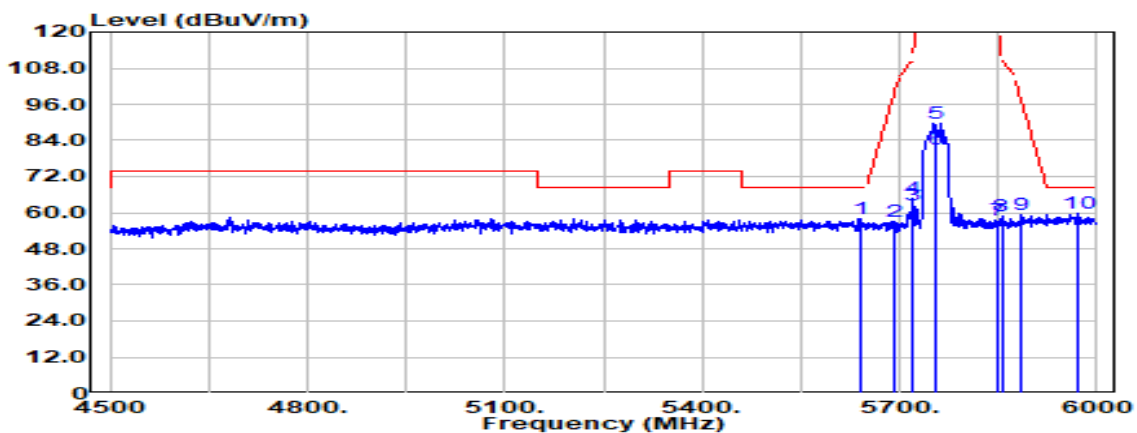

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5640.000	Peak	37.86	20.13	57.99	68.20	-10.21
5692.500	Peak	36.84	20.16	56.99	99.67	-42.68
5718.000	Peak	42.21	20.28	62.48	110.24	-47.76
5720.250	Peak	44.32	20.29	64.61	111.37	-46.76
5755.000	Peak	69.13	20.49	89.61	--	--
5755.000	Average	60.72	20.49	81.21	--	--
5850.000	Peak	36.86	20.73	57.59	122.20	-64.61
5855.250	Peak	37.92	20.75	58.68	110.73	-52.05
5885.250	Peak	38.41	20.89	59.30	97.59	-38.29
5973.000	Peak	38.48	21.16	59.65	68.20	-8.55

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

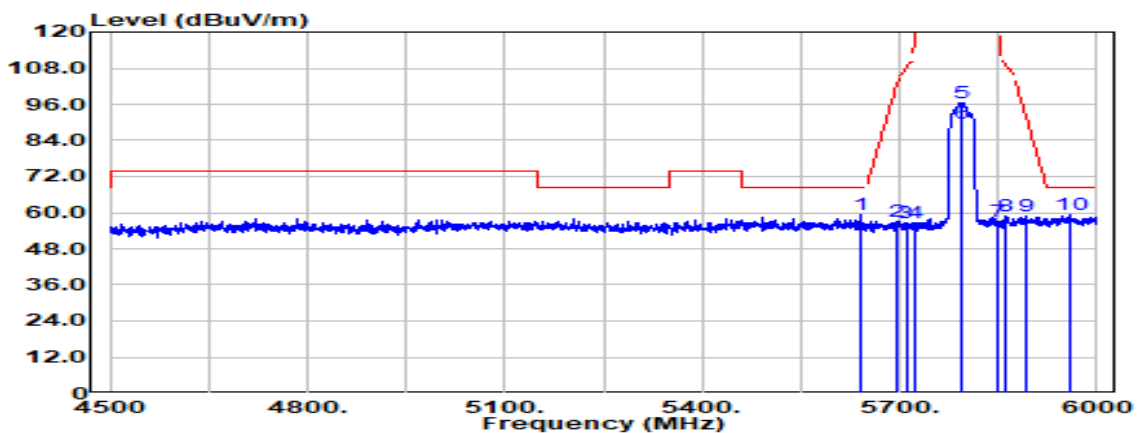

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5640.000	Peak	39.18	20.13	59.32	68.20	-8.88
5694.750	Peak	36.98	20.16	57.14	101.33	-44.19
5709.750	Peak	36.54	20.22	56.76	107.93	-51.17
5722.500	Peak	36.39	20.30	56.69	116.50	-59.81
5795.000	Peak	75.82	20.53	96.35	--	--
5795.000	Average	68.95	20.53	89.48	--	--
5850.000	Peak	36.31	20.73	57.04	122.20	-65.16
5862.750	Peak	37.86	20.79	58.65	108.63	-49.98
5892.000	Peak	37.86	20.91	58.77	92.58	-33.81
5960.250	Peak	37.98	21.16	59.14	68.20	-9.06

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

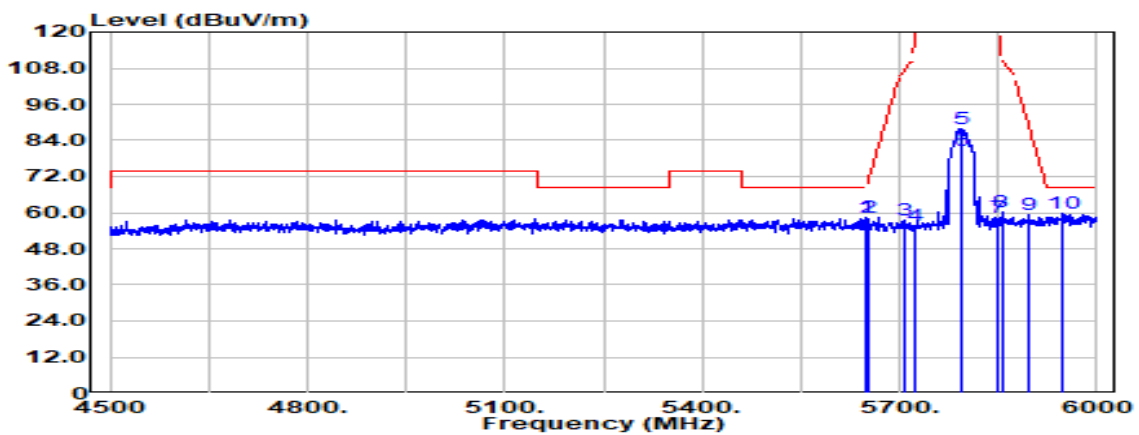

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.000	Peak	38.38	20.15	58.53	68.20	-9.67
5651.000	Peak	38.38	20.15	58.53	68.94	-10.41
5708.250	Peak	37.16	20.21	57.37	107.51	-50.14
5721.750	Peak	35.46	20.30	55.76	114.79	-59.03
5795.000	Peak	67.38	20.53	87.91	--	--
5795.000	Average	60.21	20.53	80.75	--	--
5850.000	Peak	37.68	20.73	58.41	122.20	-63.79
5855.250	Peak	39.51	20.75	60.26	110.73	-50.47
5896.500	Peak	38.34	20.93	59.28	89.25	-29.97
5946.750	Peak	38.54	21.15	59.69	68.20	-8.51

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

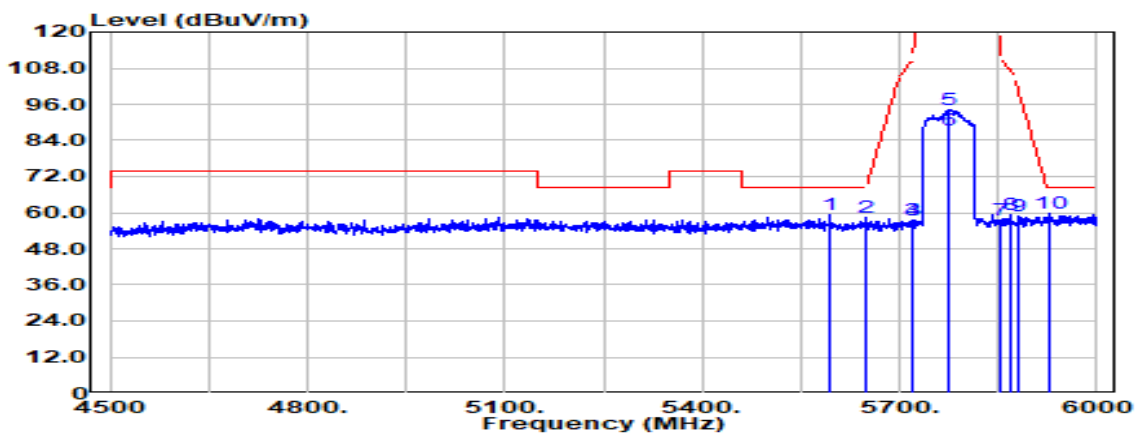

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5593.500	Peak	39.27	20.06	59.34	68.20	-8.86
5649.750	Peak	38.19	20.15	58.34	68.20	-9.86
5718.750	Peak	37.26	20.28	57.54	110.45	-52.91
5721.000	Peak	37.35	20.29	57.64	113.08	-55.44
5775.000	Peak	73.61	20.51	94.12	--	--
5775.000	Average	66.70	20.51	87.21	--	--
5853.000	Peak	36.78	20.74	57.52	115.36	-57.84
5868.750	Peak	38.47	20.81	59.29	106.95	-47.66
5880.750	Peak	38.01	20.87	58.87	100.93	-42.06
5926.500	Peak	38.54	21.06	59.60	68.20	-8.60

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.9(°C) / 52%RH
Test Item	Band Edge	Test Date	April 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

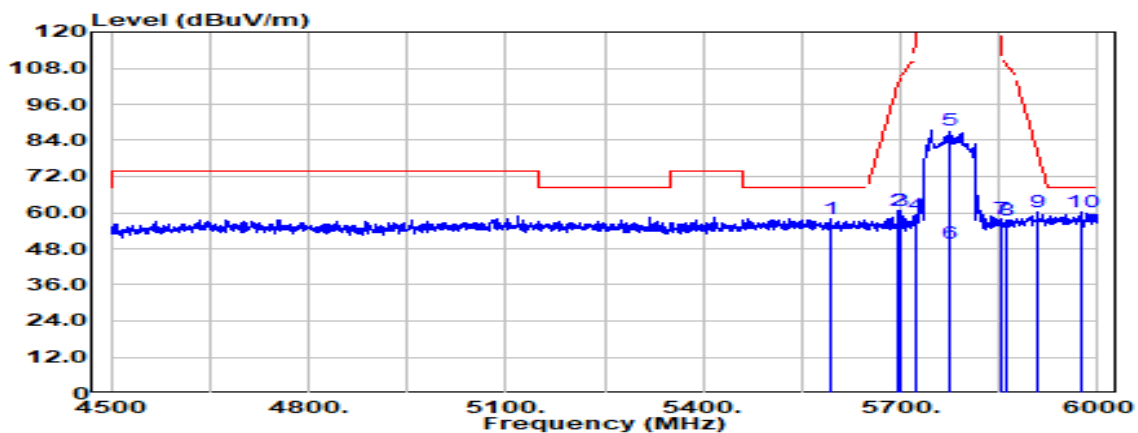

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5592.750	Peak	38.02	20.06	58.08	68.20	-10.12
5697.000	Peak	40.55	20.16	60.71	102.99	-42.28
5701.500	Peak	40.43	20.17	60.60	105.62	-45.02
5724.750	Peak	39.09	20.32	59.41	121.63	-62.22
5775.000	Peak	66.85	20.51	87.36	--	--
5775.000	Average	29.14	20.51	49.65	--	--
5851.500	Peak	37.35	20.74	58.09	118.78	-60.69
5860.500	Peak	36.91	20.78	57.68	109.26	-51.57
5908.500	Peak	39.02	20.99	60.01	80.38	-20.37
5976.000	Peak	38.94	21.17	60.11	68.20	-8.09

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

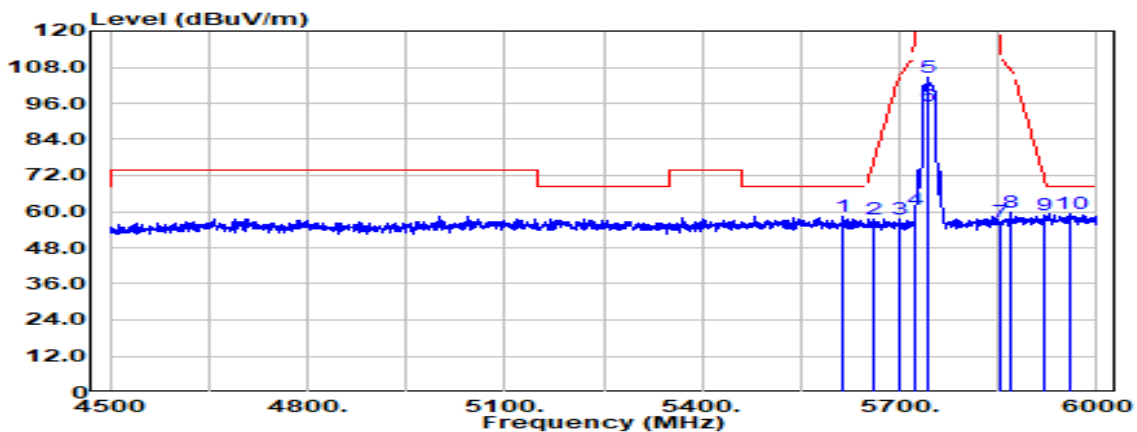

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5613.750	Peak	38.20	20.09	58.30	68.20	-9.90
5661.000	Peak	37.58	20.15	57.73	76.37	-18.64
5700.000	Peak	37.15	20.16	57.31	105.20	-47.89
5724.750	Peak	40.32	20.32	60.64	121.63	-60.99
5745.000	Peak	84.13	20.45	104.57	--	--
5745.000	Average	74.63	20.45	95.08	--	--
5853.750	Peak	35.98	20.75	56.72	113.65	-56.93
5868.750	Peak	38.84	20.81	59.65	106.95	-47.30
5919.000	Peak	37.78	21.03	58.81	72.62	-13.81
5959.500	Peak	38.27	21.16	59.44	68.20	-8.76


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	24.5(°C)/ 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

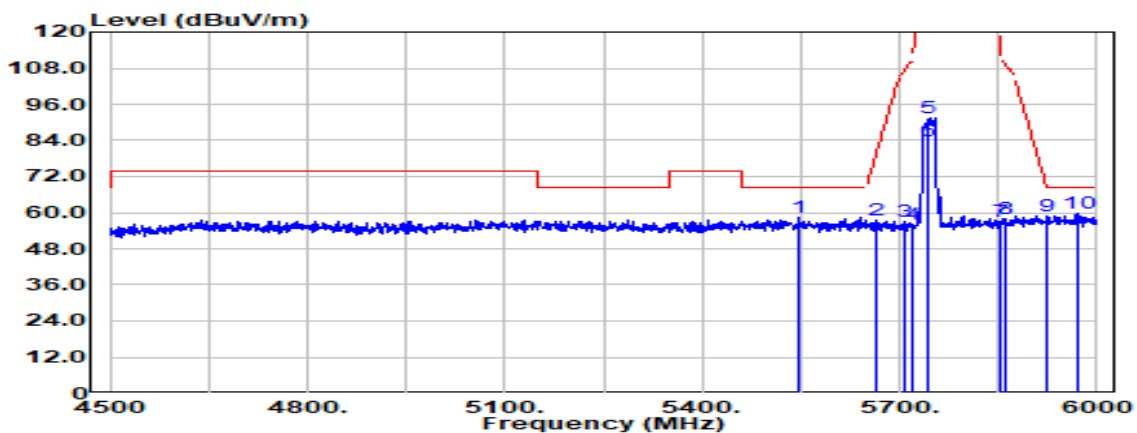

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5546.250	Peak	38.52	20.03	58.55	68.20	-9.65
5666.250	Peak	37.20	20.15	57.35	80.26	-22.91
5706.000	Peak	36.75	20.20	56.94	106.88	-49.94
5721.000	Peak	35.86	20.29	56.15	113.08	-56.93
5745.000	Peak	71.10	20.45	91.55	--	--
5745.000	Average	63.33	20.45	83.78	--	--
5853.000	Peak	36.40	20.74	57.14	115.36	-58.22
5860.500	Peak	37.32	20.78	58.09	109.26	-51.17
5922.750	Peak	37.98	21.05	59.02	69.86	-10.84
5970.750	Peak	38.53	21.16	59.69	68.20	-8.51


Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

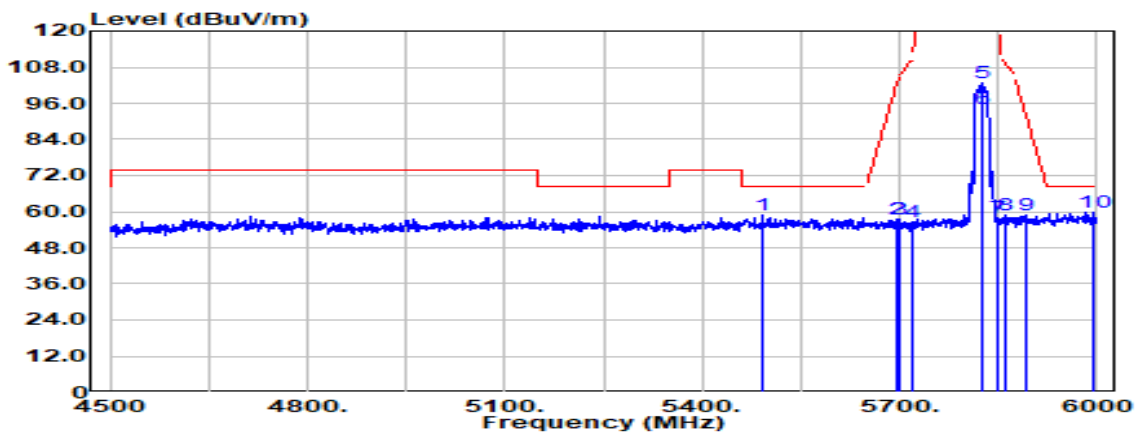

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5491.500	Peak	39.00	20.03	59.03	68.20	-9.17
5697.000	Peak	37.45	20.16	57.61	102.99	-45.38
5700.750	Peak	37.18	20.16	57.34	105.41	-48.07
5720.250	Peak	36.40	20.29	56.69	111.37	-54.68
5825.000	Peak	82.05	20.64	102.69	--	--
5825.000	Average	73.74	20.64	94.38	--	--
5850.000	Peak	37.18	20.73	57.91	122.20	-64.29
5861.250	Peak	37.99	20.78	58.77	109.05	-50.27
5893.500	Peak	37.93	20.92	58.85	91.47	-32.62
5994.750	Peak	38.69	21.17	59.86	68.20	-8.34

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

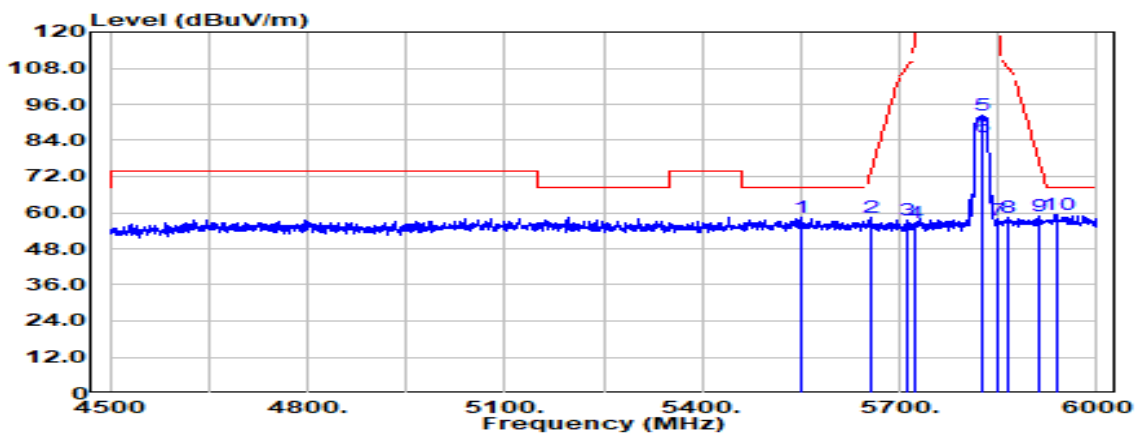

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5550.750	Peak	38.34	20.03	58.37	68.20	-9.83
5656.500	Peak	38.38	20.15	58.53	73.03	-14.50
5711.250	Peak	37.08	20.23	57.31	108.35	-51.04
5721.750	Peak	36.34	20.30	56.64	114.79	-58.15
5825.000	Peak	71.96	20.64	92.59	--	--
5825.000	Average	64.41	20.64	85.05	--	--
5850.750	Peak	36.92	20.73	57.65	120.49	-62.84
5865.000	Peak	37.70	20.80	58.50	108.00	-49.50
5912.250	Peak	37.84	21.00	58.84	77.61	-18.77
5939.250	Peak	38.39	21.11	59.51	68.20	-8.69

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	24.5(°C)/ 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

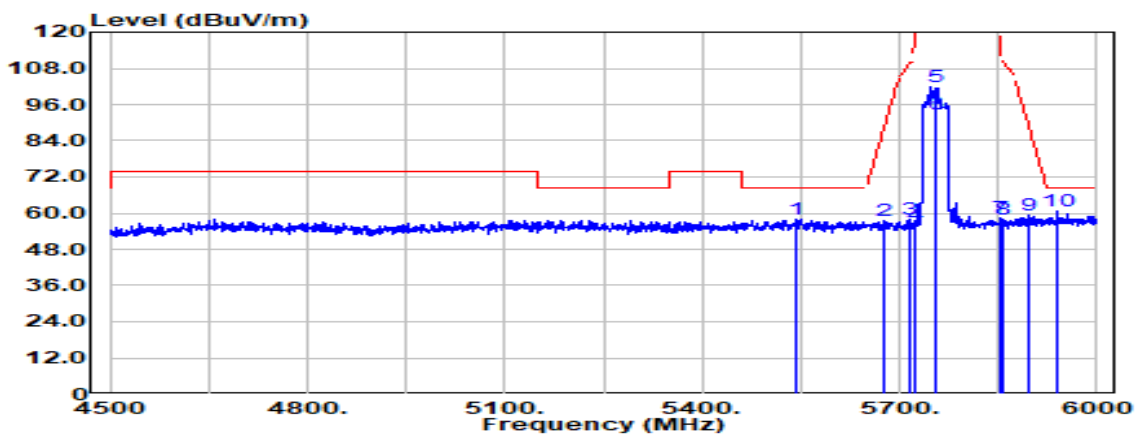

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5544.000	Peak	38.02	20.03	58.04	68.20	-10.16
5676.000	Peak	37.17	20.16	57.33	87.48	-30.15
5715.750	Peak	37.52	20.26	57.78	109.61	-51.83
5722.500	Peak	35.71	20.30	56.01	116.50	-60.49
5755.000	Peak	81.18	20.49	101.66	--	--
5755.000	Average	72.34	20.49	92.83	--	--
5852.250	Peak	37.62	20.74	58.36	117.07	-58.71
5857.500	Peak	37.37	20.76	58.13	110.10	-51.97
5896.500	Peak	38.39	20.93	59.32	89.25	-29.93
5938.500	Peak	39.72	21.11	60.83	68.20	-7.37

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

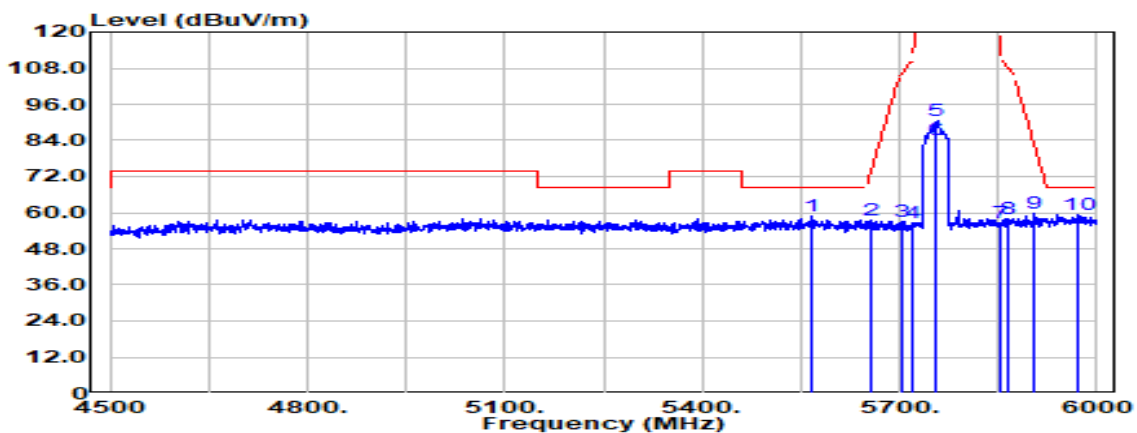

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5567.250	Peak	38.94	20.04	58.99	68.20	-9.21
5655.000	Peak	37.40	20.15	57.55	71.91	-14.36
5705.250	Peak	36.78	20.19	56.98	106.67	-49.70
5721.000	Peak	36.49	20.29	56.78	113.08	-56.30
5755.000	Peak	69.89	20.49	90.38	--	--
5755.000	Average	63.93	20.49	84.42	--	--
5853.750	Peak	35.79	20.75	56.53	113.65	-57.11
5866.500	Peak	37.34	20.80	58.15	107.58	-49.43
5904.750	Peak	38.94	20.97	59.91	83.15	-23.23
5972.250	Peak	37.96	21.16	59.13	68.20	-9.07

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5503.500	Peak	38.44	20.02	58.46	68.20	-9.74
5696.250	Peak	37.95	20.16	58.11	102.44	-44.33
5716.500	Peak	36.91	20.27	57.18	109.82	-52.64
5723.250	Peak	37.34	20.31	57.65	118.21	-60.56
5795.000	Peak	79.35	20.53	99.89	--	--
5795.000	Average	71.80	20.53	92.34	--	--
5850.750	Peak	36.86	20.73	57.59	120.49	-62.90
5864.250	Peak	37.17	20.79	57.96	108.21	-50.25
5906.250	Peak	38.58	20.98	59.55	82.04	-22.49
5946.750	Peak	38.67	21.15	59.81	68.20	-8.39

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

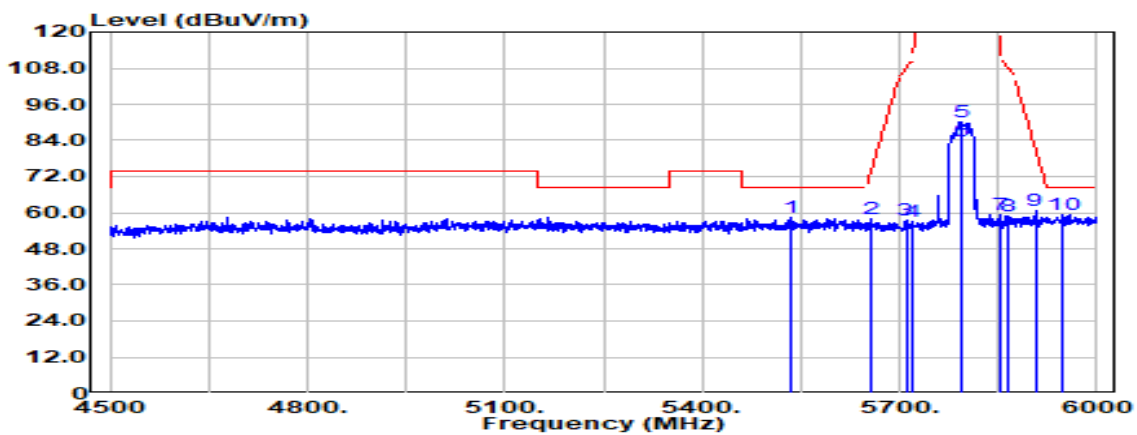

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5534.250	Peak	38.27	20.03	58.29	68.20	-9.91
5657.250	Peak	37.64	20.15	57.79	73.59	-15.80
5709.750	Peak	37.30	20.22	57.52	107.93	-50.41
5720.250	Peak	36.73	20.29	57.02	111.37	-54.35
5795.000	Peak	69.69	20.53	90.22	--	--
5795.000	Average	63.40	20.53	83.93	--	--
5853.750	Peak	38.38	20.75	59.12	113.65	-54.53
5864.250	Peak	37.89	20.79	58.69	108.21	-49.52
5906.250	Peak	39.62	20.98	60.59	82.04	-21.45
5948.250	Peak	38.34	21.15	59.49	68.20	-8.71


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

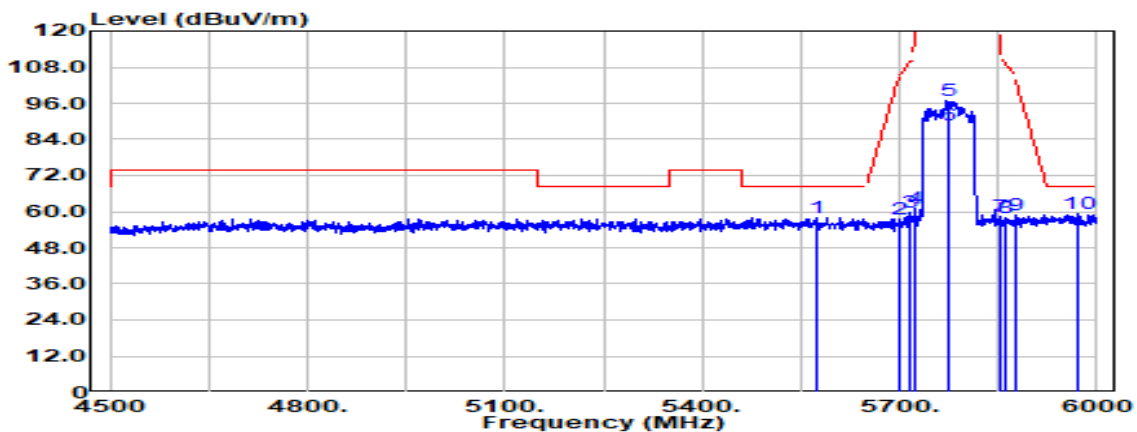

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5574.750	Peak	37.93	20.05	57.98	68.20	-10.22
5698.500	Peak	37.26	20.16	57.42	104.09	-46.68
5717.250	Peak	39.57	20.27	59.84	110.03	-50.19
5722.500	Peak	40.91	20.30	61.21	116.50	-55.29
5775.000	Peak	76.25	20.51	96.76	--	--
5775.000	Average	68.23	20.51	88.74	--	--
5852.250	Peak	37.84	20.74	58.58	117.07	-58.49
5862.750	Peak	37.15	20.79	57.94	108.63	-50.69
5876.250	Peak	38.08	20.85	58.93	104.27	-45.34
5973.000	Peak	38.08	21.16	59.25	68.20	-8.95

Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	24.5(°C) / 56%RH
Test Item	Band Edge	Test Date	April 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

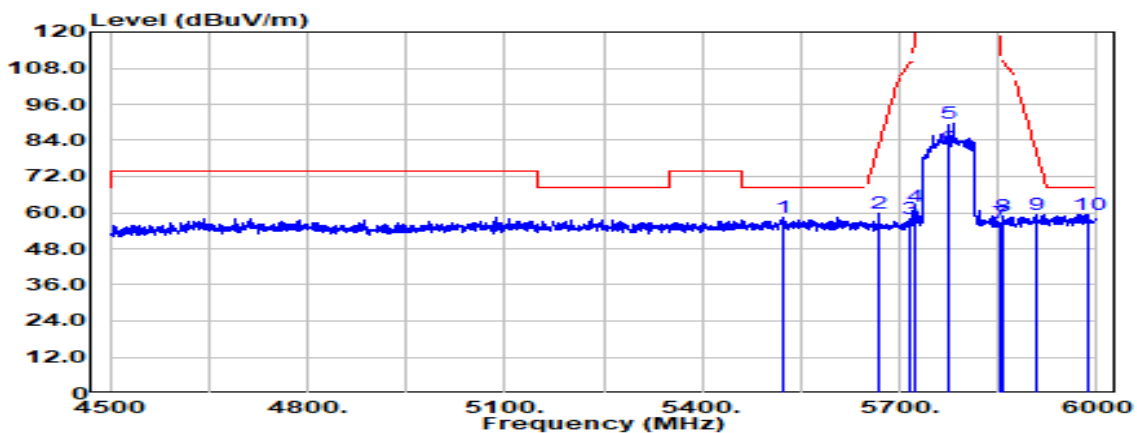


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5524.500	Peak	38.47	20.02	58.50	68.20	-9.70
5668.500	Peak	39.82	20.15	59.97	81.93	-21.95
5717.250	Peak	37.49	20.27	57.76	110.03	-52.28
5721.750	Peak	41.55	20.30	61.85	114.79	-52.94
5775.000	Peak	69.02	20.51	89.53	--	--
5775.000	Average	61.20	20.51	81.71	--	--
5853.000	Peak	35.93	20.74	56.68	115.36	-58.68
5858.250	Peak	37.99	20.77	58.76	109.89	-51.13
5909.250	Peak	38.36	20.99	59.34	79.82	-20.48
5987.250	Peak	38.33	21.17	59.50	68.20	-8.70

Report No.: TMWK2201000111KR

BFM OFF
Below 1G Test Data
Test Data for UNII-1

Test Mode	IEEE 802.11ac VHT20 / 5220MHz_	Temp/Hum	25.9(°C) / 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

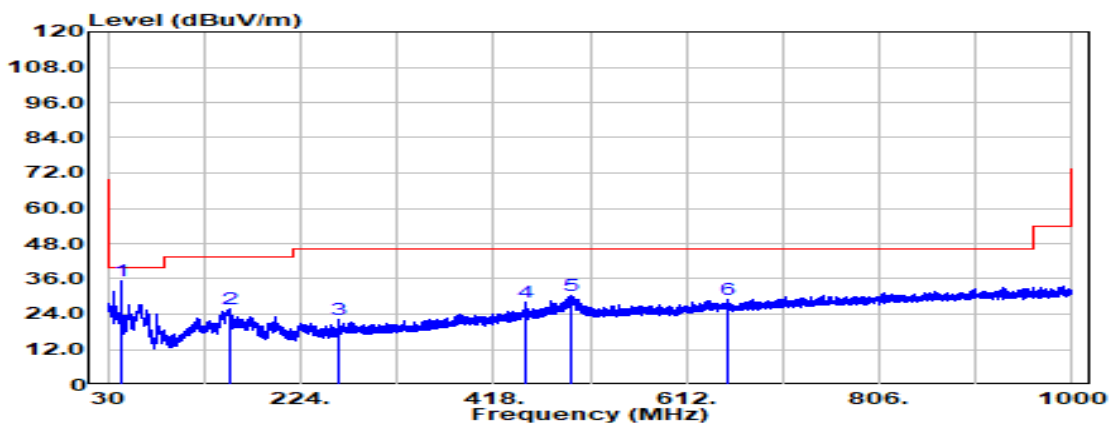


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
42.610	Peak	47.02	-11.74	35.28	40.00	-4.72
152.463	Peak	36.51	-10.75	25.76	43.50	-17.74
263.164	Peak	32.18	-9.83	22.36	46.00	-23.64
450.010	Peak	33.05	-5.00	28.05	46.00	-17.95
495.358	Peak	34.05	-3.86	30.19	46.00	-15.81
653.589	Peak	29.92	-1.10	28.83	46.00	-17.17

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5220MHz_	Temp/Hum	25.9(°C) / 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

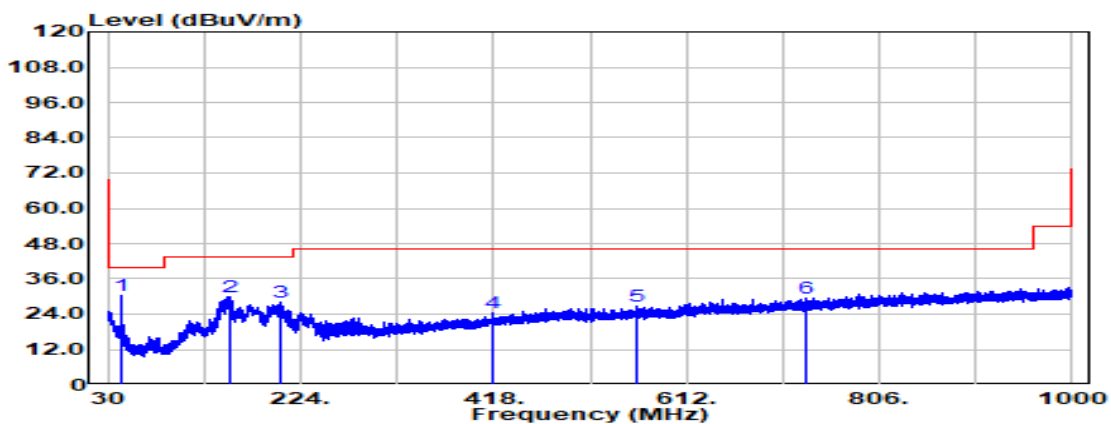


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
42.610	Peak	42.30	-11.74	30.56	40.00	-9.44
152.463	Peak	40.70	-10.75	29.94	43.50	-13.56
202.903	Peak	39.22	-11.16	28.06	43.50	-15.44
417.273	Peak	30.12	-5.76	24.36	46.00	-21.64
562.651	Peak	29.69	-2.82	26.86	46.00	-19.14
732.644	Peak	29.61	-0.08	29.53	46.00	-16.47

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260MHz_	Temp/Hum	25.9(°C)/ 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

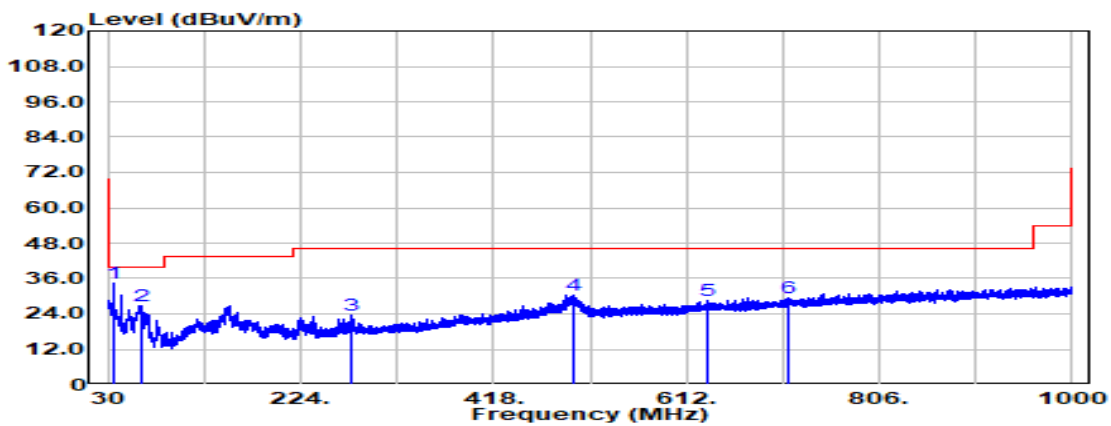


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
36.548	Peak	41.68	-7.35	34.34	40.00	-5.66
63.586	Peak	42.85	-15.92	26.93	40.00	-13.07
273.713	Peak	32.99	-9.26	23.73	46.00	-22.27
499.359	Peak	34.22	-3.85	30.36	46.00	-15.64
632.855	Peak	29.51	-1.16	28.35	46.00	-17.65
714.578	Peak	29.79	-0.22	29.58	46.00	-16.42

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5260MHz_	Temp/Hum	25.9(°C) / 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

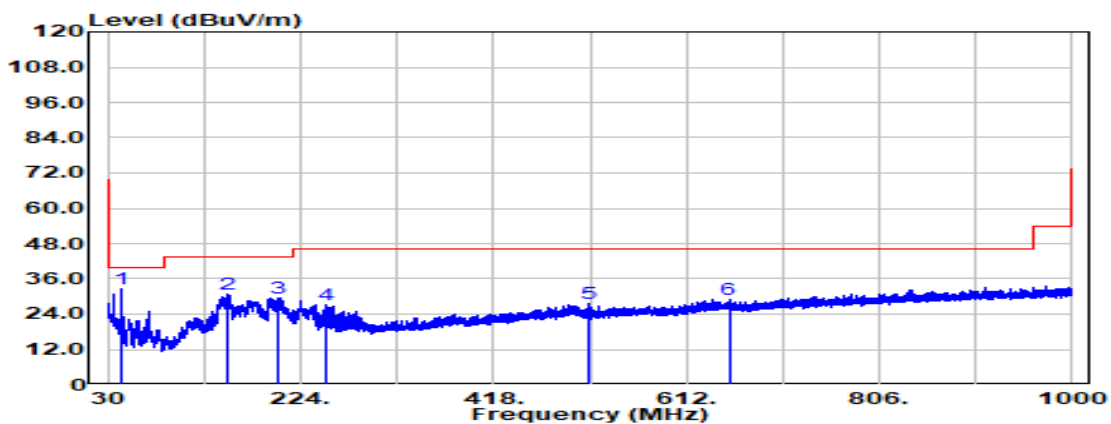


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
42.610	Peak	44.35	-11.74	32.61	40.00	-7.39
150.401	Peak	41.40	-10.68	30.73	43.50	-12.77
201.448	Peak	40.11	-10.58	29.54	43.50	-13.96
249.220	Peak	38.22	-11.09	27.13	46.00	-18.87
514.030	Peak	31.49	-3.78	27.71	46.00	-18.29
654.801	Peak	29.93	-1.08	28.84	46.00	-17.16

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5700MHz_	Temp/Hum	25.9(°C)/ 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

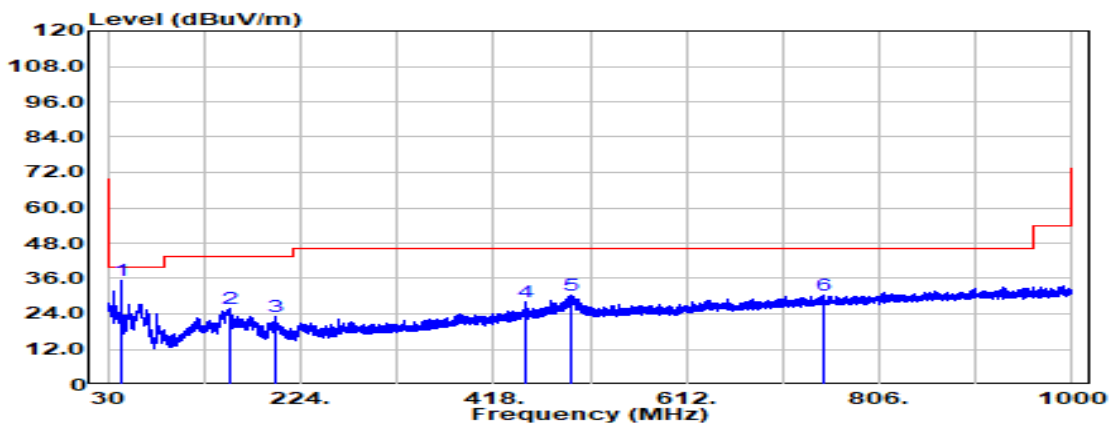


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
42.610	Peak	47.02	-11.74	35.28	40.00	-4.72
152.463	Peak	36.51	-10.75	25.76	43.50	-17.74
197.568	Peak	33.30	-10.32	22.99	43.50	-20.51
450.010	Peak	33.05	-5.00	28.05	46.00	-17.95
495.358	Peak	34.05	-3.86	30.19	46.00	-15.81
750.953	Peak	30.15	0.38	30.53	46.00	-15.47

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5700MHz_	Temp/Hum	25.9(°C) / 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

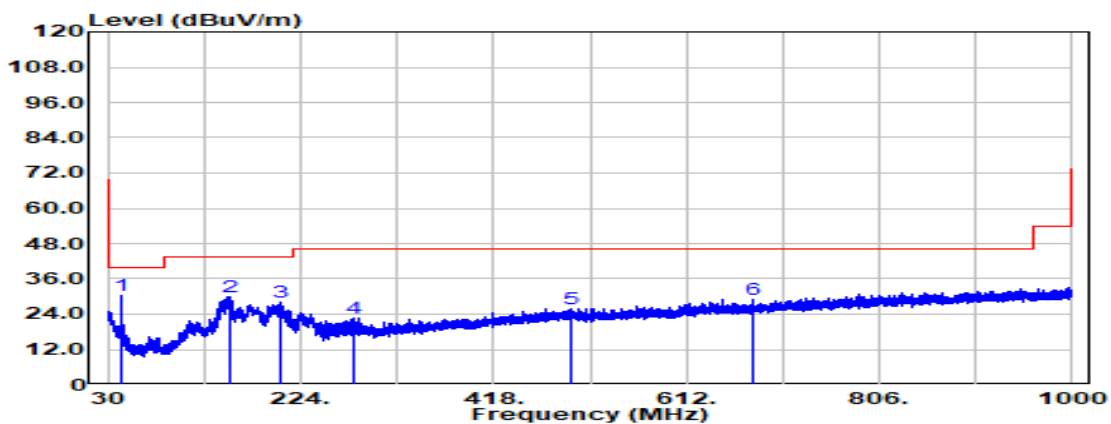


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
42.610	Peak	42.30	-11.74	30.56	40.00	-9.44
152.463	Peak	40.70	-10.75	29.94	43.50	-13.56
202.903	Peak	39.22	-11.16	28.06	43.50	-15.44
277.108	Peak	31.96	-9.24	22.72	46.00	-23.28
496.206	Peak	29.75	-3.86	25.90	46.00	-20.10
679.051	Peak	29.93	-0.98	28.95	46.00	-17.05

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Data for UNII-3

Test Mode	IEEE 802.11a / 5825MHz_	Temp/Hum	25.9(°C)/ 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

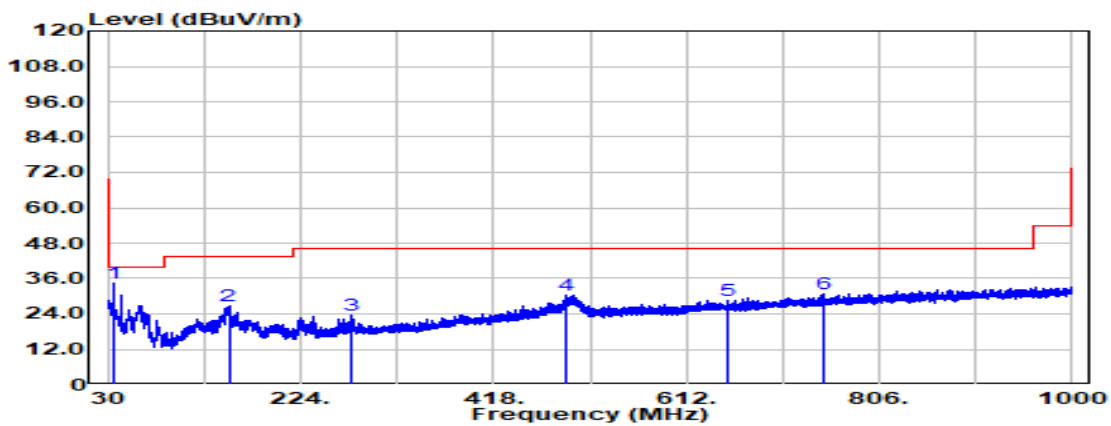


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
36.548	Peak	41.68	-7.35	34.34	40.00	-5.66
151.735	Peak	37.51	-10.67	26.85	43.50	-16.65
273.713	Peak	32.99	-9.26	23.73	46.00	-22.27
490.265	Peak	34.27	-3.93	30.35	46.00	-15.65
653.225	Peak	29.80	-1.10	28.70	46.00	-17.30
749.740	Peak	30.31	0.38	30.69	46.00	-15.31

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5825MHz_	Temp/Hum	25.9(°C) / 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

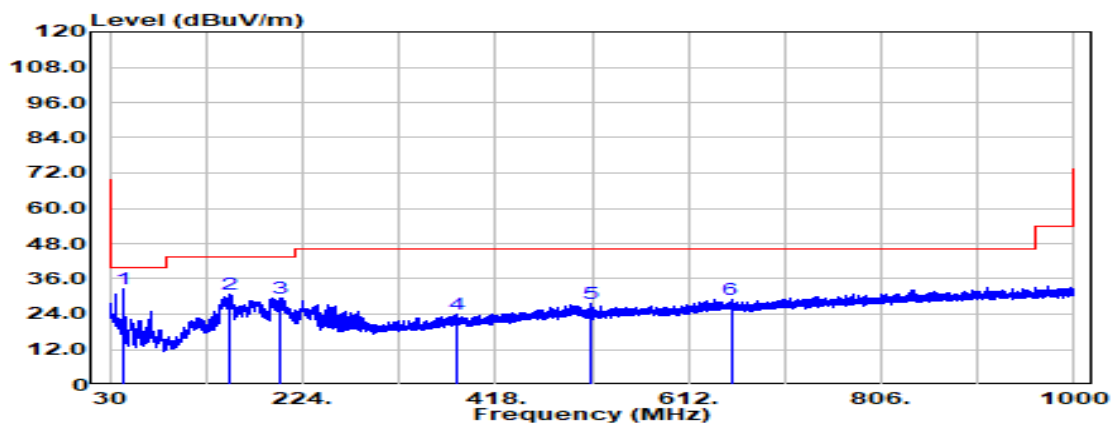

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
42.610	Peak	44.35	-11.74	32.61	40.00	-7.39
150.401	Peak	41.40	-10.68	30.73	43.50	-12.77
201.448	Peak	40.11	-10.58	29.54	43.50	-13.96
380.049	Peak	31.30	-7.15	24.15	46.00	-21.85
514.030	Peak	31.49	-3.78	27.71	46.00	-18.29
654.801	Peak	29.93	-1.08	28.84	46.00	-17.16


Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000111KR

Above 1G

BFM OFF
Test Data for UNII-1

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	20.6(°C)/ 56%RH
Test Item	Harmonic	Test Date	March 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

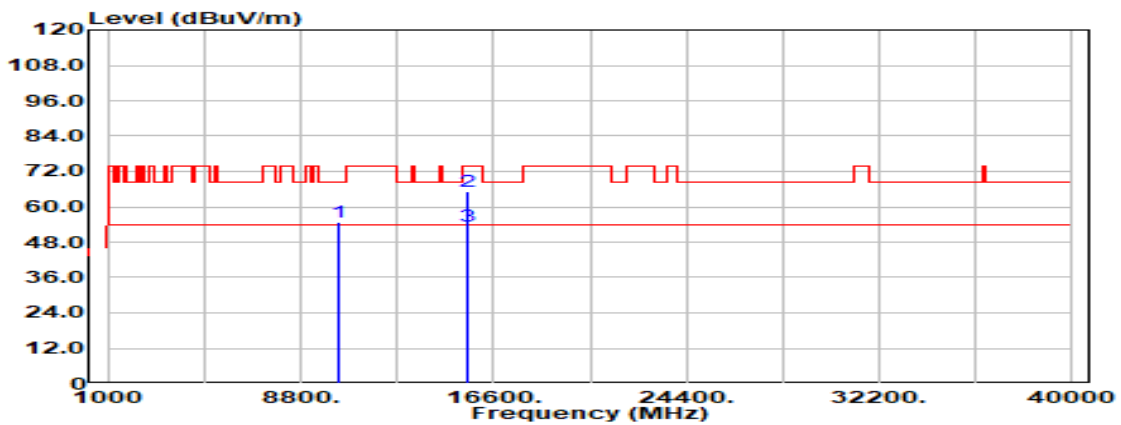


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	37.16	17.72	54.88	68.20	-13.32
15540.000	Peak	40.37	24.85	65.22	74.00	-8.78
15540.000	Average	28.64	24.85	53.49	54.00	-0.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	20.6(°C)/ 56%RH
Test Item	Harmonic	Test Date	March 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

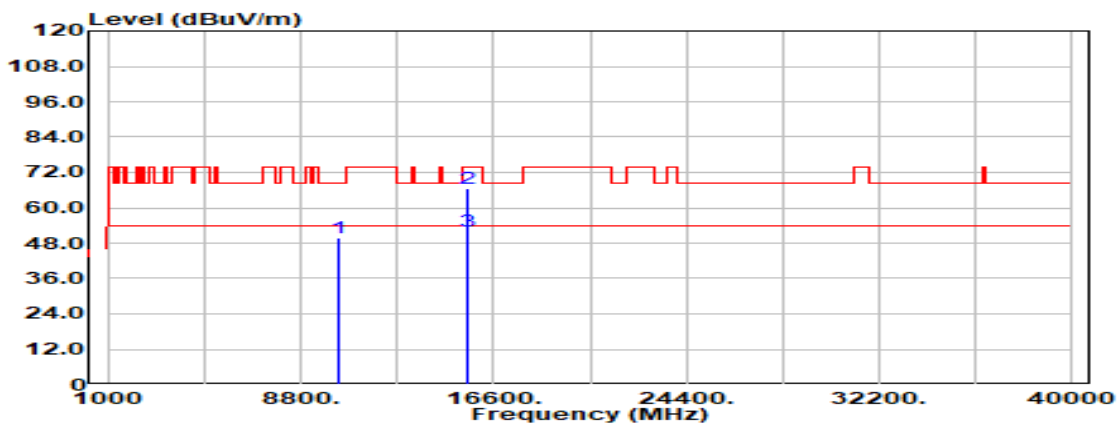


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	32.07	17.72	49.79	68.20	-18.41
15540.000	Peak	41.69	24.85	66.54	74.00	-7.46
15540.000	Average	27.11	24.85	51.96	54.00	-2.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Harmonics	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

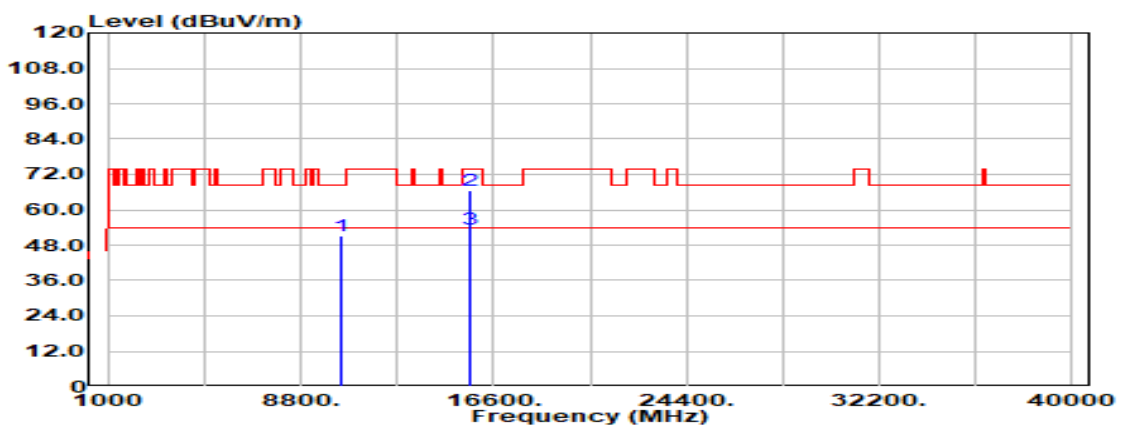


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	33.11	17.90	51.01	68.20	-17.19
15660.000	Peak	41.50	25.15	66.65	74.00	-7.35
15660.000	Average	28.32	25.15	53.47	54.00	-0.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Harmonic	Test Date	March 30, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

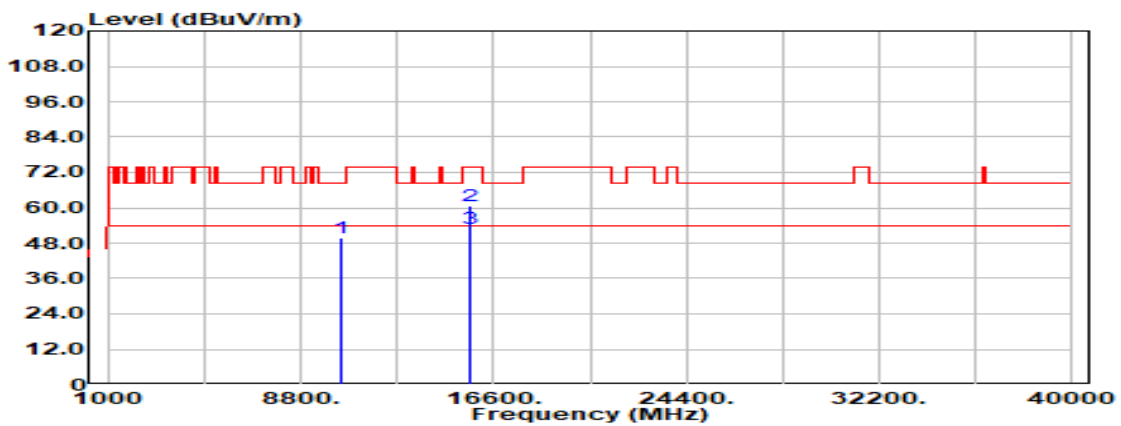


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	31.83	17.90	49.74	68.20	-18.46
15660.000	Peak	35.39	25.15	60.54	74.00	-13.46
15660.000	Average	27.63	25.15	52.78	54.00	-1.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Harmonic	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

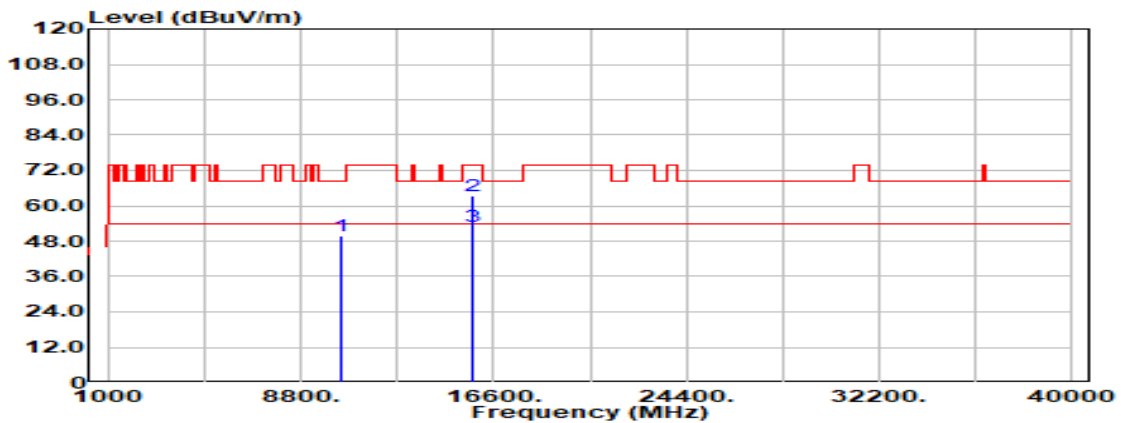


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	31.87	18.05	49.92	68.20	-18.28
15720.000	Peak	37.76	25.55	63.31	74.00	-10.69
15720.000	Average	27.48	25.55	53.03	54.00	-0.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Harmonic	Test Date	March 30, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

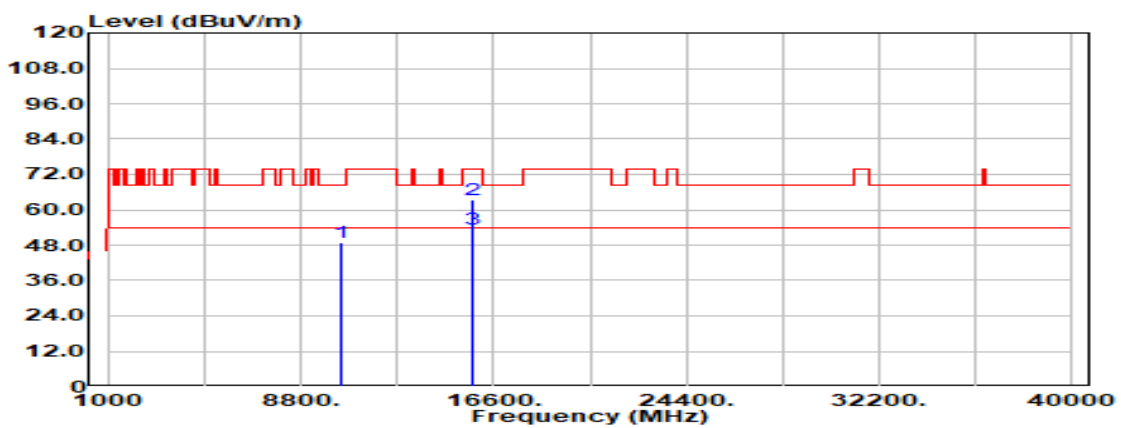


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	30.82	18.05	48.87	68.20	-19.33
15720.000	Peak	37.82	25.55	63.37	74.00	-10.63
15720.000	Average	27.82	25.55	53.37	54.00	-0.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5180MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

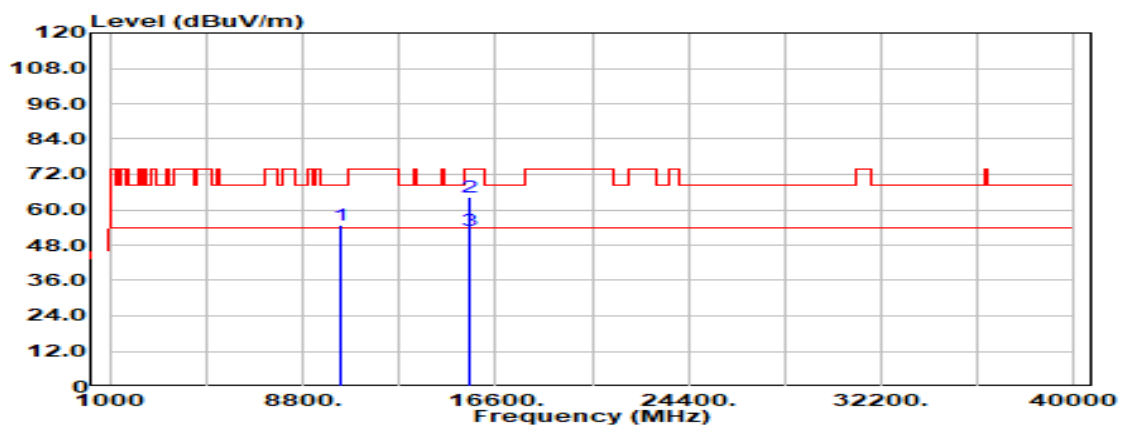


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	37.16	17.72	54.88	68.20	-13.32
15540.000	Peak	39.56	24.85	64.41	74.00	-9.59
15540.000	Average	28.31	24.85	53.16	54.00	-0.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5180MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

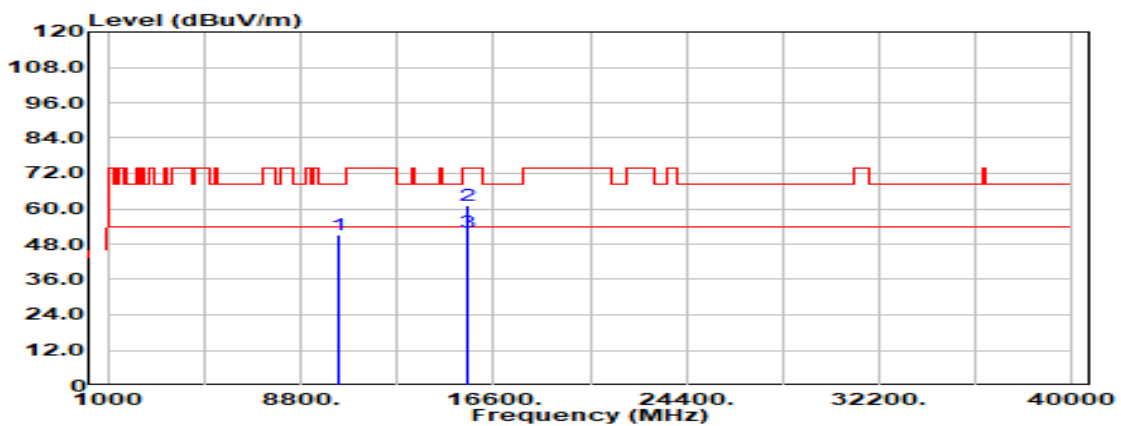


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	33.63	17.72	51.35	68.20	-16.85
15540.000	Peak	36.41	24.85	61.26	74.00	-12.74
15540.000	Average	27.17	24.85	52.02	54.00	-1.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5220MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

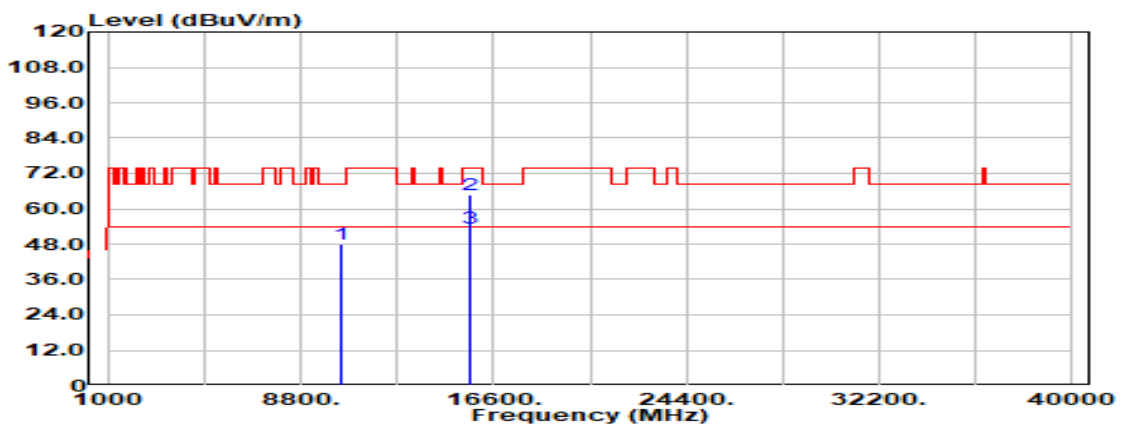


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	29.93	17.90	47.84	68.20	-20.36
15660.000	Peak	39.79	25.15	64.94	74.00	-9.06
15660.000	Average	28.16	25.15	53.31	54.00	-0.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5220MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

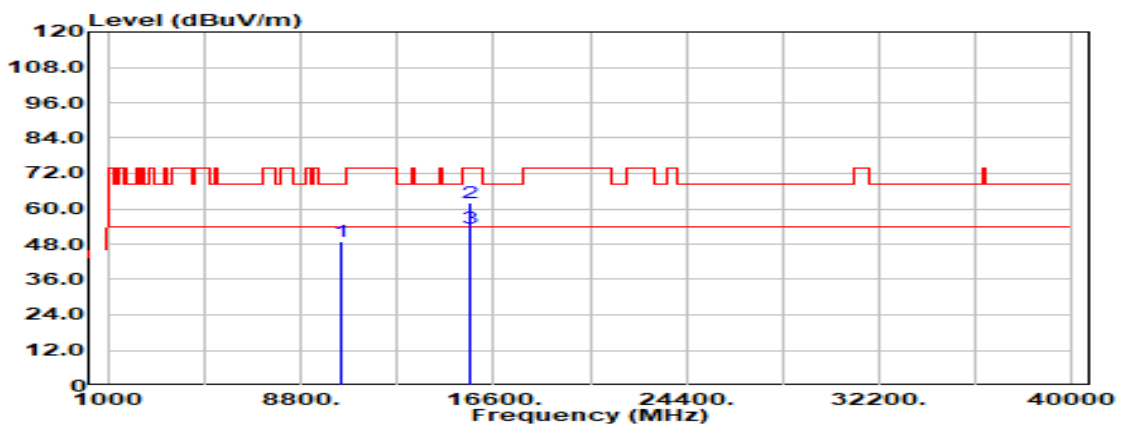


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	31.13	17.90	49.03	68.20	-19.17
15660.000	Peak	37.07	25.15	62.22	74.00	-11.78
15660.000	Average	28.50	25.15	53.65	54.00	-0.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5240MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

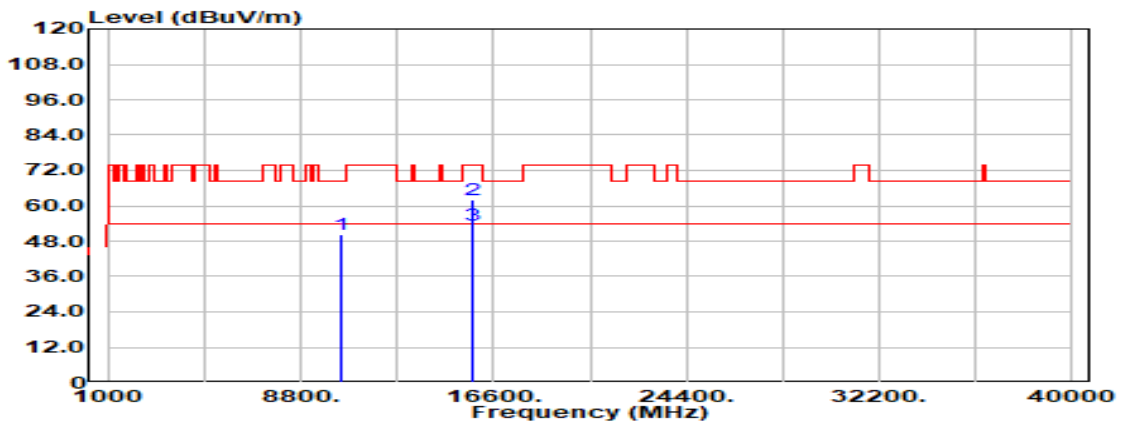


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	32.16	18.05	50.21	68.20	-17.99
15720.000	Peak	36.40	25.55	61.95	74.00	-12.05
15720.000	Average	27.86	25.55	53.41	54.00	-0.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5240MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

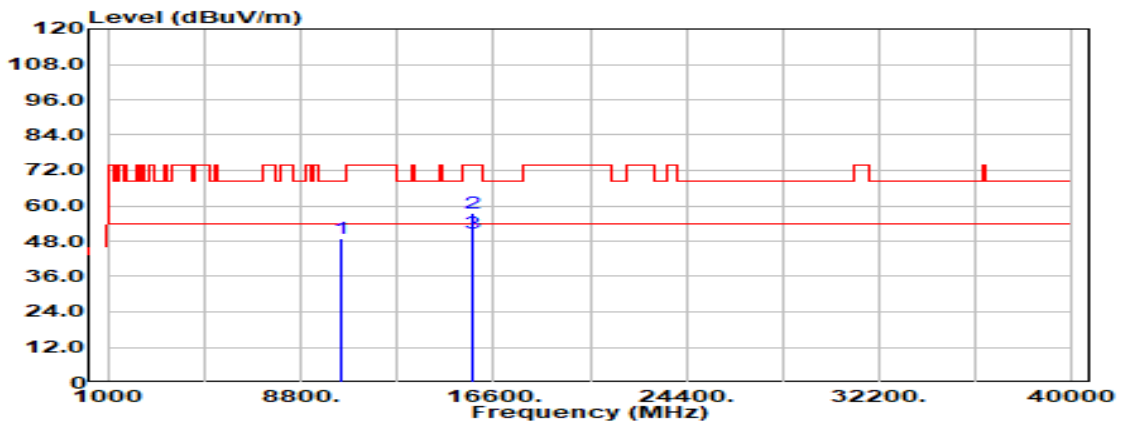


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	30.99	18.05	49.04	68.20	-19.16
15720.000	Peak	31.99	25.55	57.55	74.00	-16.45
15720.000	Average	25.13	25.55	50.68	54.00	-3.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5190MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

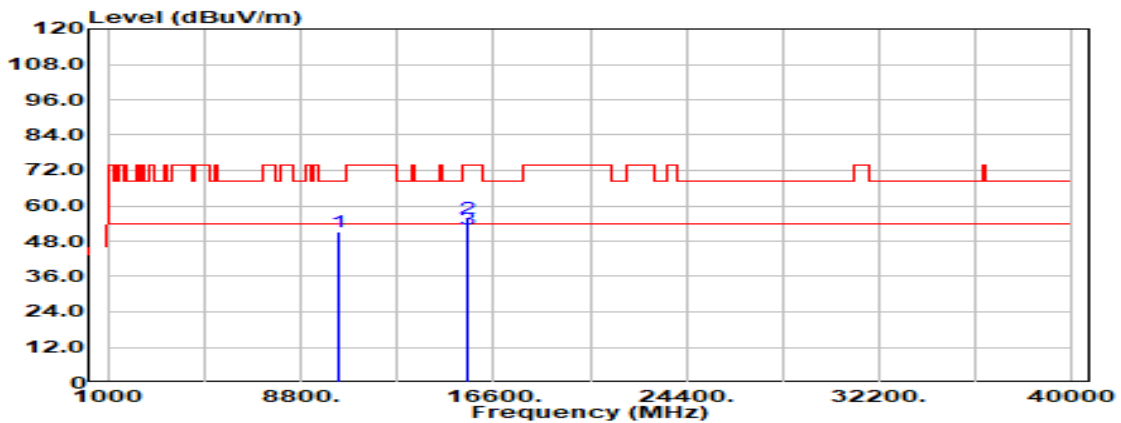


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	33.49	17.76	51.25	68.20	-16.95
15570.000	Peak	30.95	24.85	55.81	74.00	-18.19
15570.000	Average	27.16	24.85	52.01	54.00	-1.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5190MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

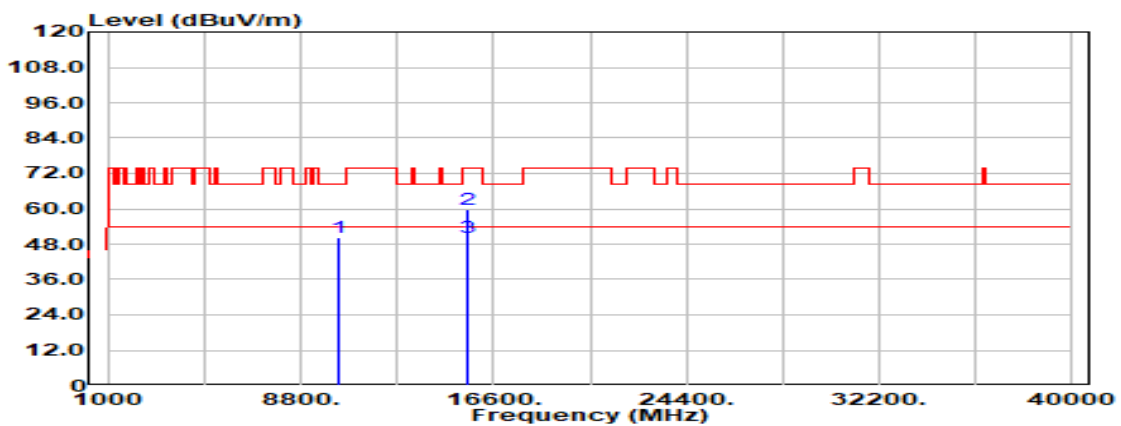


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	32.33	17.76	50.09	68.20	-18.11
15570.000	Peak	34.98	24.85	59.83	74.00	-14.17
15570.000	Average	25.48	24.85	50.33	54.00	-3.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5230MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

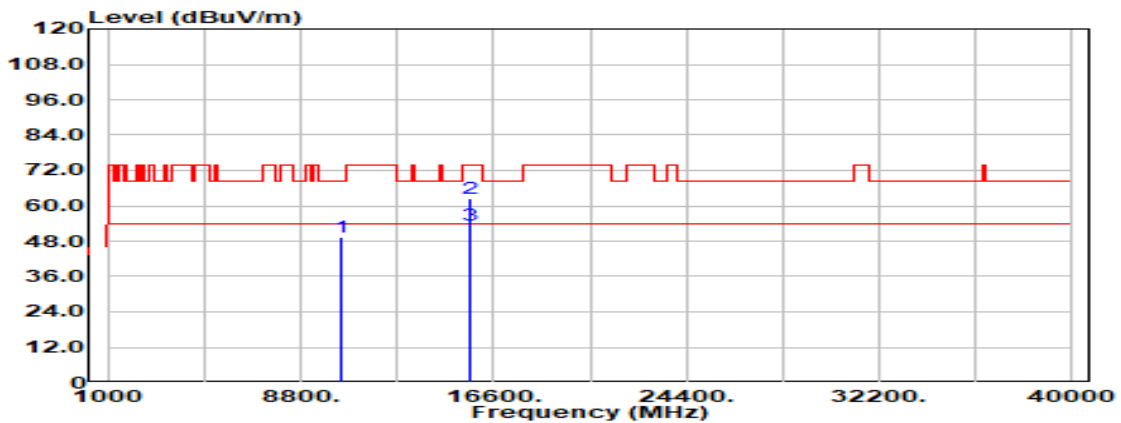


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	31.42	17.97	49.39	68.20	-18.81
15690.000	Peak	37.00	25.38	62.38	74.00	-11.62
15690.000	Average	27.84	25.38	53.23	54.00	-0.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5230MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

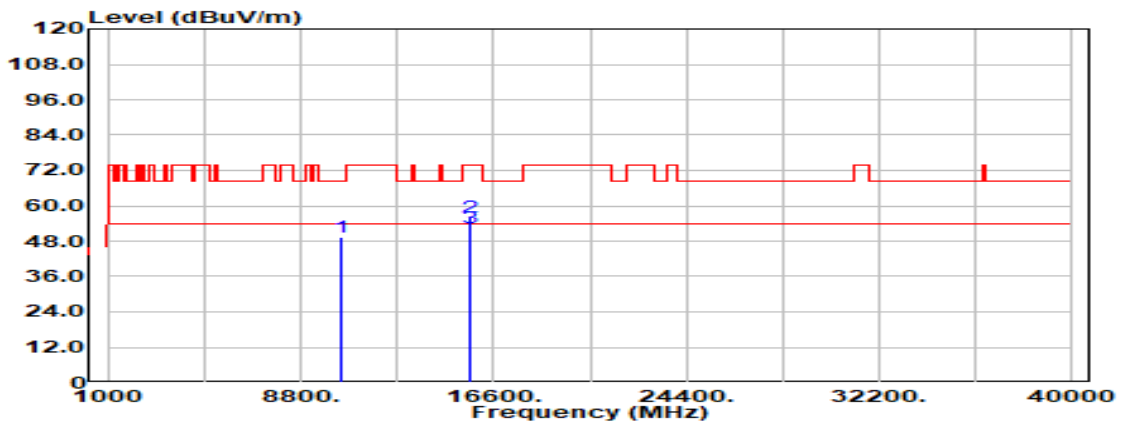


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	31.32	17.97	49.29	68.20	-18.91
15690.000	Peak	30.70	25.38	56.08	74.00	-17.92
15690.000	Average	26.93	25.38	52.31	54.00	-1.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

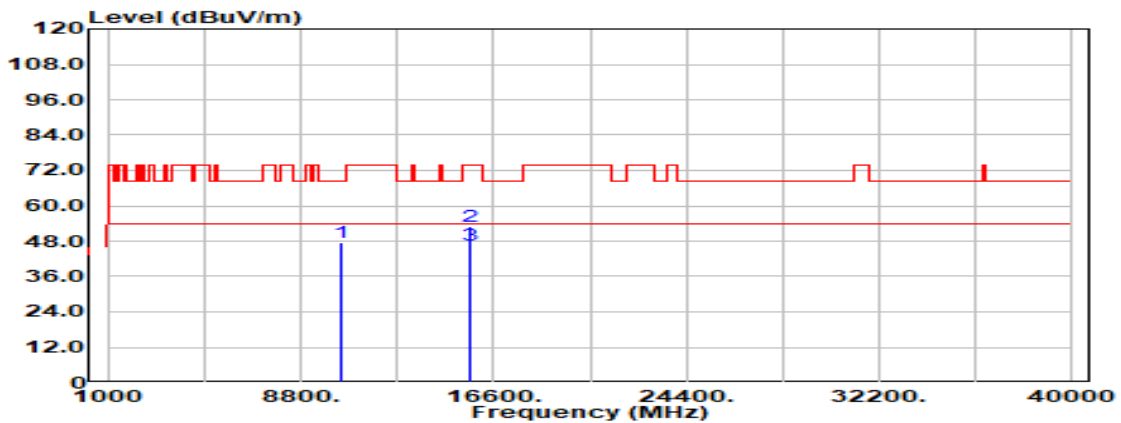


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	29.80	17.85	47.65	68.20	-20.55
15630.000	Peak	28.16	25.00	53.16	74.00	-20.84
15630.000	Average	21.82	25.00	46.81	54.00	-7.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

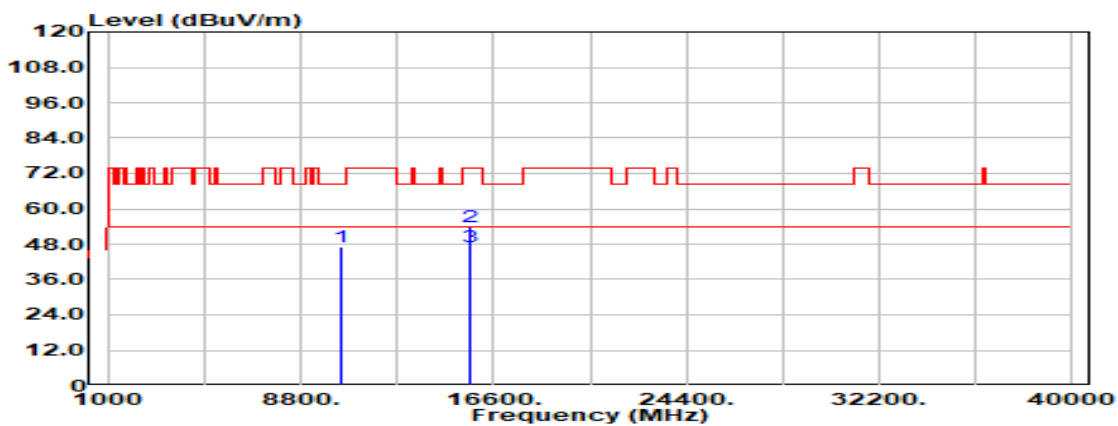


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	29.05	17.85	46.90	68.20	-21.30
15630.000	Peak	28.95	25.00	53.95	74.00	-20.05
15630.000	Average	22.23	25.00	47.23	54.00	-6.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5180MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

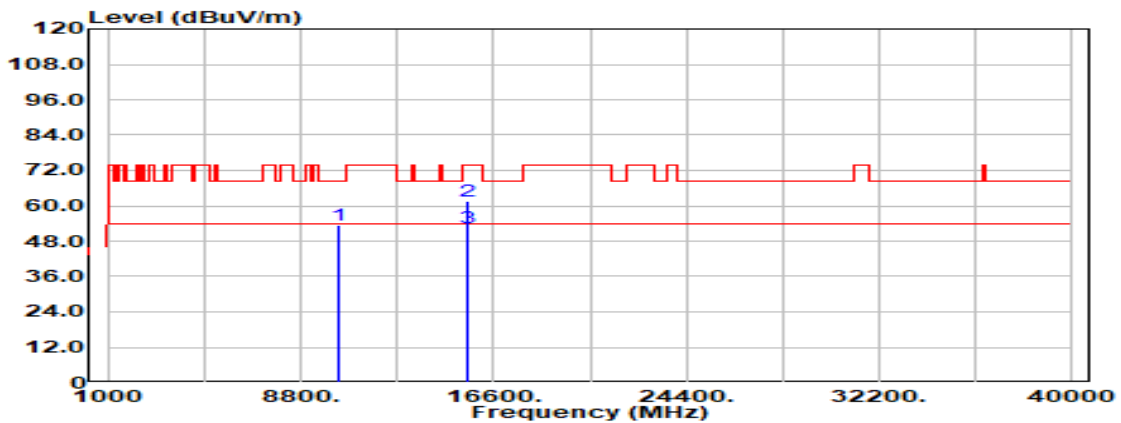


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	35.54	17.72	53.26	68.20	-14.94
15540.000	Peak	36.76	24.85	61.61	74.00	-12.39
15540.000	Average	27.64	24.85	52.48	54.00	-1.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5180MHz_	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

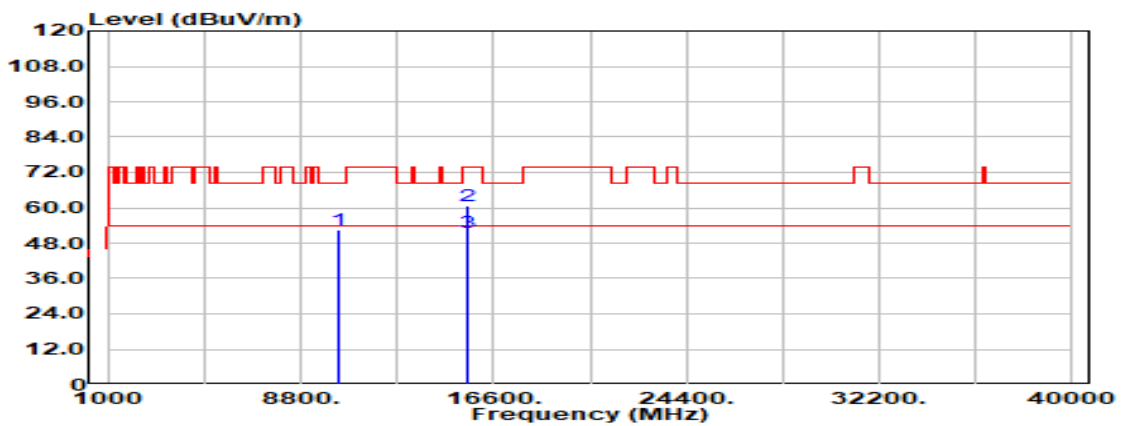


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	34.67	17.72	52.39	68.20	-15.81
15540.000	Peak	35.72	24.85	60.57	74.00	-13.43
15540.000	Average	26.77	24.85	51.62	54.00	-2.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5220MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

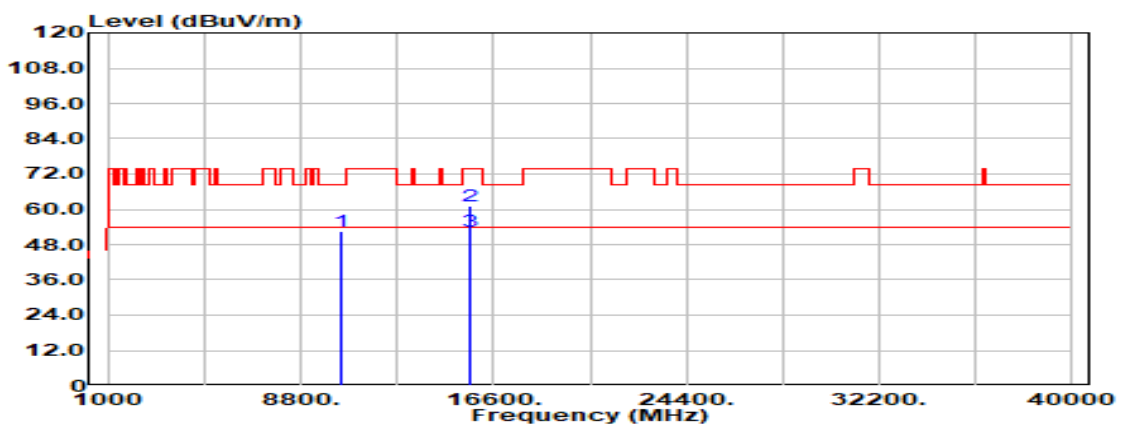


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	34.52	17.90	52.42	68.20	-15.78
15660.000	Peak	35.97	25.15	61.12	74.00	-12.88
15660.000	Average	27.59	25.15	52.73	54.00	-1.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5220MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

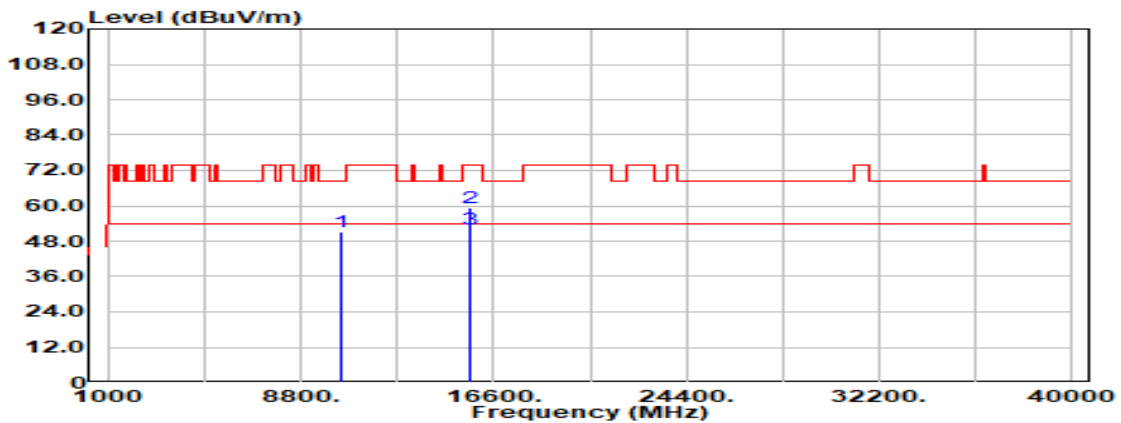


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	33.45	17.90	51.36	68.20	-16.84
15660.000	Peak	34.33	25.15	59.48	74.00	-14.52
15660.000	Average	27.10	25.15	52.25	54.00	-1.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5240MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

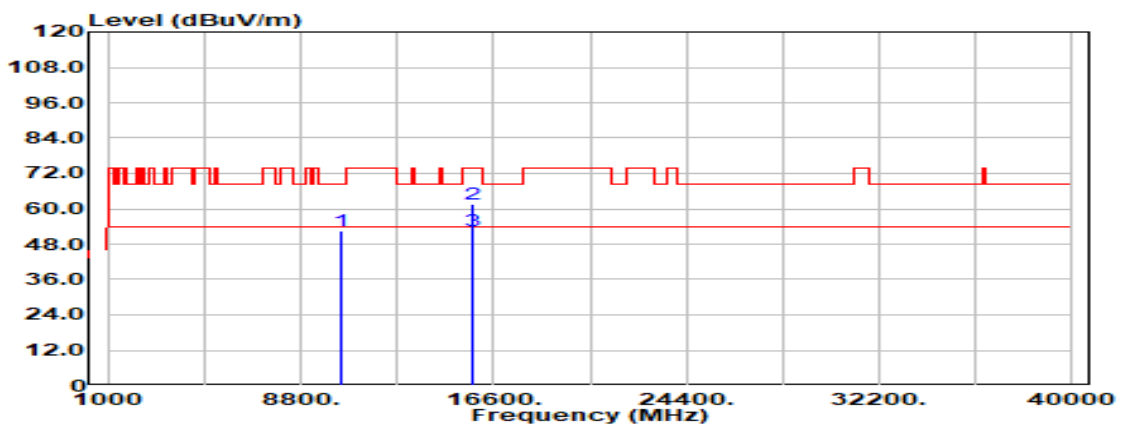


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	34.42	18.05	52.47	68.20	-15.73
15720.000	Peak	36.02	25.55	61.58	74.00	-12.42
15720.000	Average	27.03	25.55	52.58	54.00	-1.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5240MHz_	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

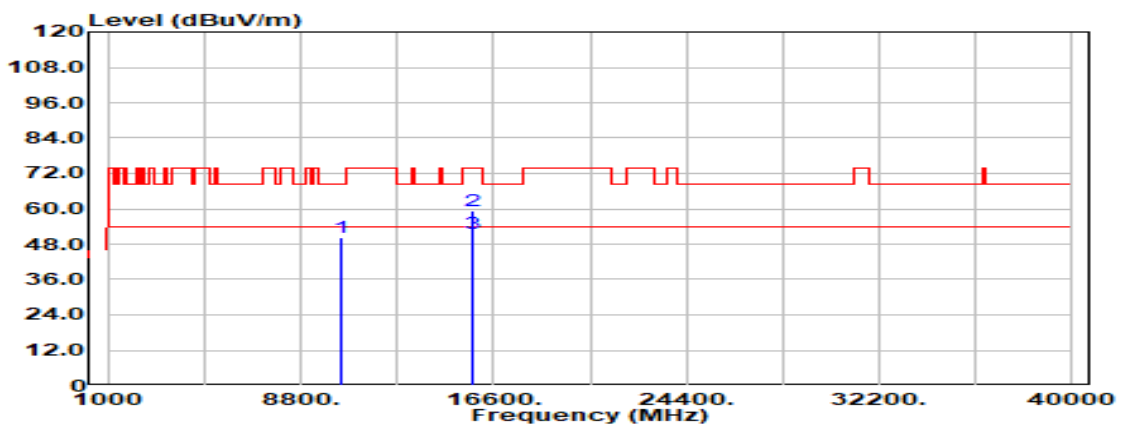


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	32.09	18.05	50.14	68.20	-18.06
15720.000	Peak	33.58	25.55	59.13	74.00	-14.87
15720.000	Average	26.00	25.55	51.55	54.00	-2.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

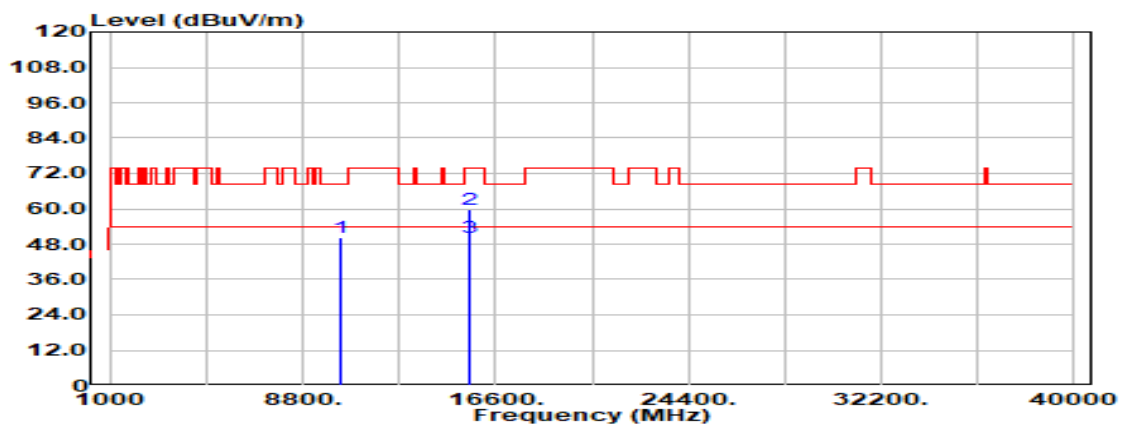


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	32.30	17.76	50.06	68.20	-18.14
15570.000	Peak	34.85	24.85	59.70	74.00	-14.30
15570.000	Average	25.51	24.85	50.36	54.00	-3.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

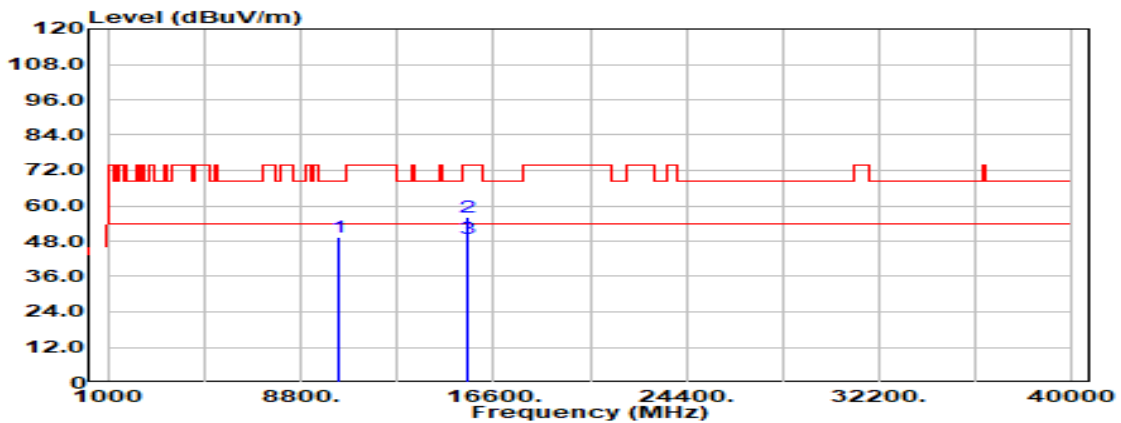


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	31.63	17.76	49.39	68.20	-18.81
15570.000	Peak	31.34	24.85	56.19	74.00	-17.81
15570.000	Average	24.08	24.85	48.93	54.00	-5.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5230MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

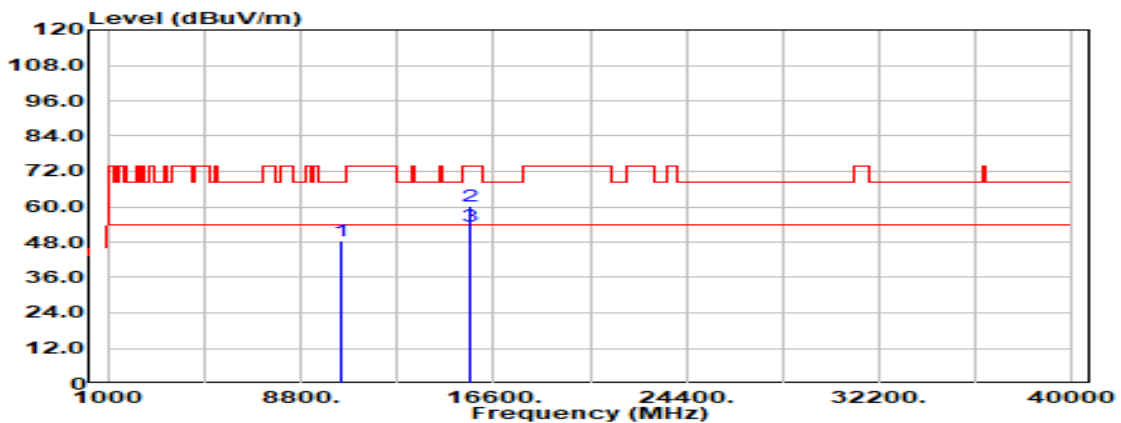


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	30.66	17.97	48.63	68.20	-19.57
15690.000	Peak	34.81	25.38	60.19	74.00	-13.81
15690.000	Average	27.84	25.38	53.22	54.00	-0.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5230MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

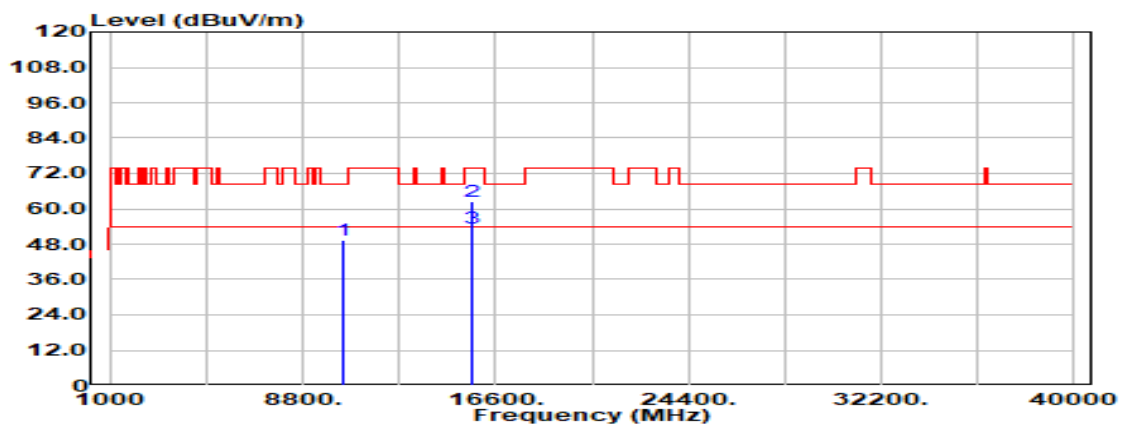


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	31.38	17.97	49.35	68.20	-18.85
15690.000	Peak	37.06	25.38	62.45	74.00	-11.55
15690.000	Average	28.06	25.38	53.44	54.00	-0.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5210MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

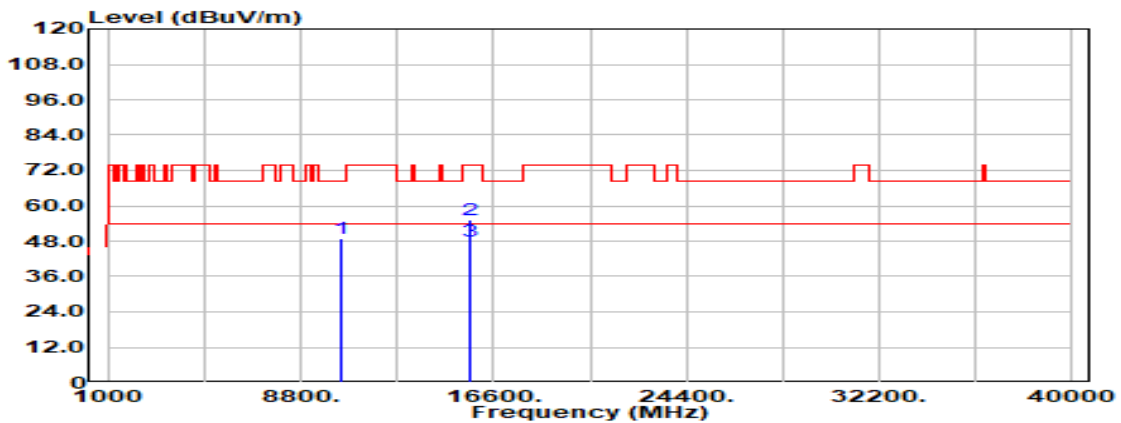


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	31.28	17.85	49.13	68.20	-19.07
15630.000	Peak	30.22	25.00	55.22	74.00	-18.78
15630.000	Average	23.21	25.00	48.20	54.00	-5.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5210MHz	Temp/Hum	22.9(°C) / 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

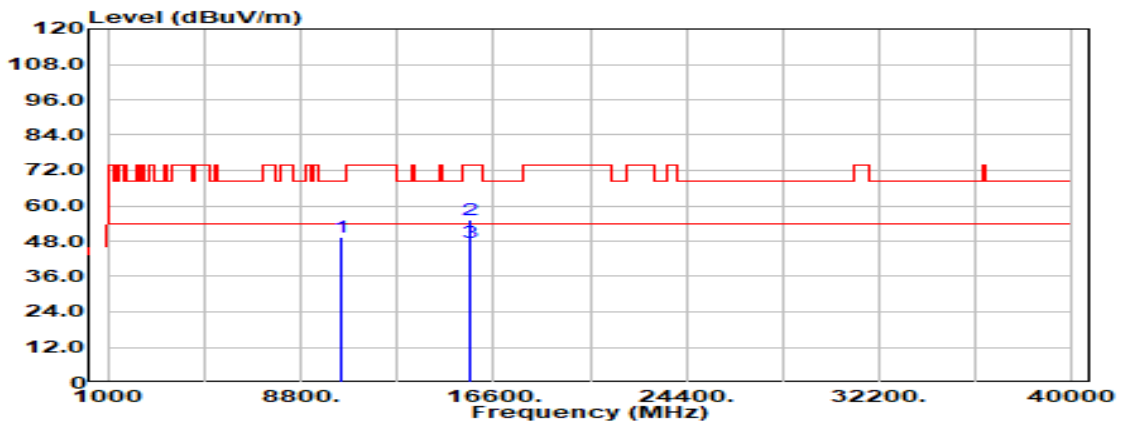

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	31.57	17.85	49.42	68.20	-18.78
15630.000	Peak	30.15	25.00	55.15	74.00	-18.85
15630.000	Average	22.73	25.00	47.73	54.00	-6.27
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	20.9(°C) / 60%RH
Test Item	Harmonic	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

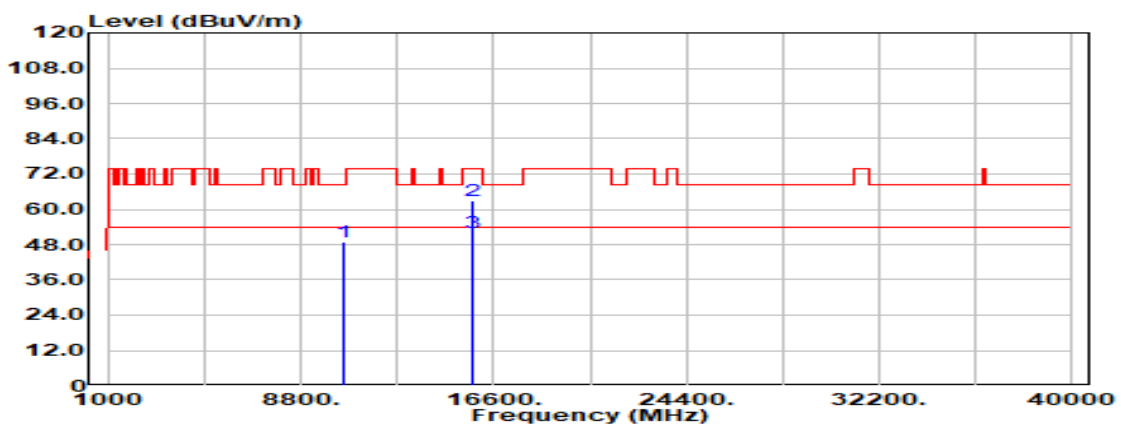


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	30.97	18.16	49.13	68.20	-19.07
15780.000	Peak	37.10	25.80	62.91	74.00	-11.09
15780.000	Average	26.31	25.80	52.11	54.00	-1.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 27, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

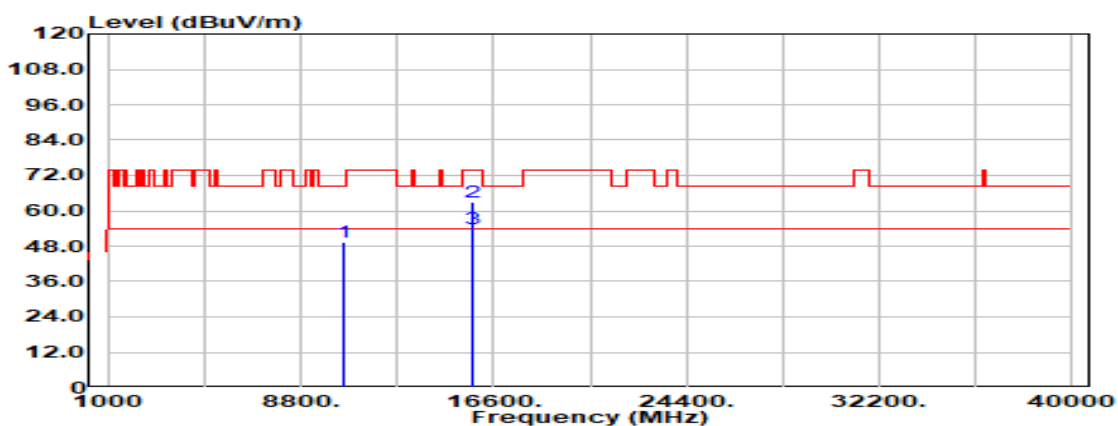


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	31.34	18.16	49.50	68.20	-18.70
15780.000	Peak	37.36	25.80	63.16	74.00	-10.84
15780.000	Average	27.94	25.80	53.74	54.00	-0.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonics	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

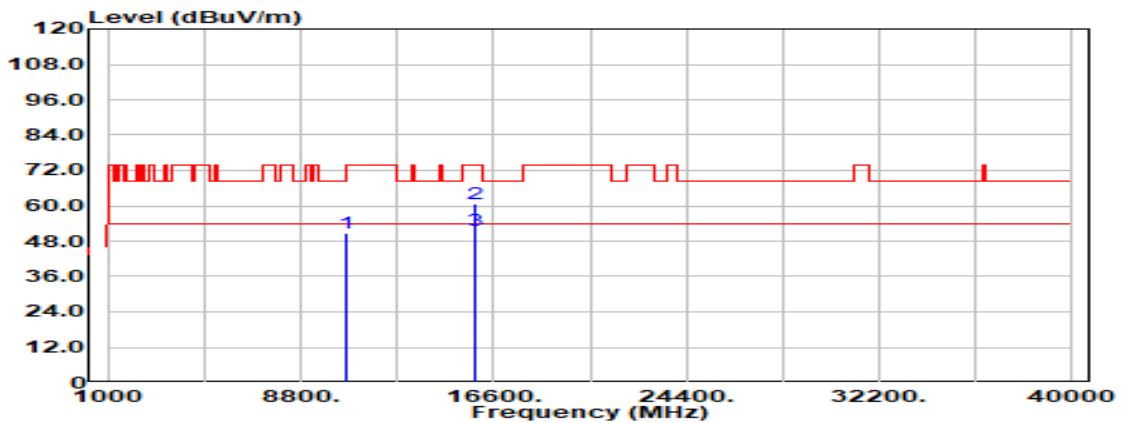


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	32.40	18.20	50.60	68.20	-17.60
15900.000	Peak	34.16	26.46	60.62	74.00	-13.38
15900.000	Average	25.11	26.46	51.57	54.00	-2.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

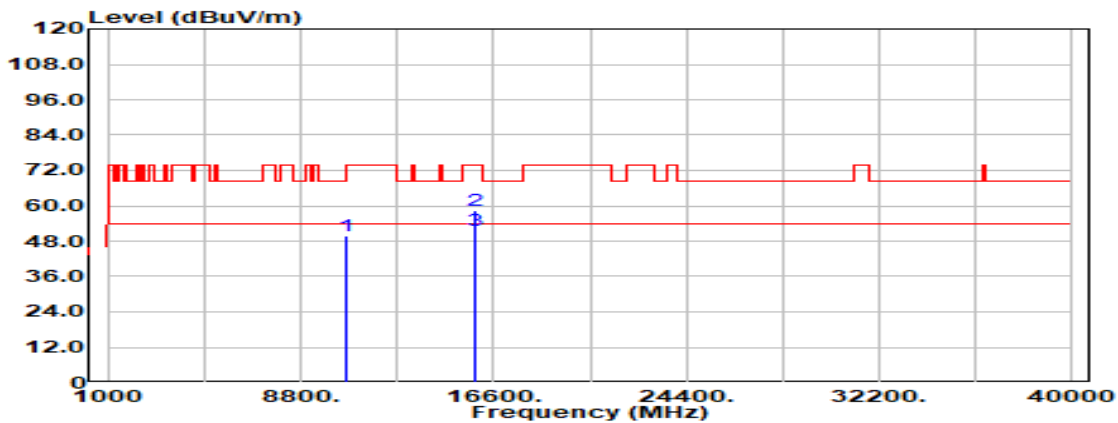


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	31.55	18.20	49.75	68.20	-18.45
15900.000	Peak	31.79	26.46	58.25	74.00	-15.75
15900.000	Average	25.32	26.46	51.78	54.00	-2.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

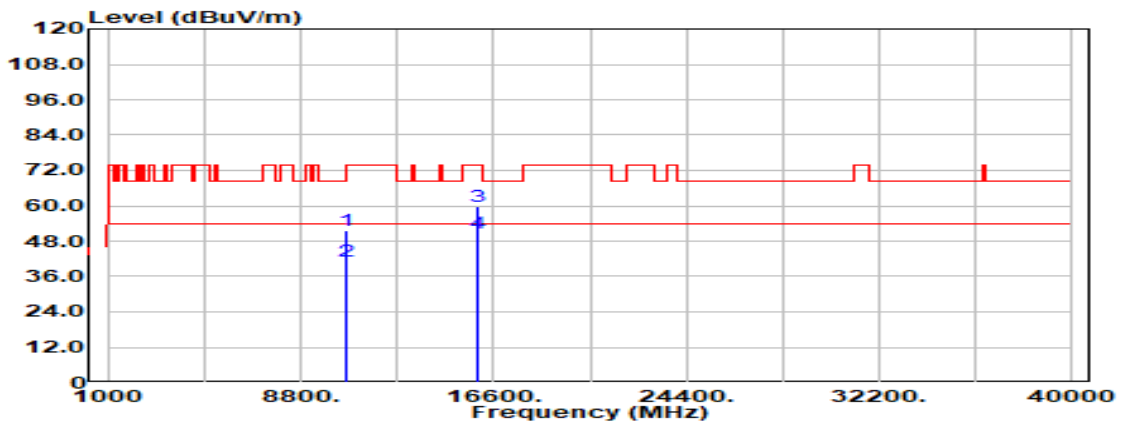


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	33.23	18.37	51.60	74.00	-22.40
10640.000	Average	22.78	18.37	41.15	54.00	-12.85
15960.000	Peak	32.79	26.84	59.63	74.00	-14.37
15960.000	Average	23.68	26.84	50.52	54.00	-3.48

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

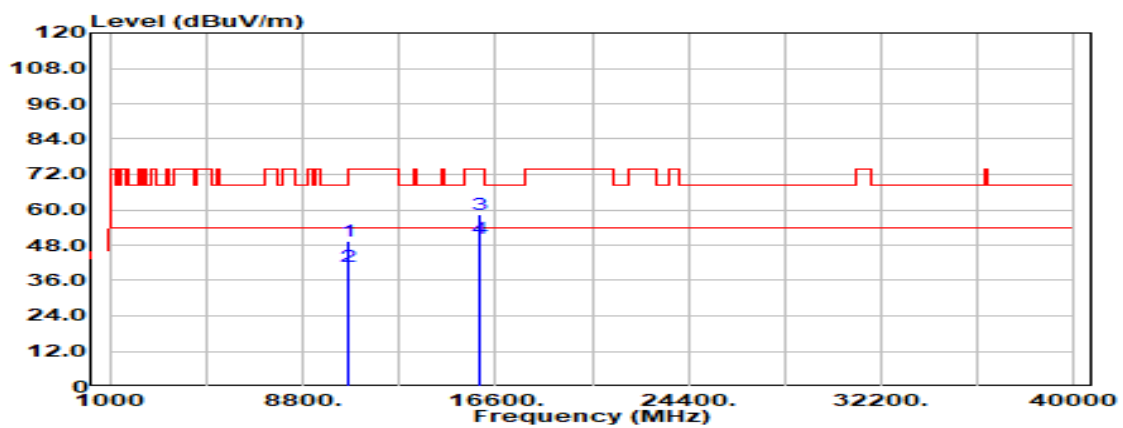


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	30.98	18.37	49.35	74.00	-24.65
10640.000	Average	22.18	18.37	40.55	54.00	-13.45
15960.000	Peak	31.43	26.84	58.27	74.00	-15.73
15960.000	Average	23.42	26.84	50.26	54.00	-3.74

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5260 MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

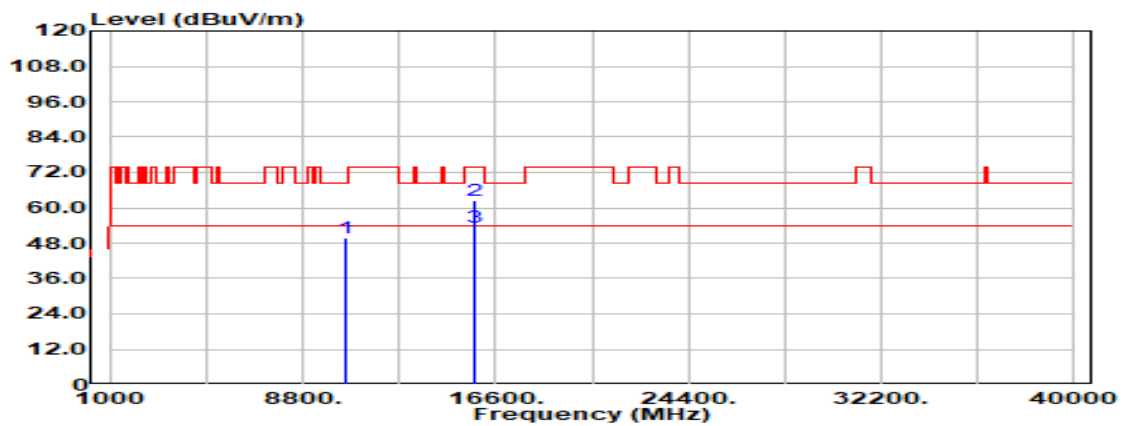


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	31.68	18.16	49.84	68.20	-18.36
15780.000	Peak	36.49	25.80	62.30	74.00	-11.70
15780.000	Average	27.54	25.80	53.34	54.00	-0.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5260 MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

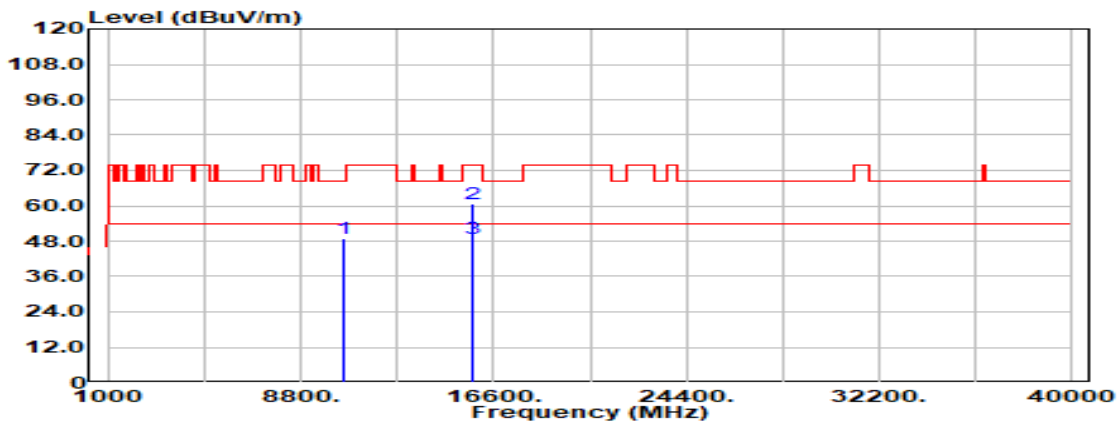


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	30.86	18.16	49.02	68.20	-19.18
15780.000	Peak	34.95	25.80	60.75	74.00	-13.25
15780.000	Average	23.18	25.80	48.98	54.00	-5.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5300MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

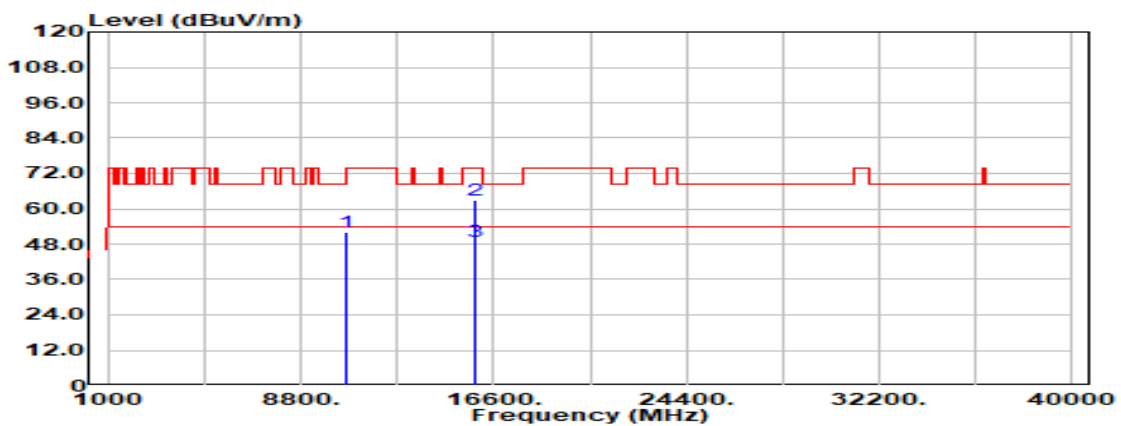


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	33.90	18.20	52.10	68.20	-16.10
15900.000	Peak	36.51	26.46	62.97	74.00	-11.03
15900.000	Average	22.53	26.46	48.99	54.00	-5.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5300MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

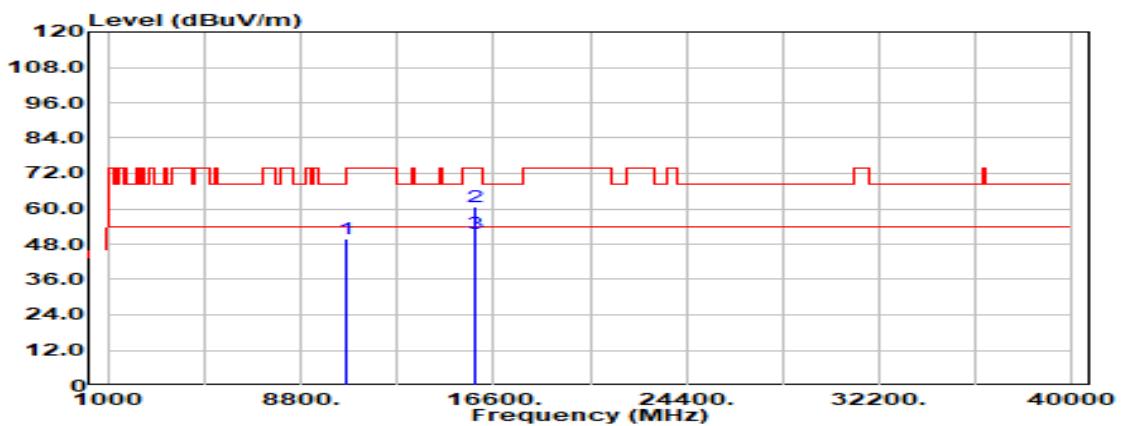


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	31.69	18.20	49.89	68.20	-18.31
15900.000	Peak	34.37	26.46	60.83	74.00	-13.17
15900.000	Average	25.16	26.46	51.62	54.00	-2.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

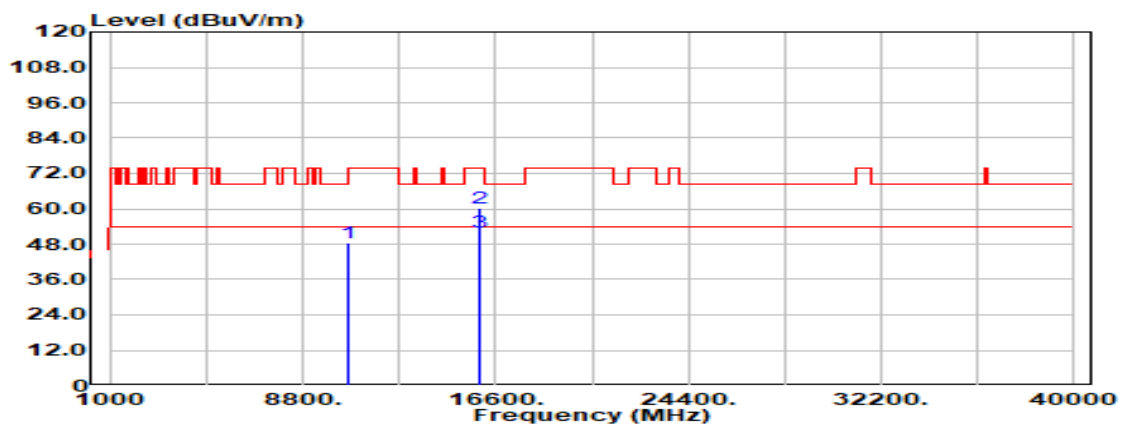


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	30.11	18.37	48.48	74.00	-25.52
15960.000	Peak	33.60	26.84	60.45	74.00	-13.55
15960.000	Average	25.20	26.84	52.04	54.00	-1.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

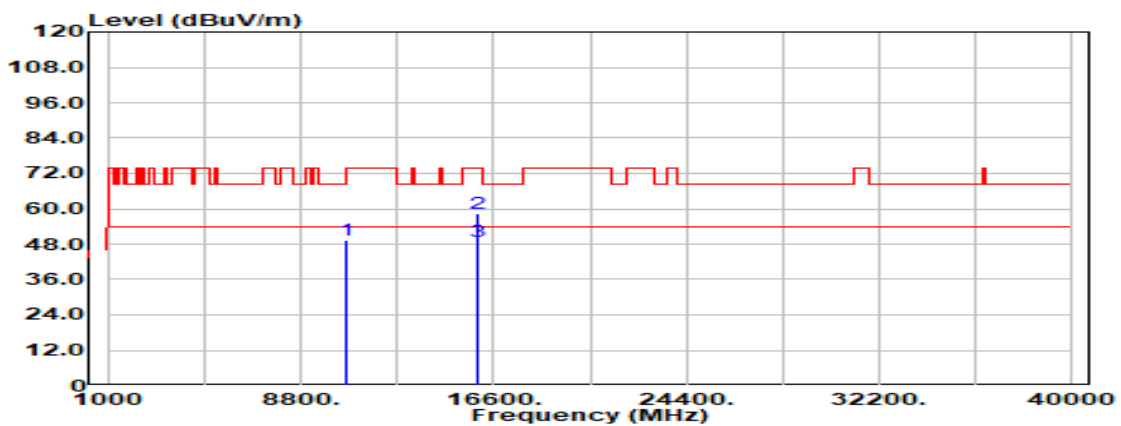


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10640.000	Peak	31.08	18.37	49.45	74.00	-24.55
15960.000	Peak	31.61	26.84	58.46	74.00	-15.54
15960.000	Average	21.86	26.84	48.70	54.00	-5.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5270 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

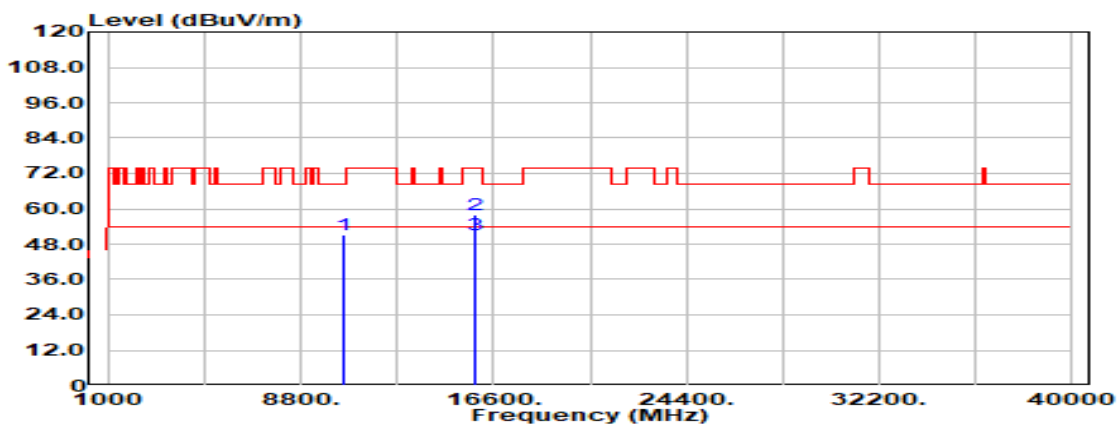


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	33.00	18.19	51.19	68.20	-17.01
15810.000	Peak	32.26	25.92	58.18	74.00	-15.82
15810.000	Average	25.08	25.92	51.00	54.00	-3.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5270 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

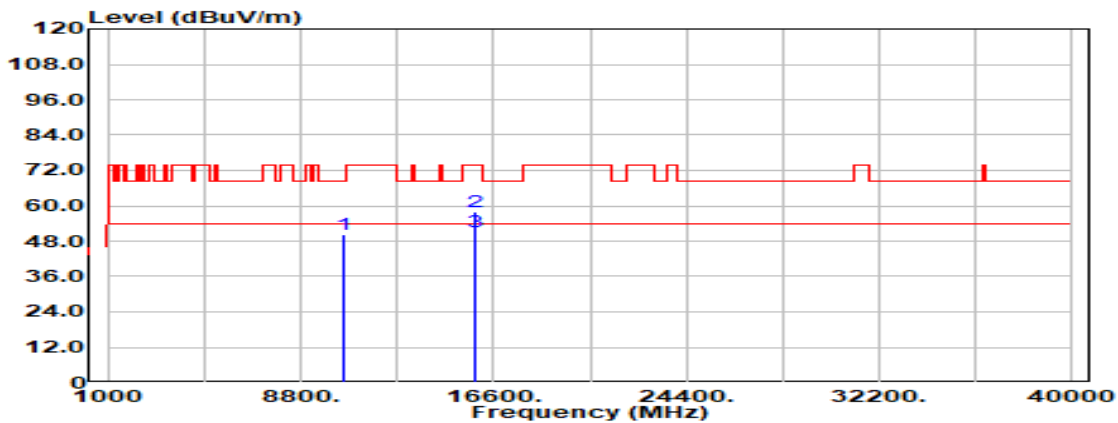


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	31.96	18.19	50.14	68.20	-18.06
15810.000	Peak	32.12	25.92	58.03	74.00	-15.97
15810.000	Average	25.18	25.92	51.10	54.00	-2.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

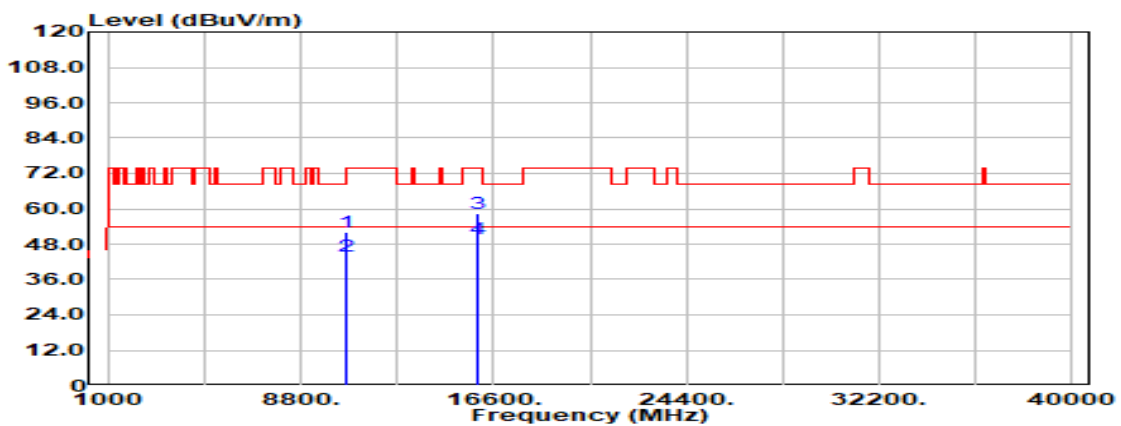


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	33.92	18.28	52.21	74.00	-21.79
10620.000	Average	25.50	18.28	43.78	54.00	-10.22
15930.000	Peak	31.65	26.63	58.29	74.00	-15.71
15930.000	Average	23.19	26.63	49.83	54.00	-4.17

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

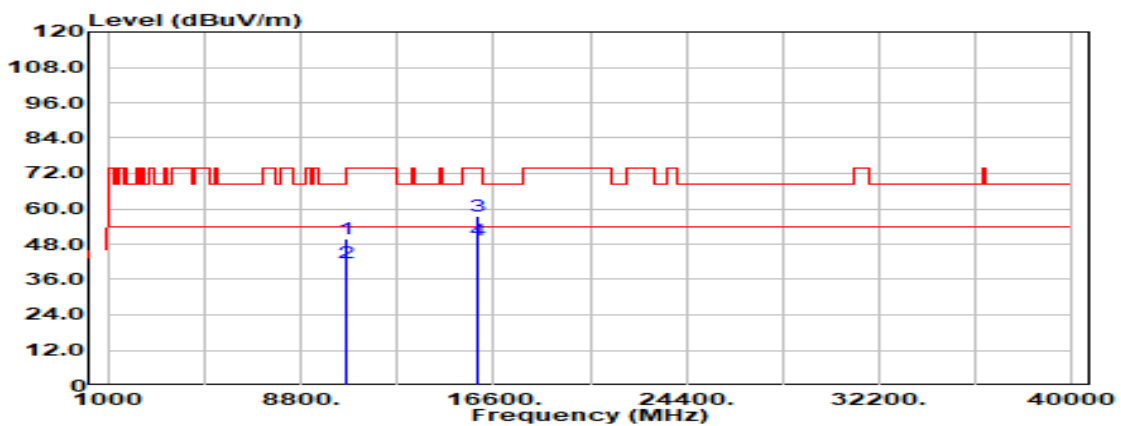


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	31.68	18.28	49.97	74.00	-24.04
10620.000	Average	23.34	18.28	41.63	54.00	-12.37
15930.000	Peak	30.72	26.63	57.35	74.00	-16.65
15930.000	Average	22.79	26.63	49.42	54.00	-4.58

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

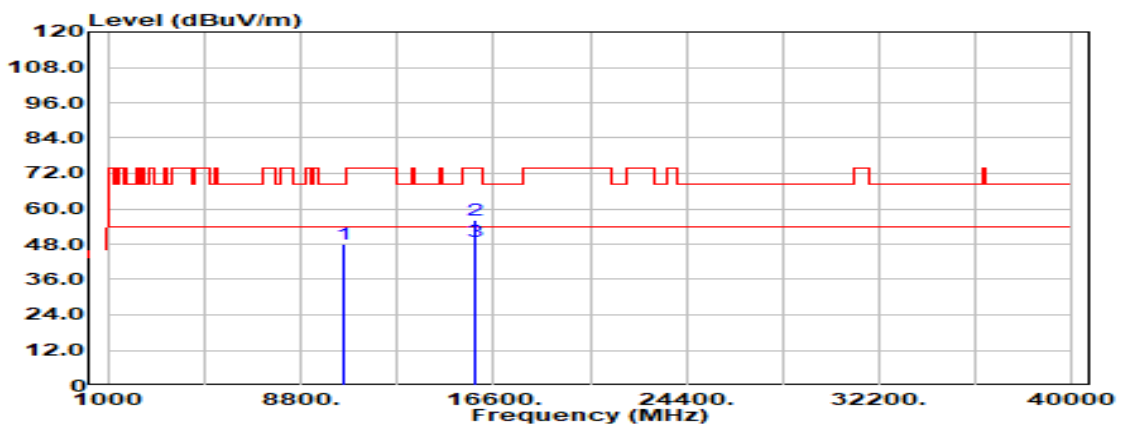

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.000	Peak	29.65	18.20	47.85	68.20	-20.35
15870.000	Peak	30.07	26.23	56.30	74.00	-17.70
15870.000	Average	22.47	26.23	48.70	54.00	-5.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.