


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

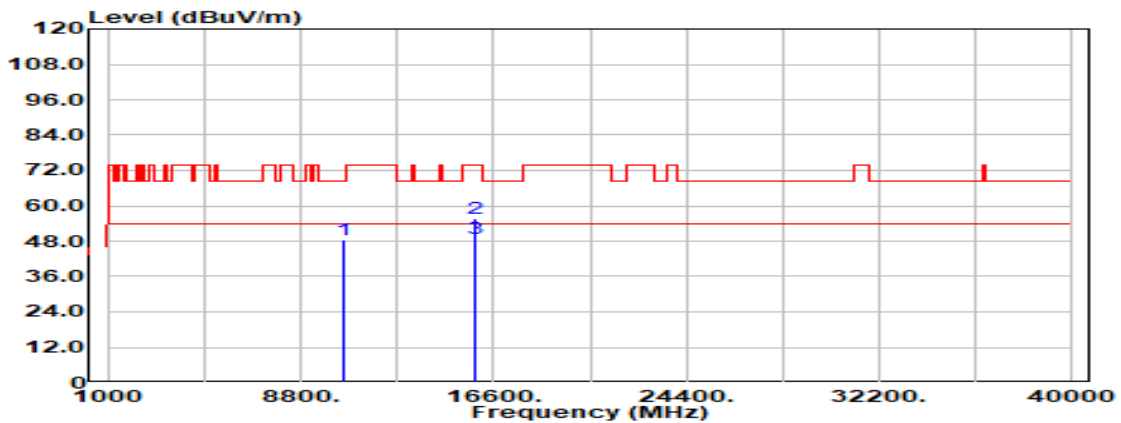


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.000	Peak	30.24	18.20	48.44	68.20	-19.76
15870.000	Peak	29.25	26.23	55.48	74.00	-18.52
15870.000	Average	22.57	26.23	48.80	54.00	-5.20
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

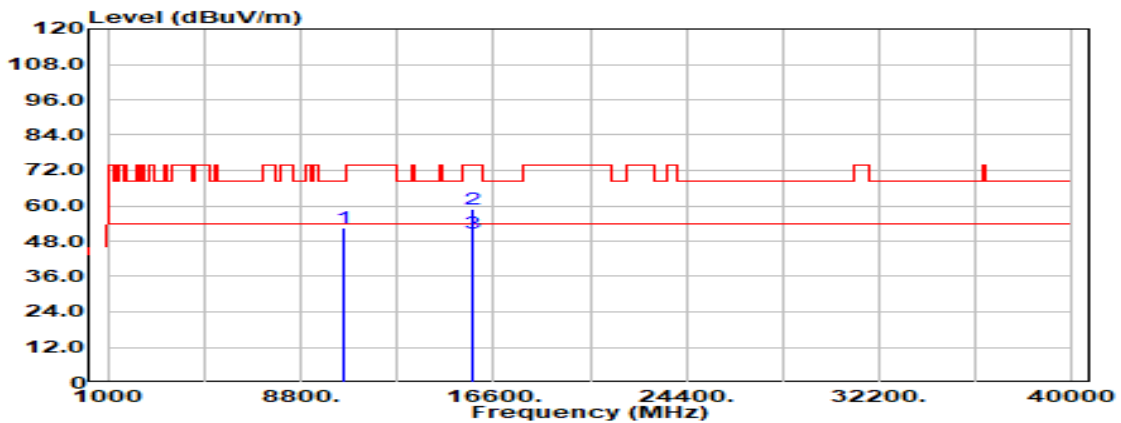


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10520.000	Peak	34.19	18.16	52.35	68.20	-15.85
15780.000	Peak	33.08	25.80	58.89	74.00	-15.11
15780.000	Average	25.04	25.80	50.84	54.00	-3.16
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

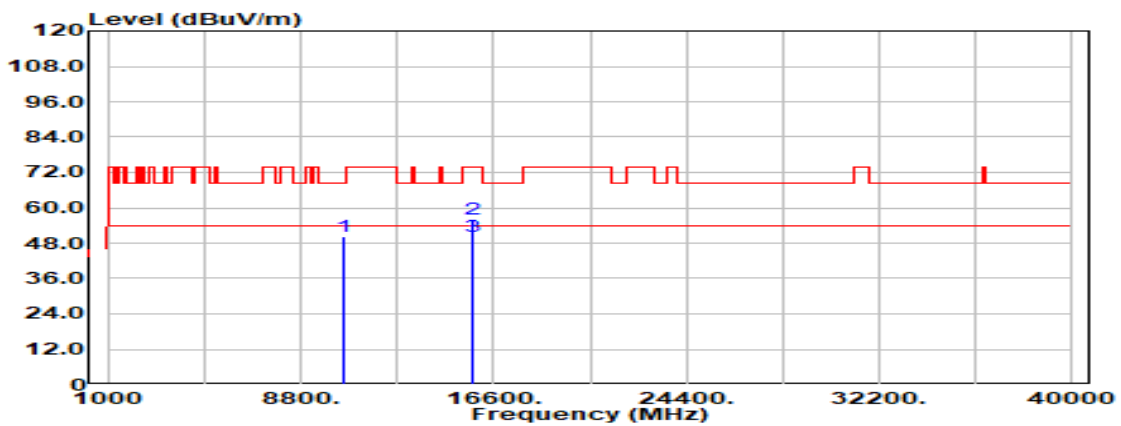


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10520.000	Peak	31.97	18.16	50.13	68.20	-18.07
15780.000	Peak	30.20	25.80	56.00	74.00	-18.00
15780.000	Average	24.32	25.80	50.12	54.00	-3.88
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

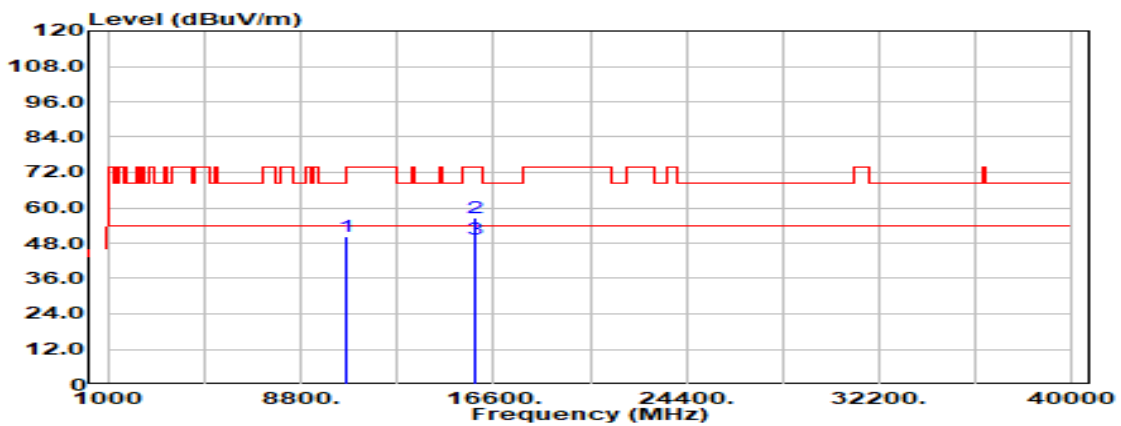


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	32.20	18.20	50.40	68.20	-17.80
15900.000	Peak	30.15	26.46	56.61	74.00	-17.39
15900.000	Average	22.77	26.46	49.23	54.00	-4.77
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

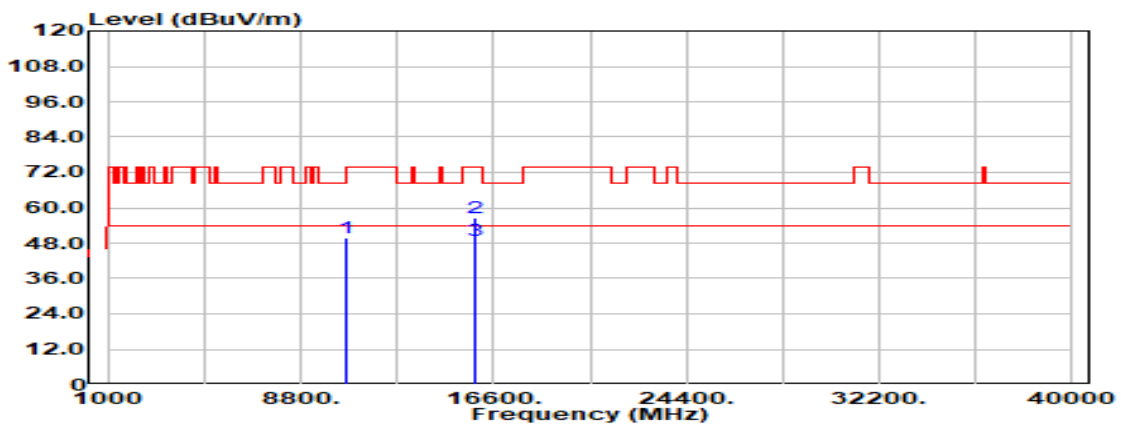


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
10600.000	Peak	31.59	18.20	49.79	68.20	-18.41
15900.000	Peak	29.97	26.46	56.43	74.00	-17.57
15900.000	Average	22.25	26.46	48.71	54.00	-5.29
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

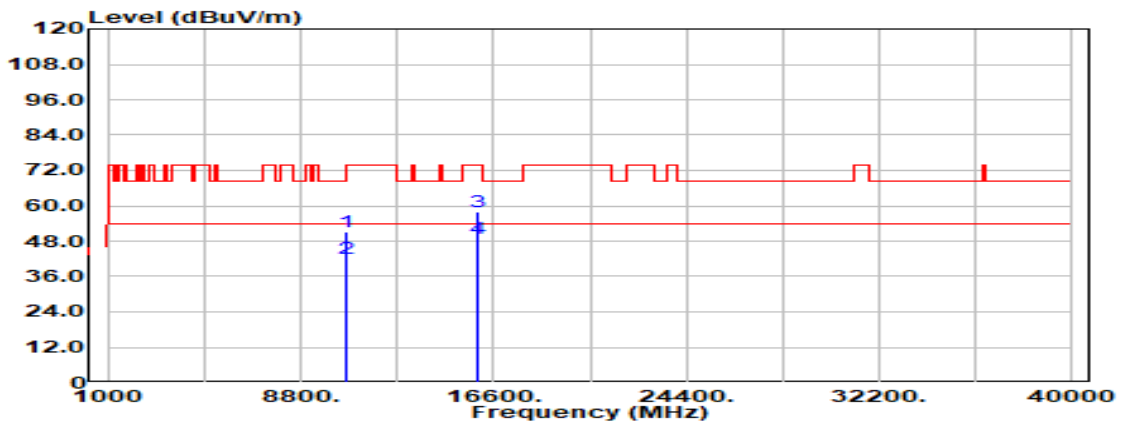


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	32.95	18.37	51.32	74.00	-22.68
10640.000	Average	23.81	18.37	42.18	54.00	-11.82
15960.000	Peak	31.24	26.84	58.08	74.00	-15.92
15960.000	Average	21.93	26.84	48.77	54.00	-5.23

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

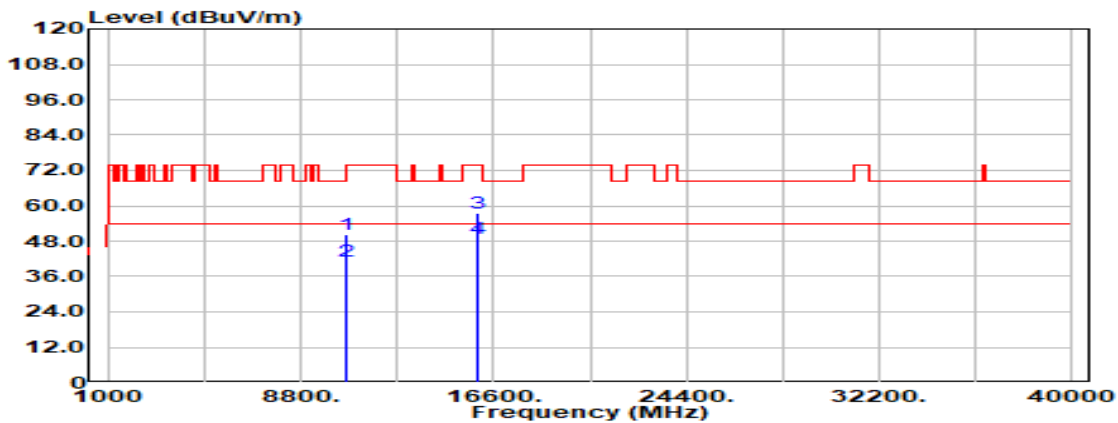


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.000	Peak	31.78	18.37	50.15	74.00	-23.85
10640.000	Average	22.80	18.37	41.17	54.00	-12.83
15960.000	Peak	30.66	26.84	57.51	74.00	-16.49
15960.000	Average	21.87	26.84	48.71	54.00	-5.29

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

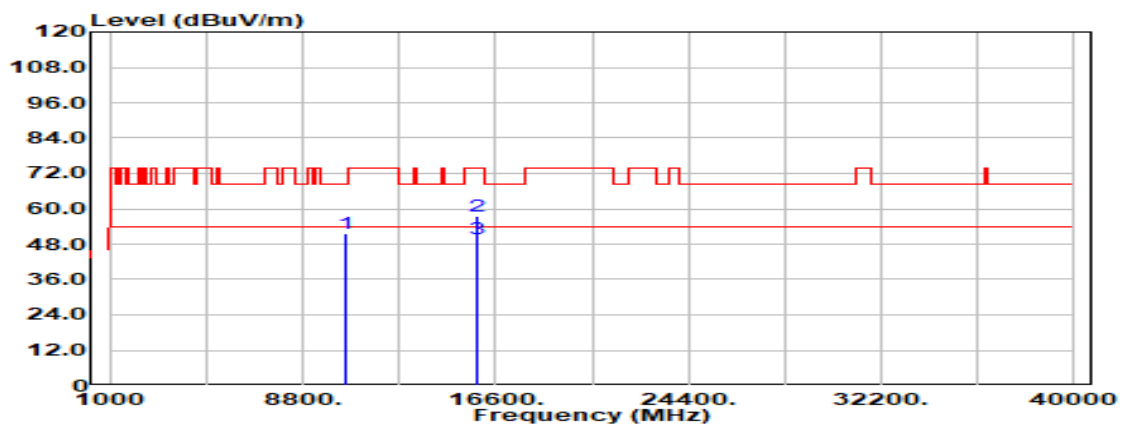

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	33.57	18.19	51.75	68.20	-16.45
15810.000	Peak	31.49	25.92	57.41	74.00	-16.59
15810.000	Average	24.02	25.92	49.93	54.00	-4.07
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

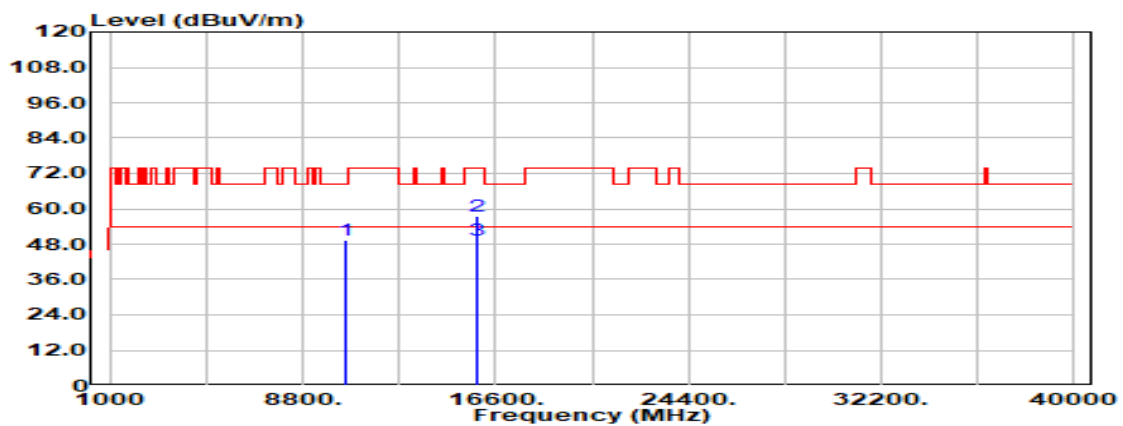


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	31.34	18.19	49.53	68.20	-18.67
15810.000	Peak	31.48	25.92	57.40	74.00	-16.60
15810.000	Average	23.40	25.92	49.32	54.00	-4.68
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

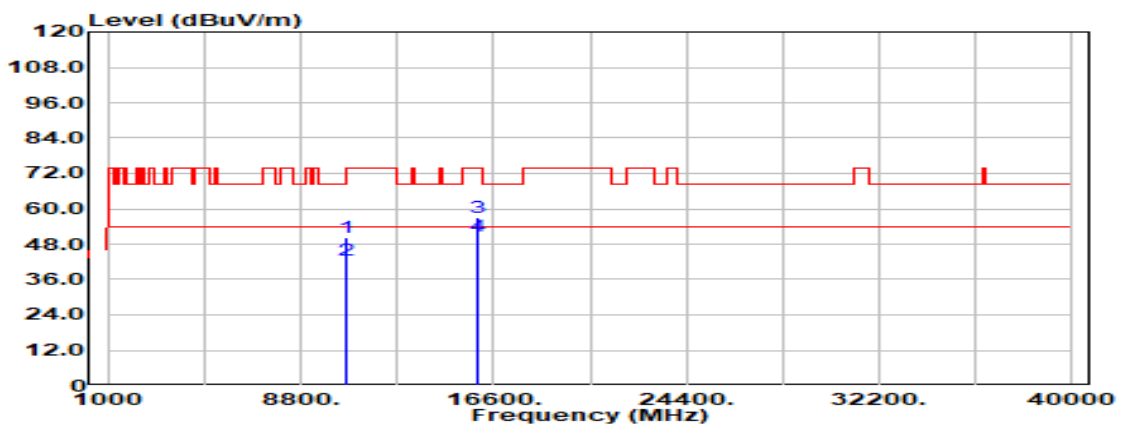


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	32.13	18.28	50.41	74.00	-23.59
10620.000	Average	24.27	18.28	42.55	54.00	-11.45
15930.000	Peak	30.49	26.63	57.13	74.00	-16.87
15930.000	Average	23.99	26.63	50.62	54.00	-3.38

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

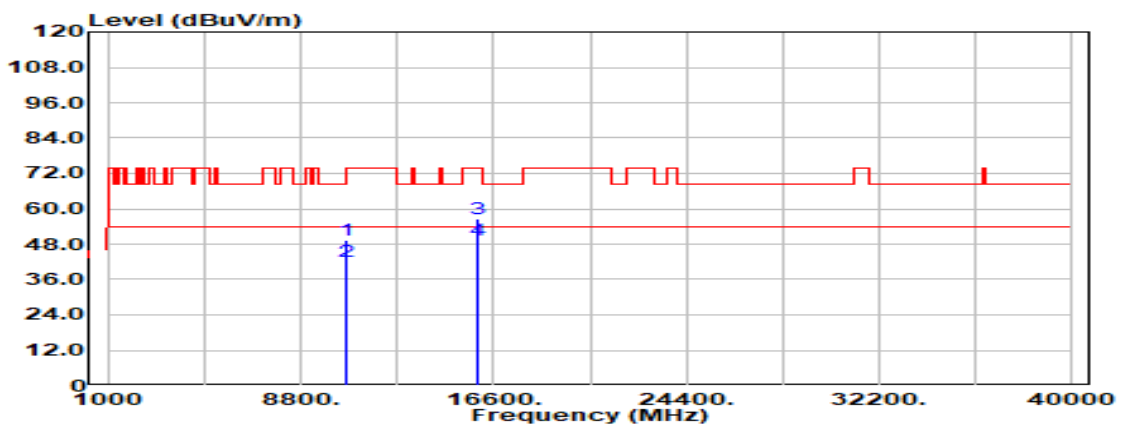


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	31.11	18.28	49.39	74.00	-24.61
10620.000	Average	23.64	18.28	41.92	54.00	-12.08
15930.000	Peak	30.04	26.63	56.68	74.00	-17.32
15930.000	Average	22.92	26.63	49.55	54.00	-4.45

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

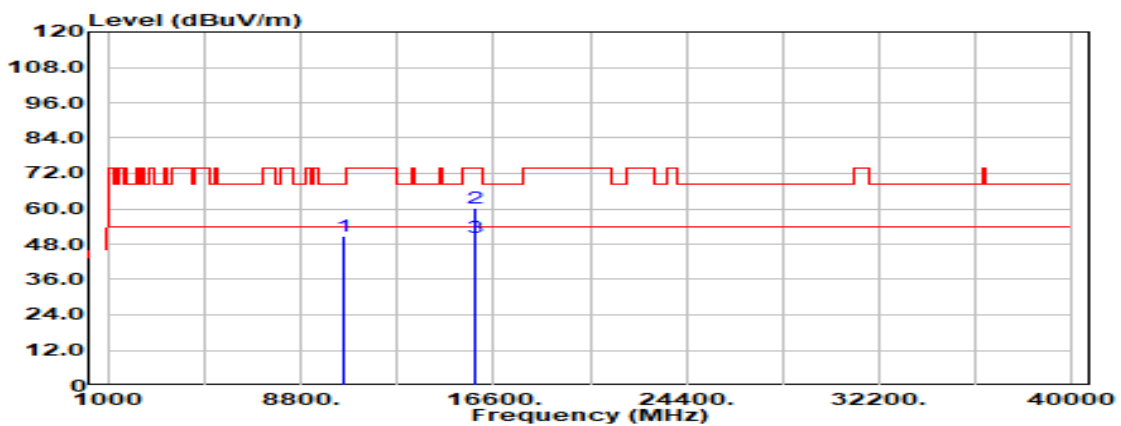


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.000	Peak	32.57	18.20	50.77	68.20	-17.43
15870.000	Peak	33.82	26.23	60.05	74.00	-13.95
15870.000	Average	23.87	26.23	50.10	54.00	-3.90
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

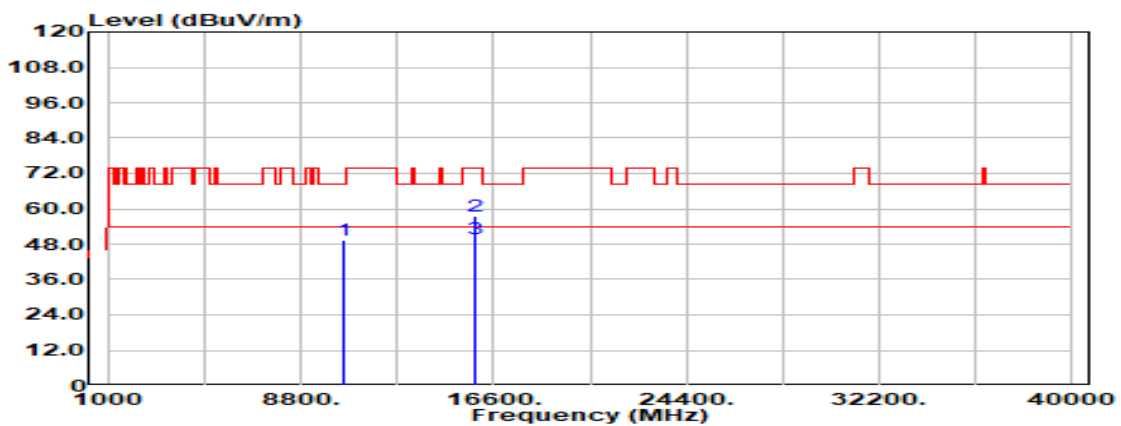


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.000	Peak	31.08	18.20	49.28	68.20	-18.92
15870.000	Peak	31.07	26.23	57.29	74.00	-16.71
15870.000	Average	23.63	26.23	49.86	54.00	-4.14
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Test Data for UNII-2c**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

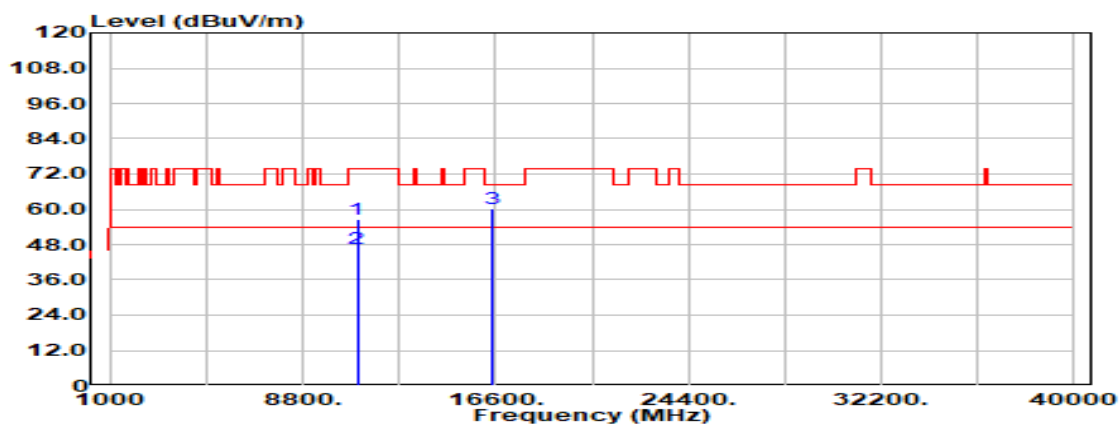


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	37.44	19.04	56.48	74.00	-17.52
11000.000	Average	27.65	19.04	46.69	54.00	-7.31
16500.000	Peak	31.38	29.02	60.40	68.20	-7.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

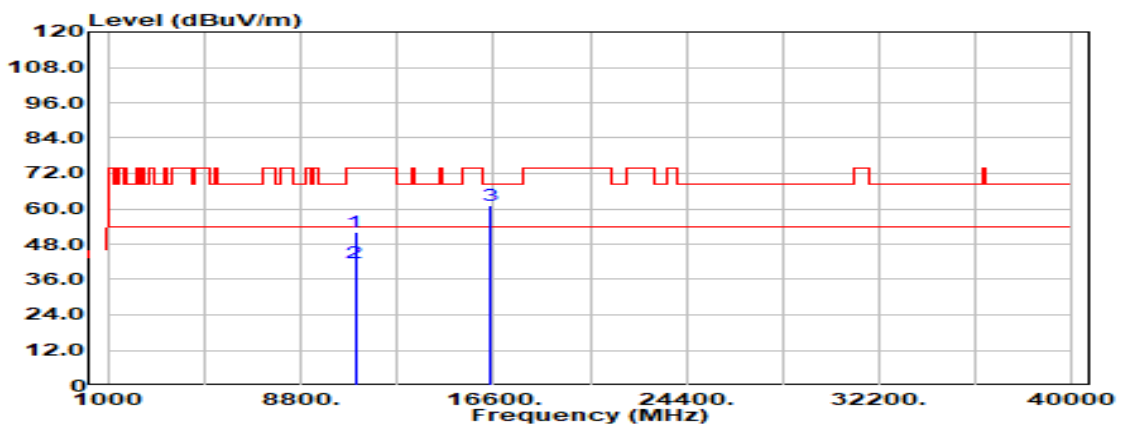


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	33.17	19.04	52.21	74.00	-21.79
11000.000	Average	22.64	19.04	41.68	54.00	-12.32
16500.000	Peak	32.16	29.02	61.18	68.20	-7.02
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonics	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

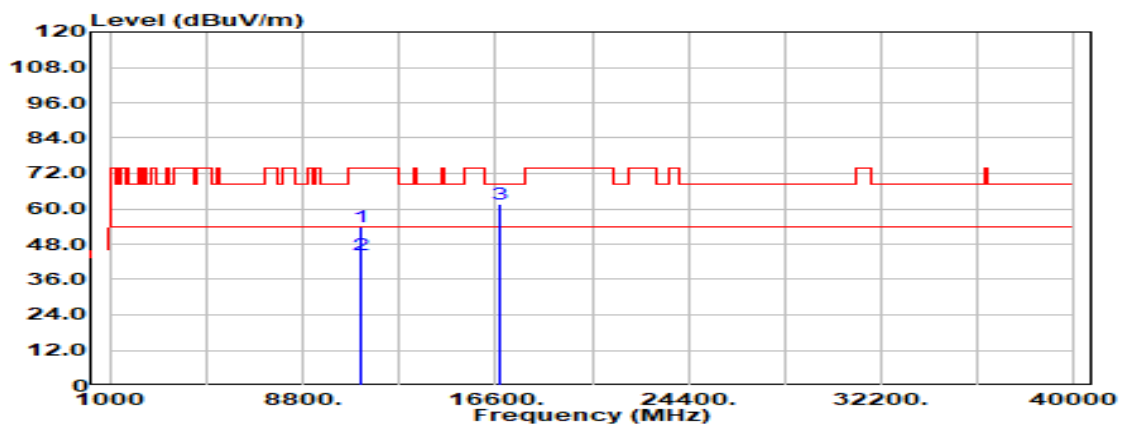


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	34.50	19.22	53.72	74.00	-20.28
11160.000	Average	25.33	19.22	44.55	54.00	-9.45
16740.000	Peak	31.49	30.21	61.70	68.20	-6.50
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

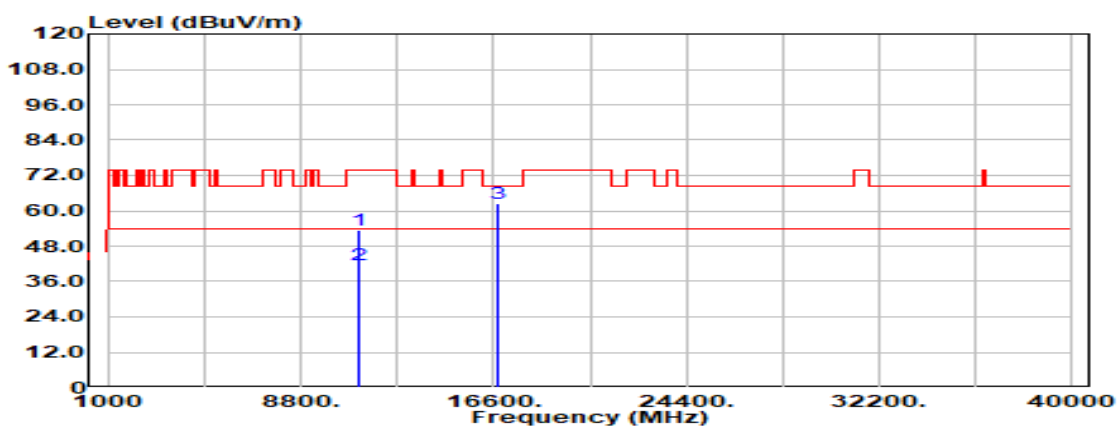


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	34.20	19.22	53.42	74.00	-20.58
11160.000	Average	22.58	19.22	41.80	54.00	-12.20
16740.000	Peak	32.10	30.21	62.31	68.20	-5.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

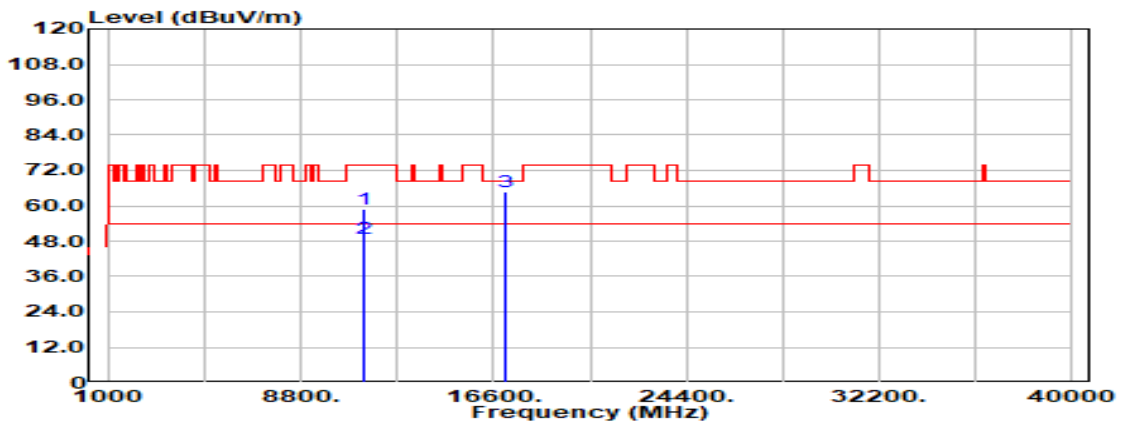


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	39.39	19.58	58.97	74.00	-15.03
11400.000	Average	29.13	19.58	48.71	54.00	-5.29
17100.000	Peak	33.38	31.23	64.61	68.20	-3.59
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

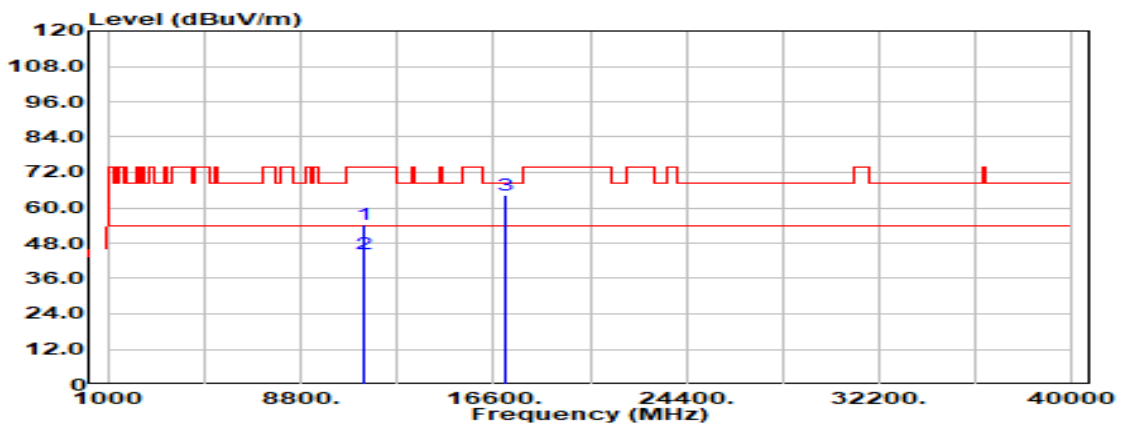


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	34.88	19.58	54.46	74.00	-19.54
11400.000	Average	24.60	19.58	44.18	54.00	-9.82
17100.000	Peak	33.06	31.23	64.29	68.20	-3.91
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

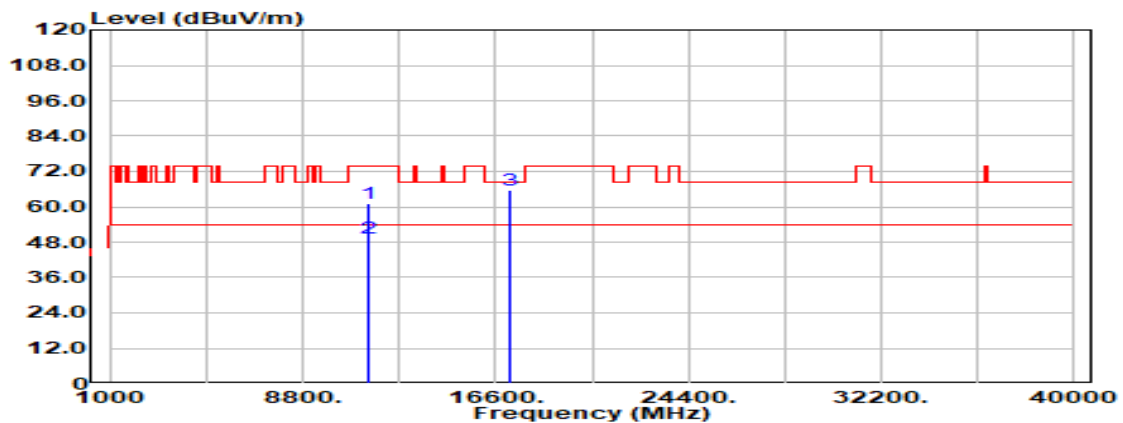


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	41.42	19.63	61.04	74.00	-12.96
11440.000	Average	29.76	19.63	49.39	54.00	-4.61
17160.000	Peak	35.04	30.57	65.61	68.20	-2.59
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

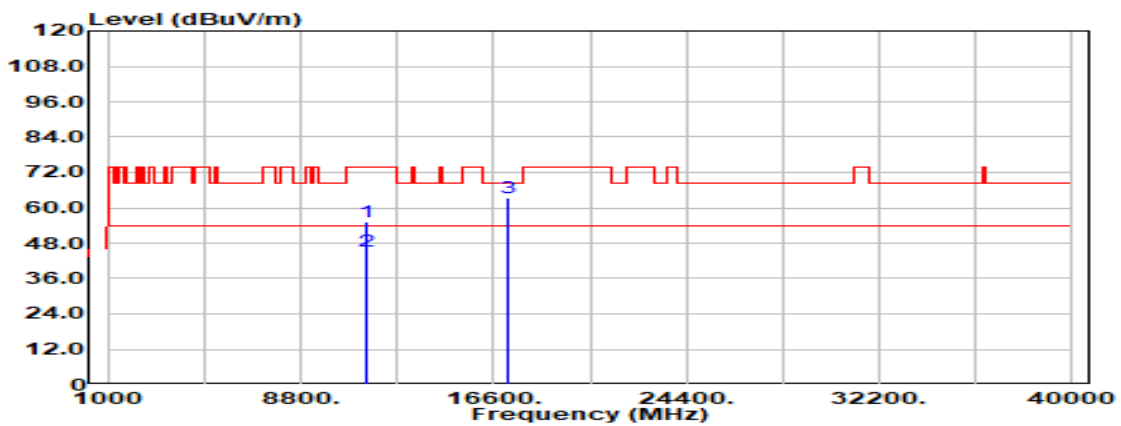


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	35.71	19.63	55.34	74.00	-18.66
11440.000	Average	25.84	19.63	45.47	54.00	-8.53
17160.000	Peak	33.04	30.57	63.61	68.20	-4.59
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

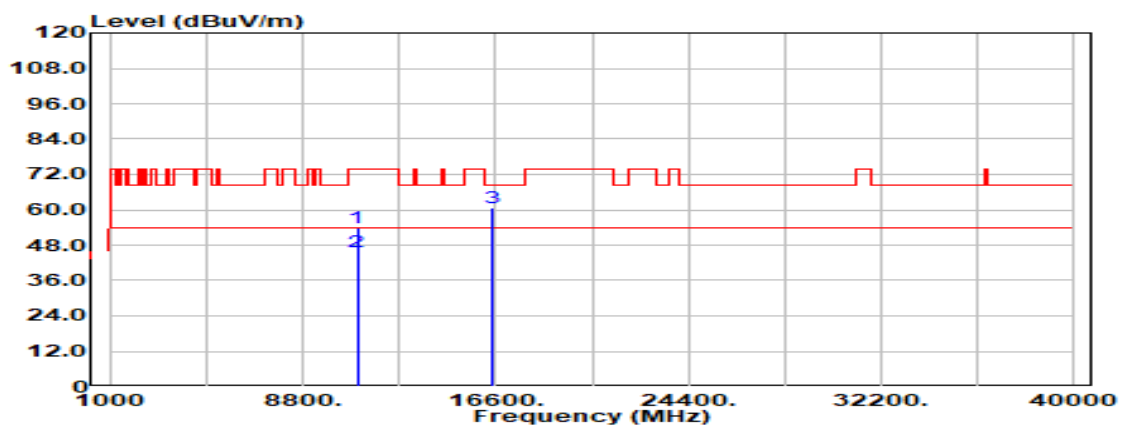


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	34.82	19.04	53.86	74.00	-20.14
11000.000	Average	26.82	19.04	45.86	54.00	-8.14
16500.000	Peak	31.46	29.02	60.48	68.20	-7.72
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

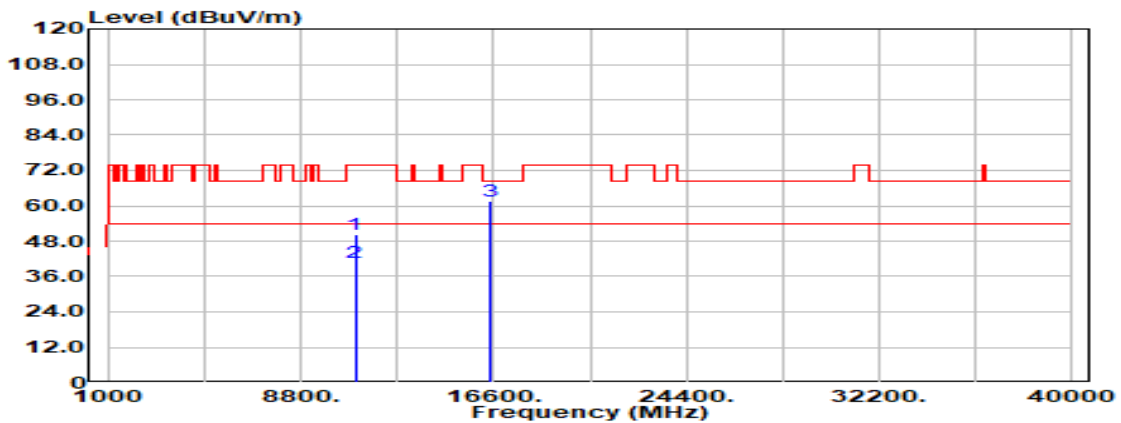


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	31.02	19.04	50.06	74.00	-23.94
11000.000	Average	21.89	19.04	40.93	54.00	-13.07
16500.000	Peak	32.60	29.02	61.62	68.20	-6.58
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5580 MHz	Temp/Hum	22.8(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

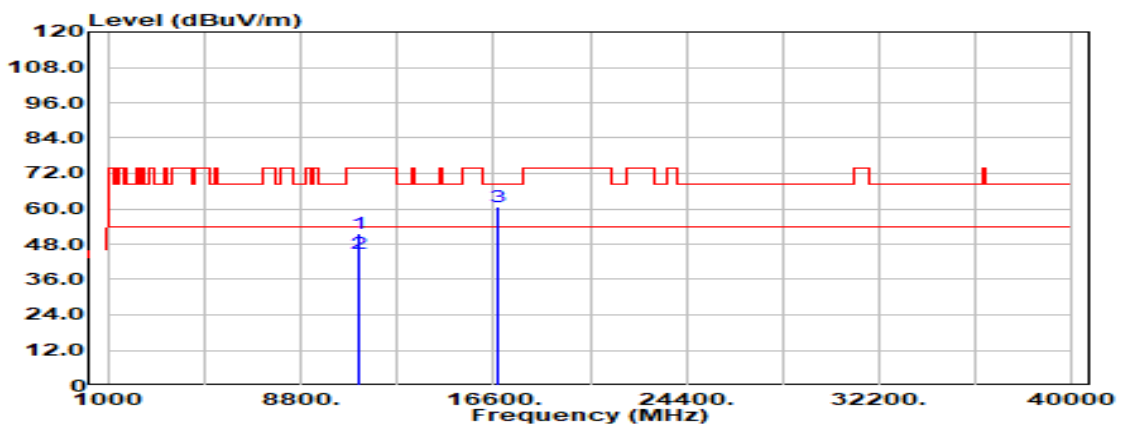

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	32.58	19.22	51.80	74.00	-22.20
11160.000	Average	25.63	19.22	44.85	54.00	-9.15
16740.000	Peak	30.64	30.21	60.85	68.20	-7.35
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5580 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

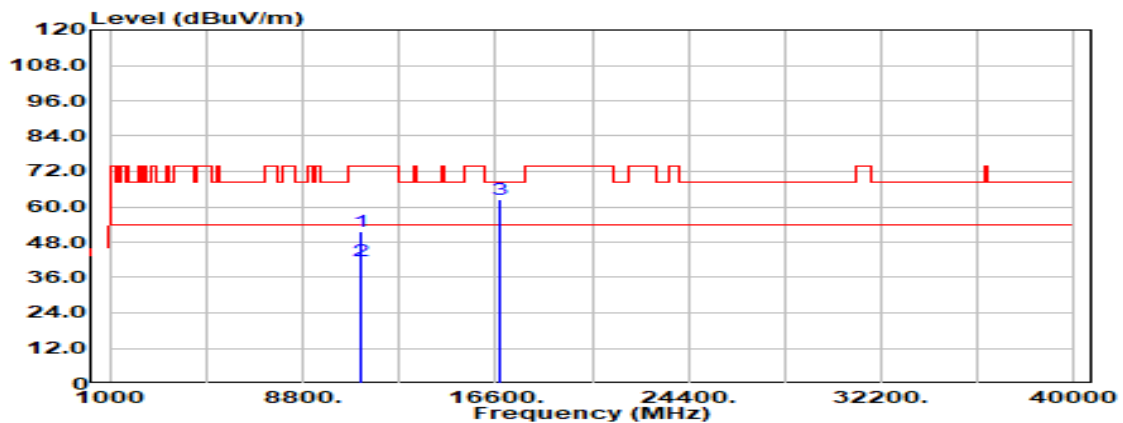


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	32.55	19.22	51.77	74.00	-22.23
11160.000	Average	22.37	19.22	41.59	54.00	-12.41
16740.000	Peak	32.29	30.21	62.50	68.20	-5.70
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

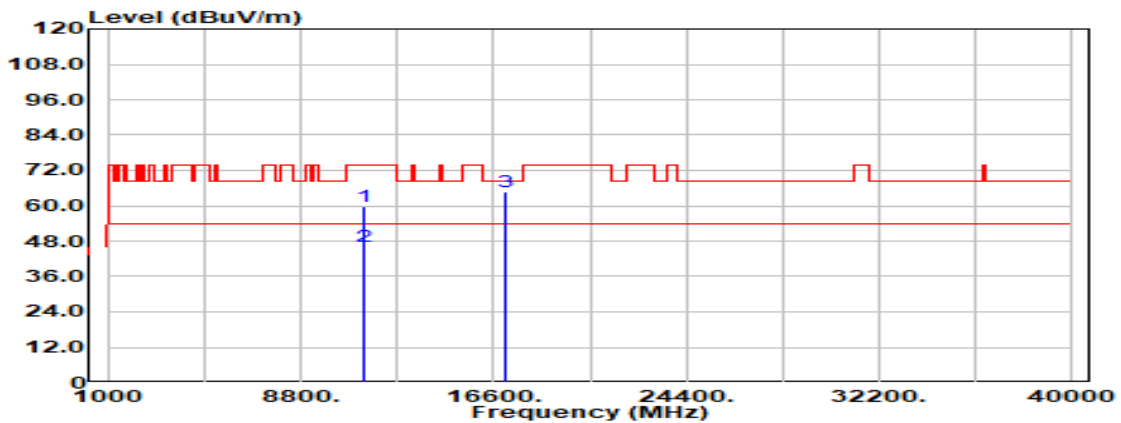


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	40.23	19.58	59.81	74.00	-14.19
11400.000	Average	26.82	19.58	46.40	54.00	-7.60
17100.000	Peak	33.41	31.23	64.64	68.20	-3.56
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

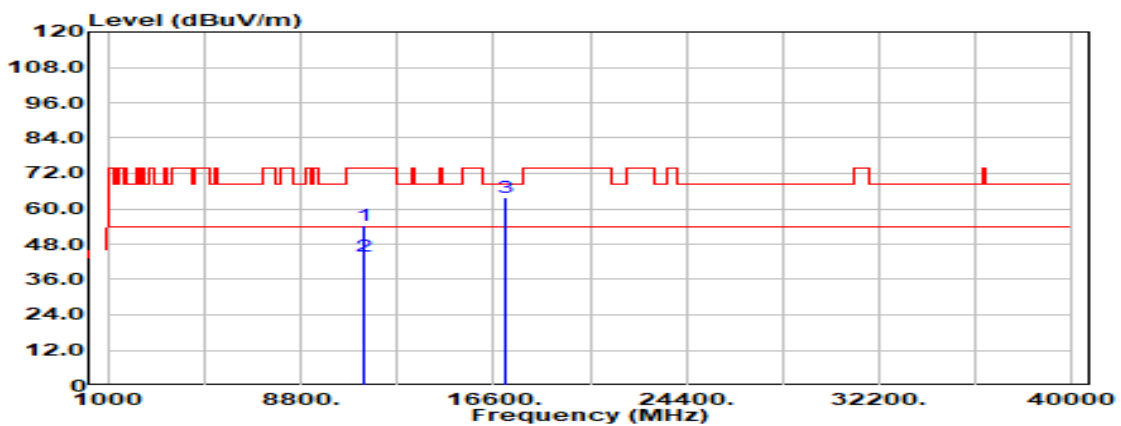


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	34.58	19.58	54.16	74.00	-19.84
11400.000	Average	24.14	19.58	43.72	54.00	-10.28
17100.000	Peak	32.59	31.23	63.82	68.20	-4.38
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5720 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

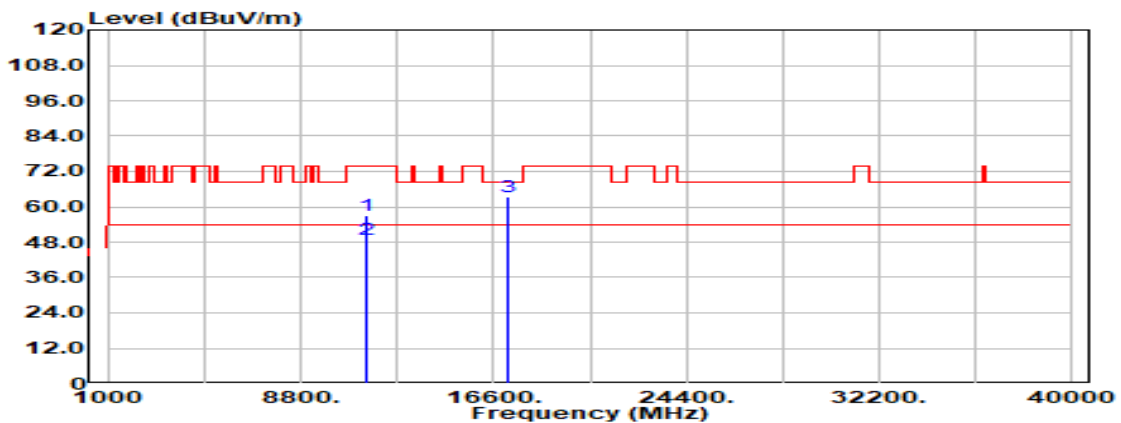


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	37.50	19.63	57.12	74.00	-16.88
11440.000	Average	29.47	19.63	49.10	54.00	-4.90
17160.000	Peak	32.86	30.57	63.43	68.20	-4.77
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5720 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

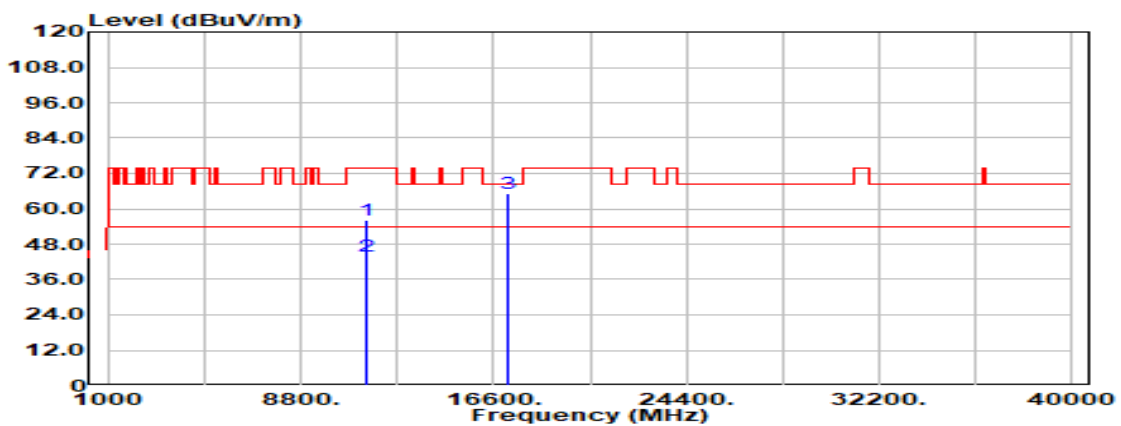


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11440.000	Peak	36.42	19.63	56.05	74.00	-17.95
11440.000	Average	24.45	19.63	44.08	54.00	-9.92
17160.000	Peak	34.48	30.57	65.05	68.20	-3.15
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

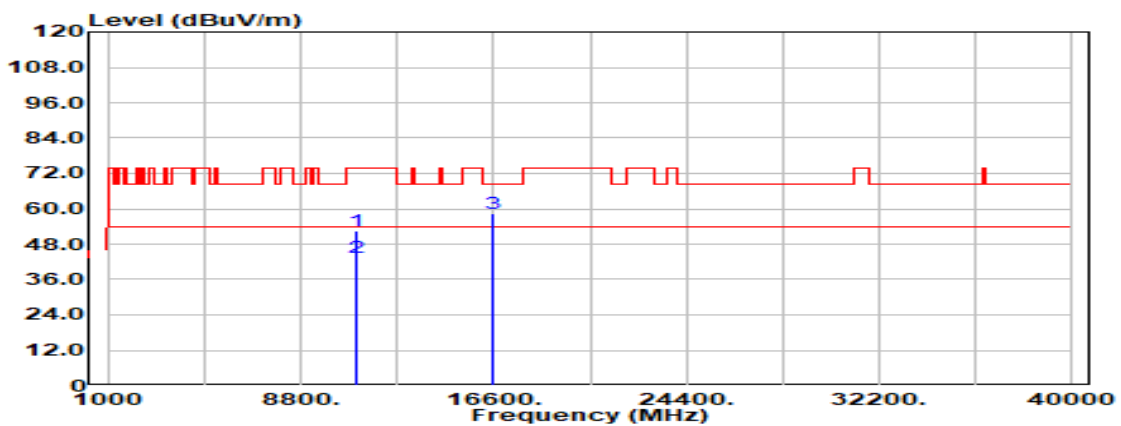


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	33.32	19.00	52.32	74.00	-21.68
11020.000	Average	24.29	19.00	43.29	54.00	-10.71
16530.000	Peak	29.56	28.97	58.53	68.20	-9.67
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

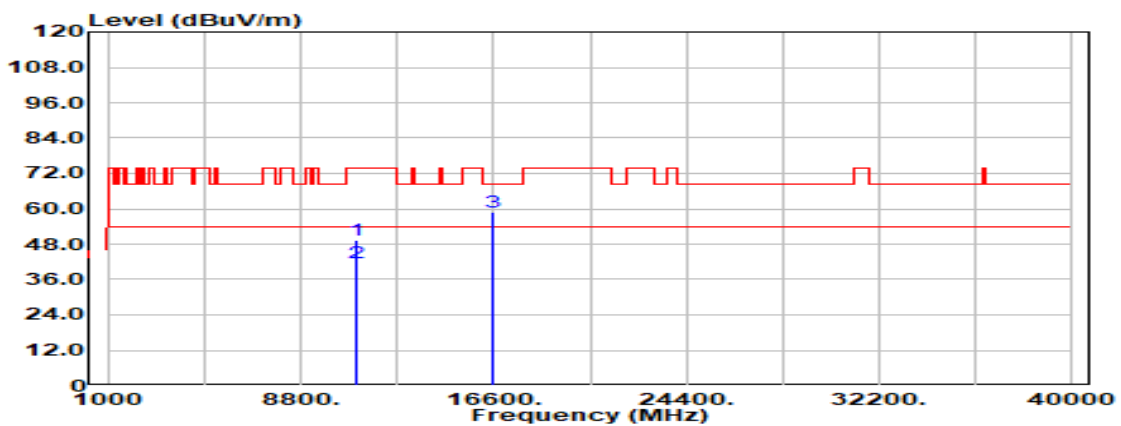


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	30.53	19.00	49.53	74.00	-24.47
11020.000	Average	22.89	19.00	41.89	54.00	-12.11
16530.000	Peak	29.81	28.97	58.77	68.20	-9.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5550 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

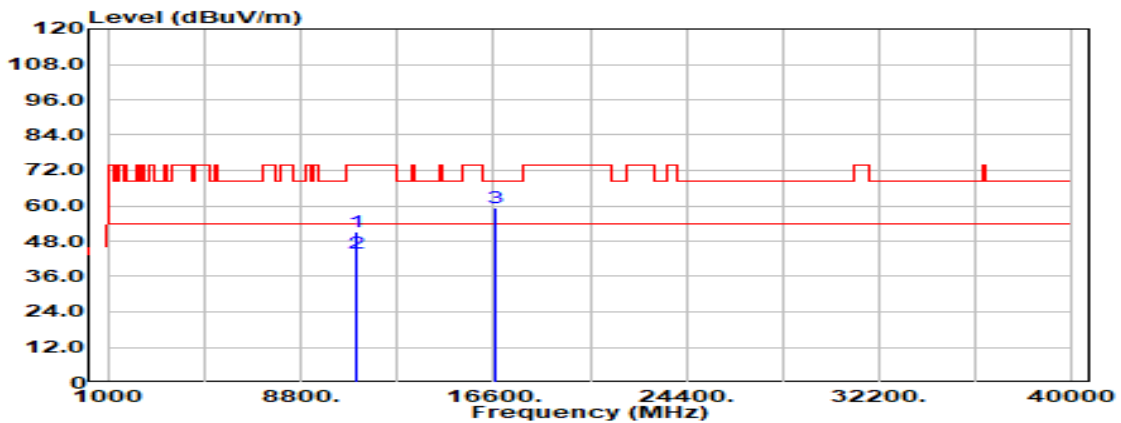


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	32.03	19.11	51.14	74.00	-22.86
11100.000	Average	24.72	19.11	43.83	54.00	-10.17
16650.000	Peak	30.04	29.28	59.32	68.20	-8.88
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Test Mode	IEEE 802.11ac VHT40 / 5550 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

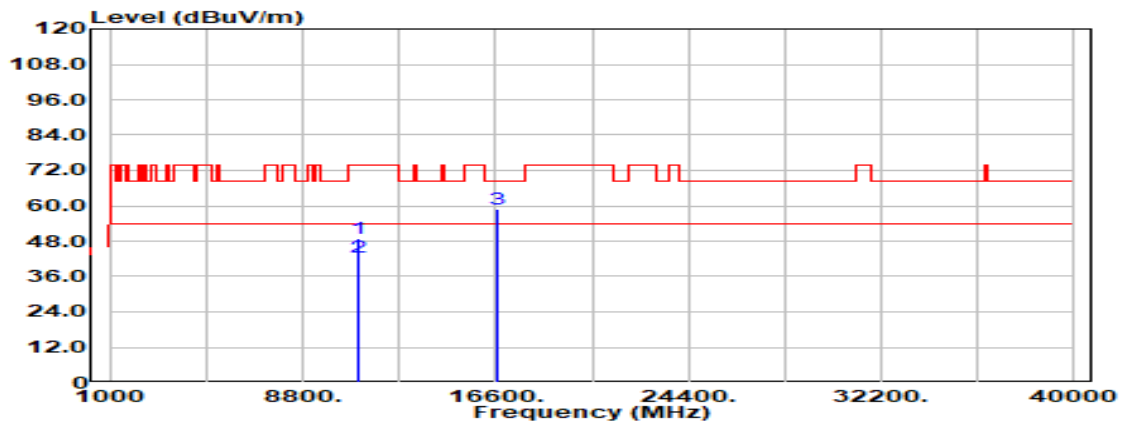


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	29.87	19.11	48.98	74.00	-25.02
11100.000	Average	23.25	19.11	42.36	54.00	-11.64
16650.000	Peak	29.68	29.28	58.96	68.20	-9.24
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

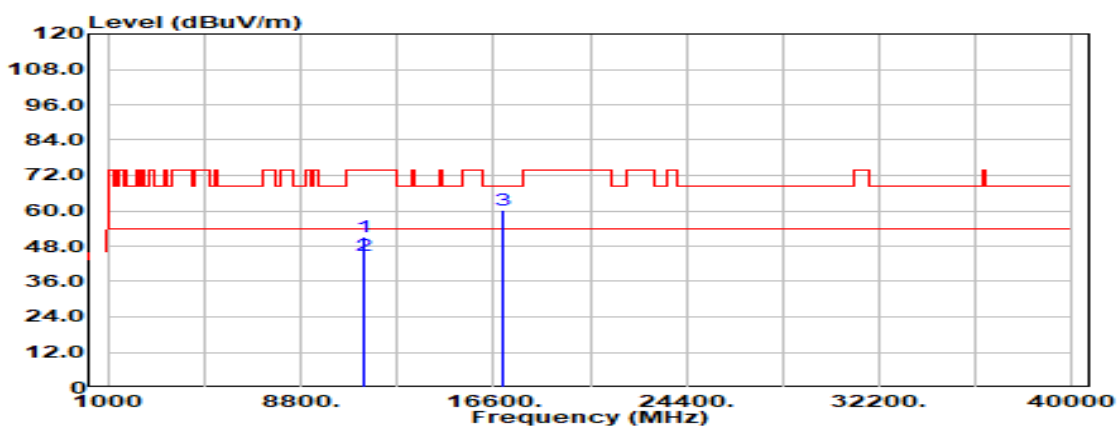


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.000	Peak	31.52	19.44	50.96	74.00	-23.04
11340.000	Average	25.45	19.44	44.89	54.00	-9.11
17010.000	Peak	28.77	31.48	60.25	68.20	-7.95
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

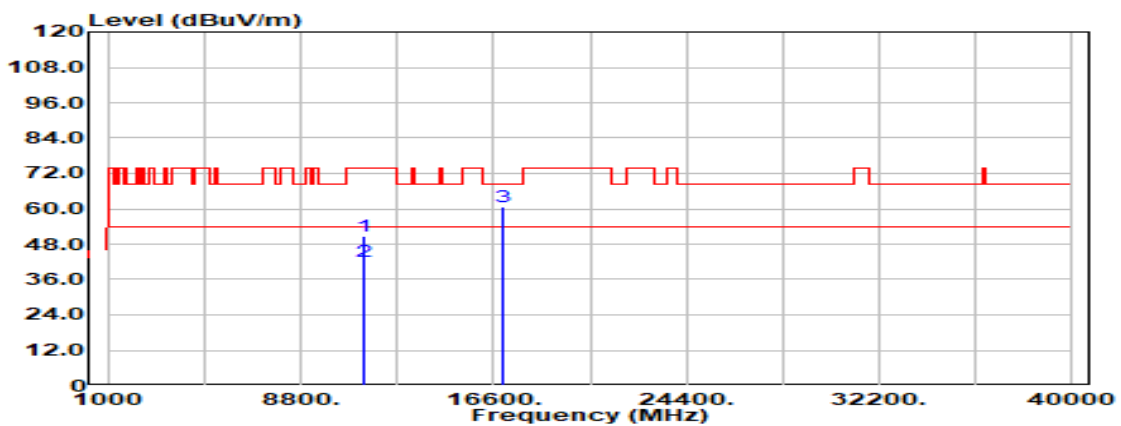


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.000	Peak	31.16	19.44	50.60	74.00	-23.40
11340.000	Average	22.78	19.44	42.22	54.00	-11.78
17010.000	Peak	29.11	31.48	60.59	68.20	-7.61
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5710 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

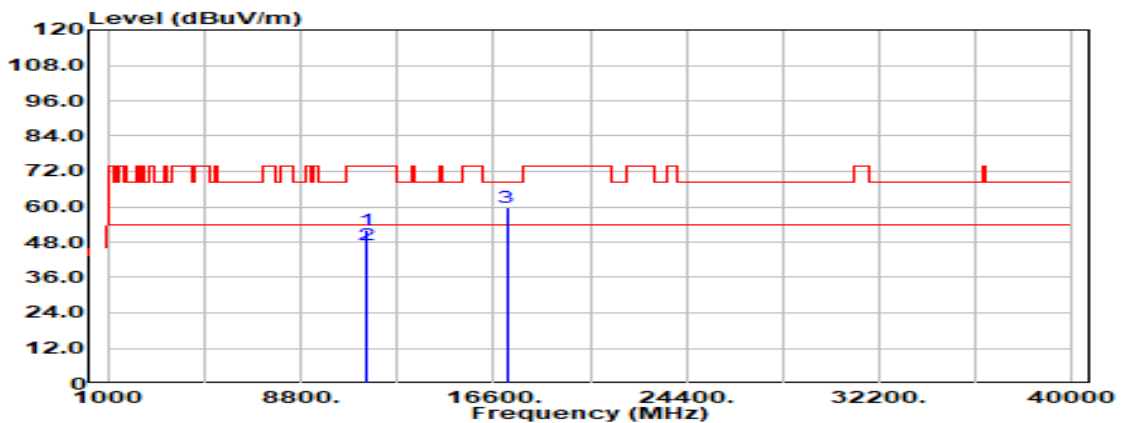


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	32.54	19.60	52.14	74.00	-21.86
11420.000	Average	27.38	19.60	46.99	54.00	-7.01
17130.000	Peak	29.01	30.88	59.88	68.20	-8.32
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5710 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

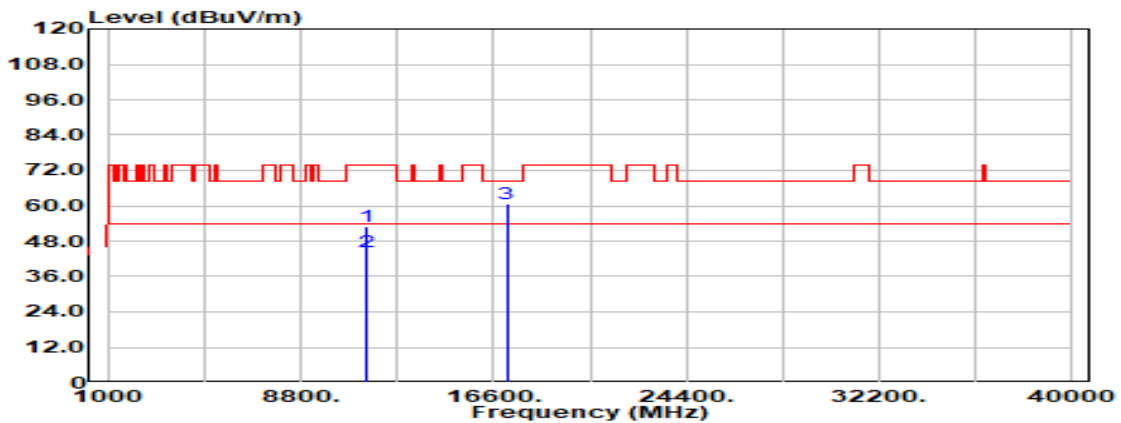


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	33.38	19.60	52.98	74.00	-21.02
11420.000	Average	24.64	19.60	44.25	54.00	-9.75
17130.000	Peak	29.59	30.88	60.47	68.20	-7.73
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

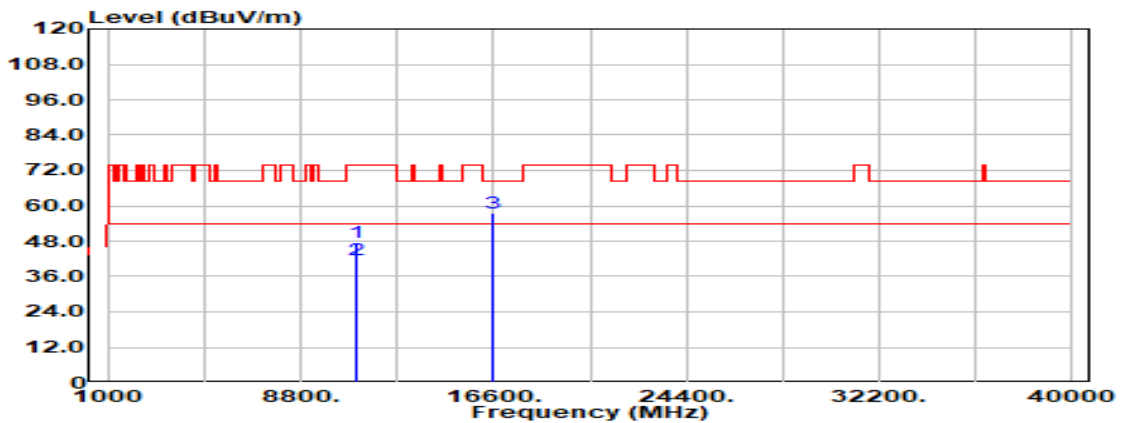


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	28.62	18.97	47.59	74.00	-26.41
11060.000	Average	22.87	18.97	41.85	54.00	-12.15
16590.000	Peak	28.74	28.94	57.68	68.20	-10.52
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

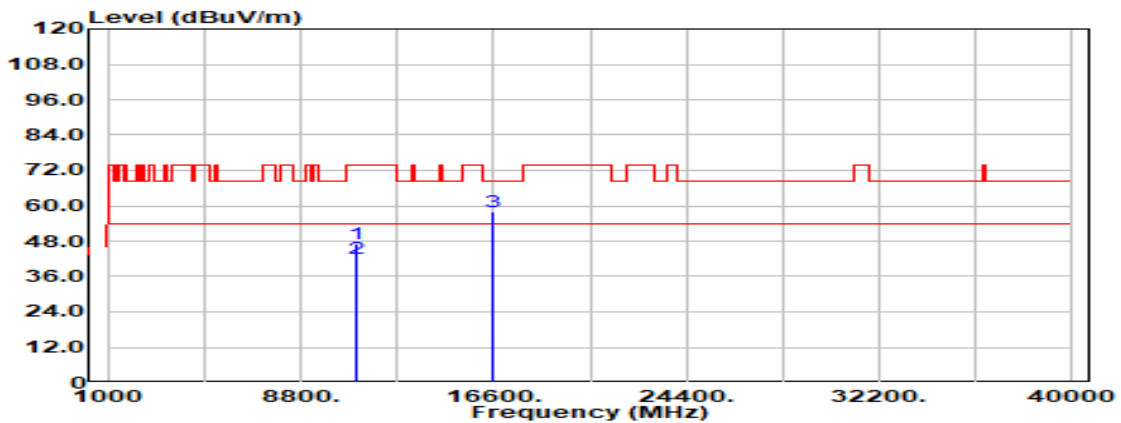


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	28.18	18.97	47.15	74.00	-26.85
11060.000	Average	23.11	18.97	42.08	54.00	-11.92
16590.000	Peak	28.90	28.94	57.84	68.20	-10.36
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

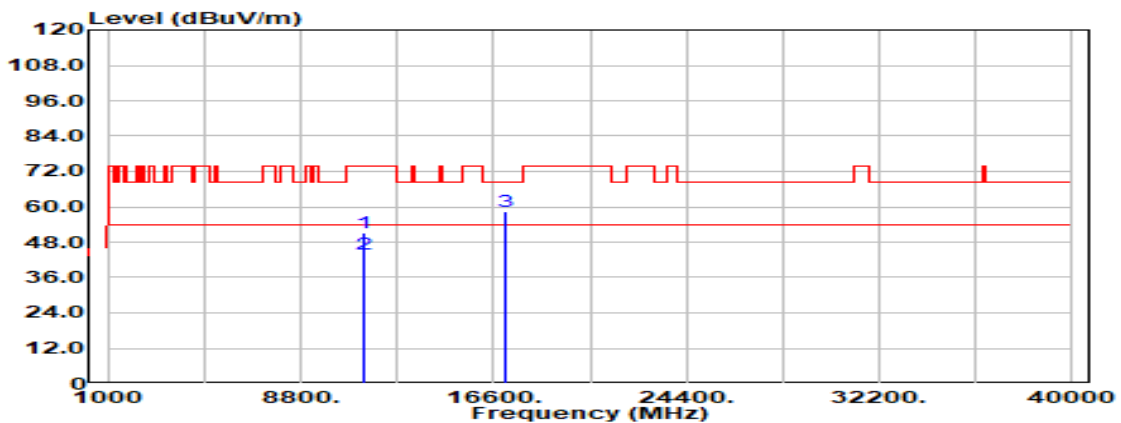

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	31.64	19.53	51.17	74.00	-22.83
11380.000	Average	24.48	19.53	44.02	54.00	-9.98
17070.000	Peak	27.28	31.30	58.57	68.20	-9.63
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

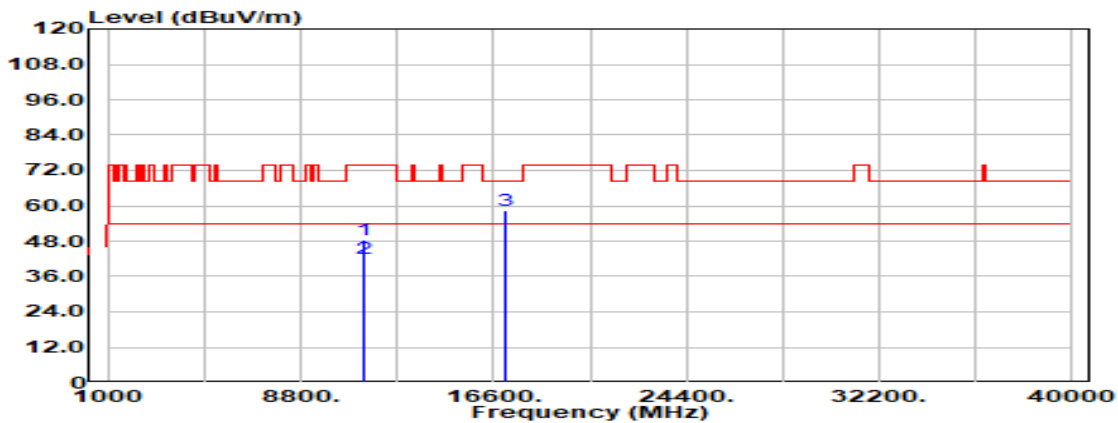


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	29.08	19.53	48.61	74.00	-25.39
11380.000	Average	22.51	19.53	42.04	54.00	-11.96
17070.000	Peak	27.19	31.30	58.49	68.20	-9.71
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

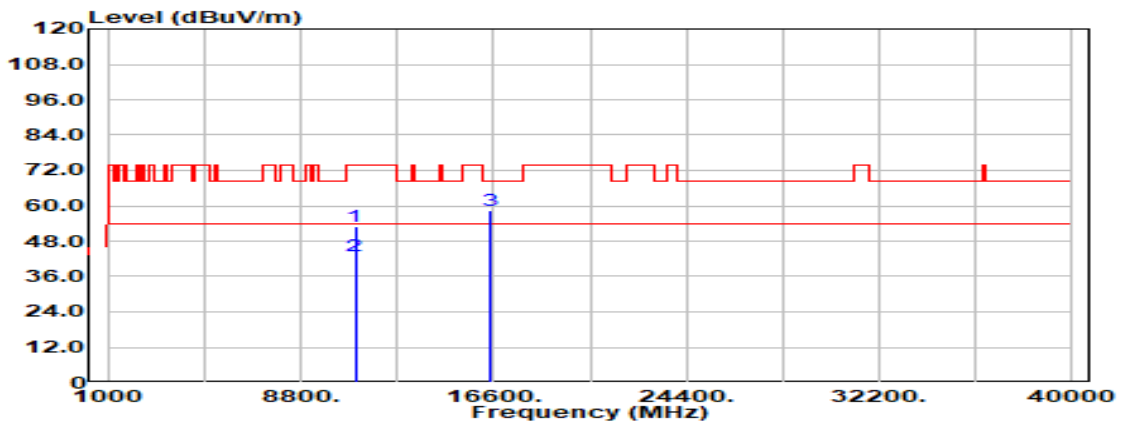


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	33.93	19.04	52.97	74.00	-21.03
11000.000	Average	23.78	19.04	42.82	54.00	-11.18
16500.000	Peak	29.31	29.02	58.33	68.20	-9.87
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

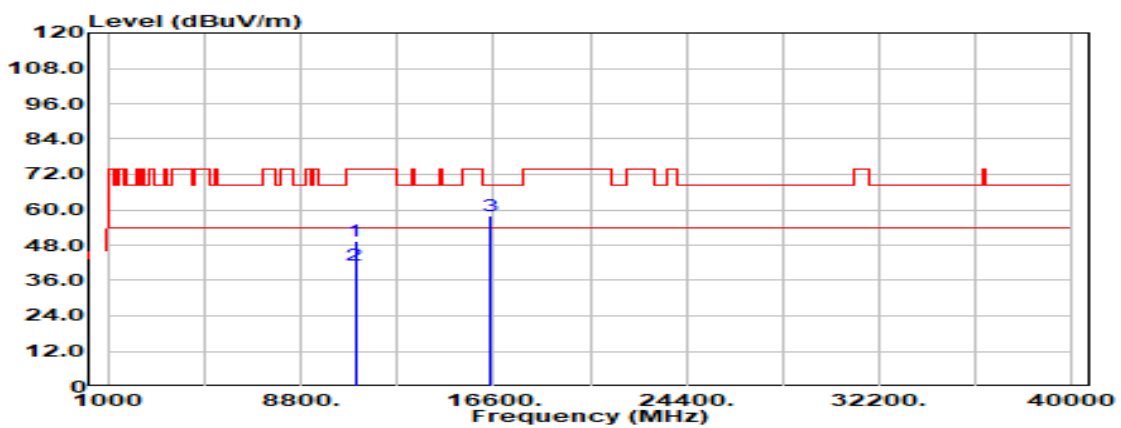


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	30.26	19.04	49.30	74.00	-24.70
11000.000	Average	22.39	19.04	41.43	54.00	-12.57
16500.000	Peak	28.95	29.02	57.97	68.20	-10.23
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

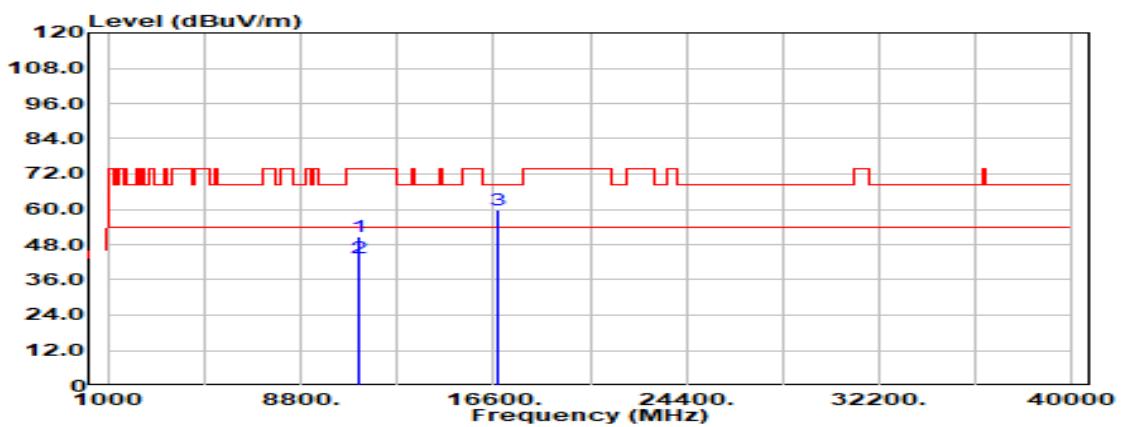


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	31.64	19.22	50.86	74.00	-23.14
11160.000	Average	24.23	19.22	43.45	54.00	-10.55
16740.000	Peak	29.54	30.21	59.75	68.20	-8.45
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

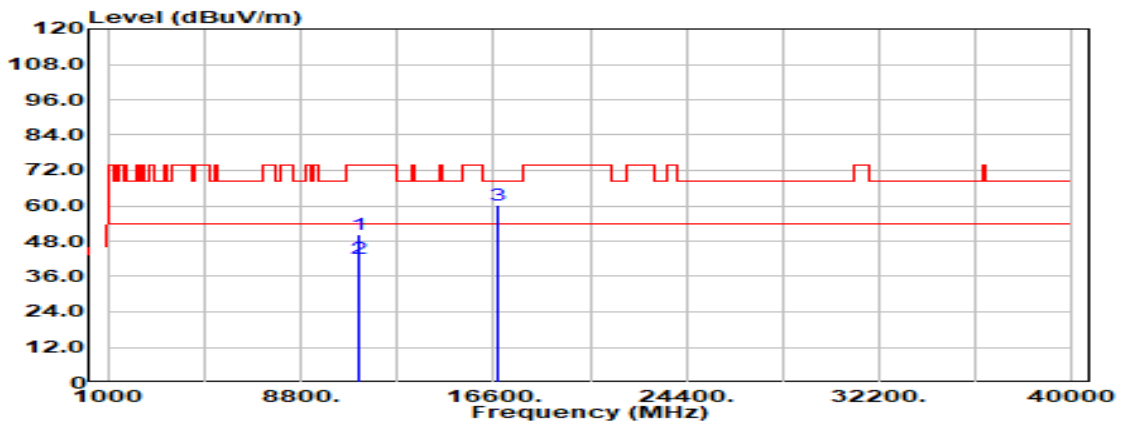


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	31.06	19.22	50.28	74.00	-23.72
11160.000	Average	22.96	19.22	42.18	54.00	-11.82
16740.000	Peak	30.10	30.21	60.31	68.20	-7.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

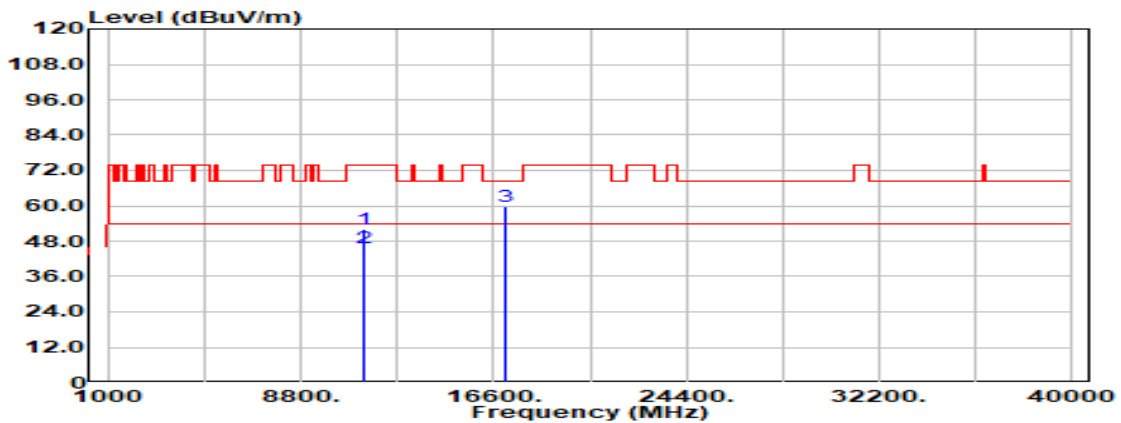


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	32.56	19.58	52.14	74.00	-21.86
11400.000	Average	25.99	19.58	45.57	54.00	-8.43
17100.000	Peak	28.40	31.23	59.63	68.20	-8.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

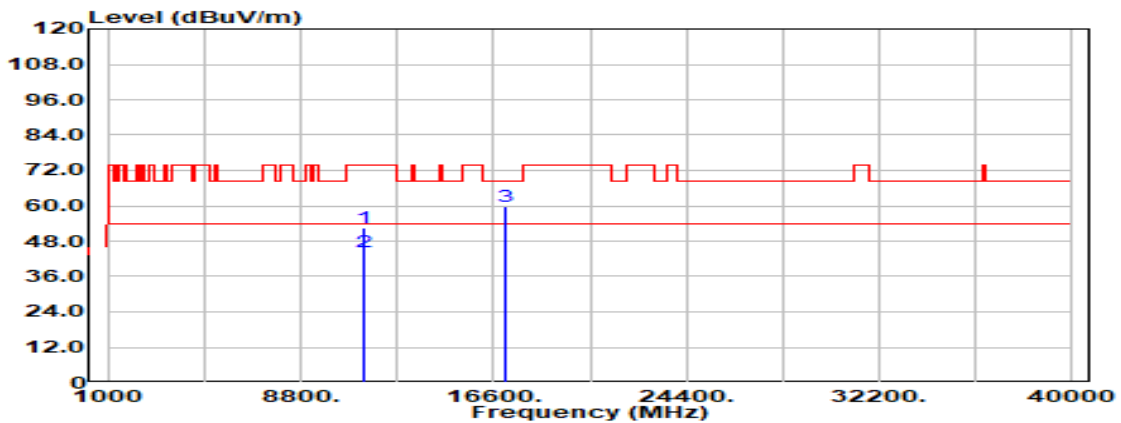


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	32.88	19.58	52.46	74.00	-21.54
11400.000	Average	24.65	19.58	44.23	54.00	-9.77
17100.000	Peak	28.75	31.23	59.98	68.20	-8.22
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5720 MHz_	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

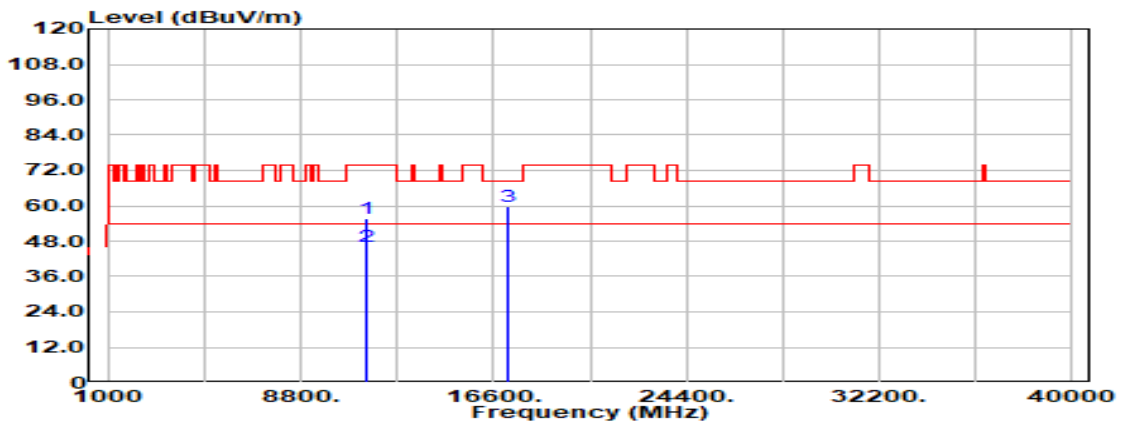

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11440.000	Peak	35.87	19.63	55.49	74.00	-18.51
11440.000	Average	26.60	19.63	46.23	54.00	-7.77
17160.000	Peak	29.13	30.57	59.70	68.20	-8.50
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5720 MHz_	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

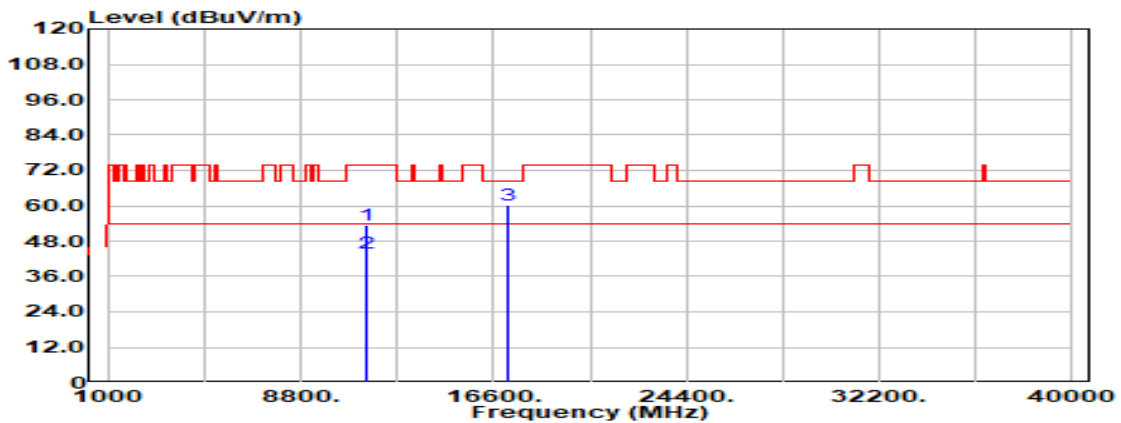


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11440.000	Peak	33.65	19.63	53.28	74.00	-20.72
11440.000	Average	24.32	19.63	43.95	54.00	-10.05
17160.000	Peak	29.73	30.57	60.30	68.20	-7.90
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

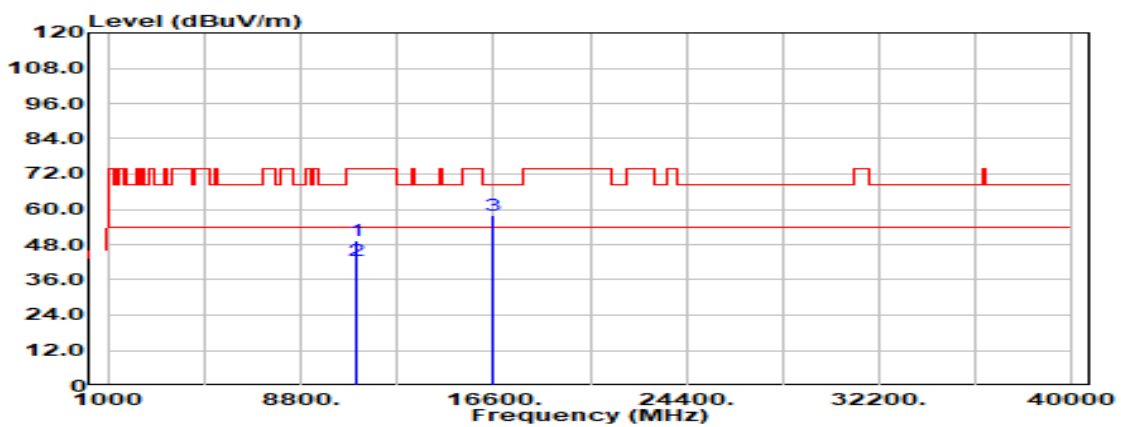


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	30.32	19.00	49.32	74.00	-24.68
11020.000	Average	23.49	19.00	42.49	54.00	-11.51
16530.000	Peak	28.89	28.97	57.85	68.20	-10.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

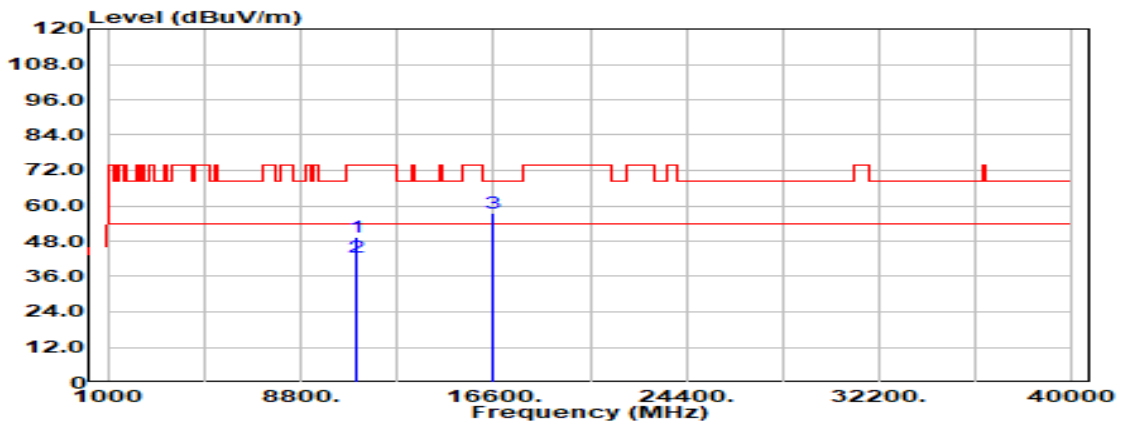


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	30.19	19.00	49.19	74.00	-24.81
11020.000	Average	23.66	19.00	42.66	54.00	-11.34
16530.000	Peak	28.50	28.97	57.46	68.20	-10.74
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

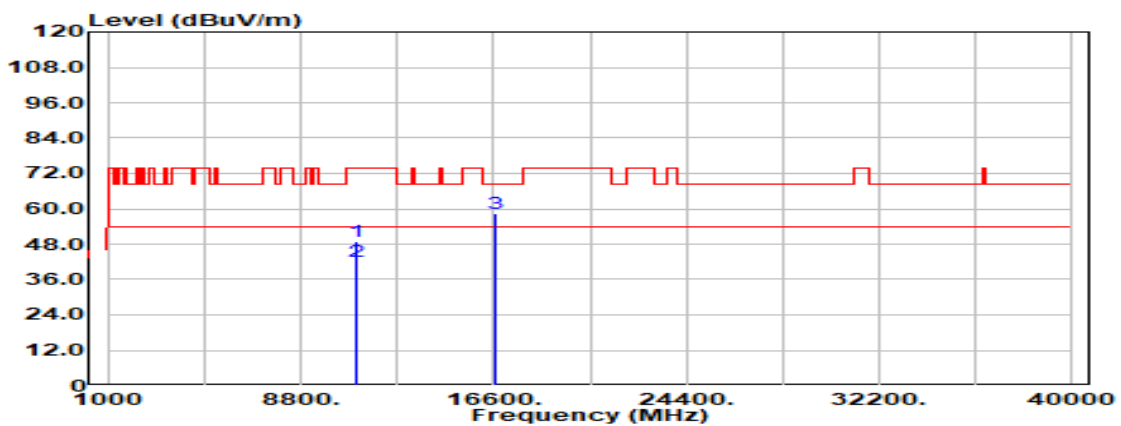


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	29.58	19.11	48.69	74.00	-25.31
11100.000	Average	23.09	19.11	42.20	54.00	-11.80
16650.000	Peak	28.93	29.28	58.21	68.20	-9.99
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

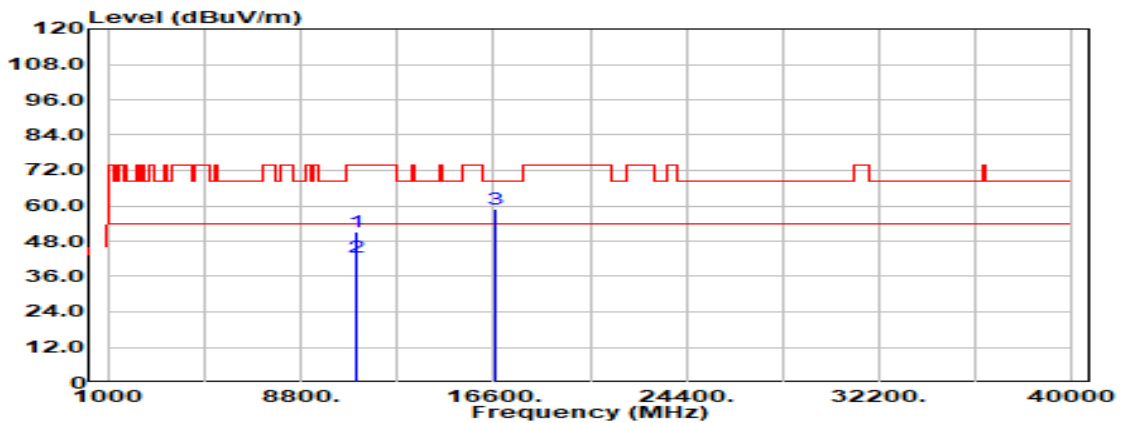


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	32.08	19.11	51.19	74.00	-22.81
11100.000	Average	23.29	19.11	42.40	54.00	-11.60
16650.000	Peak	29.47	29.28	58.75	68.20	-9.45
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

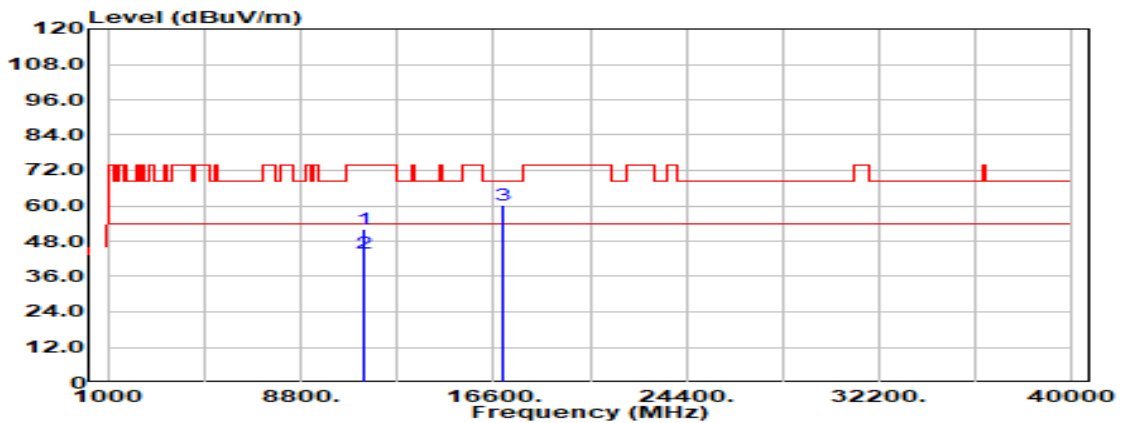


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.000	Peak	32.62	19.44	52.06	74.00	-21.94
11340.000	Average	24.46	19.44	43.89	54.00	-10.11
17010.000	Peak	28.88	31.48	60.36	68.20	-7.84
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

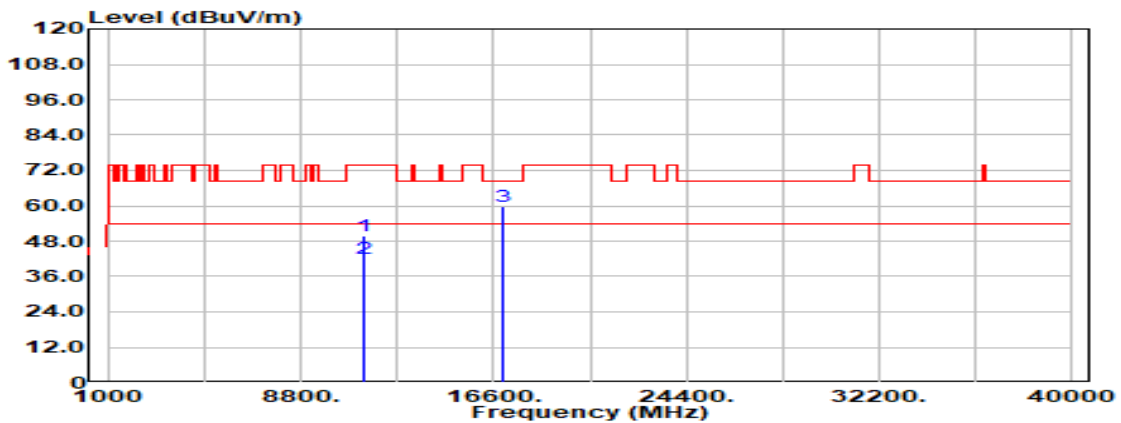


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.000	Peak	30.18	19.44	49.62	74.00	-24.38
11340.000	Average	22.66	19.44	42.09	54.00	-11.91
17010.000	Peak	28.22	31.48	59.70	68.20	-8.50
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5710 MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

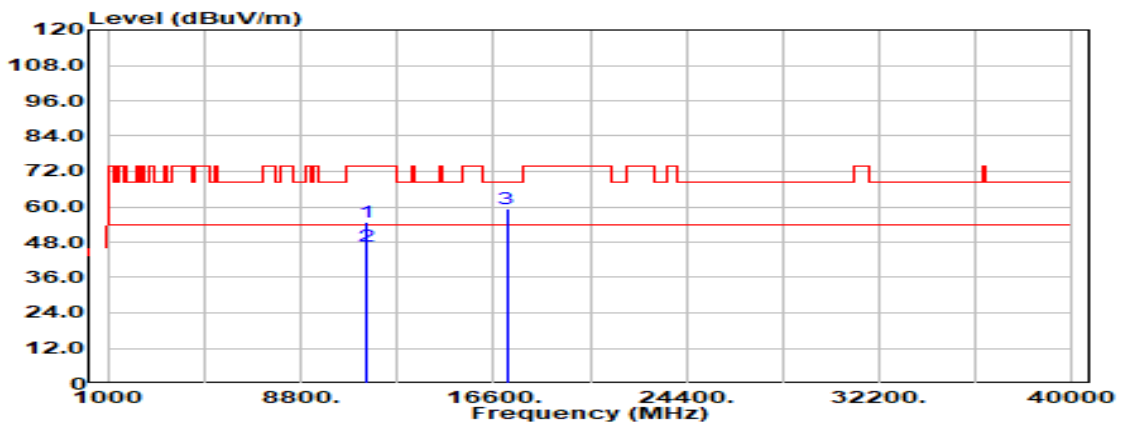

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	35.00	19.60	54.61	74.00	-19.39
11420.000	Average	27.18	19.60	46.78	54.00	-7.22
17130.000	Peak	28.25	30.88	59.12	68.20	-9.08
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5710 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

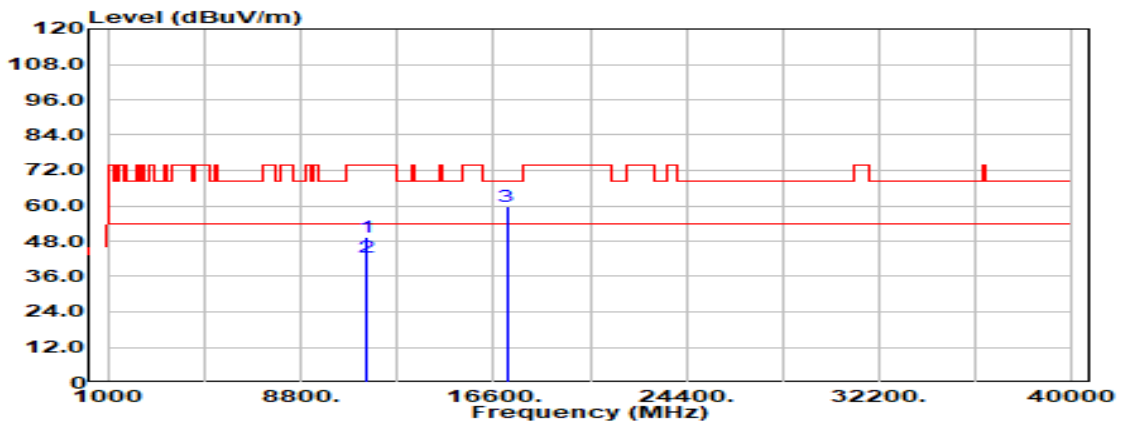


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	29.98	19.60	49.58	74.00	-24.42
11420.000	Average	22.89	19.60	42.50	54.00	-11.50
17130.000	Peak	29.08	30.88	59.95	68.20	-8.25
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

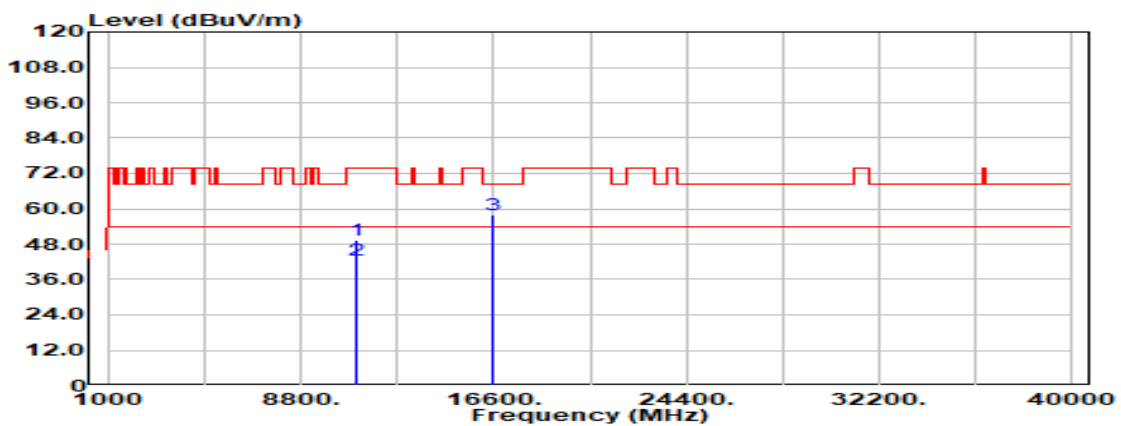


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	30.56	18.97	49.54	74.00	-24.46
11060.000	Average	23.53	18.97	42.50	54.00	-11.50
16590.000	Peak	29.24	28.94	58.18	68.20	-10.02
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

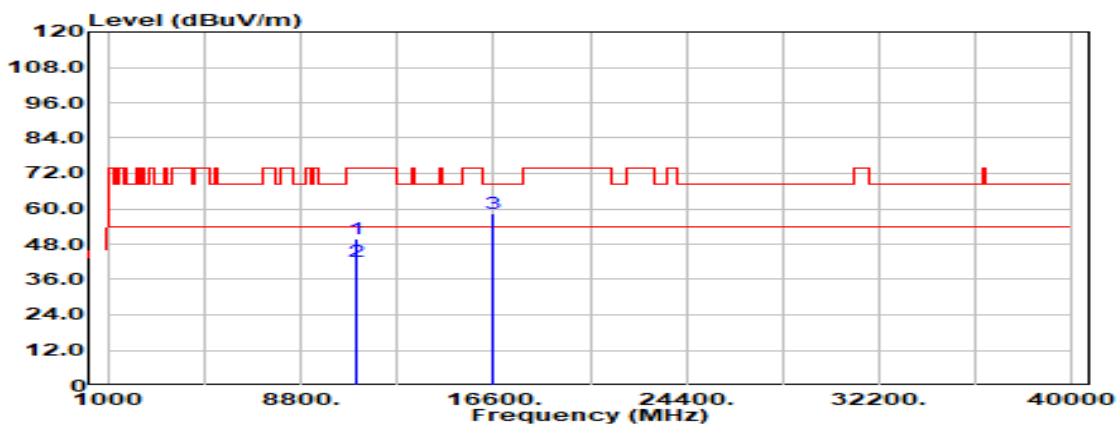


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	30.68	18.97	49.65	74.00	-24.35
11060.000	Average	23.23	18.97	42.21	54.00	-11.79
16590.000	Peak	29.33	28.94	58.26	68.20	-9.94
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5690 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

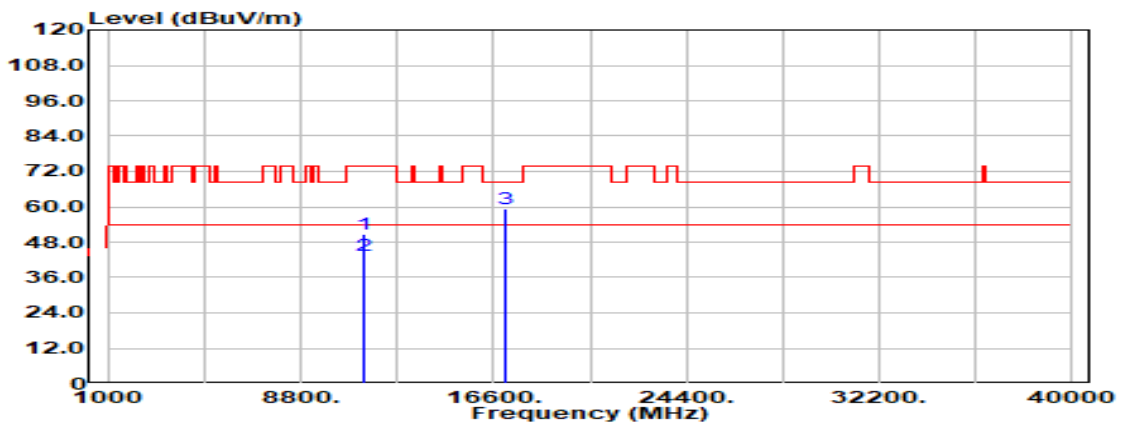


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	31.14	19.53	50.67	74.00	-23.33
11380.000	Average	24.09	19.53	43.63	54.00	-10.37
17070.000	Peak	27.82	31.30	59.12	68.20	-9.08
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5690 MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

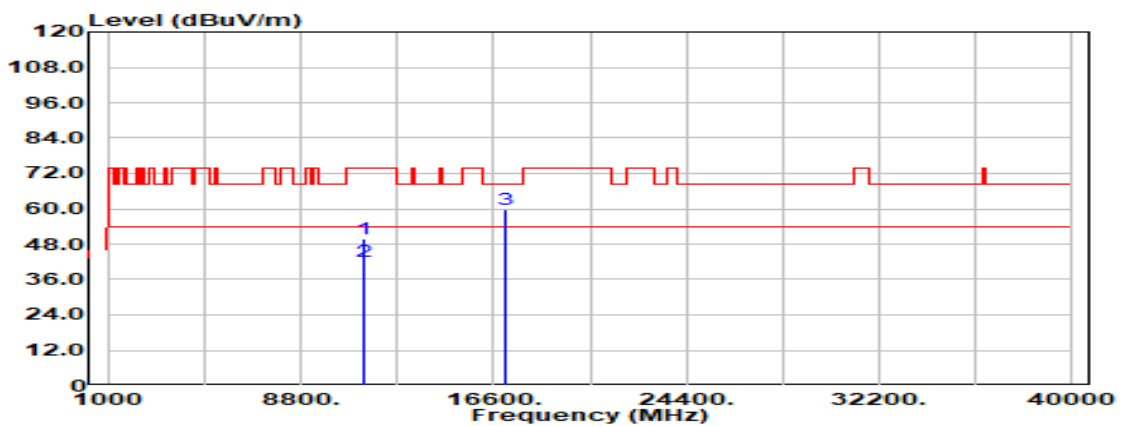

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	30.05	19.53	49.59	74.00	-24.41
11380.000	Average	22.40	19.53	41.93	54.00	-12.07
17070.000	Peak	28.40	31.30	59.70	68.20	-8.50
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

**Test Data for UNII-3**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	21.4(°C)/ 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

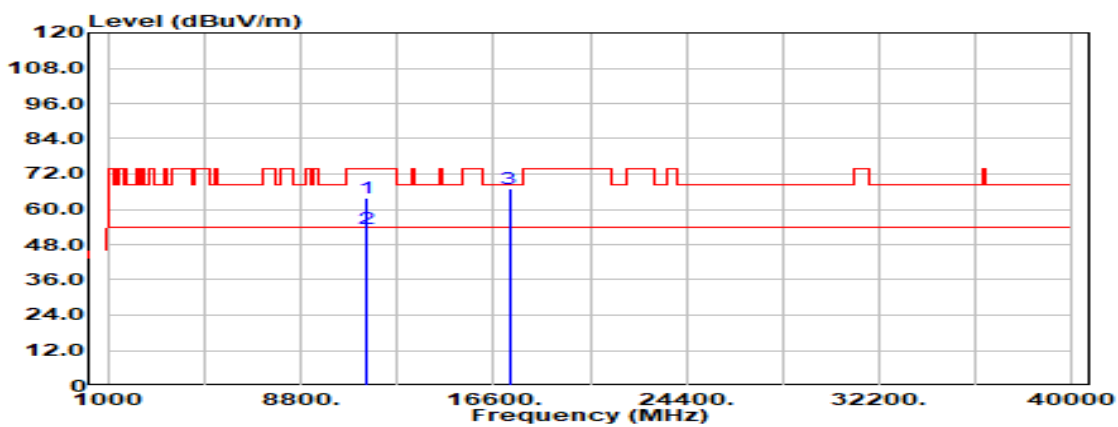


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	44.29	19.70	63.99	74.00	-10.01
11490.000	Average	33.81	19.70	53.51	54.00	-0.49
17235.000	Peak	36.87	30.01	66.88	68.20	-1.32
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

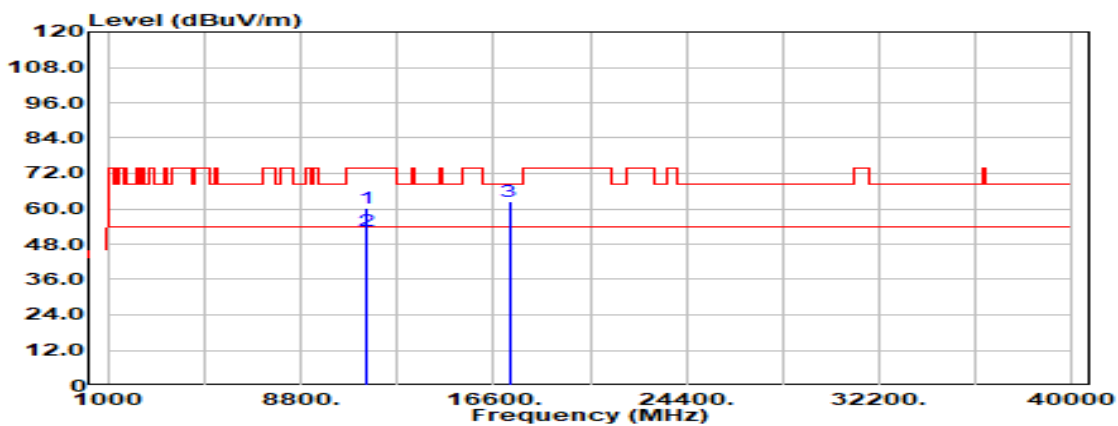


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	40.45	19.70	60.15	74.00	-13.85
11490.000	Average	32.70	19.70	52.40	54.00	-1.60
17235.000	Peak	32.29	30.01	62.30	68.20	-5.90
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

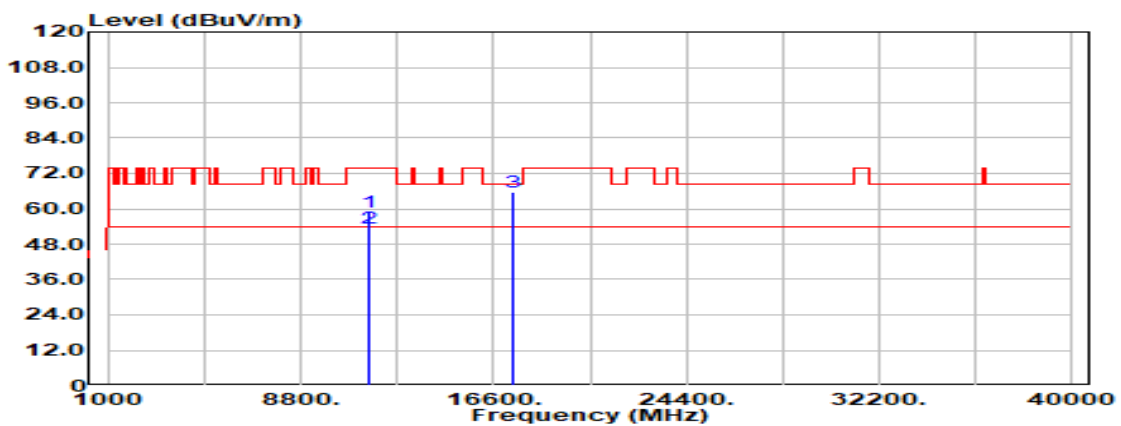

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	39.09	19.83	58.92	74.00	-15.08
11570.000	Average	33.68	19.83	53.51	54.00	-0.49
17355.000	Peak	36.22	29.33	65.55	68.20	-2.65
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

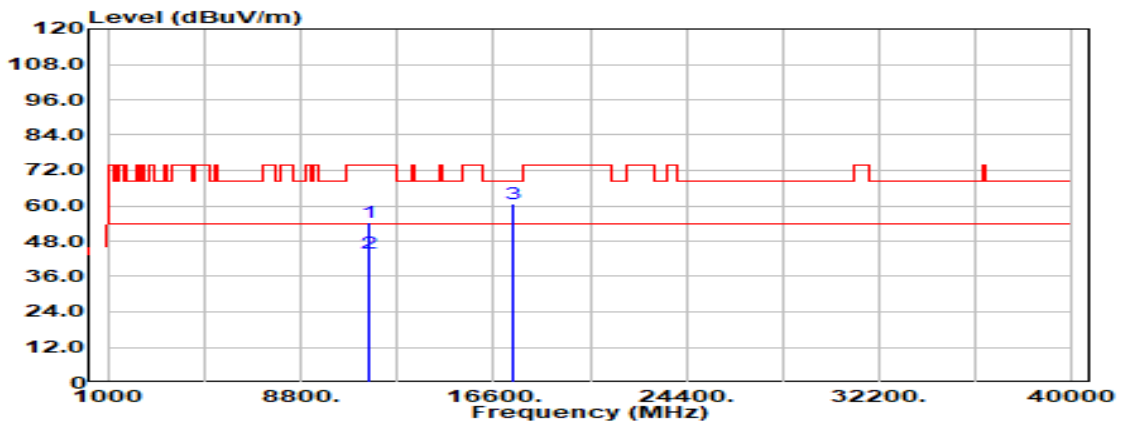


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	34.54	19.83	54.37	74.00	-19.63
11570.000	Average	23.92	19.83	43.75	54.00	-10.25
17355.000	Peak	31.30	29.33	60.63	68.20	-7.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

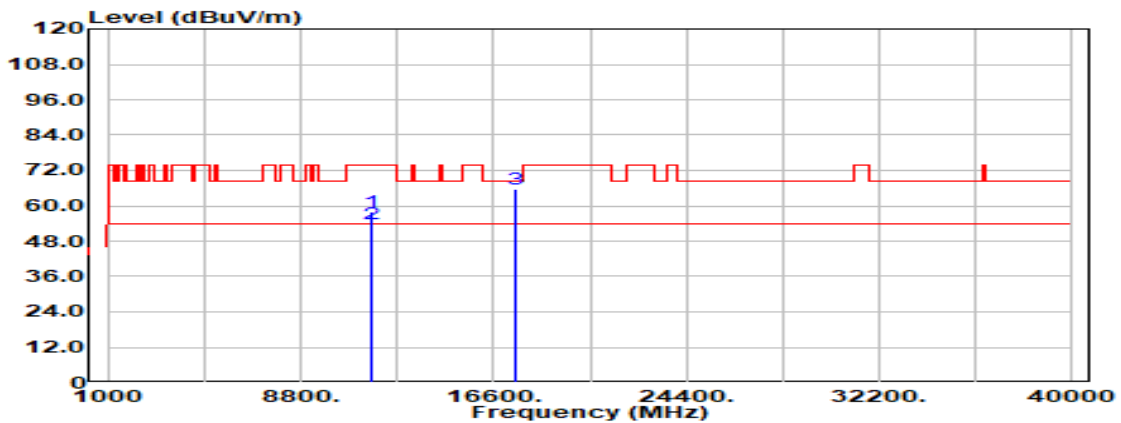


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	38.24	19.90	58.14	74.00	-15.86
11650.000	Average	33.83	19.90	53.73	54.00	-0.27
17475.000	Peak	36.73	29.11	65.83	68.20	-2.37
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	21.4(°C) / 52%RH
Test Item	Harmonic	Test Date	April 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

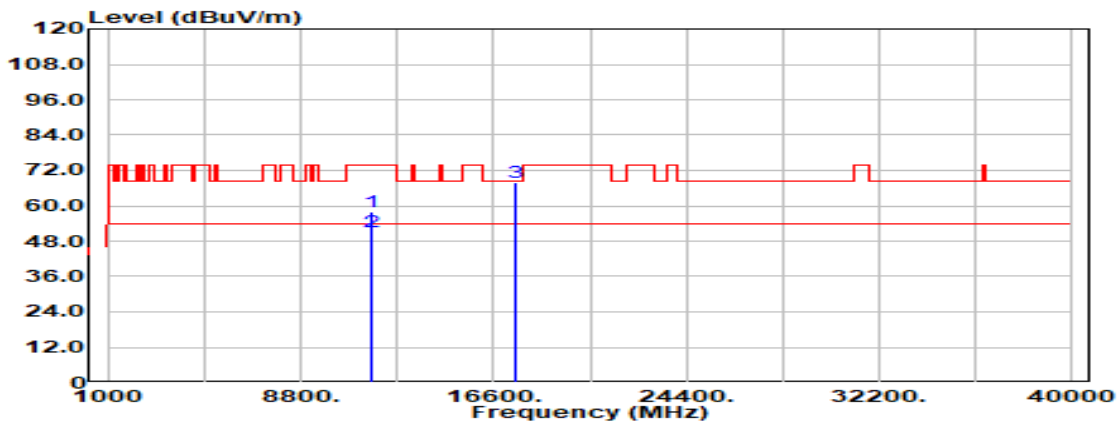


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.000	Peak	38.12	19.90	58.02	74.00	-15.98
11650.000	Average	31.09	19.90	50.99	54.00	-3.01
17475.000	Peak	38.78	29.11	67.89	68.20	-0.31
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

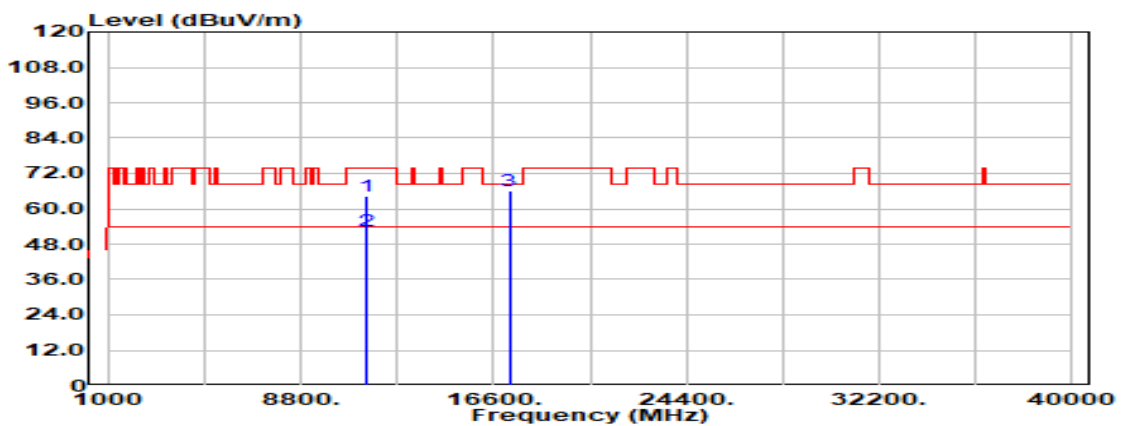


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	44.57	19.70	64.26	74.00	-9.74
11490.000	Average	32.89	19.70	52.59	54.00	-1.41
17235.000	Peak	35.91	30.01	65.92	68.20	-2.28
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.8(°C) / 58%RH
Test Item	Harmonic	Test Date	April 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

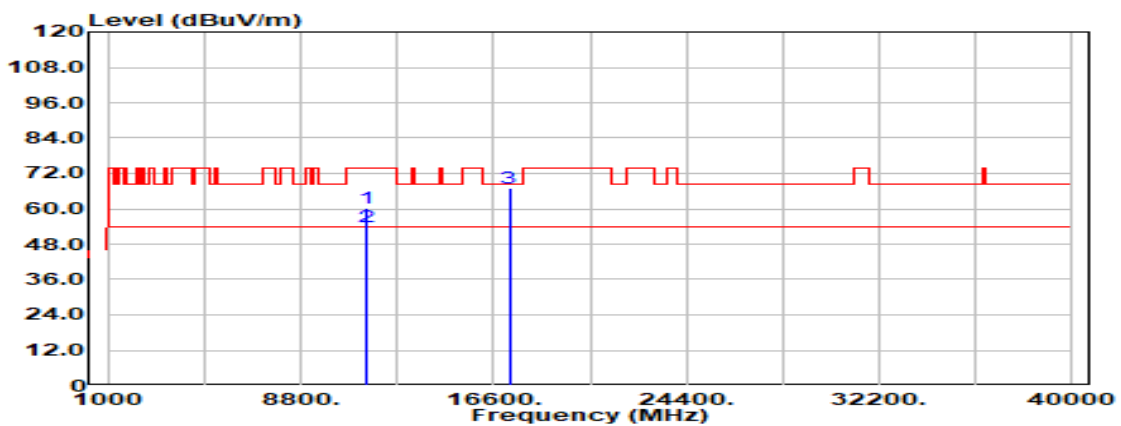


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	40.73	19.70	60.43	74.00	-13.57
11490.000	Average	34.00	19.70	53.70	54.00	-0.30
17235.000	Peak	36.80	30.01	66.81	68.20	-1.39
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5785 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

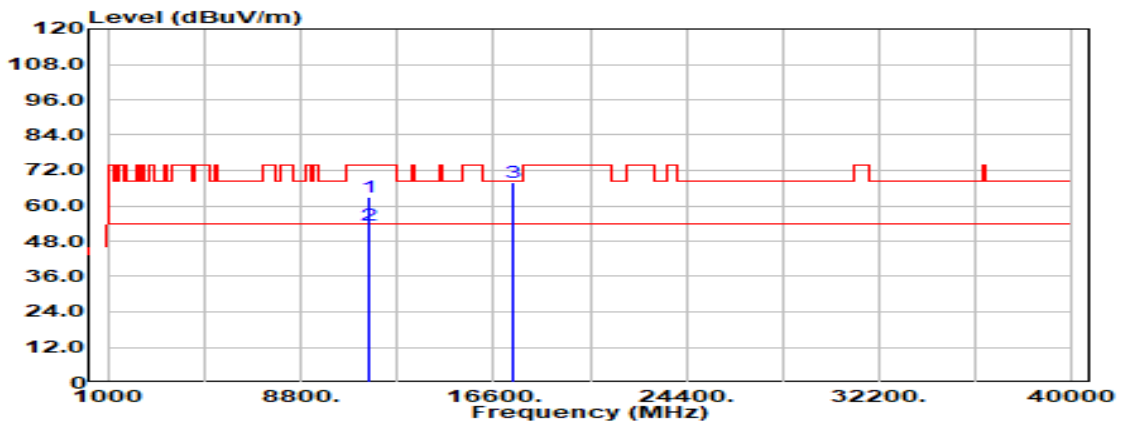


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	43.18	19.83	63.02	74.00	-10.98
11570.000	Average	33.74	19.83	53.57	54.00	-0.43
17355.000	Peak	38.69	29.33	68.02	68.20	-0.18
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5785 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

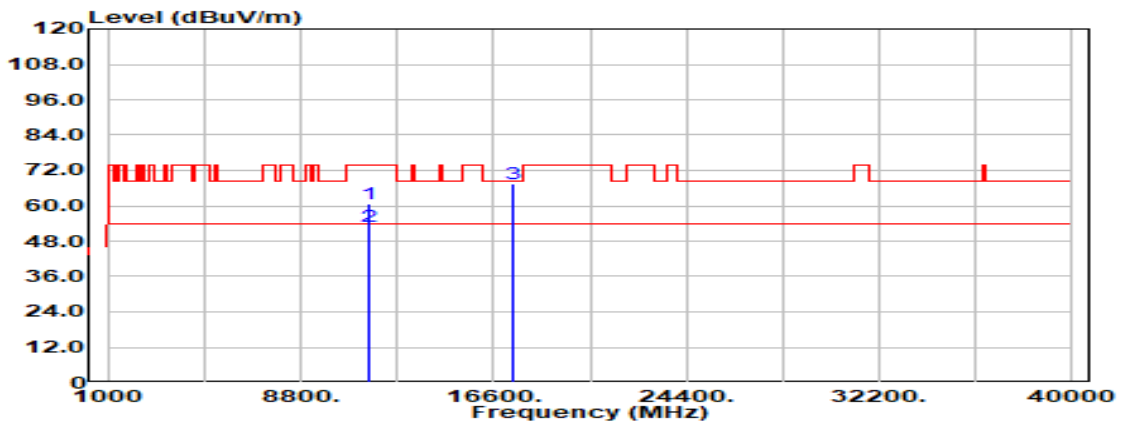


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	40.74	19.83	60.57	74.00	-13.43
11570.000	Average	33.00	19.83	52.83	54.00	-1.17
17355.000	Peak	37.99	29.33	67.33	68.20	-0.87
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

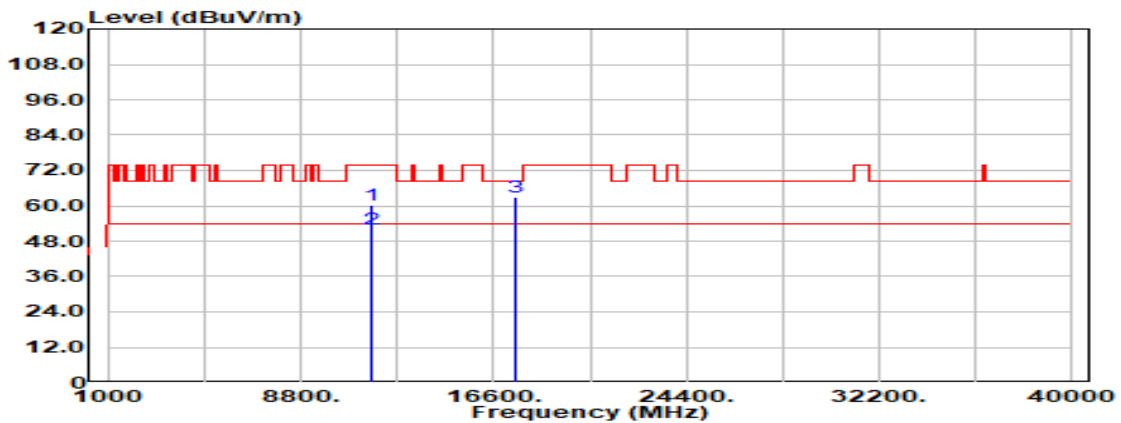

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	40.23	19.90	60.13	74.00	-13.87
11650.000	Average	32.21	19.90	52.11	54.00	-1.89
17475.000	Peak	33.85	29.11	62.96	68.20	-5.24
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

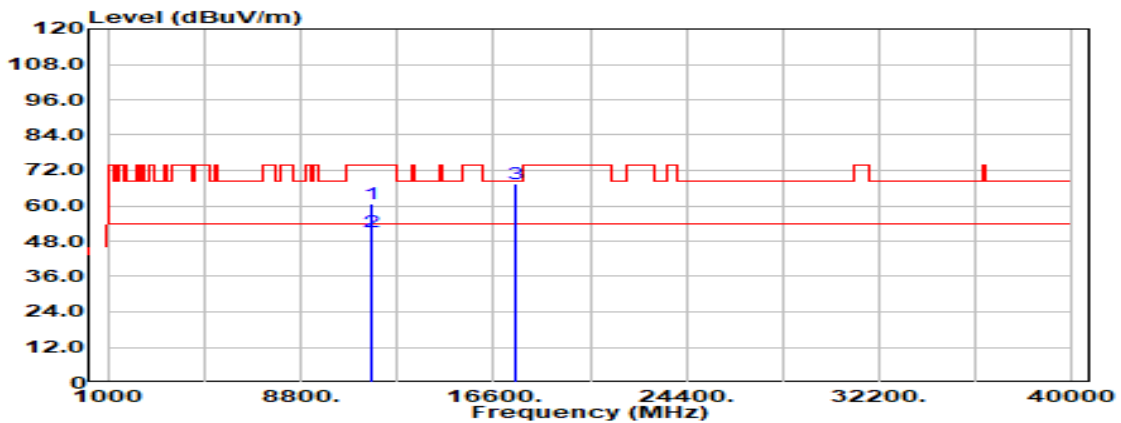


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	40.56	19.90	60.46	74.00	-13.54
11650.000	Average	31.23	19.90	51.13	54.00	-2.87
17475.000	Peak	38.30	29.11	67.41	68.20	-0.79
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

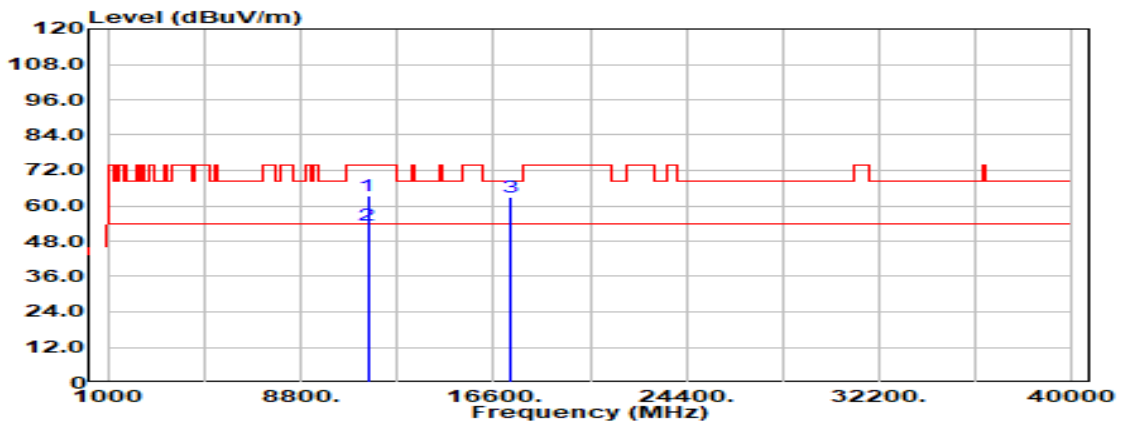


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.000	Peak	43.54	19.73	63.27	74.00	-10.73
11510.000	Average	33.86	19.73	53.59	54.00	-0.41
17265.000	Peak	33.27	29.80	63.07	68.20	-5.13
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	22.3(°C) / 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

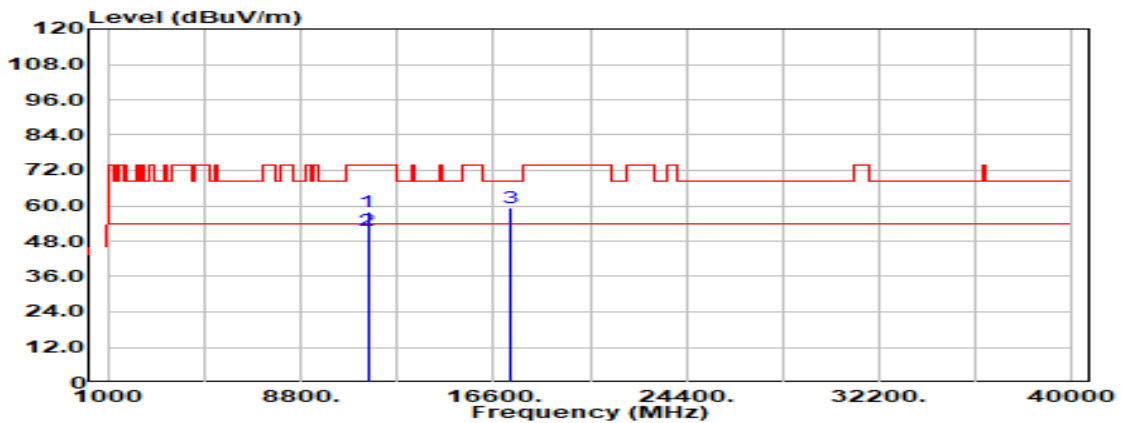


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11510.000	Peak	38.32	19.73	58.05	74.00	-15.95
11510.000	Average	31.83	19.73	51.55	54.00	-2.45
17265.000	Peak	29.59	29.80	59.39	68.20	-8.81
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

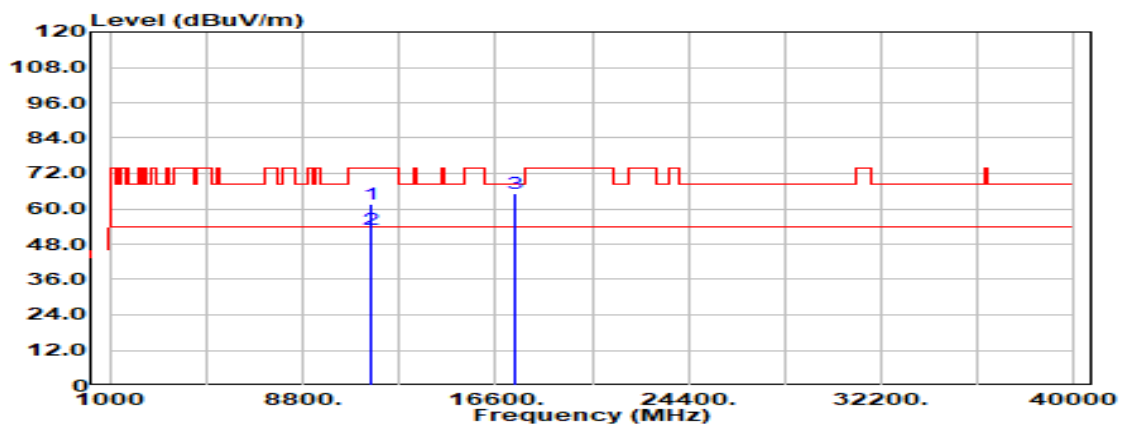


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11590.000	Peak	41.78	19.86	61.65	74.00	-12.35
11590.000	Average	33.17	19.86	53.03	54.00	-0.97
17385.000	Peak	36.06	29.24	65.29	68.20	-2.91
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

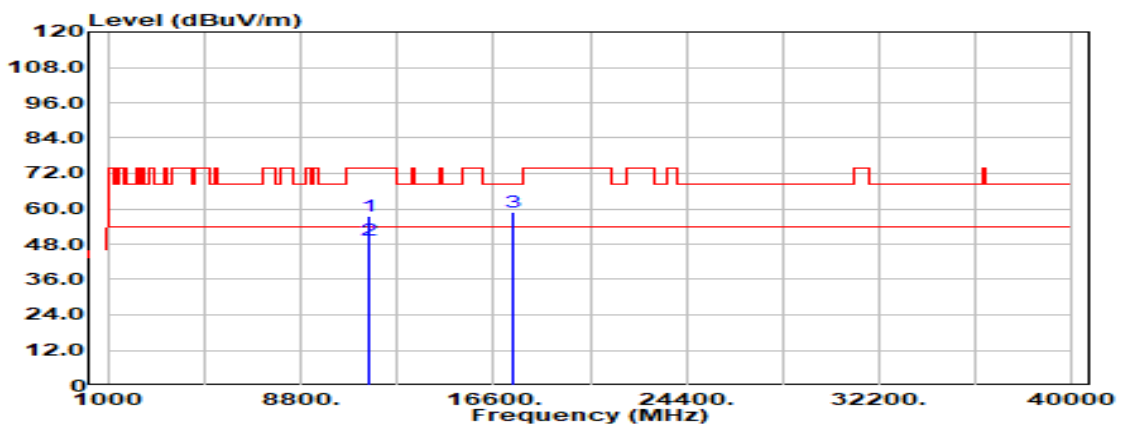


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.000	Peak	37.48	19.86	57.35	74.00	-16.65
11590.000	Average	29.43	19.86	49.30	54.00	-4.70
17385.000	Peak	29.62	29.24	58.86	68.20	-9.34
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

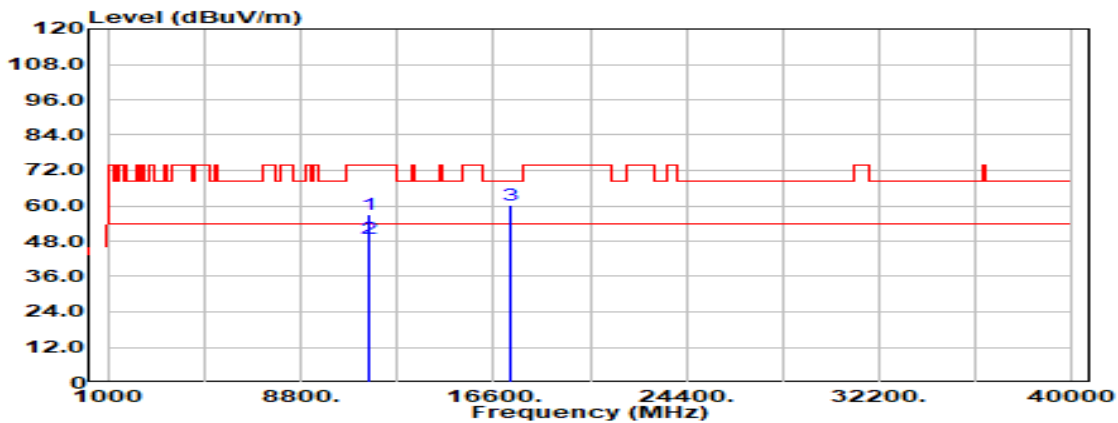


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.000	Peak	37.29	19.80	57.09	74.00	-16.91
11550.000	Average	29.30	19.80	49.10	54.00	-4.90
17325.000	Peak	30.58	29.48	60.05	68.20	-8.15
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 20, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

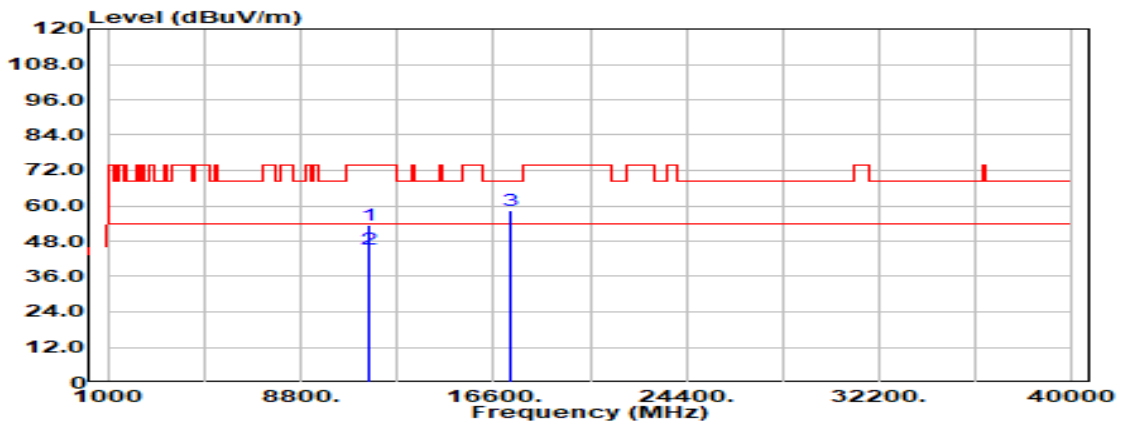


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.000	Peak	33.52	19.80	53.32	74.00	-20.68
11550.000	Average	25.53	19.80	45.33	54.00	-8.67
17325.000	Peak	29.03	29.48	58.50	68.20	-9.70
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

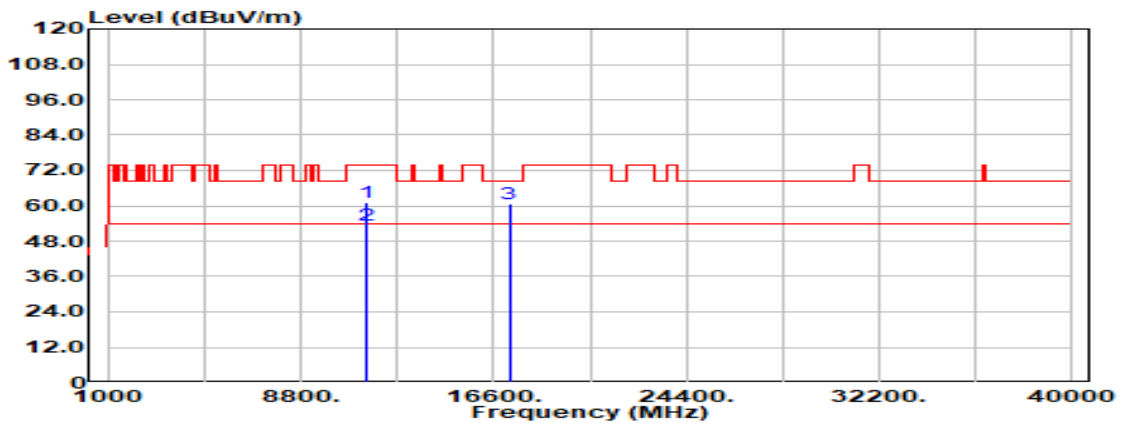

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.000	Peak	41.39	19.70	61.09	74.00	-12.91
11490.000	Average	33.78	19.70	53.47	54.00	-0.53
17235.000	Peak	30.60	30.01	60.61	68.20	-7.59
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

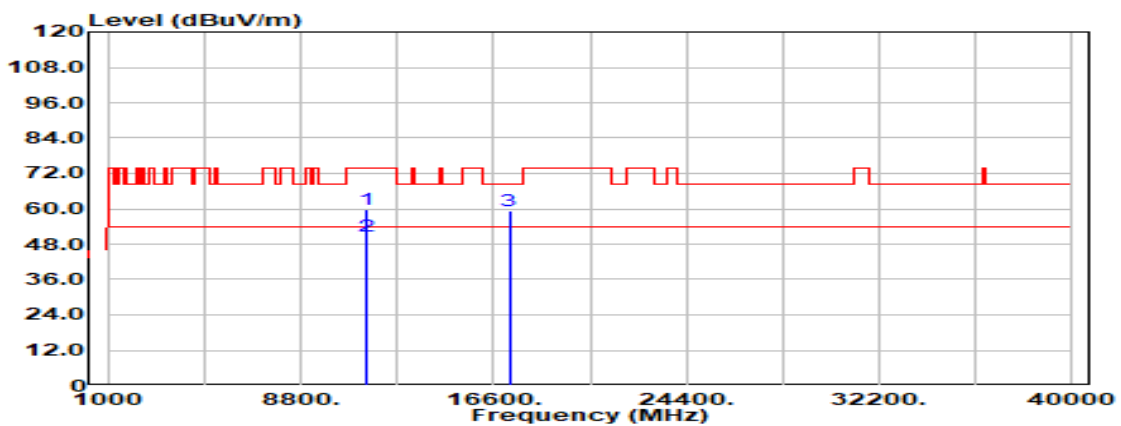


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.000	Peak	40.00	19.70	59.70	74.00	-14.30
11490.000	Average	31.08	19.70	50.78	54.00	-3.22
17235.000	Peak	29.45	30.01	59.46	68.20	-8.74
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5785MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

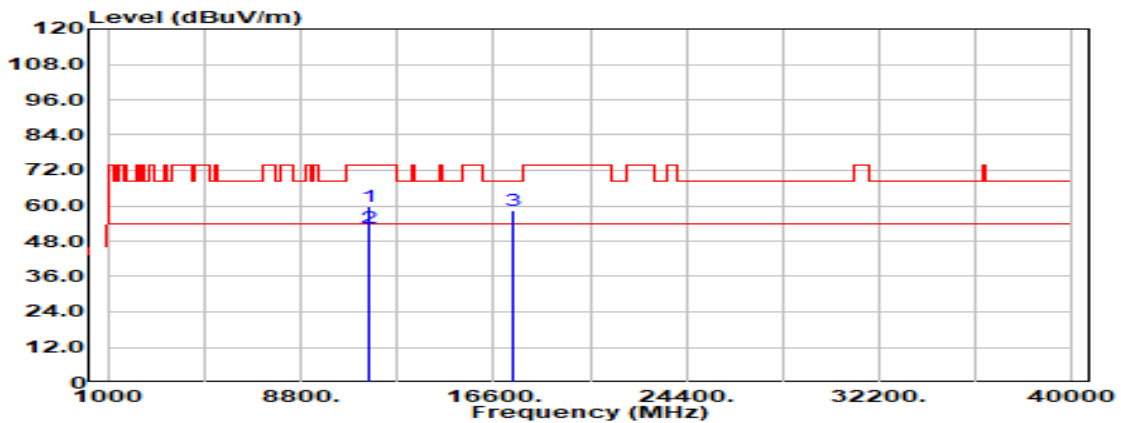


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	39.97	19.83	59.80	74.00	-14.20
11570.000	Average	32.78	19.83	52.61	54.00	-1.39
17355.000	Peak	29.18	29.33	58.52	68.20	-9.68
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5785MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

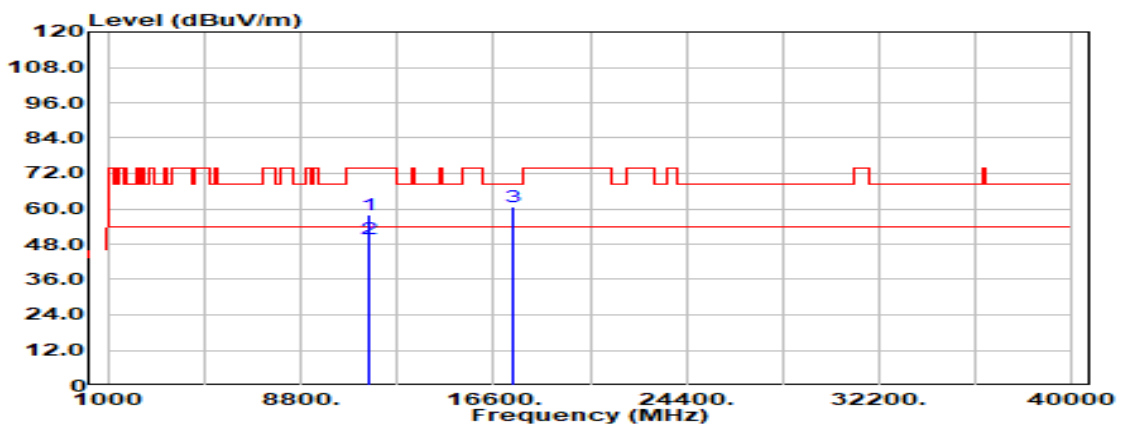


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	38.30	19.83	58.13	74.00	-15.87
11570.000	Average	30.04	19.83	49.87	54.00	-4.13
17355.000	Peak	31.56	29.33	60.89	68.20	-7.31
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

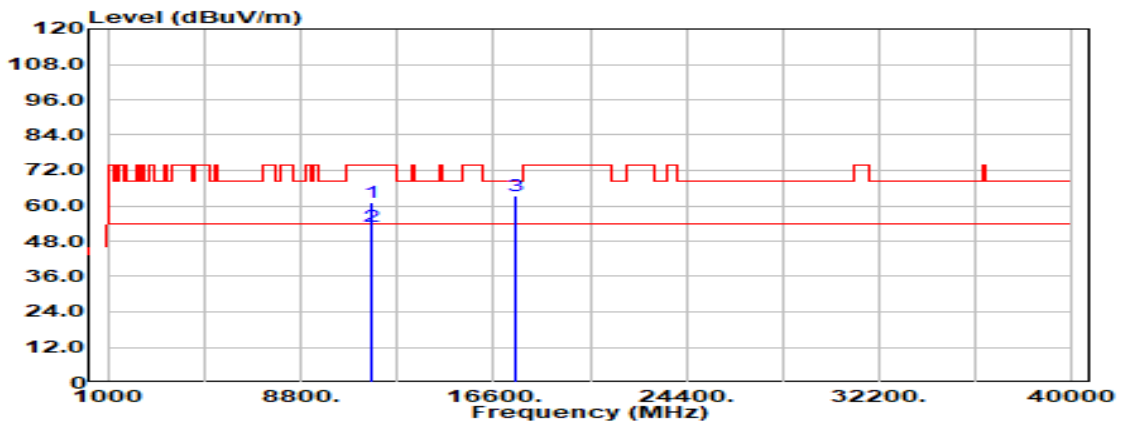


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.000	Peak	41.33	19.90	61.23	74.00	-12.77
11650.000	Average	32.90	19.90	52.80	54.00	-1.20
17475.000	Peak	34.32	29.11	63.42	68.20	-4.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz_	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

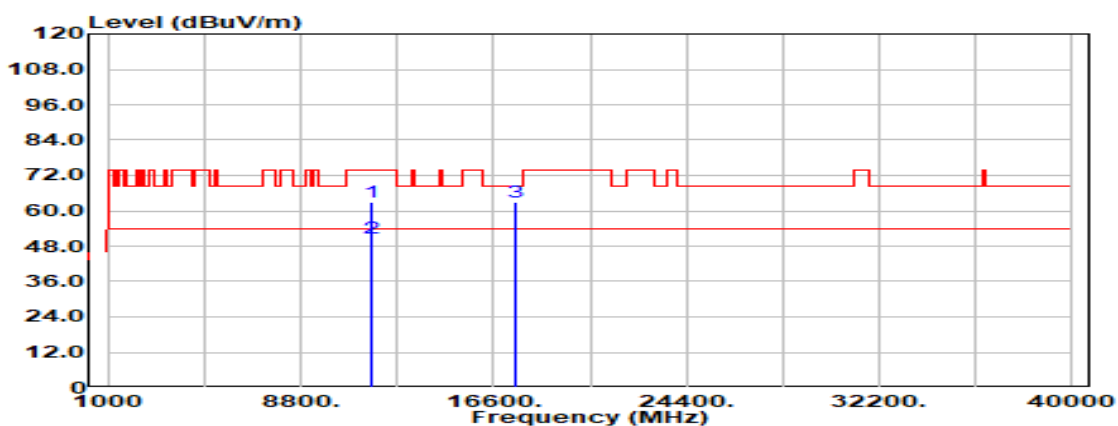


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	43.14	19.90	63.04	74.00	-10.96
11650.000	Average	30.63	19.90	50.53	54.00	-3.47
17475.000	Peak	33.88	29.11	62.99	68.20	-5.21
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5755MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

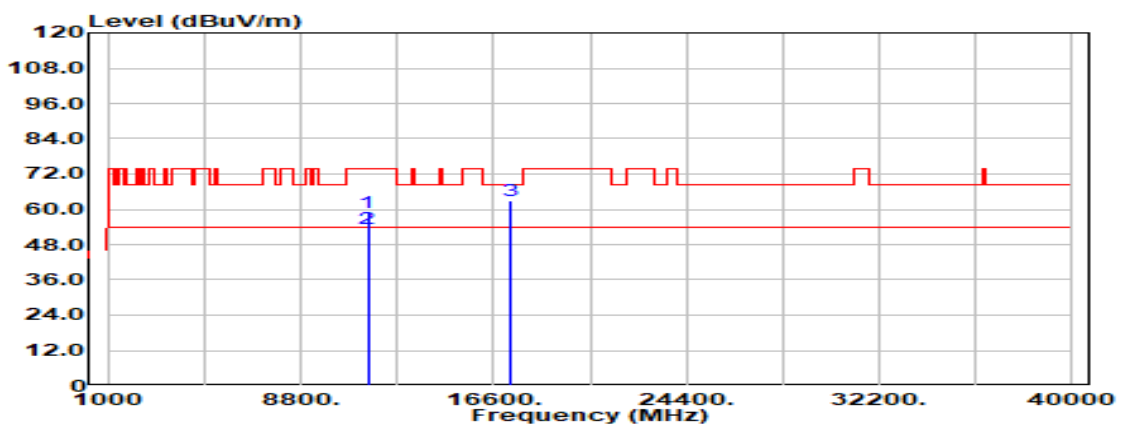


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.000	Peak	38.97	19.73	58.70	74.00	-15.30
11510.000	Average	33.56	19.73	53.29	54.00	-0.71
17265.000	Peak	33.08	29.80	62.88	68.20	-5.32
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5755MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

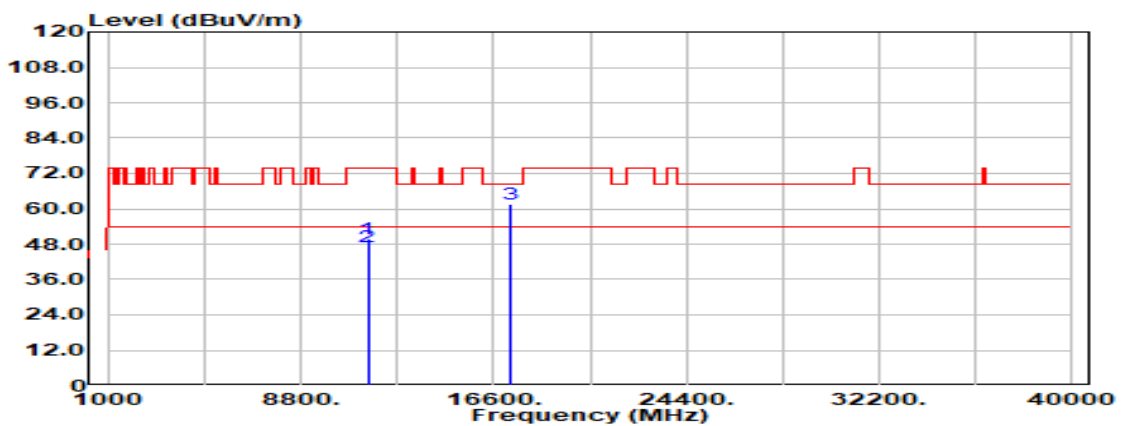


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.000	Peak	30.05	19.73	49.78	74.00	-24.22
11510.000	Average	27.52	19.73	47.25	54.00	-6.75
17265.000	Peak	31.66	29.80	61.46	68.20	-6.74
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5795MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

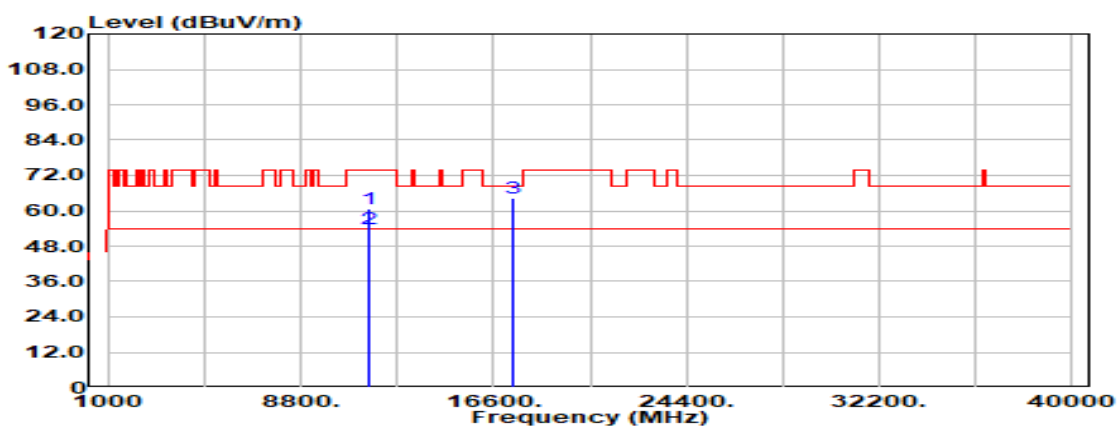

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.000	Peak	40.63	19.86	60.49	74.00	-13.51
11590.000	Average	33.85	19.86	53.71	54.00	-0.29
17385.000	Peak	35.06	29.24	64.30	68.20	-3.90
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5795MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

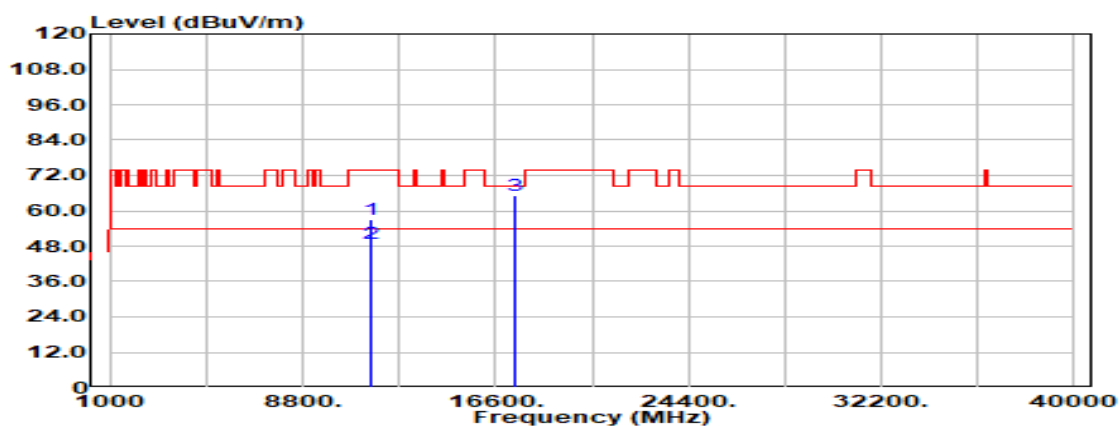


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.000	Peak	37.39	19.86	57.26	74.00	-16.74
11590.000	Average	28.98	19.86	48.85	54.00	-5.15
17385.000	Peak	36.10	29.24	65.34	68.20	-2.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	22.9(°C) / 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

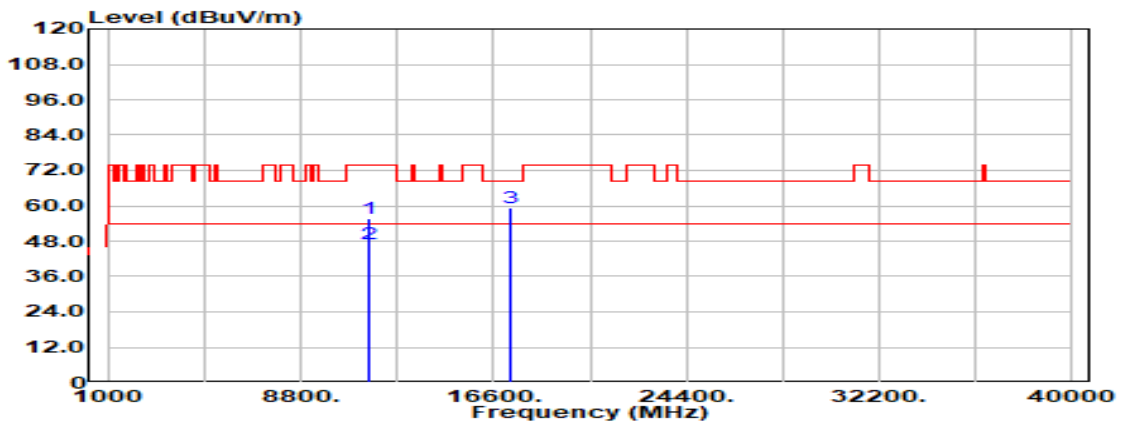


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.000	Peak	35.76	19.80	55.56	74.00	-18.44
11550.000	Average	27.14	19.80	46.94	54.00	-7.06
17325.000	Peak	29.86	29.48	59.33	68.20	-8.87
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5775MHz	Temp/Hum	22.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	April 21, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

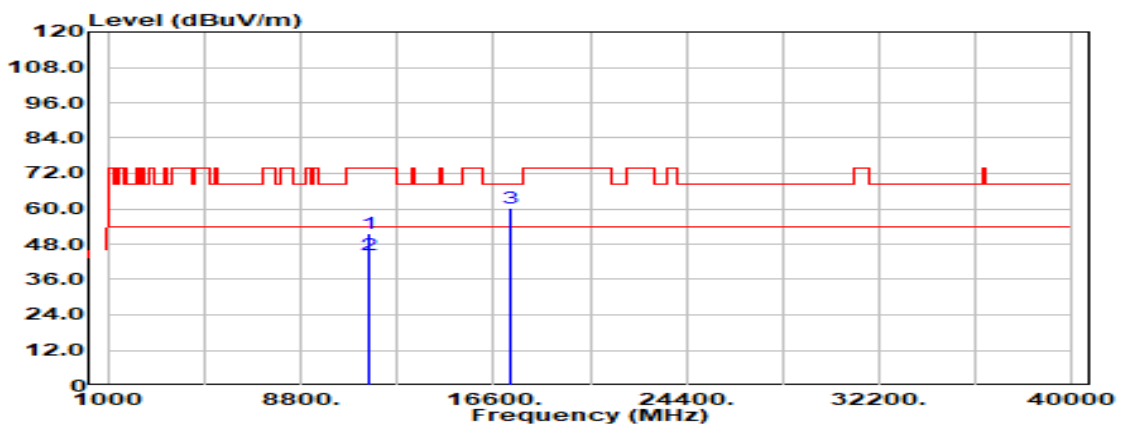

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.000	Peak	31.97	19.80	51.77	74.00	-22.23
11550.000	Average	24.57	19.80	44.37	54.00	-9.63
17325.000	Peak	30.64	29.48	60.11	68.20	-8.09
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**BFM ON**

**Above 1G**  
**Test Data for UNII-1**

Test Mode	IEEE 802.11ac VHT20 / 5180MHz	Temp/Hum	24.5(°C)/ 56%RH
Test Item	Harmonic	Test Date	April 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

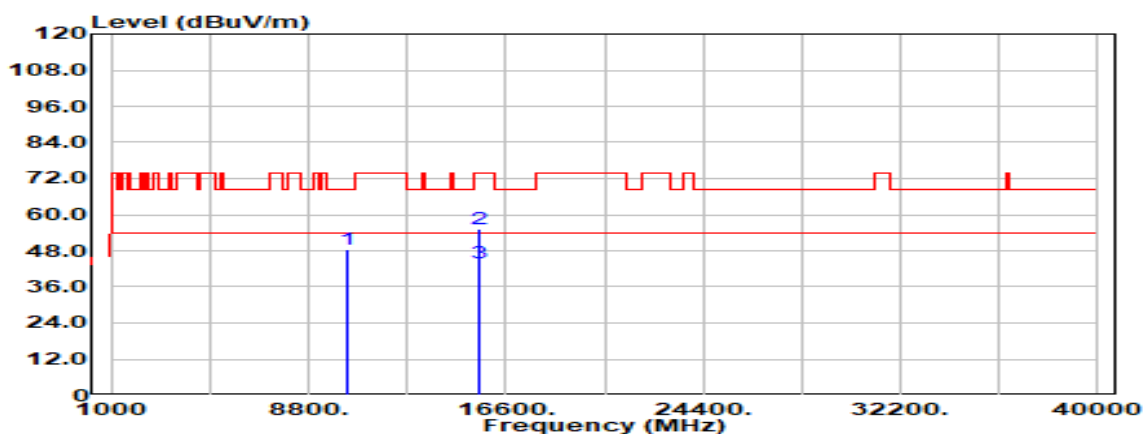

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.000	Peak	30.91	17.72	48.63	68.20	-19.57
15540.000	Peak	30.56	24.85	55.41	74.00	-18.59
15540.000	Average	18.90	24.85	43.75	54.00	-10.25
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.