


Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

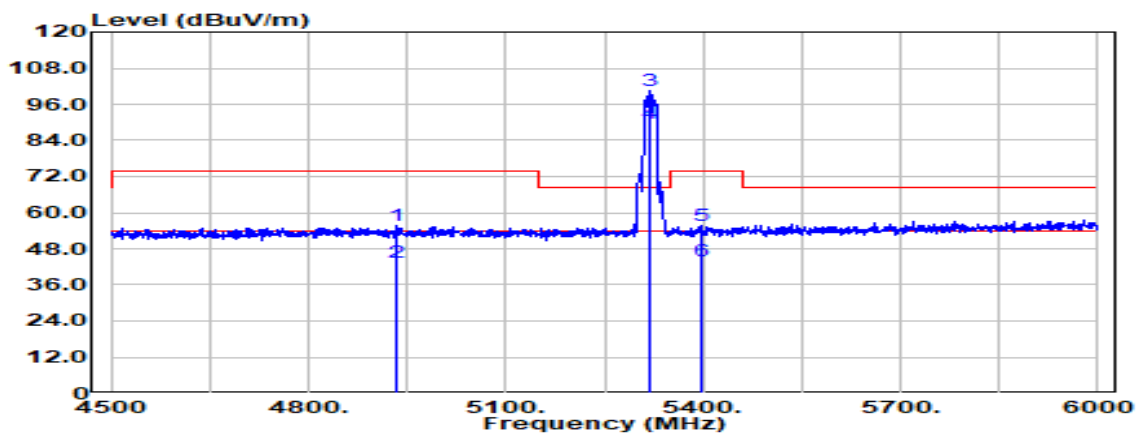

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4935.000	Peak	36.85	18.65	55.50	74.00	-18.50
4935.000	Average	24.77	18.65	43.42	54.00	-10.58
5320.000	Peak	80.92	19.81	100.73	-	-
5320.000	Average	69.99	19.81	89.80	-	-
5396.250	Peak	35.48	20.04	55.53	74.00	-18.47
5396.250	Average	23.84	20.04	43.88	54.00	-10.12

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_26/8	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

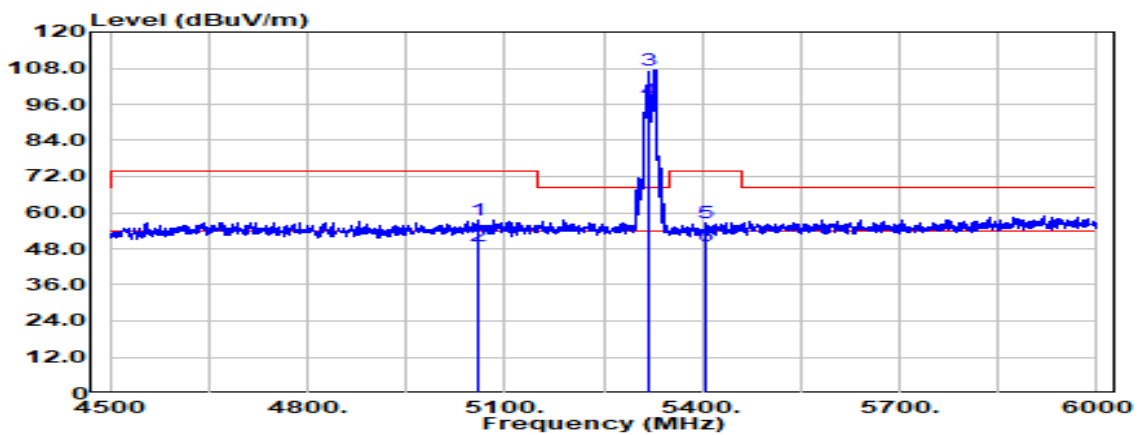

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5060.250	Peak	38.78	18.89	57.67	74.00	-16.33
5060.250	Average	30.15	18.89	49.03	54.00	-4.97
5320.000	Peak	87.61	19.81	107.43	-	-
5320.000	Average	77.64	19.81	97.46	-	-
5406.750	Peak	36.72	20.06	56.78	74.00	-17.22
5406.750	Average	29.00	20.06	49.06	54.00	-4.94


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz_26/8	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

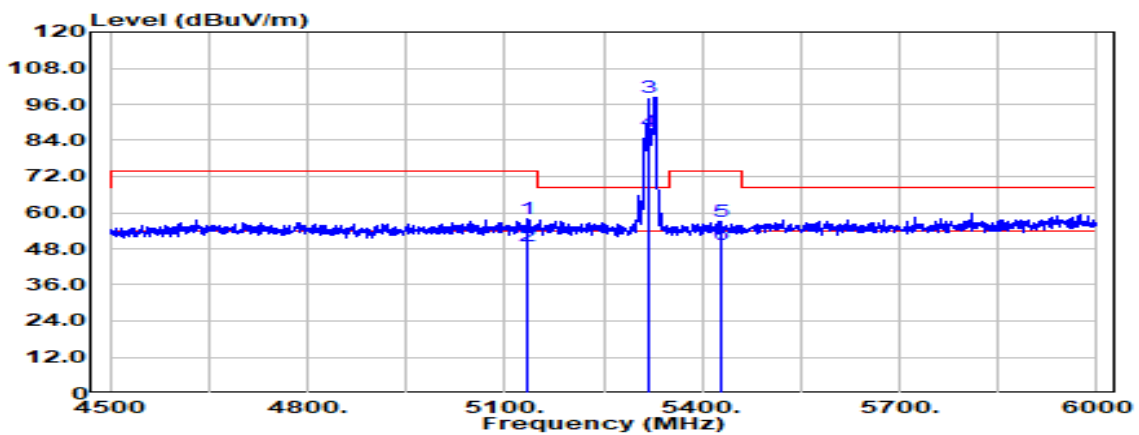

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5134.500	Peak	39.07	18.95	58.02	74.00	-15.98
5134.500	Average	29.92	18.95	48.87	54.00	-5.13
5320.000	Peak	78.57	19.81	98.38	-	-
5320.000	Average	67.34	19.81	87.15	-	-
5427.000	Peak	37.11	20.07	57.18	74.00	-16.82
5427.000	Average	29.07	20.07	49.13	54.00	-4.87


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

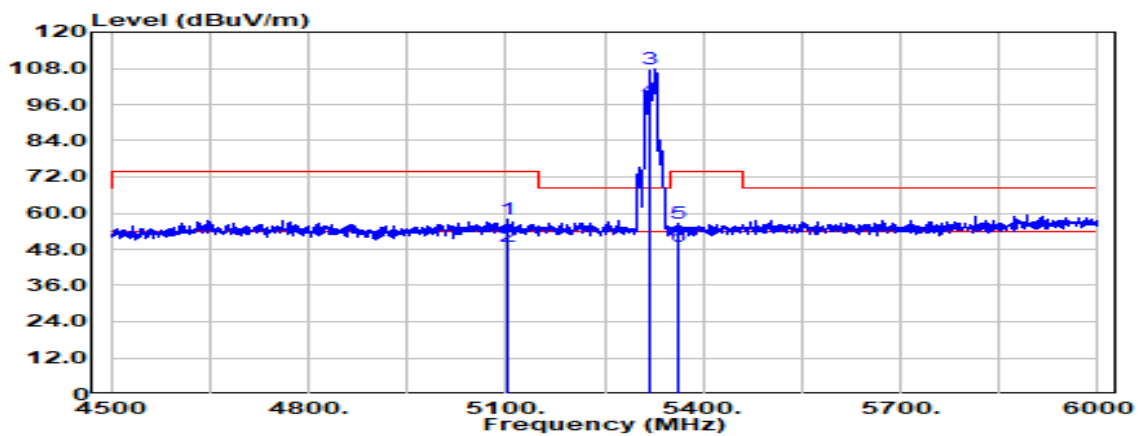

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5103.750	Peak	38.99	18.85	57.84	74.00	-16.16
5103.750	Average	30.18	18.85	49.03	54.00	-4.97
5320.000	Peak	87.92	19.81	107.73	-	-
5320.000	Average	78.12	19.81	97.94	-	-
5361.000	Peak	36.88	19.87	56.75	74.00	-17.25
5361.000	Average	29.19	19.87	49.06	54.00	-4.94

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

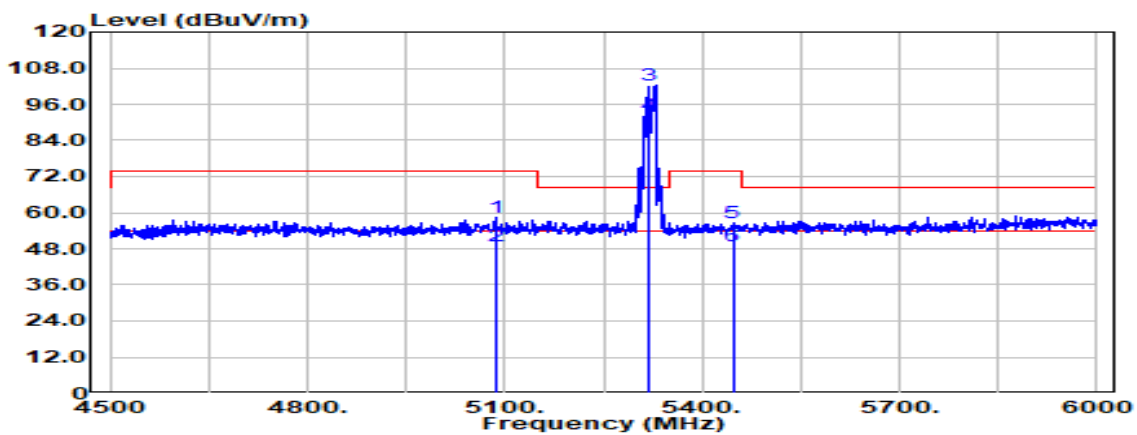

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5088.000	Peak	39.53	18.85	58.39	74.00	-15.61
5088.000	Average	30.22	18.85	49.08	54.00	-4.92
5320.000	Peak	82.61	19.81	102.43	-	-
5320.000	Average	72.67	19.81	92.48	-	-
5446.500	Peak	36.43	20.07	56.50	74.00	-17.50
5446.500	Average	29.05	20.07	49.12	54.00	-4.88

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_106/54	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

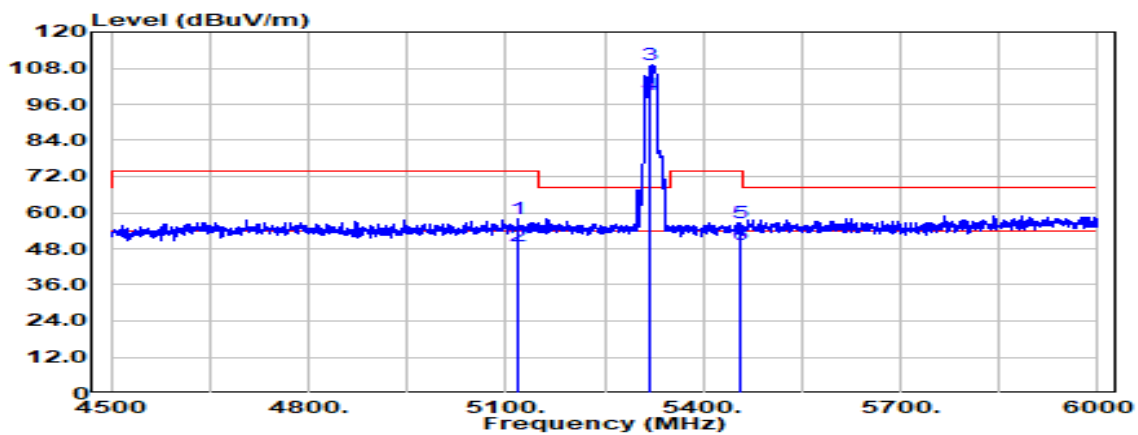

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5119.500	Peak	38.94	18.90	57.84	74.00	-16.16
5119.500	Average	30.07	18.90	48.97	54.00	-5.03
5320.000	Peak	89.31	19.81	109.12	-	-
5320.000	Average	79.16	19.81	98.98	-	-
5456.250	Peak	36.71	20.06	56.77	74.00	-17.23
5456.250	Average	29.12	20.06	49.19	54.00	-4.81

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_106/54	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

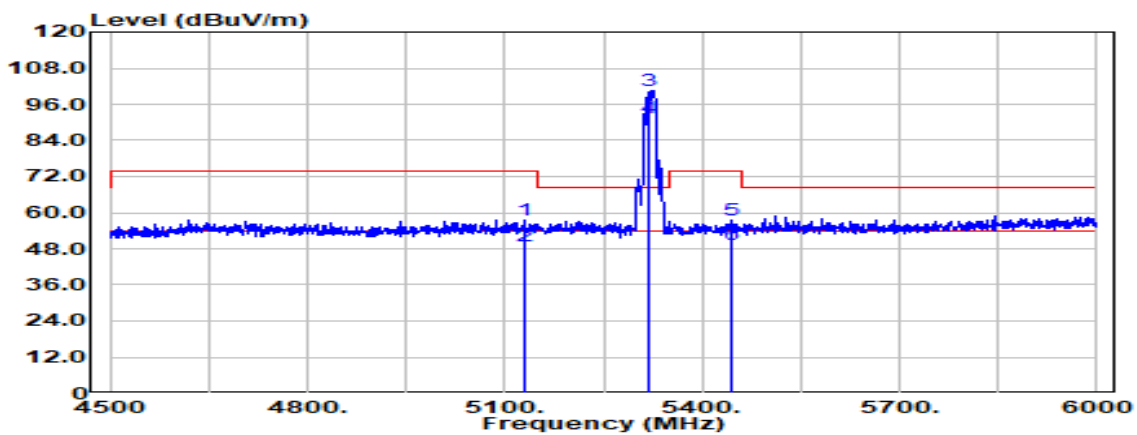

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5130.000	Peak	38.51	18.94	57.44	74.00	-16.56
5130.000	Average	30.13	18.94	49.06	54.00	-4.94
5320.000	Peak	80.60	19.81	100.42	-	-
5320.000	Average	71.53	19.81	91.34	-	-
5444.250	Peak	37.39	20.07	57.46	74.00	-16.54
5444.250	Average	29.12	20.07	49.19	54.00	-4.81

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

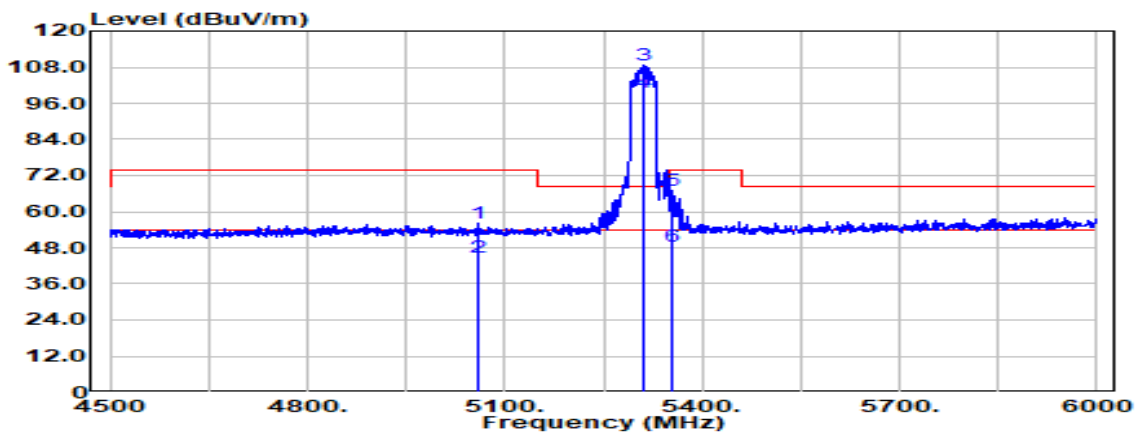

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5060.250	Peak	37.13	18.89	56.02	74.00	-17.98
5060.250	Average	25.73	18.89	44.62	54.00	-9.38
5310.000	Peak	88.95	19.81	108.76	-	-
5310.000	Average	79.66	19.81	99.47	-	-
5352.750	Peak	47.22	19.83	67.06	74.00	-6.94
5352.750	Average	28.44	19.83	48.27	54.00	-5.73




Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

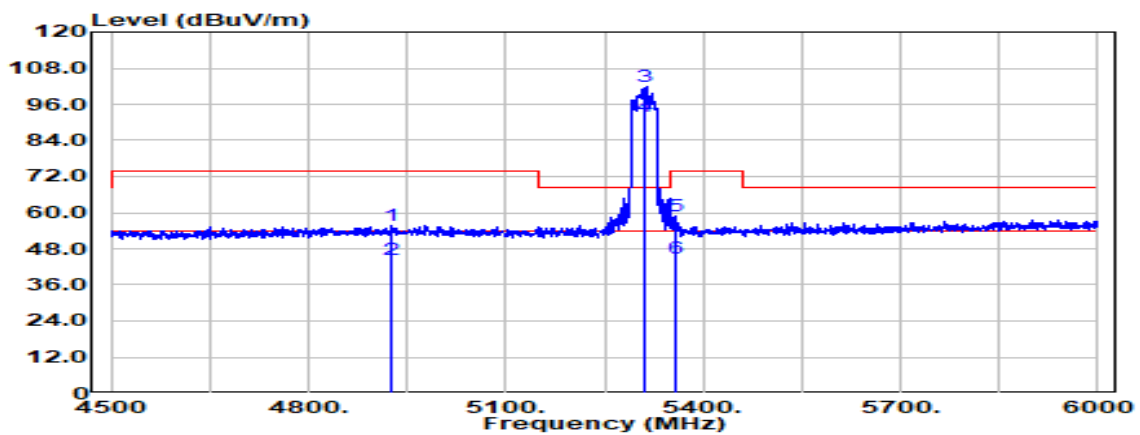

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4926.000	Peak	37.28	18.63	55.91	74.00	-18.09
4926.000	Average	25.90	18.63	44.53	54.00	-9.47
5310.000	Peak	81.97	19.81	101.78	-	-
5310.000	Average	72.24	19.81	92.05	-	-
5358.750	Peak	38.79	19.86	58.65	74.00	-15.35
5358.750	Average	24.98	19.86	44.84	54.00	-9.16

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5310 MHz 242/62	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

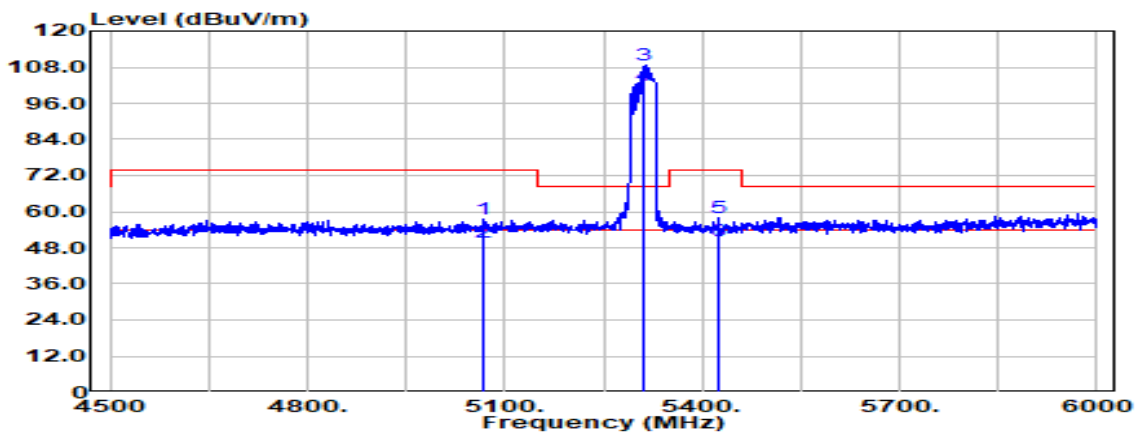

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5068.500	Peak	38.47	18.88	57.35	74.00	-16.65
5068.500	Average	31.14	18.88	50.02	54.00	-3.98
5310.000	Peak	88.69	19.81	108.51	-	-
5310.000	Average	82.16	19.81	101.97	-	-
5424.000	Peak	37.73	20.06	57.80	74.00	-16.20
5424.000	Average	30.25	20.06	50.31	54.00	-3.69

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5310 MHz 242/62	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

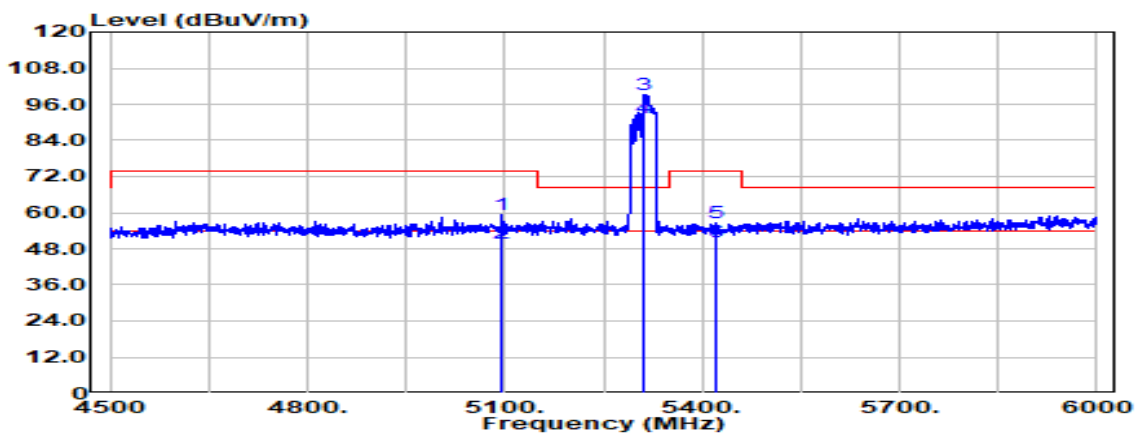

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5095.500	Peak	40.66	18.85	59.50	74.00	-14.50
5095.500	Average	31.06	18.85	49.90	54.00	-4.10
5310.000	Peak	79.36	19.81	99.17	-	-
5310.000	Average	71.78	19.81	91.59	-	-
5422.500	Peak	36.58	20.06	56.64	74.00	-17.36
5422.500	Average	30.05	20.06	50.11	54.00	-3.89


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	20.9(°C) / 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

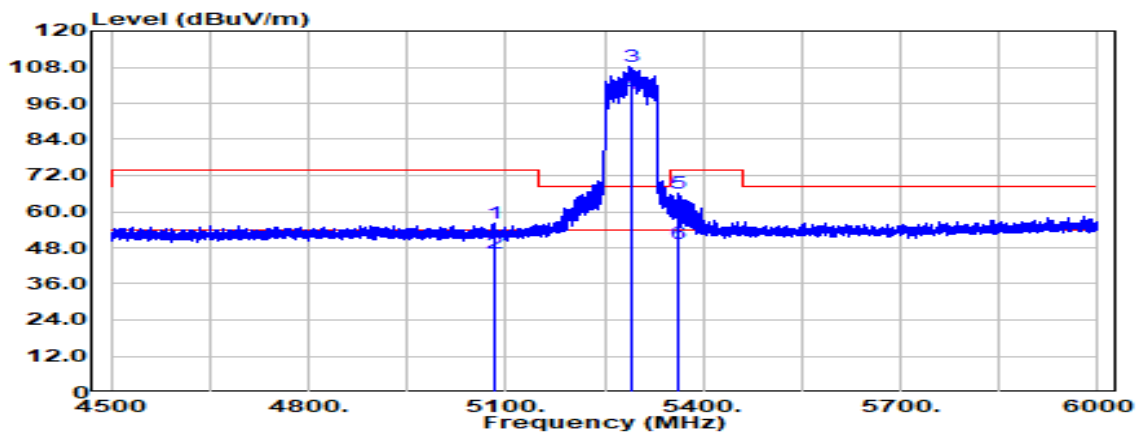

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5083.313	Peak	37.19	18.86	56.05	74.00	-17.95
5083.313	Average	27.11	18.86	45.97	54.00	-8.03
5290.000	Peak	88.49	19.78	108.27	-	-
5290.000	Average	79.57	19.78	99.35	-	-
5362.313	Peak	46.28	19.88	66.16	74.00	-7.84
5362.313	Average	29.59	19.88	49.47	54.00	-4.53


Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

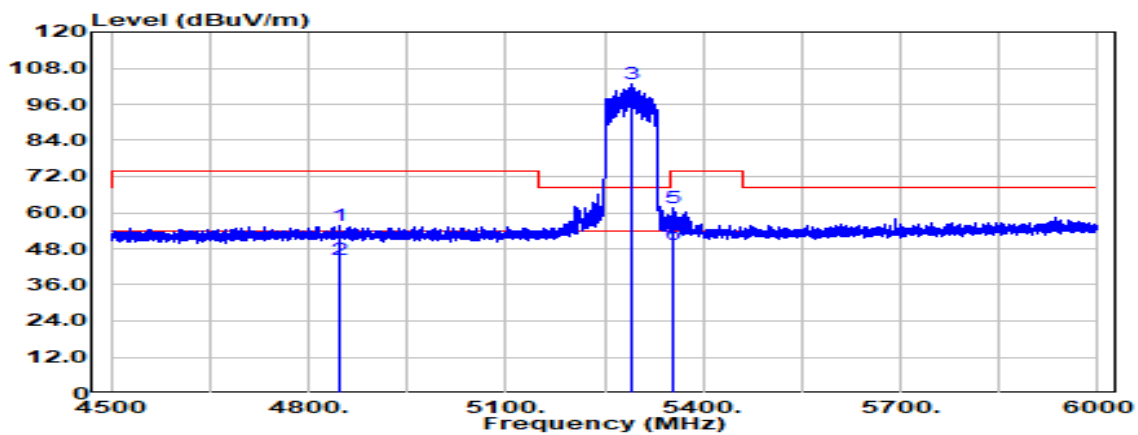

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4845.938	Peak	37.28	18.60	55.88	74.00	-18.12
4845.938	Average	25.88	18.60	44.48	54.00	-9.52
5290.000	Peak	83.02	19.78	102.80	-	-
5290.000	Average	72.95	19.78	92.73	-	-
5354.063	Peak	41.87	19.84	61.71	74.00	-12.29
5354.063	Average	29.44	19.84	49.28	54.00	-4.72

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz 484/66	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

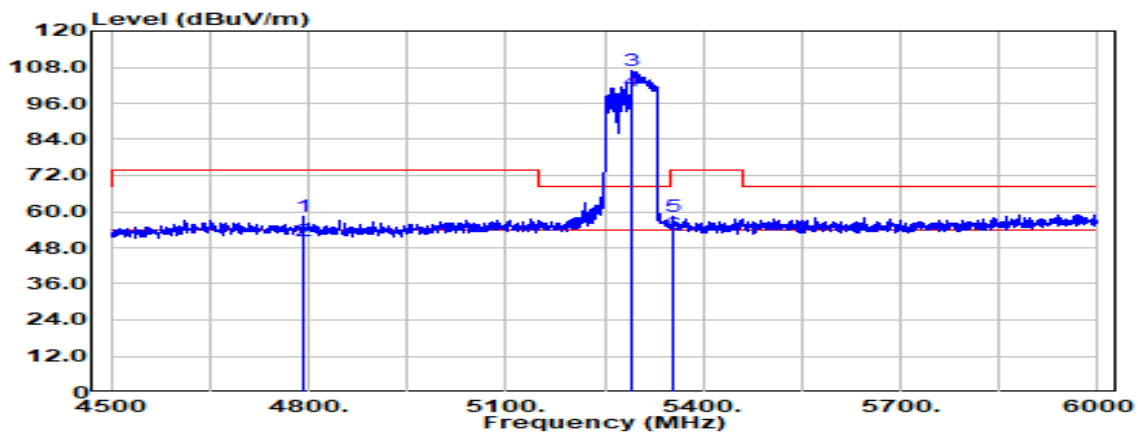

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4792.500	Peak	39.79	18.46	58.24	74.00	-15.76
4792.500	Average	31.65	18.46	50.10	54.00	-3.90
5290.000	Peak	87.19	19.78	106.97	-	-
5290.000	Average	80.39	19.78	100.17	-	-
5354.250	Peak	38.75	19.84	58.59	74.00	-15.41
5354.250	Average	32.62	19.84	52.46	54.00	-1.54

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz 484/66	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4714.500	Peak	39.17	18.46	57.64	74.00	-16.36
4714.500	Average	31.73	18.46	50.19	54.00	-3.81
5290.000	Peak	80.08	19.78	99.86	-	-
5290.000	Average	72.41	19.78	92.19	-	-
5445.000	Peak	39.72	20.07	59.79	74.00	-14.21
5445.000	Average	29.96	20.07	50.03	54.00	-3.97

Report No.: TMWK2201000111KR

**Test Data for UNII-2c**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

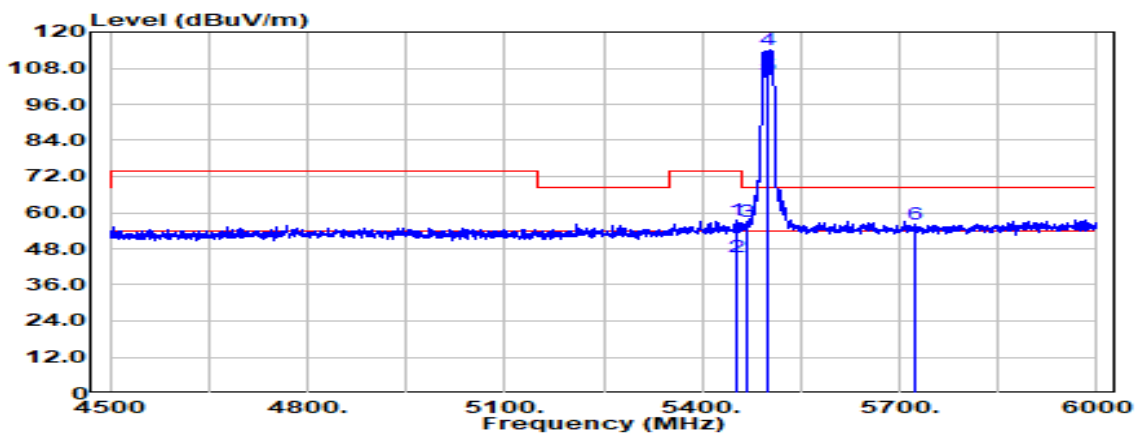


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5451.750	Peak	37.33	20.07	57.39	74.00	-16.61
5451.750	Average	25.18	20.07	45.25	54.00	-8.75
5468.250	Peak	36.90	20.05	56.95	68.20	-11.25
5500.000	Peak	94.16	20.02	114.18	-	-
5500.000	Average	85.49	20.02	105.51	-	-
5725.000	Peak	35.64	20.32	55.96	68.20	-12.24




Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

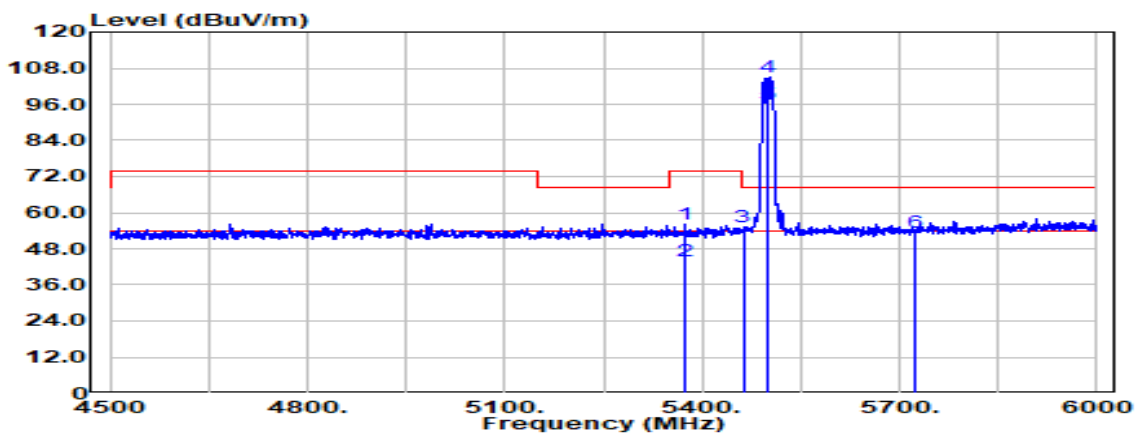

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5373.000	Peak	36.03	19.93	55.97	74.00	-18.03
5373.000	Average	24.02	19.93	43.95	54.00	-10.05
5462.250	Peak	35.39	20.06	55.45	68.20	-12.75
5500.000	Peak	85.03	20.02	105.05	-	-
5500.000	Average	76.11	20.02	96.13	-	-
5725.000	Peak	33.22	20.32	53.54	68.20	-14.66


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

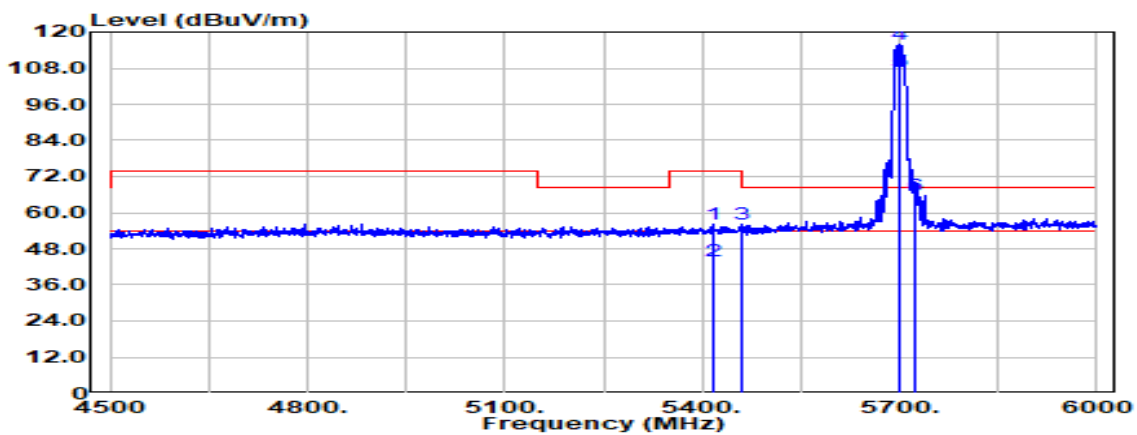

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5416.500	Peak	36.24	20.06	56.30	74.00	-17.70
5416.500	Average	23.95	20.06	44.02	54.00	-9.98
5461.500	Peak	36.21	20.06	56.27	68.20	-11.93
5700.000	Peak	95.76	20.16	115.92	-	-
5700.000	Average	86.92	20.16	107.08	-	-
5725.000	Peak	45.33	20.32	65.65	68.20	-2.55


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

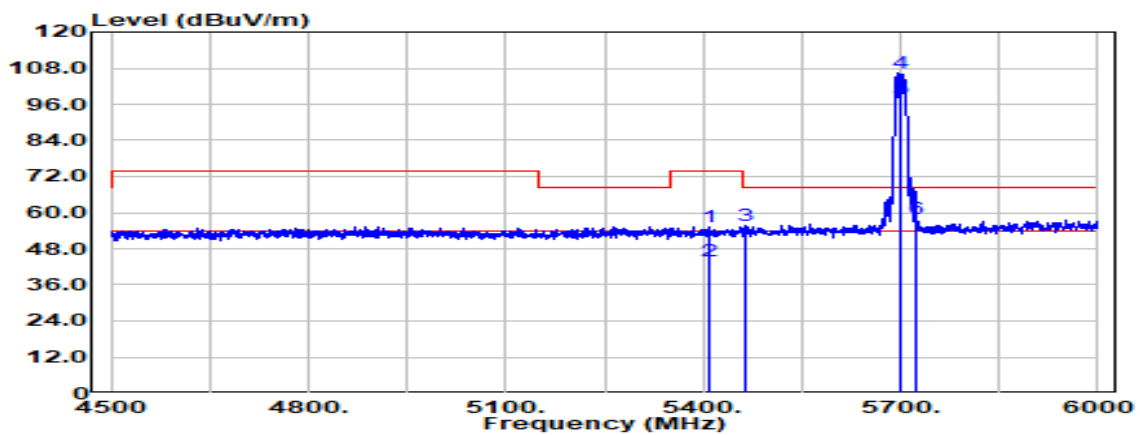

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5409.750	Peak	35.35	20.06	55.41	74.00	-18.59
5409.750	Average	23.72	20.06	43.78	54.00	-10.22
5464.500	Peak	35.59	20.06	55.65	68.20	-12.55
5700.000	Peak	86.16	20.16	106.32	-	-
5700.000	Average	77.85	20.16	98.01	-	-
5725.000	Peak	37.74	20.32	58.06	68.20	-10.14


Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

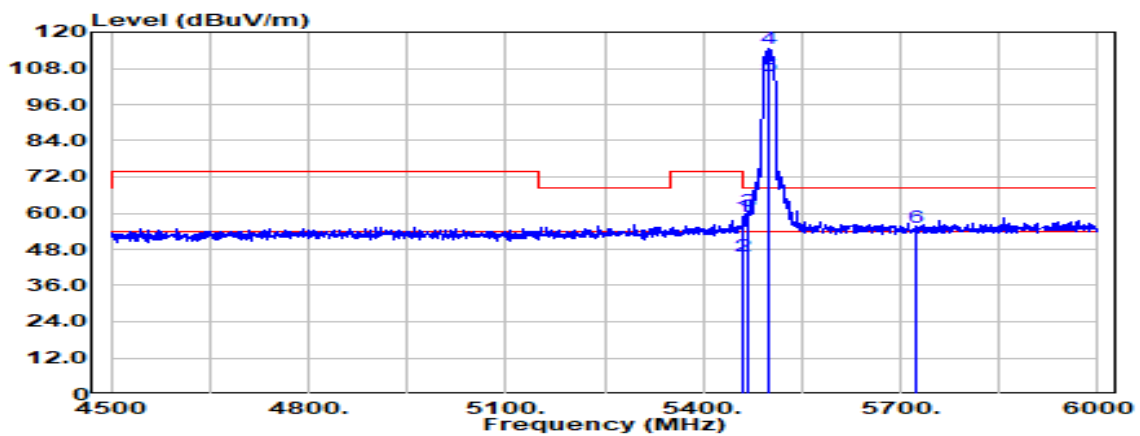

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5459.250	Peak	38.72	20.06	58.78	74.00	-15.22
5459.250	Average	25.71	20.06	45.77	54.00	-8.23
5466.750	Peak	40.59	20.05	60.64	68.20	-7.56
5500.000	Peak	94.32	20.02	114.34	-	-
5500.000	Average	85.55	20.02	105.57	-	-
5725.000	Peak	35.04	20.32	55.36	68.20	-12.84

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

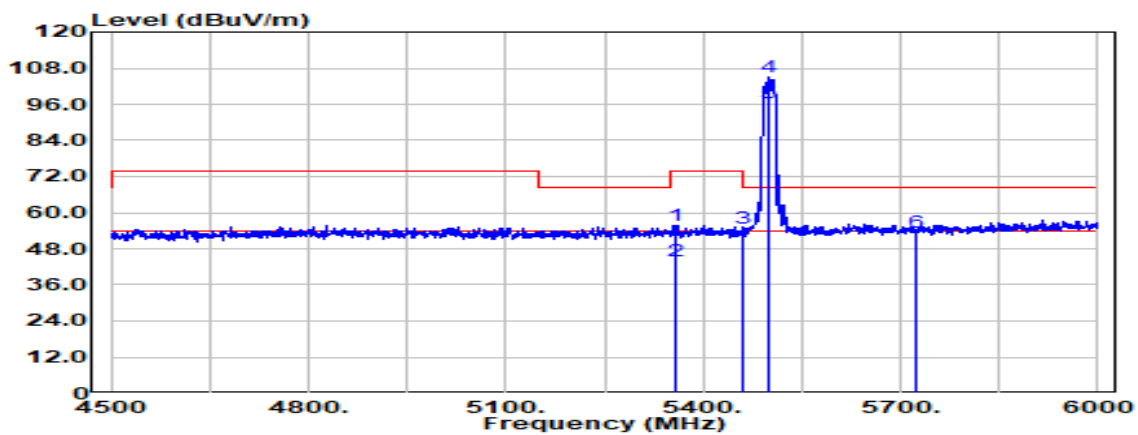

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5359.500	Peak	35.81	19.87	55.68	74.00	-18.32
5359.500	Average	24.09	19.87	43.95	54.00	-10.05
5460.750	Peak	34.93	20.06	54.99	68.20	-13.21
5500.000	Peak	84.82	20.02	104.84	-	-
5500.000	Average	76.36	20.02	96.38	-	-
5725.000	Peak	33.12	20.32	53.44	68.20	-14.76


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

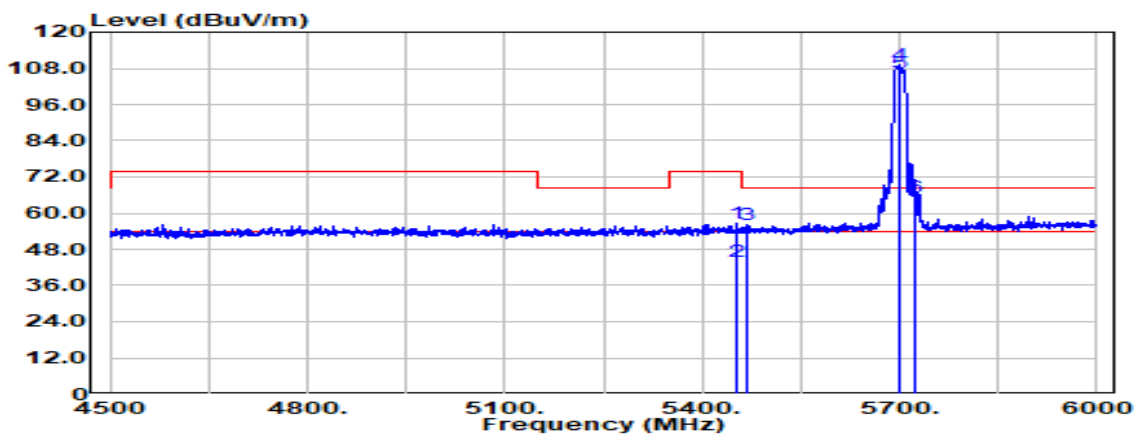

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.750	Peak	36.35	20.07	56.41	74.00	-17.59
5451.750	Average	24.07	20.07	44.14	54.00	-9.86
5469.000	Peak	36.09	20.05	56.14	68.20	-12.06
5700.000	Peak	89.08	20.16	109.24	-	-
5700.000	Average	86.41	20.16	106.57	-	-
5725.000	Peak	45.03	20.32	65.35	68.20	-2.85


Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

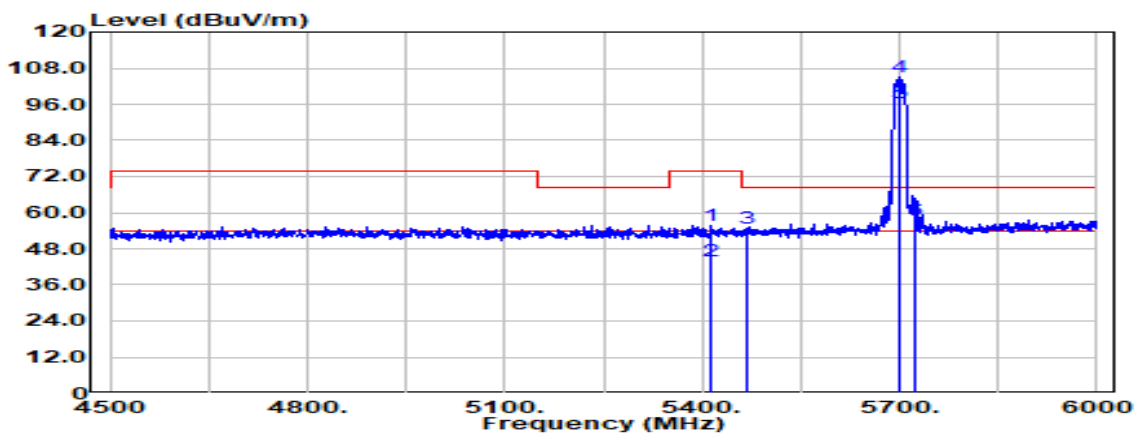

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5415.000	Peak	35.84	20.06	55.90	74.00	-18.10
5415.000	Average	23.70	20.06	43.77	54.00	-10.23
5469.000	Peak	34.57	20.05	54.62	68.20	-13.58
5700.000	Peak	84.74	20.16	104.90	-	-
5700.000	Average	76.26	20.16	96.42	-	-
5725.000	Peak	37.06	20.32	57.38	68.20	-10.82

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

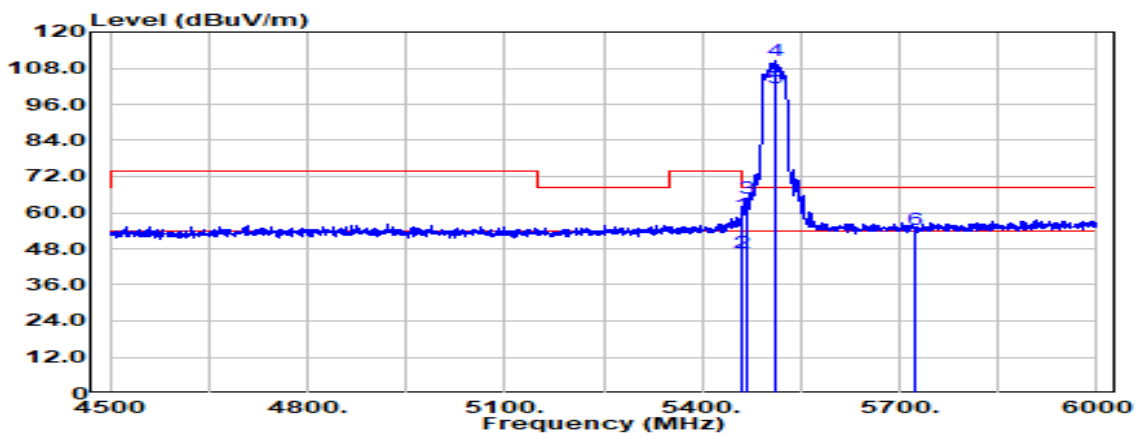

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5458.500	Peak	39.34	20.06	59.40	74.00	-14.60
5458.500	Average	26.76	20.06	46.83	54.00	-7.17
5468.250	Peak	44.49	20.05	64.55	68.20	-3.65
5510.000	Peak	90.57	20.02	110.59	-	-
5510.000	Average	81.49	20.02	101.51	-	-
5725.000	Peak	34.09	20.32	54.41	68.20	-13.79




Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

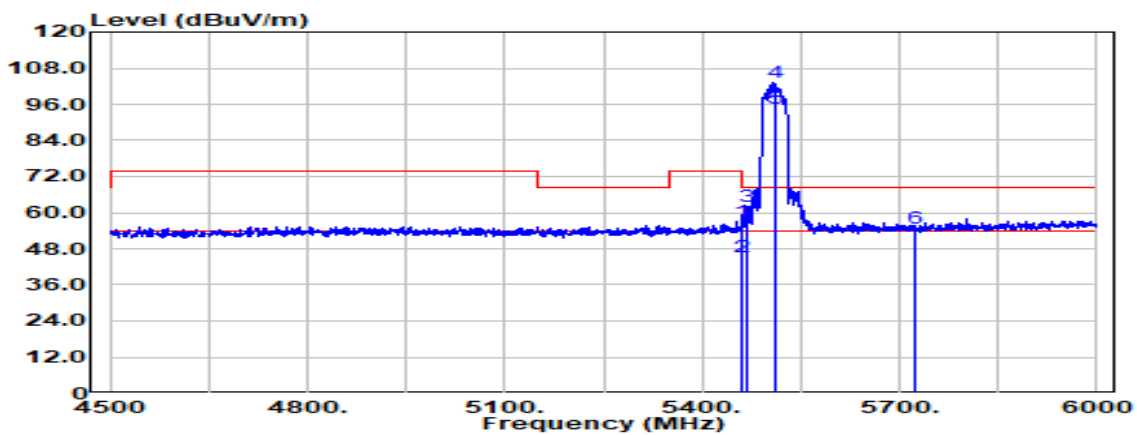

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.000	Peak	36.82	20.06	56.88	68.20	-11.32
5460.000	Average	25.17	20.06	45.23	54.00	-8.77
5469.750	Peak	42.07	20.05	62.12	68.20	-6.08
5510.000	Peak	83.10	20.02	103.12	-	-
5510.000	Average	74.73	20.02	94.75	-	-
5725.000	Peak	34.30	20.32	54.62	68.20	-13.58


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

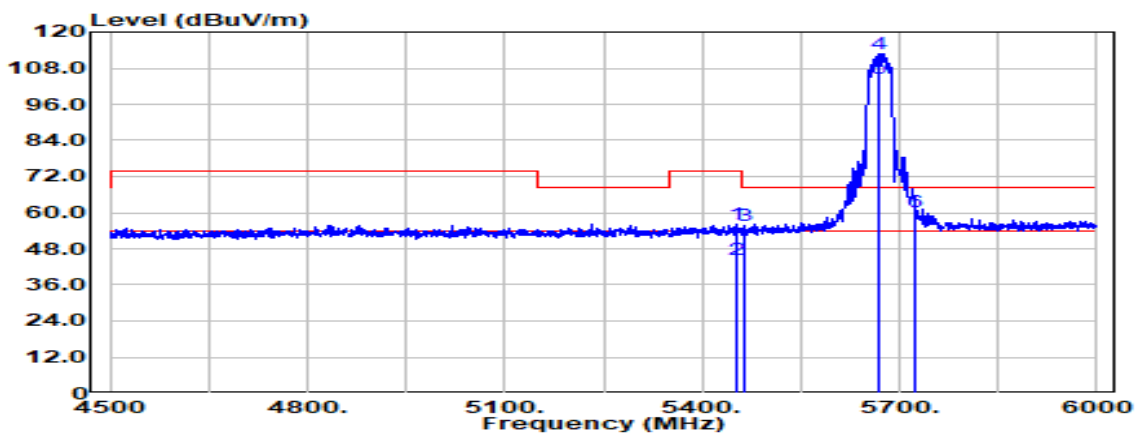

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
5451.000	Peak	35.93	20.07	56.00	74.00	-18.00
5451.000	Average	24.45	20.07	44.52	54.00	-9.48
5463.750	Peak	35.78	20.06	55.84	68.20	-12.36
5670.000	Peak	92.82	20.15	112.97	-	-
5670.000	Average	84.61	20.15	104.77	-	-
5725.000	Peak	40.12	20.32	60.44	68.20	-7.76


Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

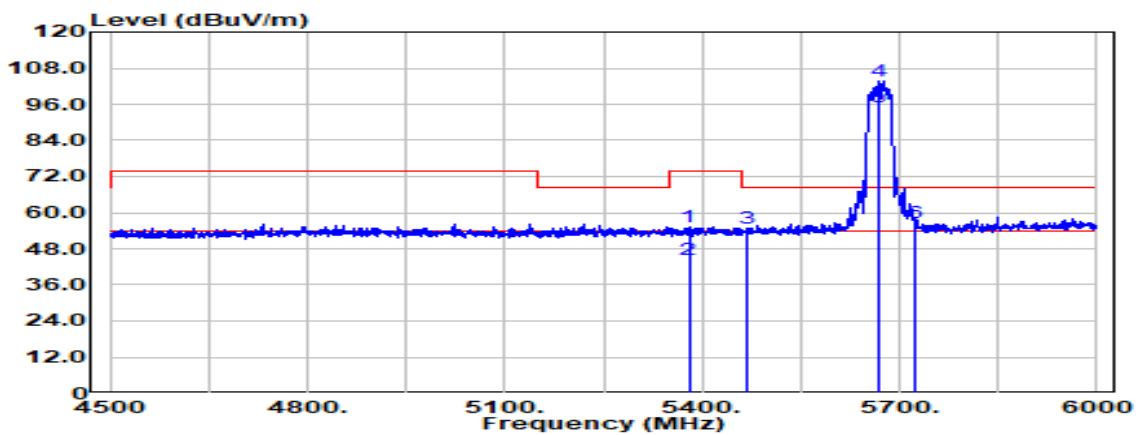

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5379.750	Peak	35.43	19.96	55.39	74.00	-18.61
5379.750	Average	24.31	19.96	44.27	54.00	-9.73
5467.500	Peak	34.74	20.05	54.80	68.20	-13.40
5670.000	Peak	83.48	20.15	103.63	-	-
5670.000	Average	75.15	20.15	95.31	-	-
5725.000	Peak	36.13	20.32	56.45	68.20	-11.75


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

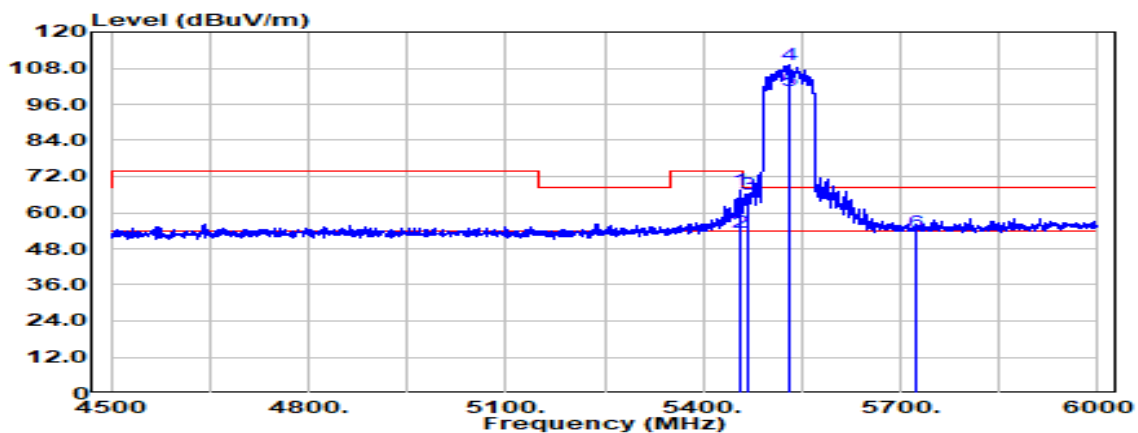

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.250	Peak	47.43	20.06	67.49	74.00	-6.51
5456.250	Average	33.34	20.06	53.40	54.00	-0.60
5468.250	Peak	46.01	20.05	66.06	68.20	-2.14
5530.000	Peak	88.95	20.03	108.97	-	-
5530.000	Average	80.58	20.03	100.61	-	-
5725.000	Peak	33.29	20.32	53.61	68.20	-14.59


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

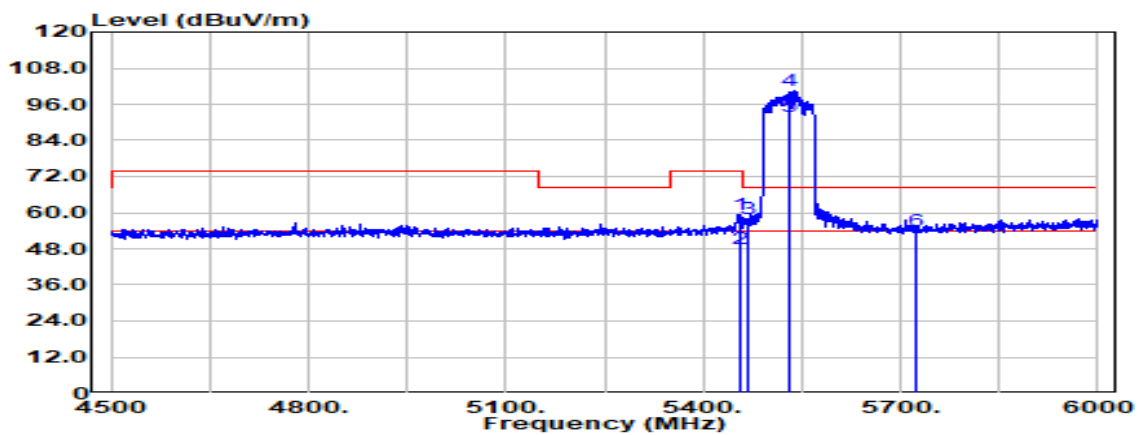

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.250	Peak	39.45	20.06	59.51	74.00	-14.49
5456.250	Average	28.12	20.06	48.18	54.00	-5.82
5468.250	Peak	38.10	20.05	58.16	68.20	-10.04
5530.000	Peak	80.30	20.03	100.32	-	-
5530.000	Average	71.86	20.03	91.89	-	-
5725.000	Peak	33.39	20.32	53.71	68.20	-14.49


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

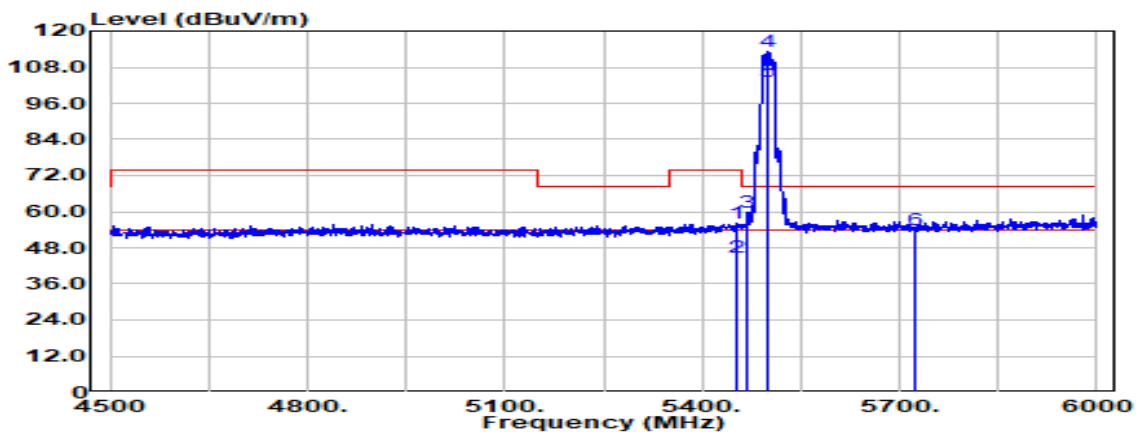


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.000	Peak	35.95	20.07	56.02	74.00	-17.98
5454.000	Average	24.98	20.07	45.05	54.00	-8.95
5469.750	Peak	39.60	20.05	59.65	68.20	-8.55
5500.000	Peak	92.99	20.02	113.01	-	-
5500.000	Average	83.29	20.02	103.31	-	-
5725.000	Peak	33.55	20.32	53.87	68.20	-14.33

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

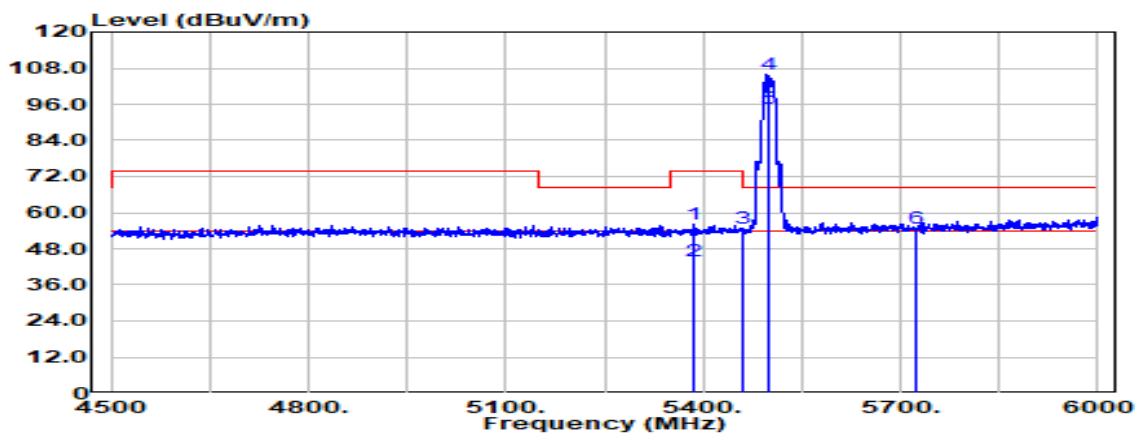

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5384.250	Peak	36.27	19.98	56.25	74.00	-17.75
5384.250	Average	23.93	19.98	43.91	54.00	-10.09
5461.500	Peak	34.71	20.06	54.77	68.20	-13.43
5500.000	Peak	85.75	20.02	105.77	-	-
5500.000	Average	74.74	20.02	94.76	-	-
5725.000	Peak	34.66	20.32	54.98	68.20	-13.22

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_26/0	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

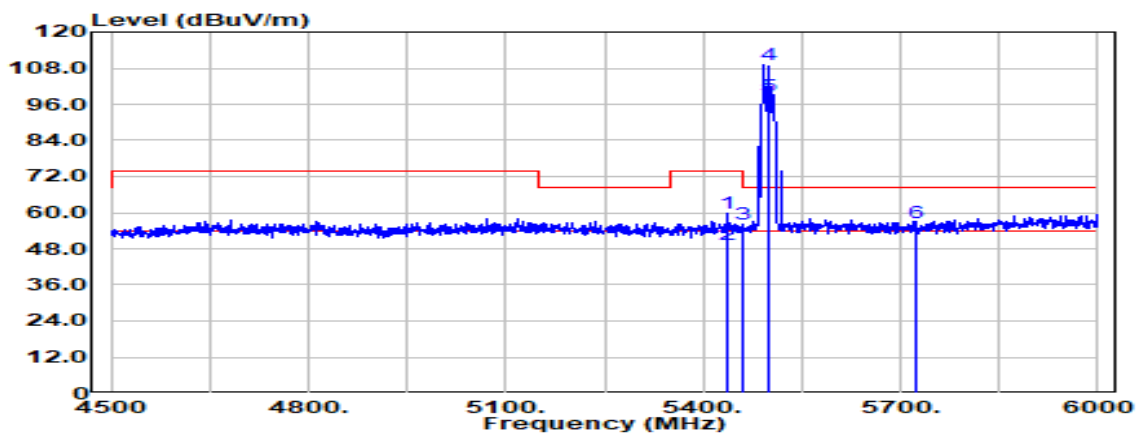


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5438.250	Peak	39.84	20.07	59.91	74.00	-14.09
5438.250	Average	29.07	20.07	49.14	54.00	-4.86
5461.500	Peak	35.98	20.06	56.04	68.20	-12.16
5500.000	Peak	89.07	20.02	109.09	-	-
5500.000	Average	78.57	20.02	98.59	-	-
5725.000	Peak	36.23	20.32	56.55	68.20	-11.65



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_26/0	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

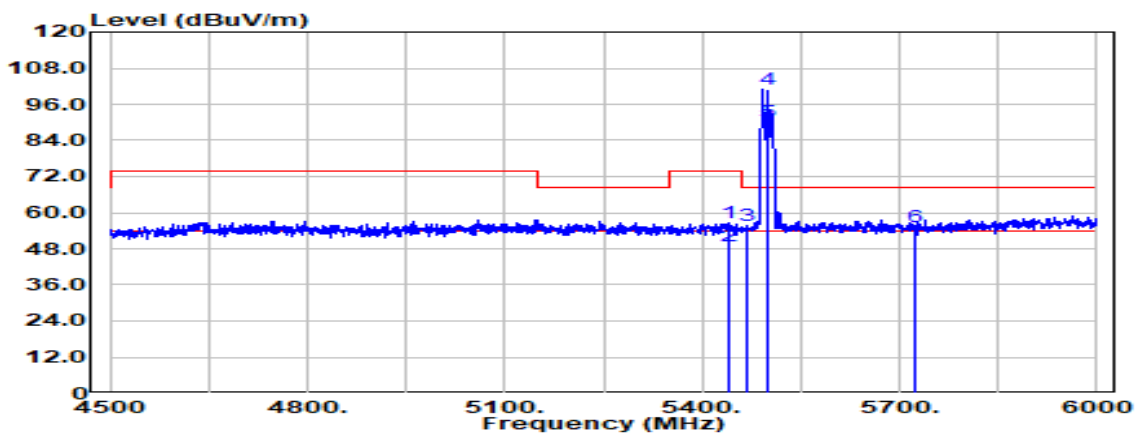

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5441.250	Peak	36.41	20.07	56.48	74.00	-17.52
5441.250	Average	29.04	20.07	49.11	54.00	-4.89
5469.750	Peak	35.82	20.05	55.87	68.20	-12.33
5500.000	Peak	81.11	20.02	101.13	-	-
5500.000	Average	70.32	20.02	90.34	-	-
5725.000	Peak	35.06	20.32	55.38	68.20	-12.82


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_52/37	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

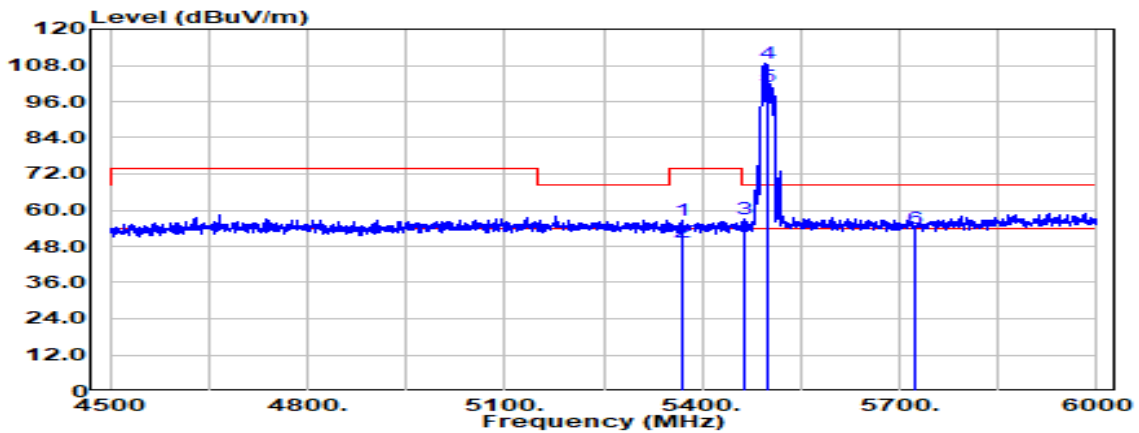

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5368.500	Peak	36.56	19.91	56.47	74.00	-17.53
5368.500	Average	29.24	19.91	49.15	54.00	-4.85
5463.750	Peak	37.12	20.06	57.18	68.20	-11.02
5500.000	Peak	88.47	20.02	108.49	-	-
5500.000	Average	81.10	20.02	101.12	-	-
5725.000	Peak	33.63	20.32	53.95	68.20	-14.25


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_52/37	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

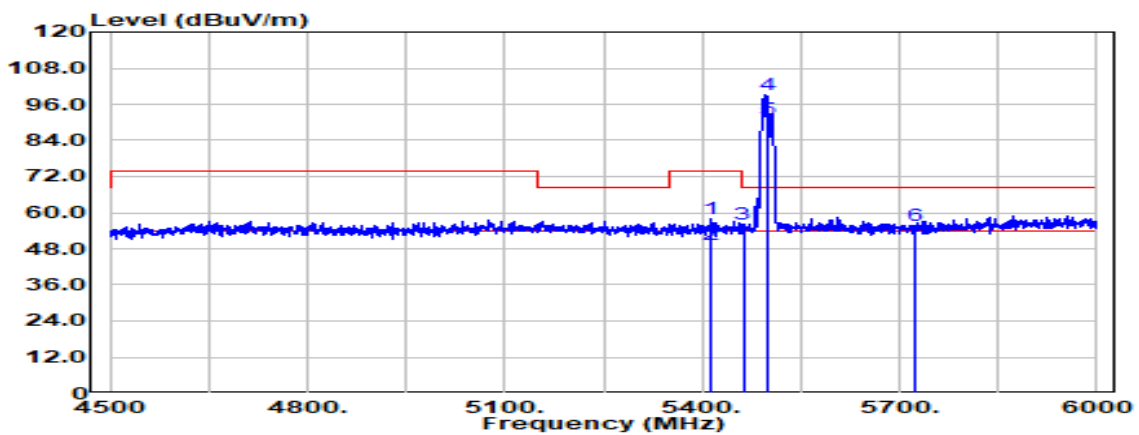

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5414.250	Peak	37.96	20.06	58.02	74.00	-15.98
5414.250	Average	29.15	20.06	49.21	54.00	-4.79
5462.250	Peak	36.17	20.06	56.23	68.20	-11.97
5500.000	Peak	78.97	20.02	98.99	-	-
5500.000	Average	70.82	20.02	90.84	-	-
5725.000	Peak	35.33	20.32	55.65	68.20	-12.55


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_106/53	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

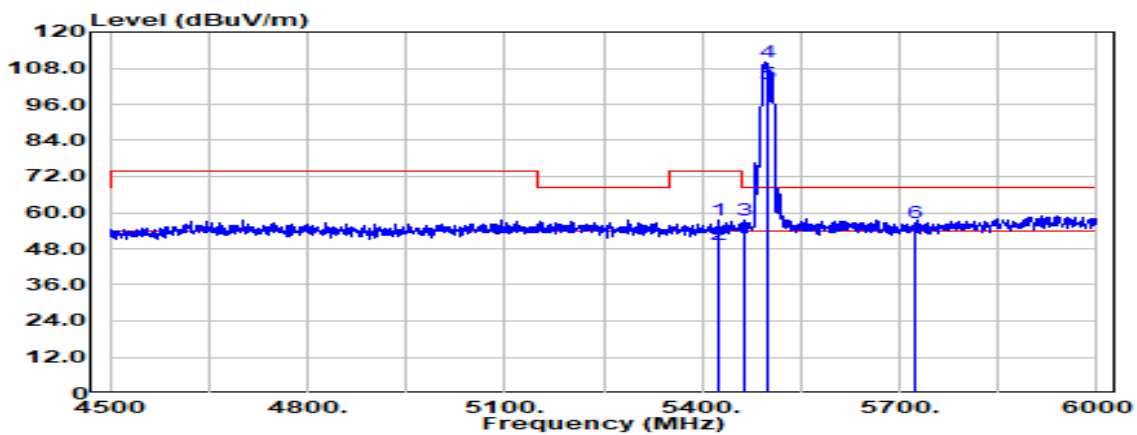

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5426.250	Peak	37.47	20.07	57.54	74.00	-16.46
5426.250	Average	29.17	20.07	49.24	54.00	-4.76
5466.000	Peak	37.41	20.05	57.47	68.20	-10.73
5500.000	Peak	90.19	20.02	110.21	-	-
5500.000	Average	82.79	20.02	102.81	-	-
5725.000	Peak	36.48	20.32	56.80	68.20	-11.40


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_106/53	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

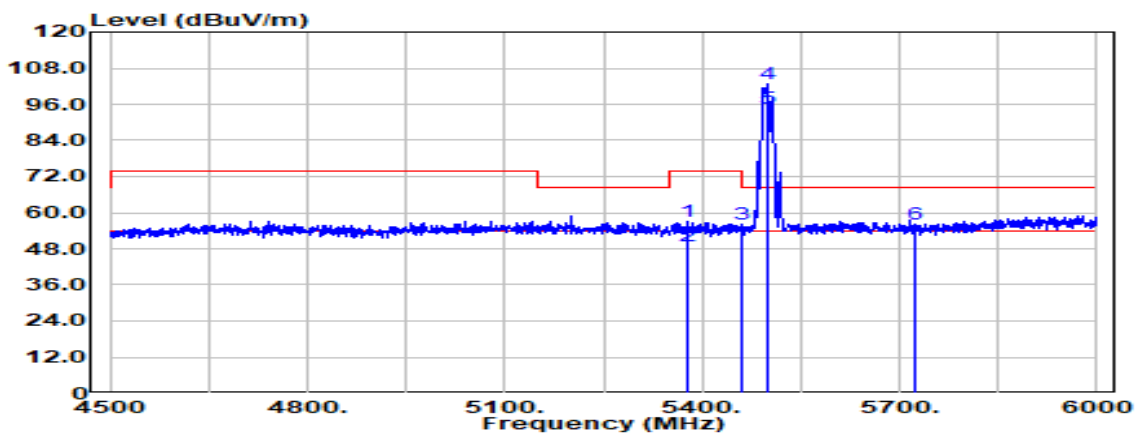

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5379.000	Peak	37.01	19.96	56.97	74.00	-17.03
5379.000	Average	29.14	19.96	49.10	54.00	-4.90
5461.500	Peak	36.04	20.06	56.10	68.20	-12.10
5500.000	Peak	82.67	20.02	102.69	-	-
5500.000	Average	74.81	20.02	94.83	-	-
5725.000	Peak	35.89	20.32	56.21	68.20	-11.99

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

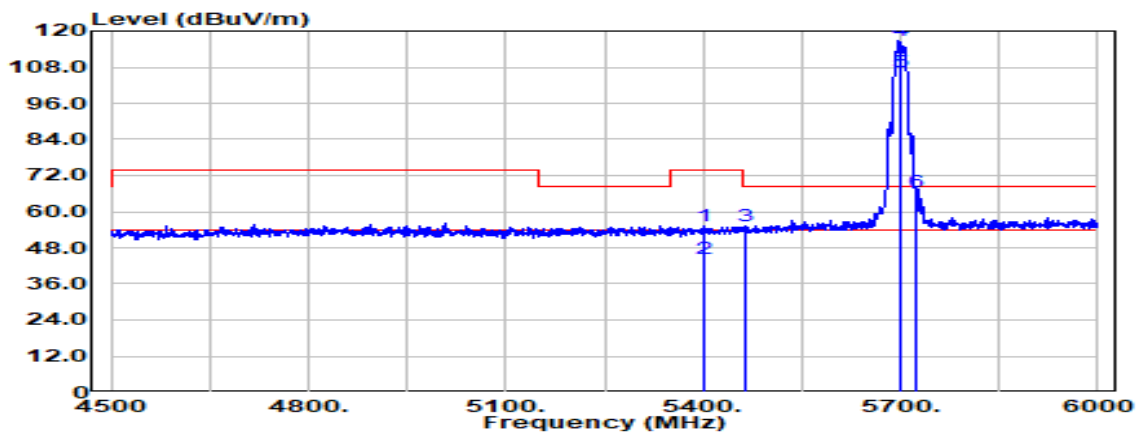

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5403.000	Peak	35.36	20.06	55.42	74.00	-18.58
5403.000	Average	24.14	20.06	44.20	54.00	-9.80
5465.250	Peak	35.09	20.05	55.15	68.20	-13.05
5700.000	Peak	96.88	20.16	117.04	-	-
5700.000	Average	86.18	20.16	106.34	-	-
5725.000	Peak	46.22	20.32	66.54	68.20	-1.66

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

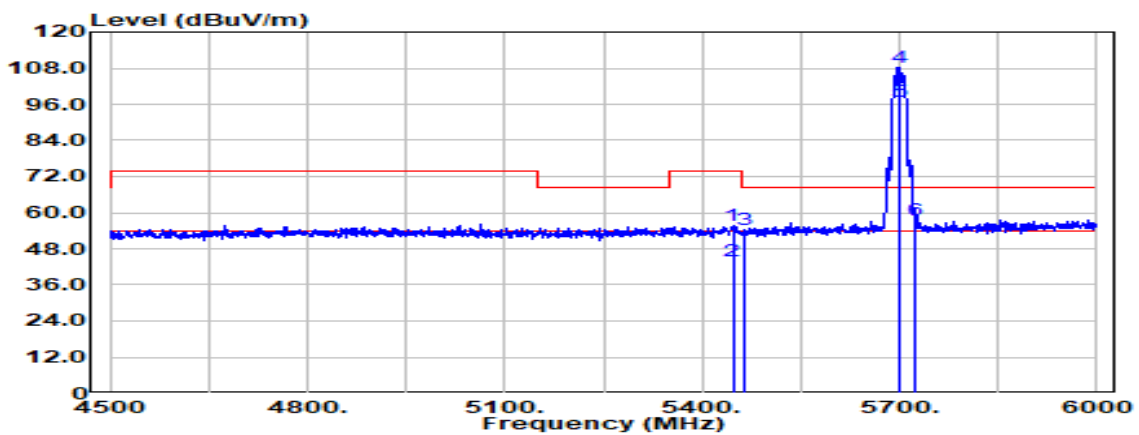

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5446.500	Peak	35.73	20.07	55.80	74.00	-18.20
5446.500	Average	23.78	20.07	43.85	54.00	-10.15
5465.250	Peak	34.13	20.05	54.19	68.20	-14.01
5700.000	Peak	87.88	20.16	108.04	-	-
5700.000	Average	76.76	20.16	96.92	-	-
5725.000	Peak	37.12	20.32	57.44	68.20	-10.76

Test Mode	IEEE 802.11ax HE20 / 5700 MHz_26/8	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5439.750	Peak	36.90	20.07	56.97	74.00	-17.03
5439.750	Average	29.14	20.07	49.21	54.00	-4.79
5466.000	Peak	36.74	20.05	56.79	68.20	-11.41
5700.000	Peak	91.38	20.16	111.54	-	-
5700.000	Average	79.72	20.16	99.88	-	-
5725.000	Peak	34.43	20.32	54.75	68.20	-13.45



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_26/8	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

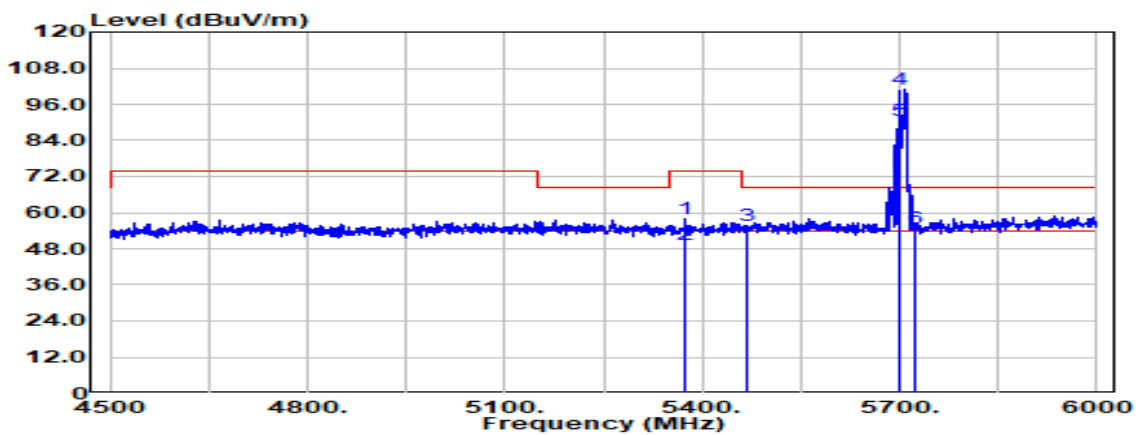

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5375.250	Peak	38.08	19.94	58.02	74.00	-15.98
5375.250	Average	29.23	19.94	49.17	54.00	-4.83
5469.000	Peak	35.66	20.05	55.72	68.20	-12.48
5700.000	Peak	80.92	20.16	101.08	-	-
5700.000	Average	70.59	20.16	90.75	-	-
5725.000	Peak	34.53	20.32	54.85	68.20	-13.35


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

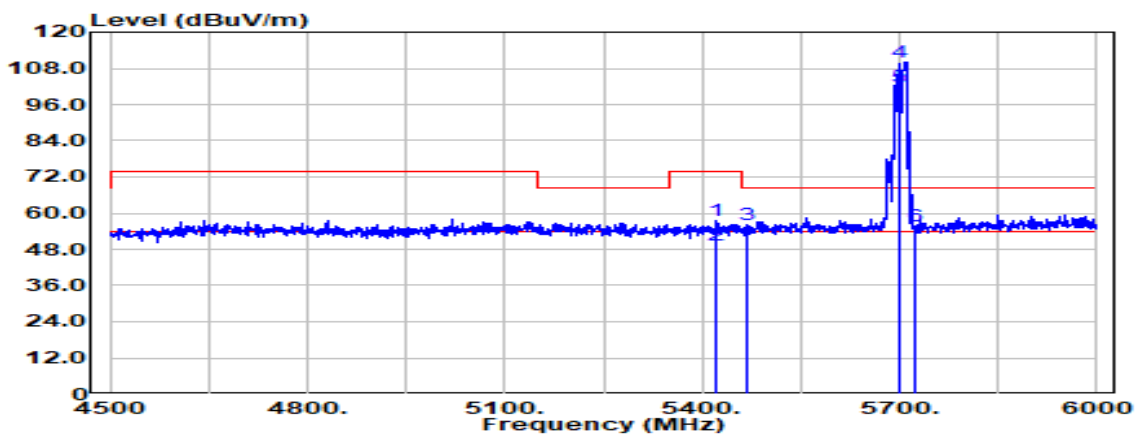

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5422.500	Peak	37.50	20.06	57.56	74.00	-16.44
5422.500	Average	29.09	20.06	49.15	54.00	-4.85
5469.750	Peak	36.07	20.05	56.12	68.20	-12.08
5700.000	Peak	89.97	20.16	110.13	-	-
5700.000	Average	81.78	20.16	101.94	-	-
5725.000	Peak	35.31	20.32	55.63	68.20	-12.57


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_52/40	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

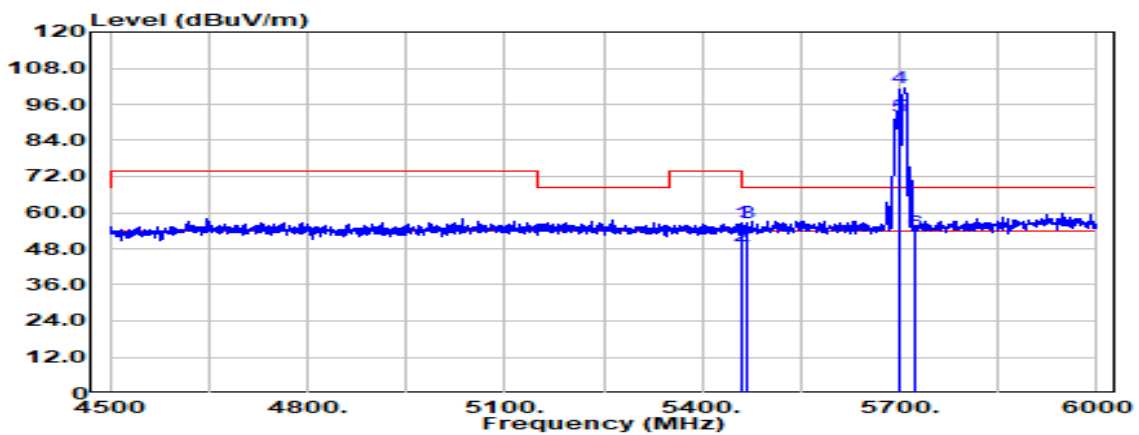

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.500	Peak	36.40	20.06	56.46	74.00	-17.54
5458.500	Average	28.98	20.06	49.04	54.00	-4.96
5468.250	Peak	36.46	20.05	56.51	68.20	-11.69
5700.000	Peak	81.16	20.16	101.32	-	-
5700.000	Average	71.99	20.16	92.15	-	-
5725.000	Peak	33.28	20.32	53.60	68.20	-14.60

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_106/54	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

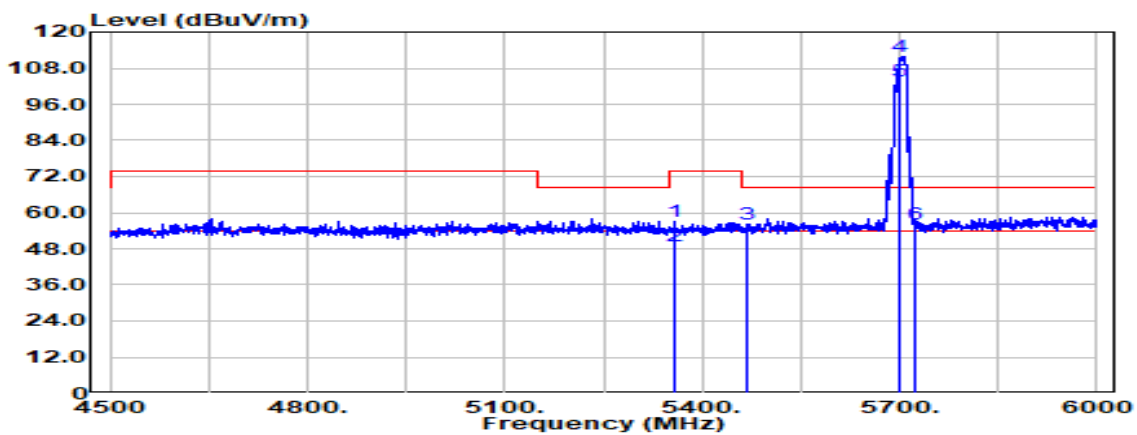

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5358.000	Peak	37.10	19.86	56.96	74.00	-17.04
5358.000	Average	29.22	19.86	49.08	54.00	-4.92
5469.750	Peak	36.09	20.05	56.14	68.20	-12.06
5700.000	Peak	91.79	20.16	111.95	-	-
5700.000	Average	83.32	20.16	103.48	-	-
5725.000	Peak	36.00	20.32	56.32	68.20	-11.88

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_106/54	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

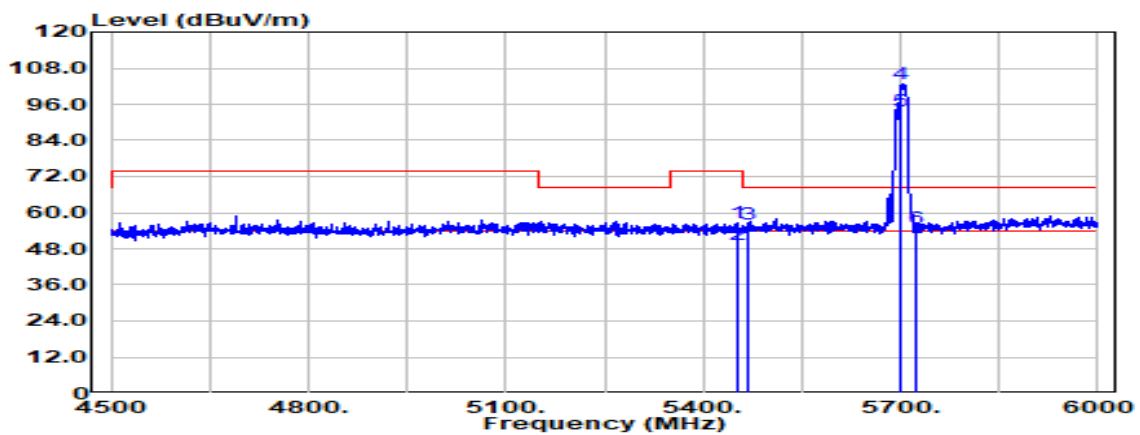

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.000	Peak	36.64	20.07	56.70	74.00	-17.30
5451.000	Average	29.13	20.07	49.20	54.00	-4.80
5469.750	Peak	36.19	20.05	56.24	68.20	-11.96
5700.000	Peak	82.55	20.16	102.71	-	-
5700.000	Average	73.67	20.16	93.83	-	-
5725.000	Peak	34.70	20.32	55.02	68.20	-13.18

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

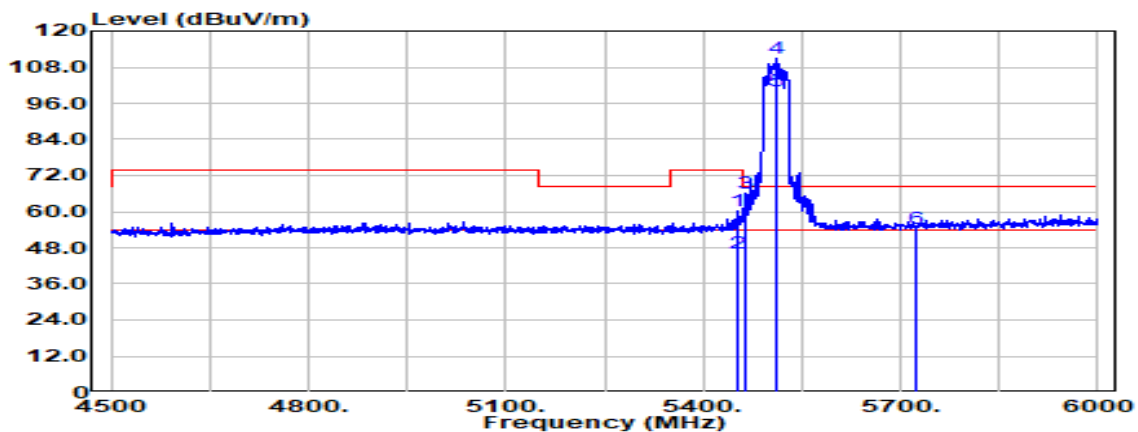

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5453.250	Peak	40.08	20.07	60.14	74.00	-13.86
5453.250	Average	25.90	20.07	45.97	54.00	-8.03
5465.250	Peak	46.17	20.05	66.23	68.20	-1.97
5510.000	Peak	90.88	20.02	110.90	-	-
5510.000	Average	80.12	20.02	100.14	-	-
5725.000	Peak	33.96	20.32	54.28	68.20	-13.92

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

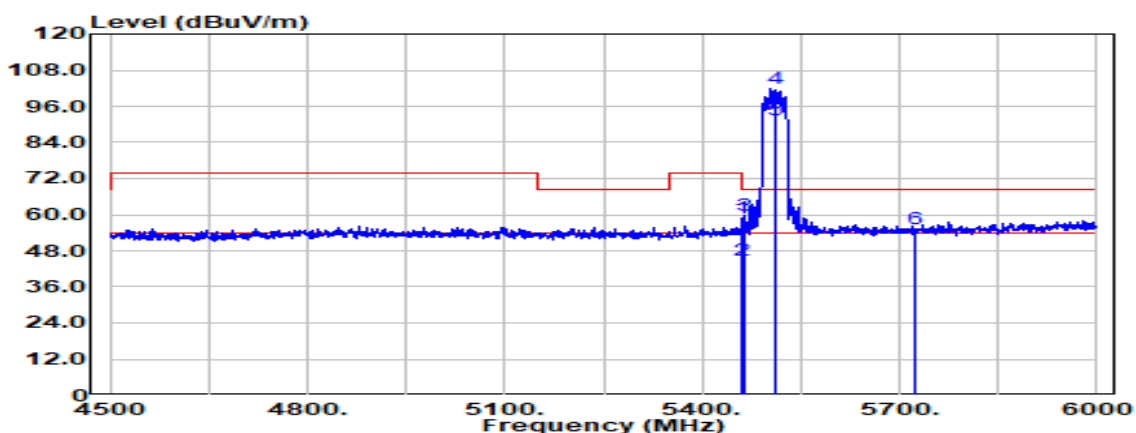

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.000	Peak	38.66	20.06	58.72	68.20	-9.48
5460.000	Average	24.89	20.06	44.95	54.00	-9.05
5465.250	Peak	39.89	20.05	59.94	68.20	-8.26
5510.000	Peak	82.06	20.02	102.08	-	-
5510.000	Average	71.37	20.02	91.40	-	-
5725.000	Peak	35.07	20.32	55.39	68.20	-12.81

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_242/61	Temp/Hum	23.6(°C) / 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

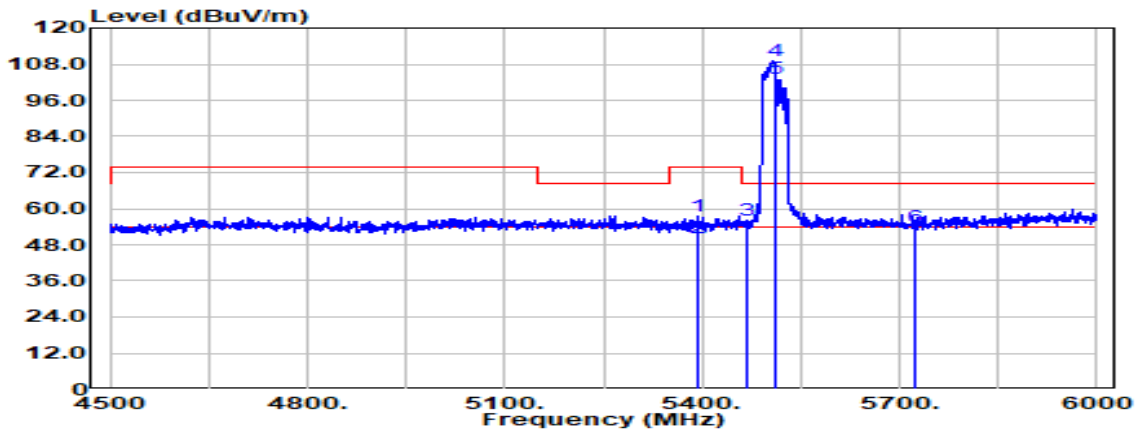


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (d $\mu$ V)	Factor (dB)	Actual FS (d $\mu$ V/m)	Limit @3m (d $\mu$ V/m)	Margin (dB)
5394.750	Peak	37.58	20.03	57.62	74.00	-16.38
5394.750	Average	30.39	20.03	50.43	54.00	-3.57
5469.000	Peak	36.20	20.05	56.26	68.20	-11.94
5510.000	Peak	89.20	20.02	109.22	-	-
5510.000	Average	83.43	20.02	103.45	-	-
5725.000	Peak	33.39	20.32	53.71	68.20	-14.49



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz 242/61	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

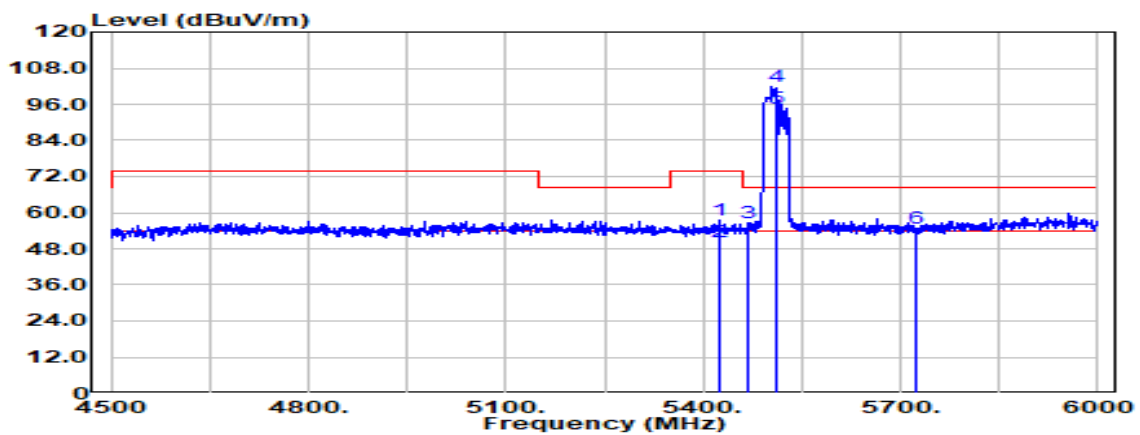

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5423.250	Peak	37.33	20.06	57.39	74.00	-16.61
5423.250	Average	30.10	20.06	50.16	54.00	-3.84
5469.000	Peak	36.70	20.05	56.75	68.20	-11.45
5510.000	Peak	82.07	20.02	102.09	-	-
5510.000	Average	74.77	20.02	94.80	-	-
5725.000	Peak	34.52	20.32	54.84	68.20	-13.36

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

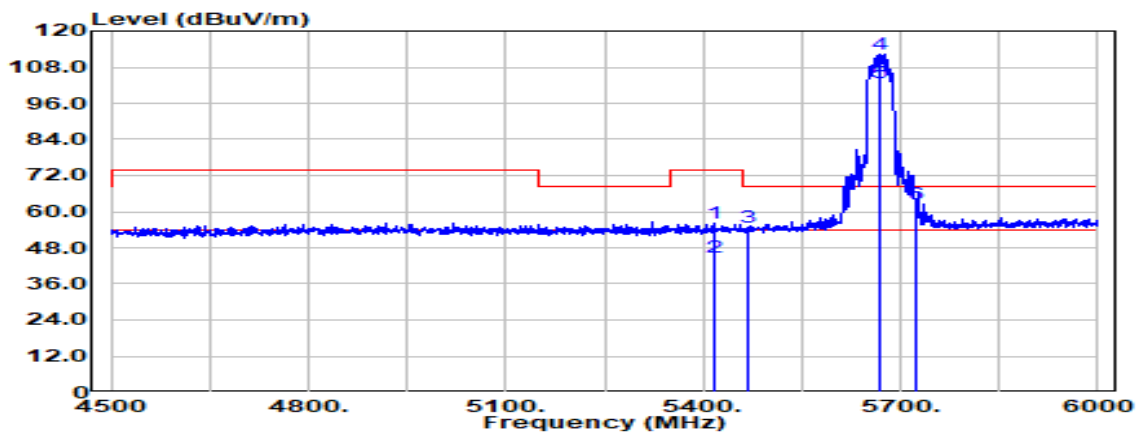

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5416.500	Peak	36.17	20.06	56.23	74.00	-17.77
5416.500	Average	24.78	20.06	44.84	54.00	-9.16
5466.750	Peak	34.83	20.05	54.88	68.20	-13.32
5670.000	Peak	92.26	20.15	112.41	-	-
5670.000	Average	82.74	20.15	102.90	-	-
5725.000	Peak	42.09	20.32	62.41	68.20	-5.79

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	21.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

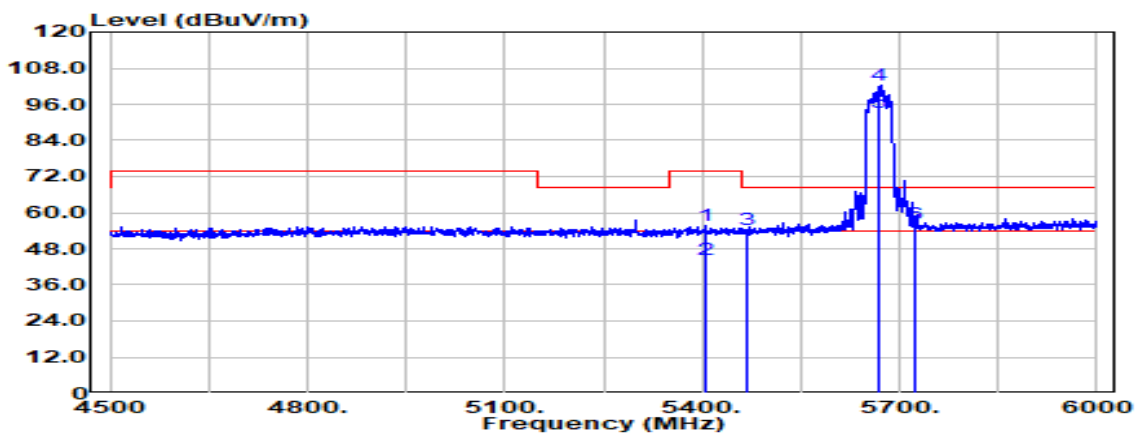

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5406.000	Peak	35.72	20.06	55.78	74.00	-18.22
5406.000	Average	24.41	20.06	44.47	54.00	-9.53
5468.250	Peak	34.28	20.05	54.33	68.20	-13.87
5670.000	Peak	82.05	20.15	102.20	-	-
5670.000	Average	73.18	20.15	93.33	-	-
5725.000	Peak	35.97	20.32	56.29	68.20	-11.91

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_242/62	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

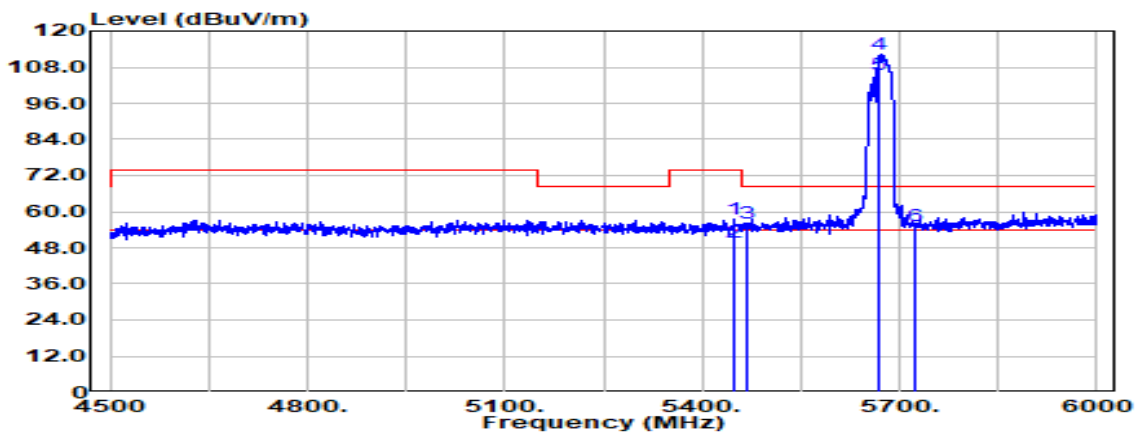

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (d $\mu$ V)	Factor (dB)	Actual FS (d $\mu$ V/m)	Limit @3m (d $\mu$ V/m)	Margin (dB)
5448.750	Peak	37.51	20.07	57.58	74.00	-16.42
5448.750	Average	29.96	20.07	50.03	54.00	-3.97
5466.750	Peak	36.11	20.05	56.17	68.20	-12.03
5670.000	Peak	92.26	20.15	112.41	-	-
5670.000	Average	85.17	20.15	105.33	-	-
5725.000	Peak	35.12	20.32	55.44	68.20	-12.76

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz 242/62	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

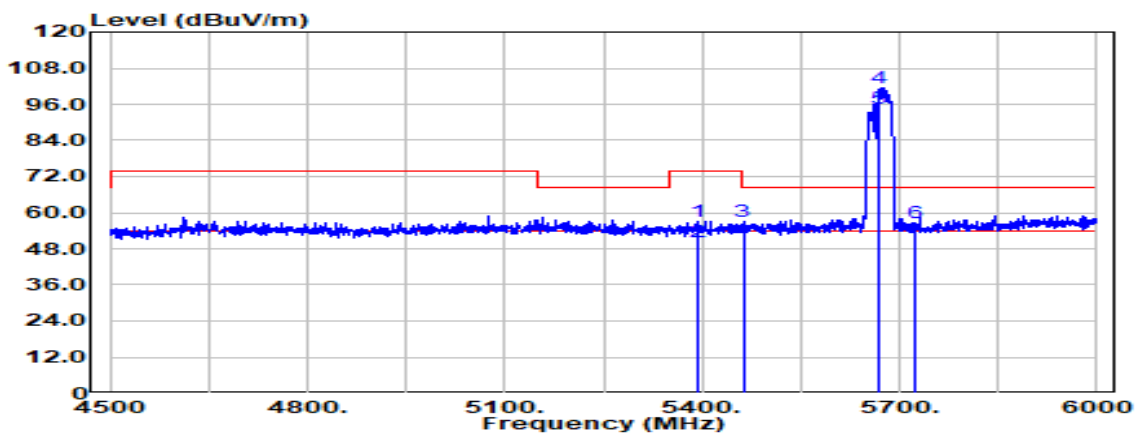

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5391.750	Peak	36.88	20.02	56.90	74.00	-17.10
5391.750	Average	30.22	20.02	50.24	54.00	-3.76
5462.250	Peak	37.18	20.06	57.23	68.20	-10.97
5670.000	Peak	81.42	20.15	101.57	-	-
5670.000	Average	74.51	20.15	94.66	-	-
5725.000	Peak	36.25	20.32	56.57	68.20	-11.63

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz_	Temp/Hum	20.9(°C) / 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

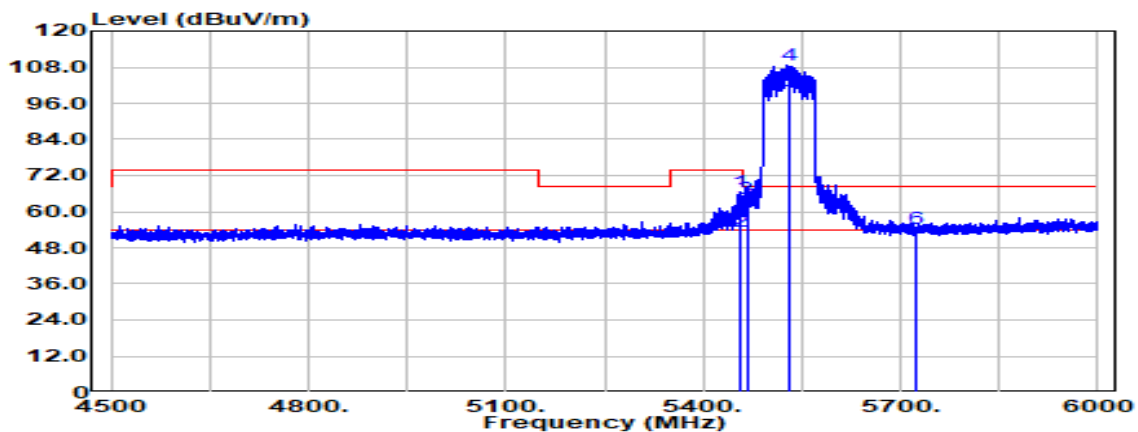

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5455.688	Peak	46.35	20.06	66.42	74.00	-7.58
5455.688	Average	33.41	20.06	53.47	54.00	-0.53
5466.188	Peak	44.11	20.05	64.16	68.20	-4.04
5530.000	Peak	88.52	20.03	108.55	-	-
5530.000	Average	79.87	20.03	99.90	-	-
5725.000	Peak	34.19	20.32	54.51	68.20	-13.69

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	20.9(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 30, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

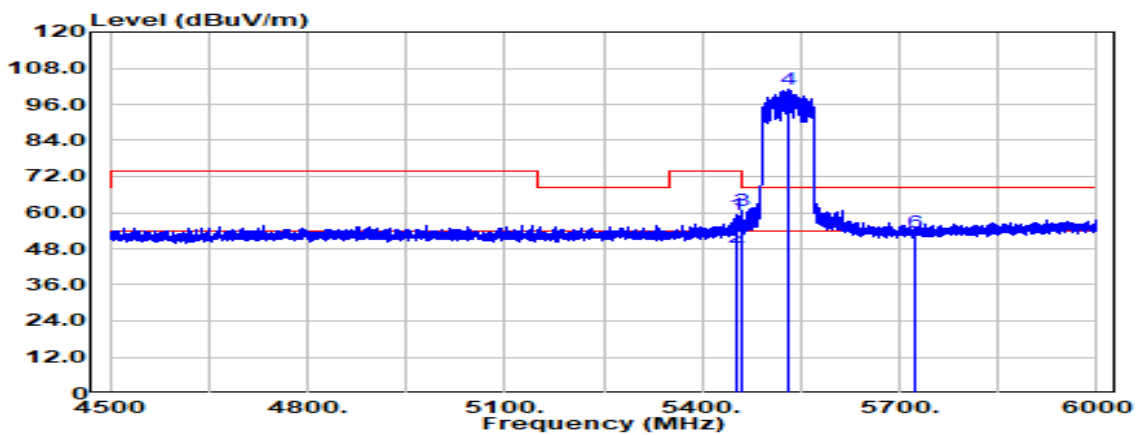

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.625	Peak	39.24	20.07	59.31	74.00	-14.69
5453.625	Average	28.55	20.07	48.61	54.00	-5.39
5460.938	Peak	40.47	20.06	60.53	68.20	-7.67
5530.000	Peak	80.80	20.03	100.83	-	-
5530.000	Average	72.82	20.03	92.85	-	-
5725.000	Peak	33.12	20.32	53.44	68.20	-14.76

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz_484/65	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

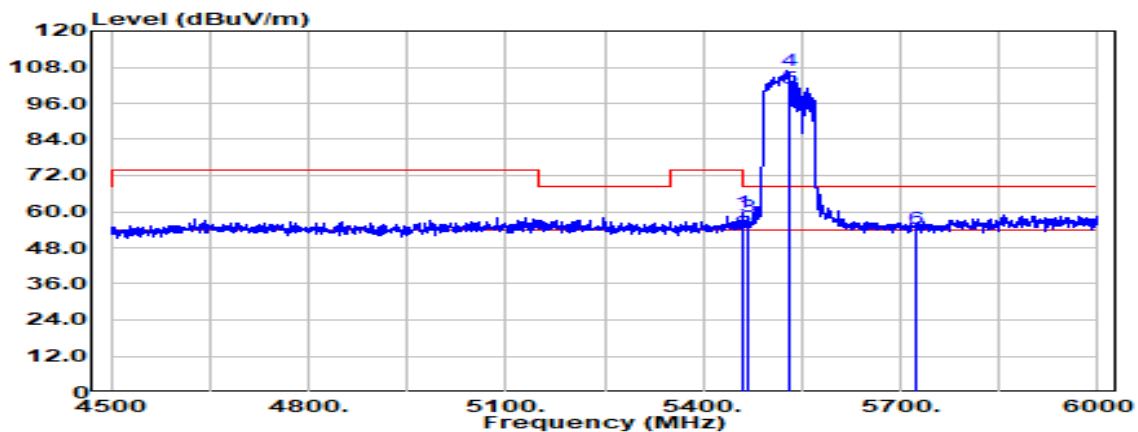

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5459.250	Peak	39.74	20.06	59.80	74.00	-14.20
5459.250	Average	32.78	20.06	52.84	54.00	-1.16
5469.000	Peak	38.44	20.05	58.49	68.20	-9.71
5530.000	Peak	87.00	20.03	107.02	-	-
5530.000	Average	80.92	20.03	100.95	-	-
5725.000	Peak	33.93	20.32	54.25	68.20	-13.95



Test Mode	IEEE 802.11ax HE80 / 5530 MHz 484/65	Temp/Hum	23.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 4, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

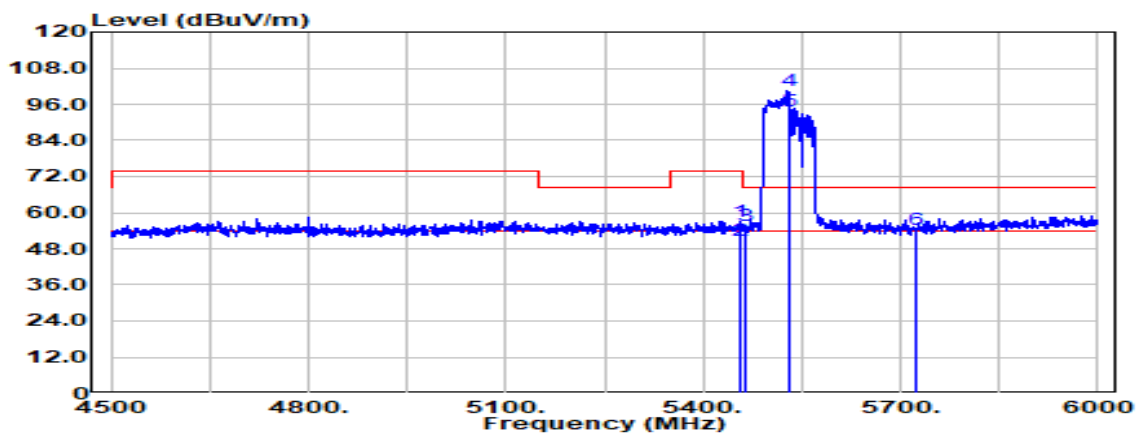


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.750	Peak	36.96	20.07	57.03	74.00	-16.97
5454.750	Average	30.59	20.07	50.66	54.00	-3.34
5465.250	Peak	35.70	20.05	55.76	68.20	-12.44
5530.000	Peak	80.51	20.03	100.54	-	-
5530.000	Average	73.58	20.03	93.60	-	-
5725.000	Peak	34.06	20.32	54.38	68.20	-13.82

Report No.: TMWK2201000111KR

**Test Data for UNII-3**


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

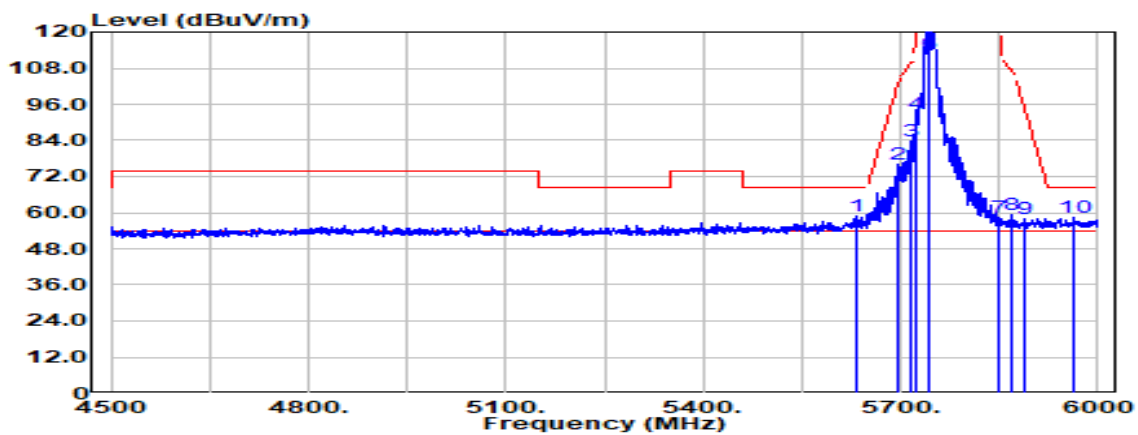

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5631.750	Peak	38.56	20.12	58.68	68.20	-9.52
5696.250	Peak	55.81	20.16	75.97	102.44	-26.47
5716.500	Peak	63.34	20.27	83.60	109.82	-26.22
5724.750	Peak	72.68	20.32	92.99	121.63	-28.64
5745.000	Peak	101.03	20.45	121.48	-	-
5745.000	Average	92.24	20.45	112.69	-	-
5850.750	Peak	37.54	20.73	58.28	120.49	-62.21
5870.250	Peak	38.39	20.82	59.20	106.53	-47.32
5887.500	Peak	37.10	20.90	58.00	95.92	-37.92
5962.500	Peak	37.18	21.16	58.34	68.20	-9.86

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

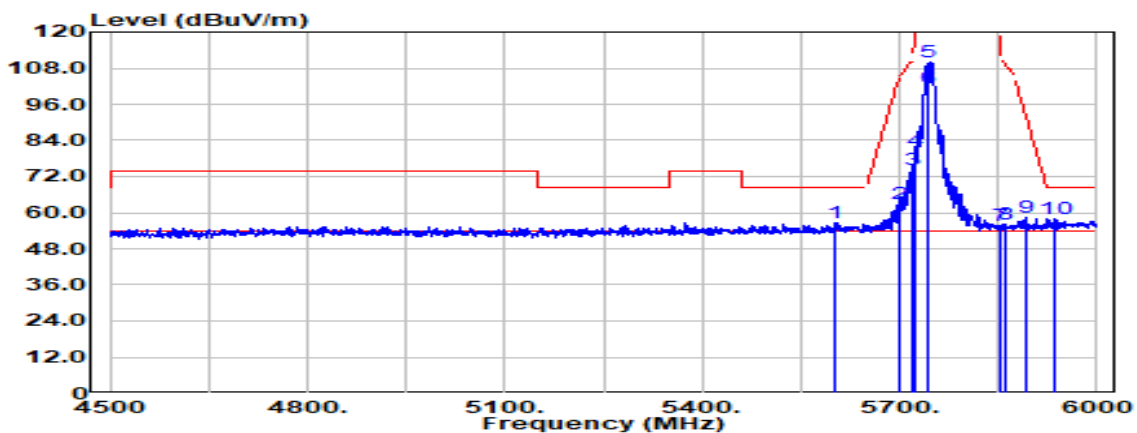

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5603.250	Peak	36.73	20.08	56.81	68.20	-11.39
5699.250	Peak	42.99	20.16	63.15	104.65	-41.49
5719.500	Peak	54.18	20.28	74.46	110.66	-36.20
5724.000	Peak	60.29	20.31	80.60	119.92	-39.32
5745.000	Peak	89.44	20.45	109.89	-	-
5745.000	Average	80.95	20.45	101.40	-	-
5854.500	Peak	34.97	20.75	55.72	111.94	-56.22
5862.750	Peak	35.51	20.79	56.30	108.63	-52.33
5892.750	Peak	37.34	20.92	58.26	92.03	-33.77
5934.750	Peak	36.72	21.10	57.82	68.20	-10.38


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

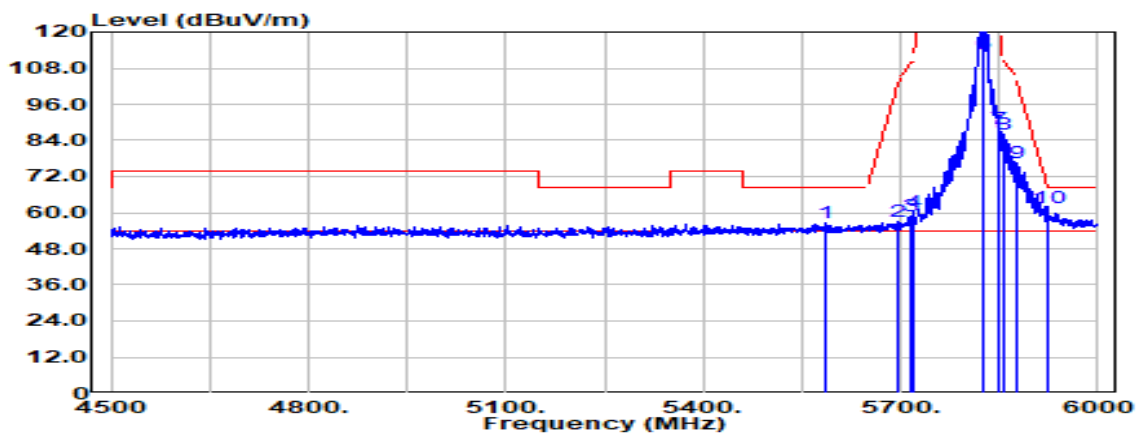

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5587.500	Peak	36.41	20.06	56.47	68.20	-11.73
5697.750	Peak	36.68	20.16	56.84	103.54	-46.70
5715.750	Peak	38.44	20.26	58.70	109.61	-50.91
5720.250	Peak	39.82	20.29	60.11	111.37	-51.26
5825.000	Peak	100.87	20.64	121.50	-	-
5825.000	Average	92.16	20.64	112.80	-	-
5850.750	Peak	67.10	20.73	87.83	120.49	-32.66
5856.000	Peak	65.44	20.76	86.20	110.52	-24.32
5875.500	Peak	55.91	20.84	76.75	104.83	-28.08
5925.000	Peak	40.41	21.06	61.46	68.20	-6.74


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

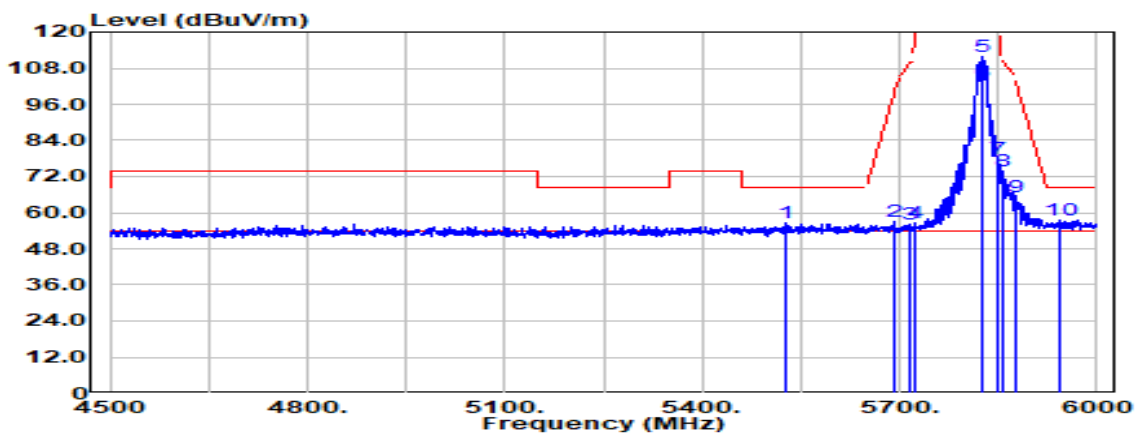

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5528.250	Peak	36.57	20.03	56.59	68.20	-11.61
5693.250	Peak	36.69	20.16	56.85	100.22	-43.38
5715.750	Peak	35.97	20.26	56.23	109.61	-53.38
5722.500	Peak	36.22	20.30	56.53	116.50	-59.97
5825.000	Peak	91.26	20.64	111.90	-	-
5825.000	Average	82.52	20.64	103.15	-	-
5850.000	Peak	57.10	20.73	77.83	122.20	-44.37
5856.000	Peak	53.03	20.76	73.78	110.52	-36.74
5875.500	Peak	44.20	20.84	65.04	104.83	-39.78
5942.250	Peak	36.18	21.13	57.30	68.20	-10.90

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

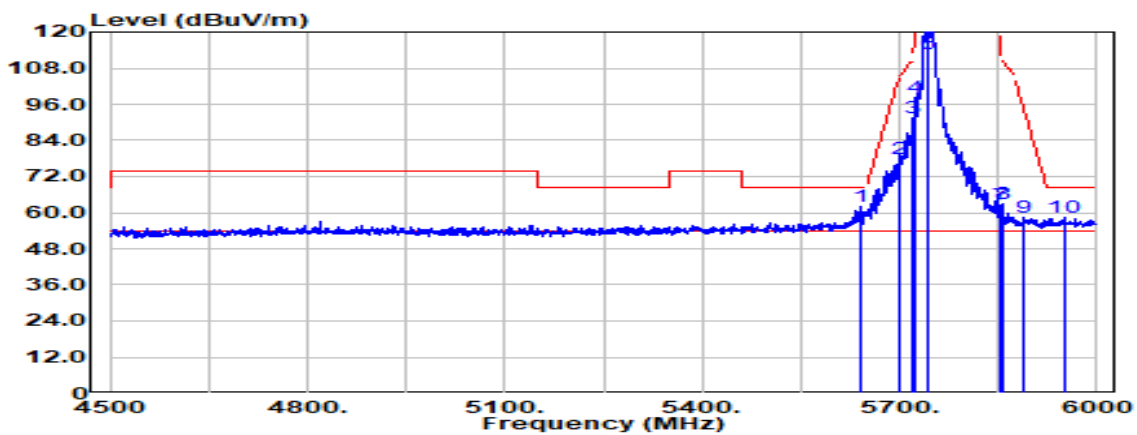

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5639.250	Peak	41.80	20.13	61.93	68.20	-6.27
5699.250	Peak	57.93	20.16	78.09	104.65	-26.56
5719.500	Peak	71.06	20.28	91.34	110.66	-19.32
5724.750	Peak	78.06	20.32	98.37	121.63	-23.26
5745.000	Peak	101.53	20.45	121.97	-	-
5745.000	Average	92.09	20.45	112.54	-	-
5853.750	Peak	41.52	20.75	62.26	113.65	-51.38
5856.750	Peak	42.08	20.76	62.84	110.31	-47.47
5889.000	Peak	37.43	20.90	58.33	94.81	-36.48
5949.750	Peak	37.21	21.16	58.37	68.20	-9.83


Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5628.750	Peak	36.43	20.12	56.55	68.20	-11.65
5699.250	Peak	46.02	20.16	66.18	104.65	-38.47
5716.500	Peak	56.35	20.27	76.61	109.82	-33.21
5724.000	Peak	65.12	20.31	85.43	119.92	-34.49
5745.000	Peak	90.59	20.45	111.03	-	-
5745.000	Average	81.26	20.45	101.71	-	-
5850.000	Peak	36.34	20.73	57.07	122.20	-65.13
5871.000	Peak	35.67	20.82	56.50	106.32	-49.82
5875.500	Peak	36.59	20.84	57.43	104.83	-47.40
5965.500	Peak	36.39	21.16	57.55	68.20	-10.65

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak & Average		

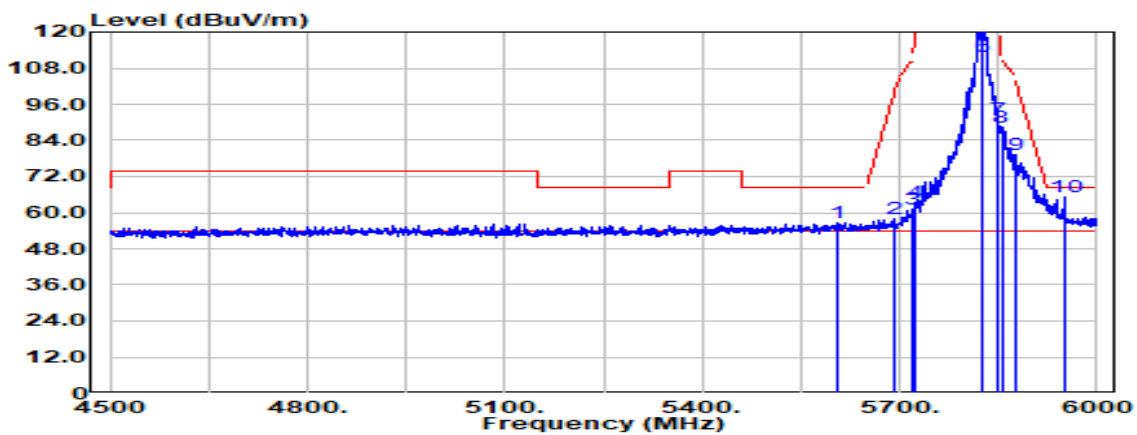


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5607.000	Peak	36.68	20.08	56.76	68.20	-11.44
5691.750	Peak	37.78	20.16	57.94	99.12	-41.18
5719.500	Peak	41.05	20.28	61.33	110.66	-49.33
5724.750	Peak	43.11	20.32	63.43	121.63	-58.20
5825.000	Peak	99.78	20.64	120.41	-	-
5825.000	Average	91.00	20.64	111.63	-	-
5850.000	Peak	70.47	20.73	91.20	122.20	-31.00
5855.250	Peak	67.43	20.75	88.18	110.73	-22.55
5878.500	Peak	58.19	20.86	79.05	102.60	-23.55
5950.500	Peak	44.05	21.16	65.21	68.20	-2.99



Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	22.5(°C) / 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

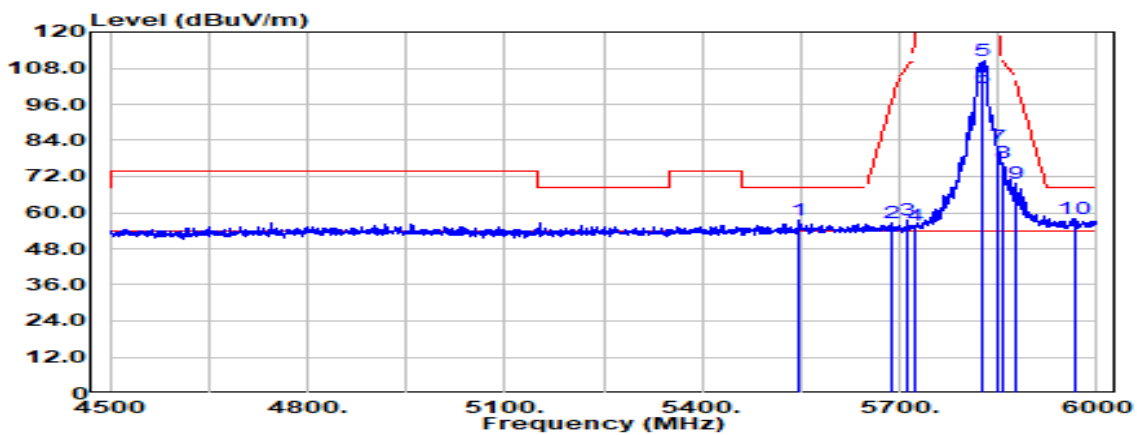

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5546.250	Peak	37.46	20.03	57.49	68.20	-10.71
5687.250	Peak	36.51	20.16	56.67	95.80	-39.13
5712.000	Peak	37.43	20.24	57.66	108.56	-50.90
5723.250	Peak	35.20	20.31	55.51	118.21	-62.70
5825.000	Peak	89.66	20.64	110.30	-	-
5825.000	Average	80.85	20.64	101.49	-	-
5850.750	Peak	61.29	20.73	82.03	120.49	-38.46
5857.500	Peak	55.85	20.76	76.61	110.10	-33.49
5877.750	Peak	48.90	20.85	69.75	103.16	-33.41
5965.500	Peak	36.82	21.16	57.98	68.20	-10.22

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

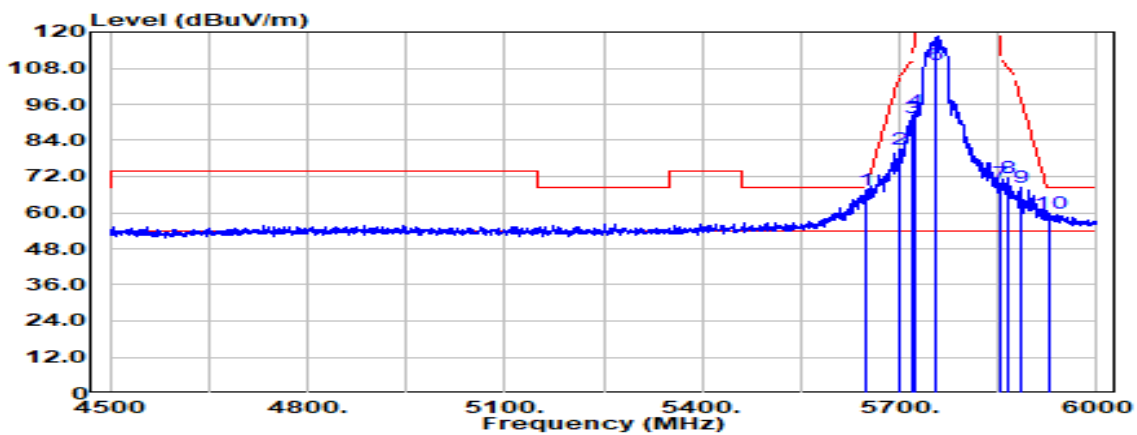

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5648.250	Peak	47.13	20.15	67.28	68.20	-0.92
5699.250	Peak	60.78	20.16	80.94	104.65	-23.71
5718.750	Peak	71.15	20.28	91.43	110.45	-19.02
5724.000	Peak	73.55	20.31	93.86	119.92	-26.06
5755.000	Peak	98.08	20.49	118.57	-	-
5755.000	Average	88.54	20.49	109.02	-	-
5851.500	Peak	48.84	20.74	69.58	118.78	-49.20
5864.250	Peak	50.74	20.79	71.53	108.21	-36.68
5883.000	Peak	47.37	20.88	68.24	99.26	-31.01
5928.750	Peak	38.57	21.07	59.64	68.20	-8.56

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

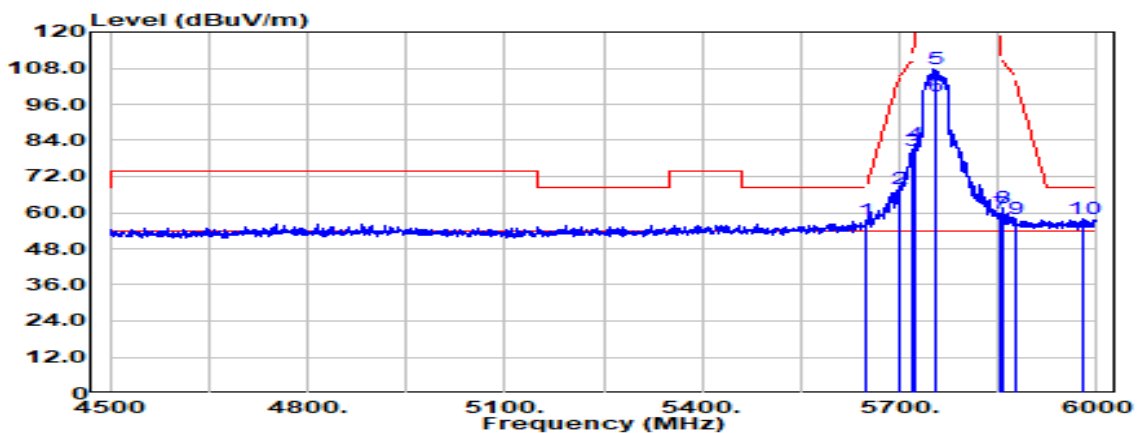

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5648.250	Peak	37.33	20.15	57.48	68.20	-10.72
5698.500	Peak	47.61	20.16	67.77	104.09	-36.33
5718.750	Peak	60.37	20.28	80.65	110.45	-29.80
5723.250	Peak	62.76	20.31	83.07	118.21	-35.14
5755.000	Peak	87.14	20.49	107.62	-	-
5755.000	Average	78.03	20.49	98.52	-	-
5852.250	Peak	38.90	20.74	59.64	117.07	-57.43
5859.000	Peak	40.68	20.77	61.45	109.68	-48.23
5876.250	Peak	37.15	20.85	58.00	104.27	-46.27
5979.000	Peak	36.92	21.17	58.08	68.20	-10.12

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

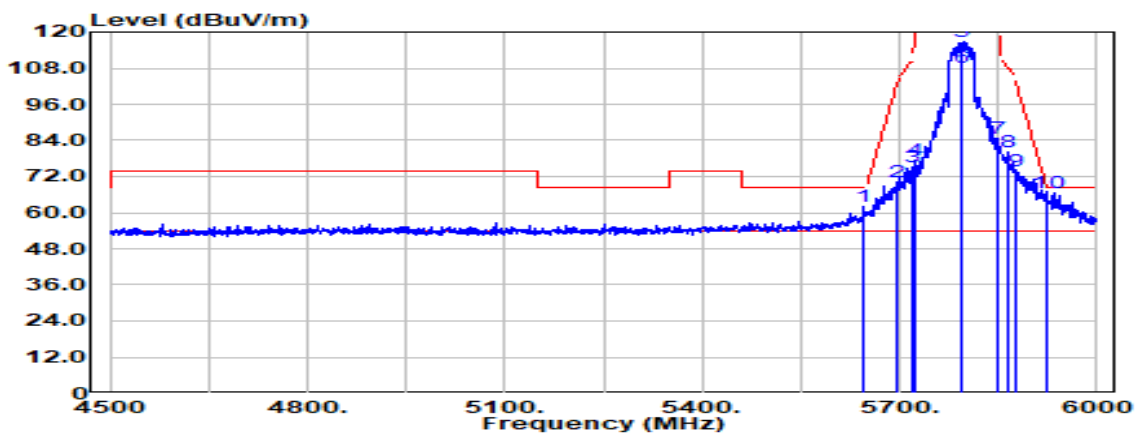

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5645.250	Peak	41.76	20.14	61.91	68.20	-6.29
5694.750	Peak	50.10	20.16	70.26	101.33	-31.07
5719.500	Peak	55.01	20.28	75.30	110.66	-35.36
5722.500	Peak	56.94	20.30	77.24	116.50	-39.26
5795.000	Peak	96.16	20.53	116.70	-	-
5795.000	Average	87.58	20.53	108.12	-	-
5850.750	Peak	63.81	20.73	84.54	120.49	-35.95
5865.000	Peak	59.50	20.80	80.30	108.00	-27.70
5877.750	Peak	53.14	20.85	73.99	103.16	-29.17
5925.000	Peak	45.67	21.06	66.73	68.20	-1.47

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

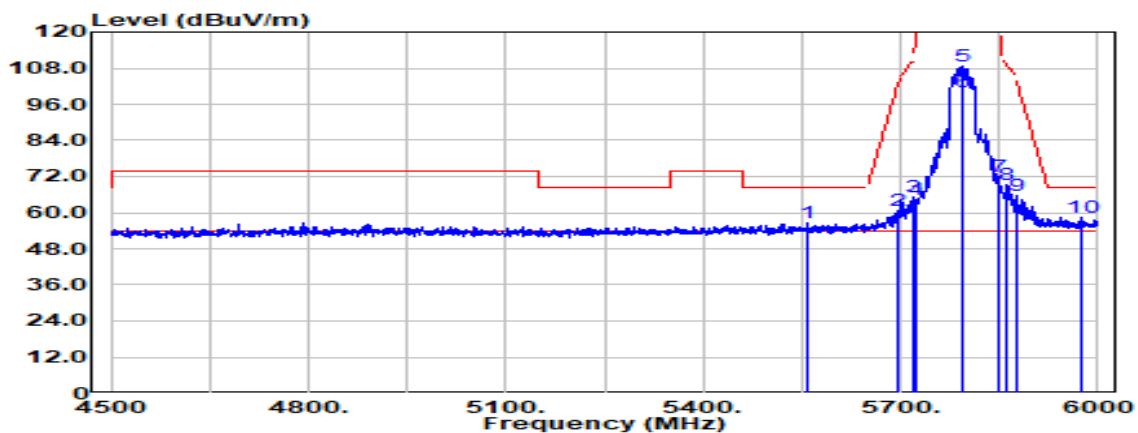

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5558.250	Peak	36.45	20.04	56.49	68.20	-11.71
5695.500	Peak	40.39	20.16	60.55	101.88	-41.33
5718.000	Peak	44.86	20.28	65.13	110.24	-45.11
5724.750	Peak	43.76	20.32	64.08	121.63	-57.55
5795.000	Peak	88.04	20.53	108.57	-	-
5795.000	Average	79.76	20.53	100.29	-	-
5850.000	Peak	51.41	20.73	72.14	122.20	-50.06
5860.500	Peak	48.60	20.78	69.38	109.26	-39.88
5875.500	Peak	44.95	20.84	65.79	104.83	-39.04
5973.750	Peak	37.34	21.16	58.50	68.20	-9.70

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

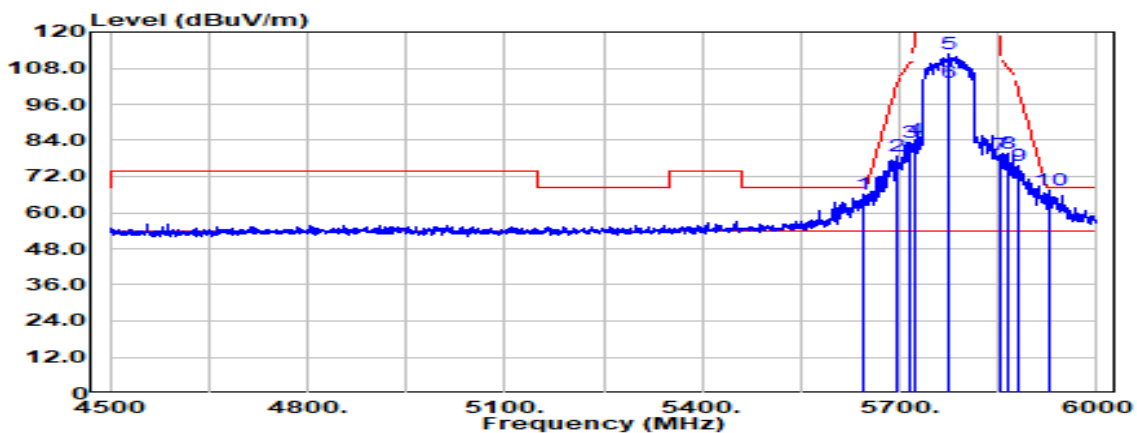

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5643.750	Peak	45.77	20.14	65.91	68.20	-2.29
5696.250	Peak	58.52	20.16	78.68	102.44	-23.76
5714.250	Peak	63.29	20.25	83.54	109.19	-25.65
5723.250	Peak	63.72	20.31	84.03	118.21	-34.18
5775.000	Peak	92.05	20.51	112.56	-	-
5775.000	Average	82.76	20.51	103.27	-	-
5851.500	Peak	58.70	20.74	79.44	118.78	-39.34
5863.500	Peak	58.96	20.79	79.75	108.42	-28.67
5879.250	Peak	54.65	20.86	75.51	102.04	-26.54
5926.500	Peak	46.41	21.06	67.47	68.20	-0.73

Report No.: TMWK2201000111KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Band Edge	Test Date	March 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

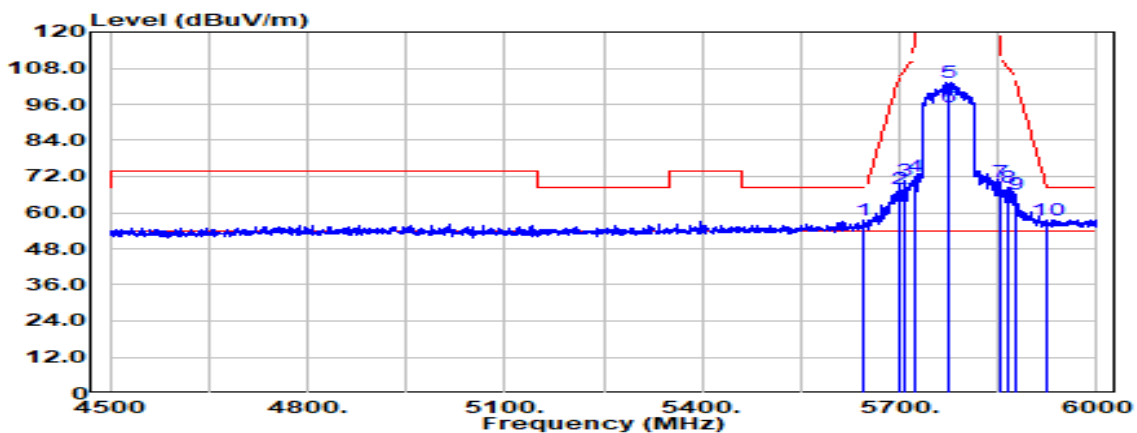

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5643.750	Peak	37.40	20.14	57.54	68.20	-10.66
5698.500	Peak	47.64	20.16	67.80	104.09	-36.29
5706.000	Peak	50.37	20.20	70.57	106.88	-36.32
5724.000	Peak	51.64	20.31	71.95	119.92	-47.97
5775.000	Peak	82.95	20.51	103.46	-	-
5775.000	Average	74.56	20.51	95.07	-	-
5851.500	Peak	49.60	20.74	70.33	118.78	-48.45
5863.500	Peak	47.72	20.79	68.51	108.42	-39.91
5876.250	Peak	45.20	20.85	66.04	104.27	-38.23
5925.000	Peak	36.65	21.06	57.71	68.20	-10.49

Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

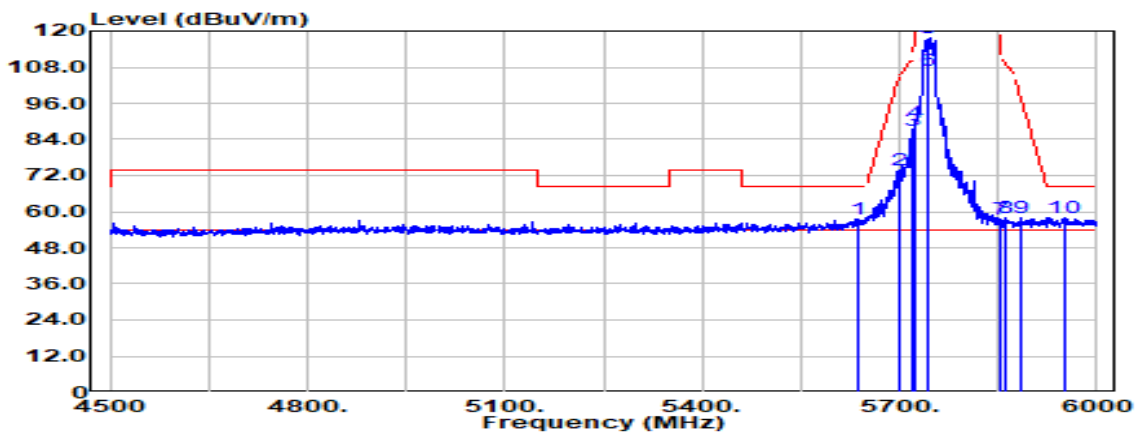


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5635.500	Peak	37.34	20.13	57.47	68.20	-10.73
5698.500	Peak	53.78	20.16	73.94	104.09	-30.16
5718.000	Peak	66.61	20.28	86.88	110.24	-23.36
5723.250	Peak	69.33	20.31	89.63	118.21	-28.58
5745.000	Peak	97.41	20.45	117.85	-	-
5745.000	Average	86.23	20.45	106.68	-	-
5853.000	Peak	36.84	20.74	57.58	115.36	-57.77
5860.500	Peak	37.04	20.78	57.81	109.26	-51.44
5883.000	Peak	36.99	20.88	57.86	99.26	-41.39
5949.750	Peak	36.98	21.16	58.14	68.20	-10.06



Report No.: TMWK2201000111KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	21.8(°C) / 64%RH
Test Item	Band Edge	Test Date	March 29, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

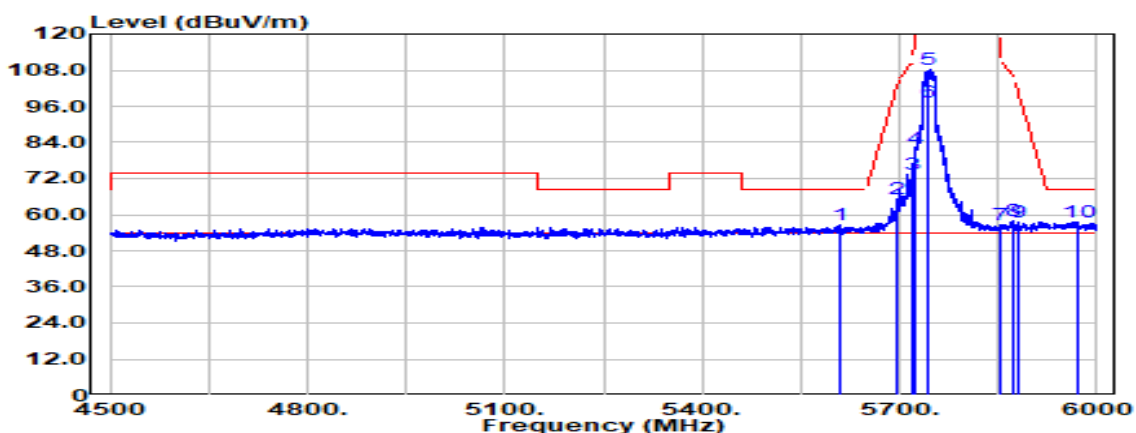

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5610.000	Peak	36.66	20.09	56.75	68.20	-11.45
5695.500	Peak	44.88	20.16	65.04	101.88	-36.84
5719.500	Peak	53.26	20.28	73.55	110.66	-37.11
5724.750	Peak	61.53	20.32	81.85	121.63	-39.78
5745.000	Peak	87.88	20.45	108.33	-	-
5745.000	Average	76.94	20.45	97.38	-	-
5853.000	Peak	35.75	20.74	56.49	115.36	-58.87
5871.750	Peak	37.34	20.83	58.16	106.11	-47.95
5882.250	Peak	36.85	20.87	57.72	99.82	-42.09
5973.000	Peak	36.46	21.16	57.63	68.20	-10.57