


Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

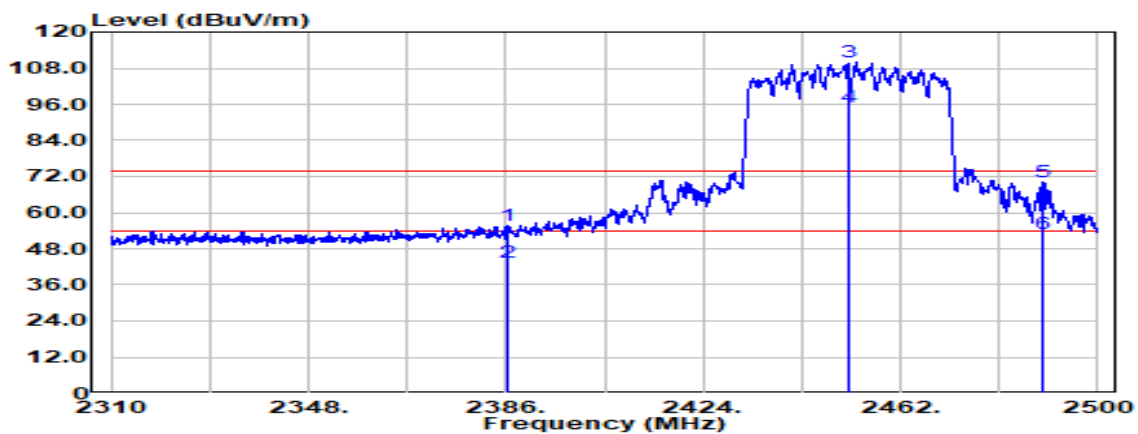

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2386.380	Peak	43.04	12.46	55.50	74.00	-18.50
2386.380	Average	31.19	12.46	43.66	54.00	-10.34
2452.000	Peak	97.25	12.86	110.11	74.00	36.11
2452.000	Average	82.05	12.86	94.91	54.00	40.91
2489.550	Peak	57.22	13.12	70.34	74.00	-3.66
2489.550	Average	39.79	13.12	52.91	54.00	-1.09

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Band Edge	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak & Average		

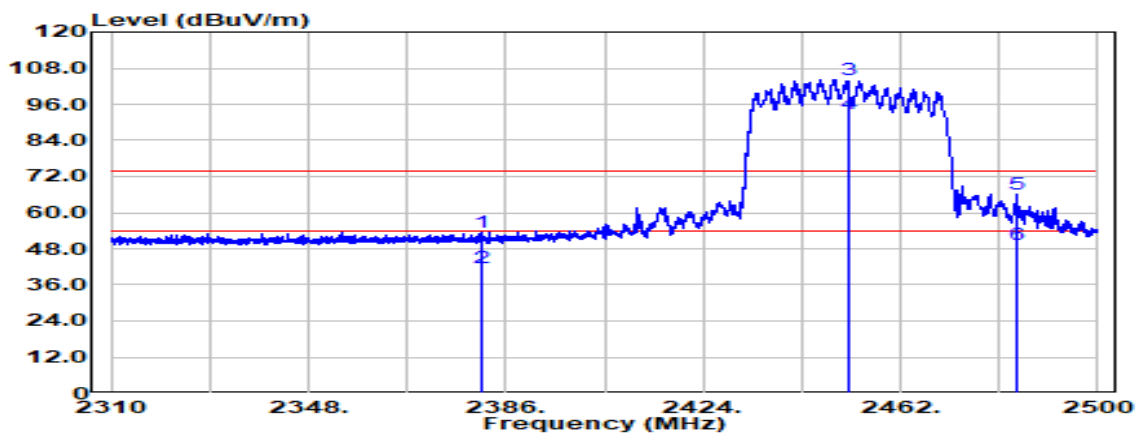

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2381.440	Peak	41.00	12.44	53.43	74.00	-20.57
2381.440	Average	29.11	12.44	41.55	54.00	-12.45
2452.000	Peak	91.36	12.86	104.22	--	--
2452.000	Average	79.98	12.86	92.84	--	--
2484.420	Peak	52.90	13.08	65.98	74.00	-8.02
2484.420	Average	36.33	13.08	49.41	54.00	-4.59

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) (242/62) CH 2452MHz	Temp/Hum	21.9(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 3, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

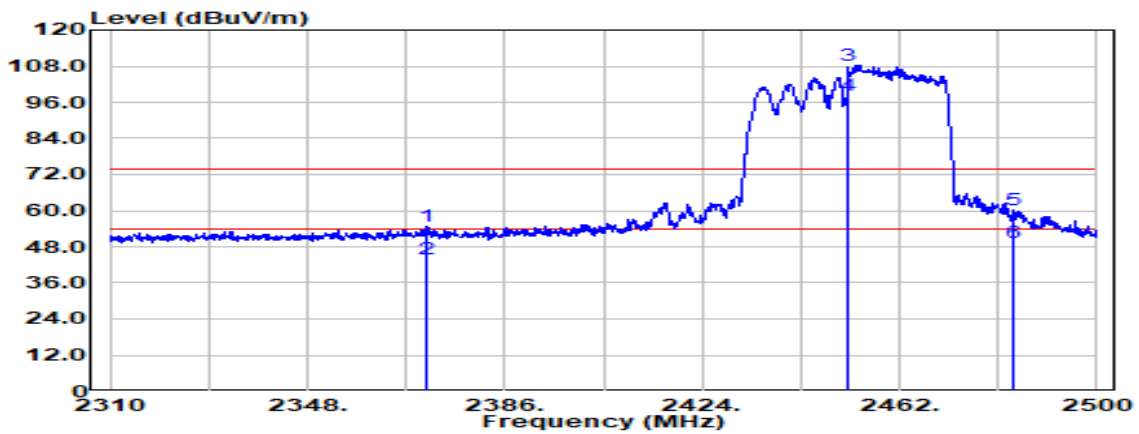

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2371.085	Peak	42.41	12.39	54.80	74.00	-19.20
2371.085	Average	31.59	12.39	43.97	54.00	-10.03
2452.000	Peak	95.47	12.86	108.33	74.00	34.33
2452.000	Average	85.49	12.86	98.35	54.00	44.35
2484.135	Peak	47.12	13.08	60.20	74.00	-13.80
2484.135	Average	36.16	13.08	49.25	54.00	-4.75

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) (242/62) CH 2452MHz	Temp/Hum	21.9(°C)/ 62%RH
Test Item	Band Edge	Test Date	May 3, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

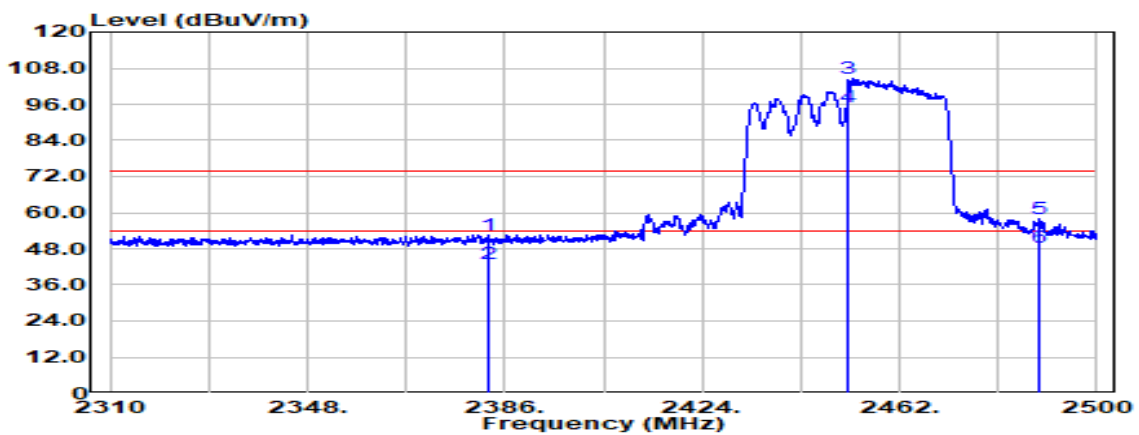


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2382.960	Peak	40.29	12.44	52.74	74.00	-21.26
2382.960	Average	30.43	12.44	42.88	54.00	-11.12
2452.000	Peak	91.71	12.86	104.58	74.00	30.58
2452.000	Average	82.08	12.86	94.95	54.00	40.95
2489.075	Peak	44.84	13.12	57.96	74.00	-16.04
2489.075	Average	35.43	13.12	48.55	54.00	-5.45

Report No.: TMWK2201000110KR

BFM ON


Test Mode	IEEE 802.11 ac (VHT20) CH 2412MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

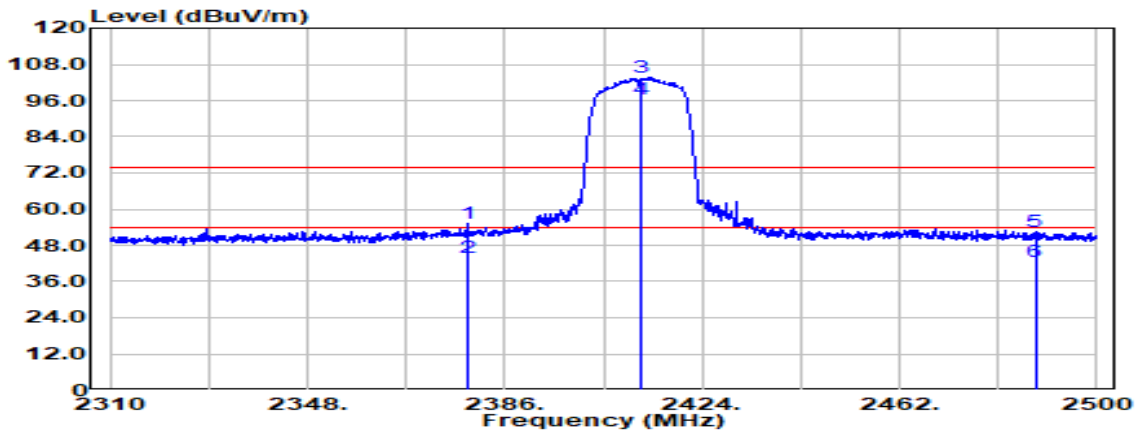

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2378.875	Peak	42.66	12.42	55.08	74.00	-18.92
2378.875	Average	31.55	12.42	43.97	54.00	-10.03
2412.000	Peak	91.16	12.61	103.77	-	-
2412.000	Average	83.86	12.61	96.46	-	-
2488.125	Peak	39.59	13.11	52.70	74.00	-21.30
2488.125	Average	29.45	13.11	42.56	54.00	-11.44

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ac (VHT20) CH 2412MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

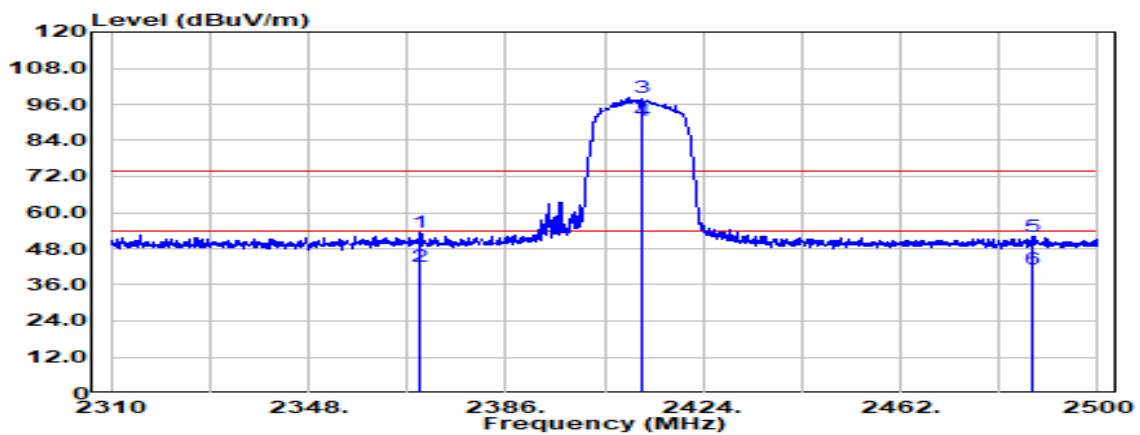

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2369.660	Peak	40.85	12.38	53.23	74.00	-20.77
2369.660	Average	29.88	12.38	42.26	54.00	-11.74
2412.000	Peak	85.55	12.61	98.16	-	-
2412.000	Average	77.91	12.61	90.51	-	-
2487.555	Peak	39.16	13.11	52.27	74.00	-21.73
2487.555	Average	28.31	13.11	41.42	54.00	-12.58

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ac (VHT20) CH 2462MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

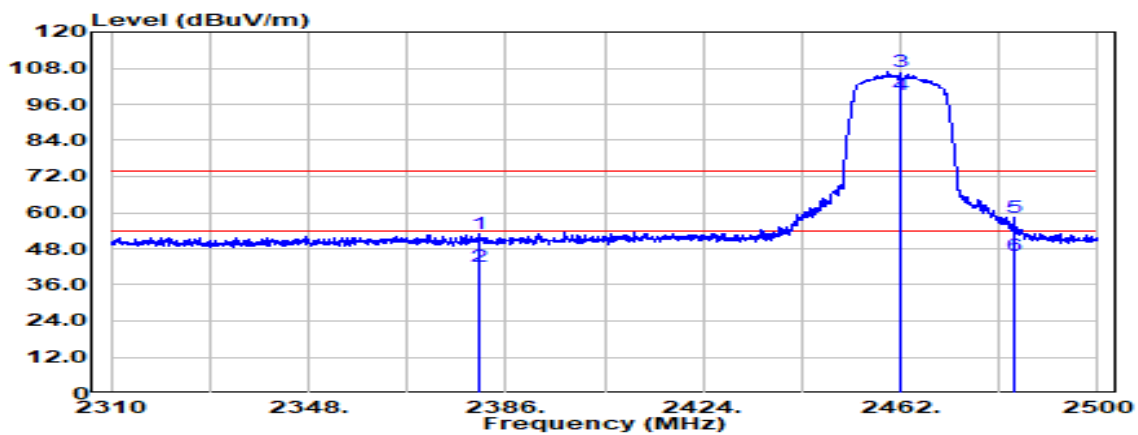

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2381.060	Peak	40.47	12.44	52.90	74.00	-21.10
2381.060	Average	29.68	12.44	42.12	54.00	-11.88
2462.000	Peak	94.05	12.93	106.99	-	-
2462.000	Average	86.14	12.93	99.08	-	-
2483.850	Peak	45.50	13.08	58.58	74.00	-15.42
2483.850	Average	32.65	13.08	45.73	54.00	-8.27


Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

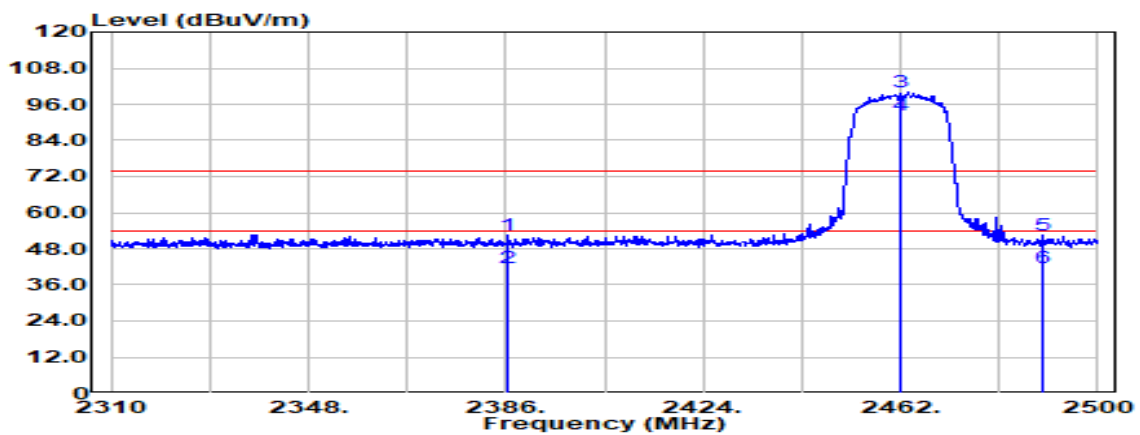

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2386.190	Peak	40.15	12.46	52.61	74.00	-21.39
2386.190	Average	29.06	12.46	41.52	54.00	-12.48
2462.000	Peak	86.95	12.93	99.88	-	-
2462.000	Average	79.44	12.93	92.37	-	-
2489.360	Peak	39.33	13.12	52.44	74.00	-21.56
2489.360	Average	28.70	13.12	41.82	54.00	-12.18


Test Mode	IEEE 802.11 ac (VHT40) CH 2422MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

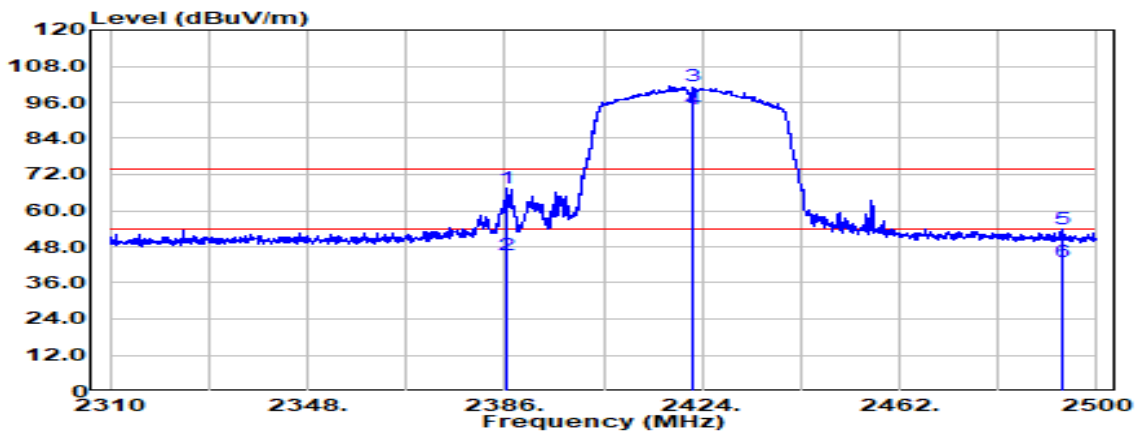

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2386.570	Peak	54.88	12.46	67.35	74.00	-6.65
2386.570	Average	32.69	12.46	45.15	54.00	-8.85
2422.000	Peak	88.65	12.67	101.32	-	-
2422.000	Average	81.06	12.67	93.73	-	-
2493.160	Peak	40.67	13.14	53.82	74.00	-20.18
2493.160	Average	29.65	13.14	42.80	54.00	-11.20

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2422MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

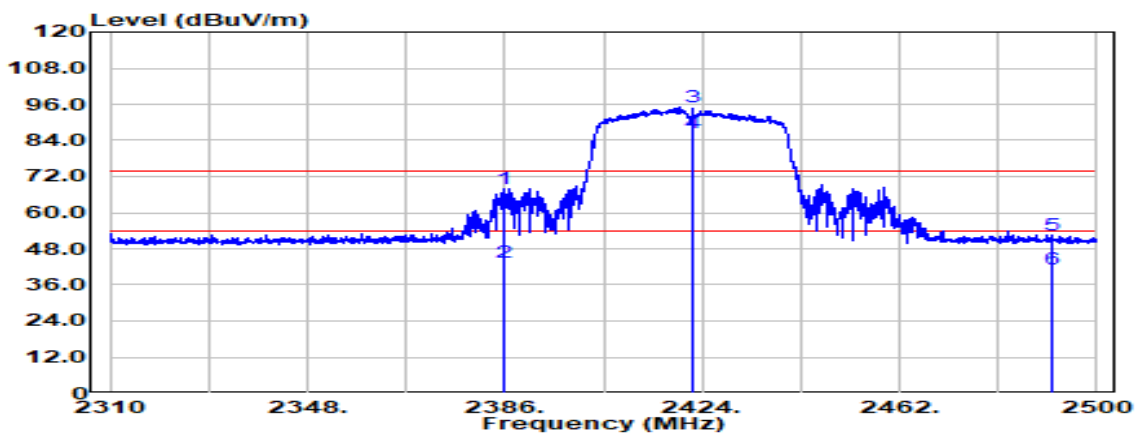

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2386.000	Peak	55.62	12.46	68.08	74.00	-5.92
2386.000	Average	30.96	12.46	43.42	54.00	-10.58
2422.000	Peak	82.21	12.67	94.88	-	-
2422.000	Average	73.63	12.67	86.30	-	-
2491.450	Peak	39.46	13.13	52.59	74.00	-21.41
2491.450	Average	28.30	13.13	41.43	54.00	-12.57

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2452MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

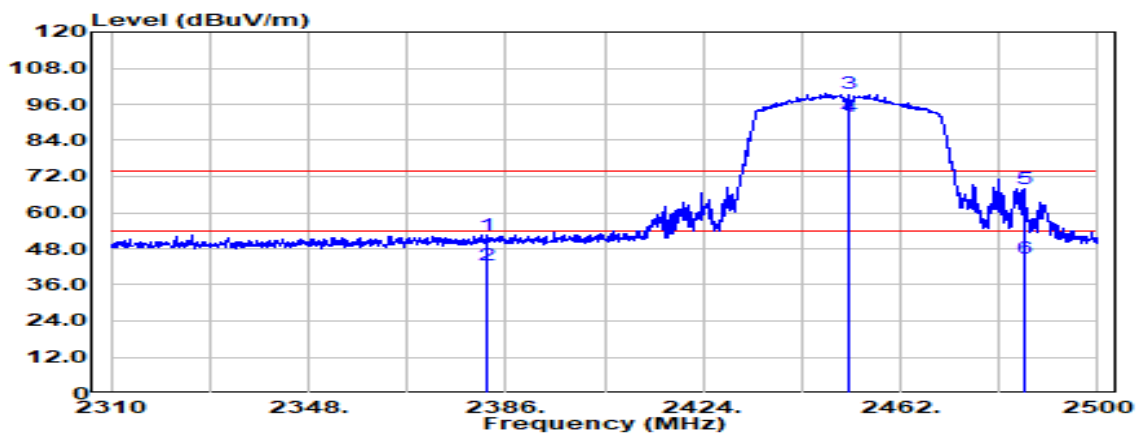

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2382.200	Peak	40.30	12.44	52.74	74.00	-21.26
2382.200	Average	30.16	12.44	42.60	54.00	-11.40
2452.000	Peak	86.69	12.86	99.55	-	-
2452.000	Average	79.13	12.86	91.99	-	-
2485.940	Peak	54.80	13.09	67.89	74.00	-6.11
2485.940	Average	31.74	13.09	44.83	54.00	-9.17

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2452MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

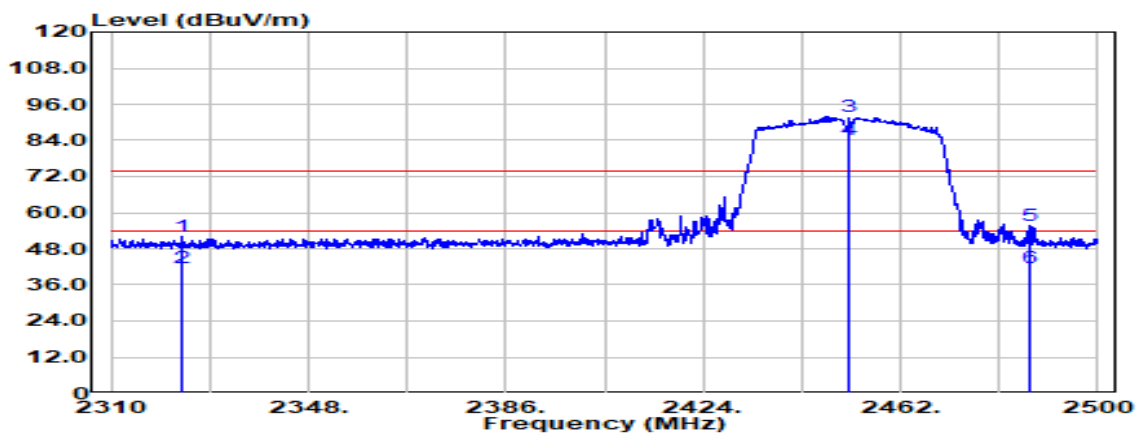

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2323.490	Peak	39.69	12.24	51.93	74.00	-22.07
2323.490	Average	29.38	12.24	41.62	54.00	-12.38
2452.000	Peak	79.21	12.86	92.08	-	-
2452.000	Average	71.48	12.86	84.34	-	-
2486.795	Peak	42.55	13.10	55.65	74.00	-18.35
2486.795	Average	28.77	13.10	41.87	54.00	-12.13

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE20) CH 2412MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

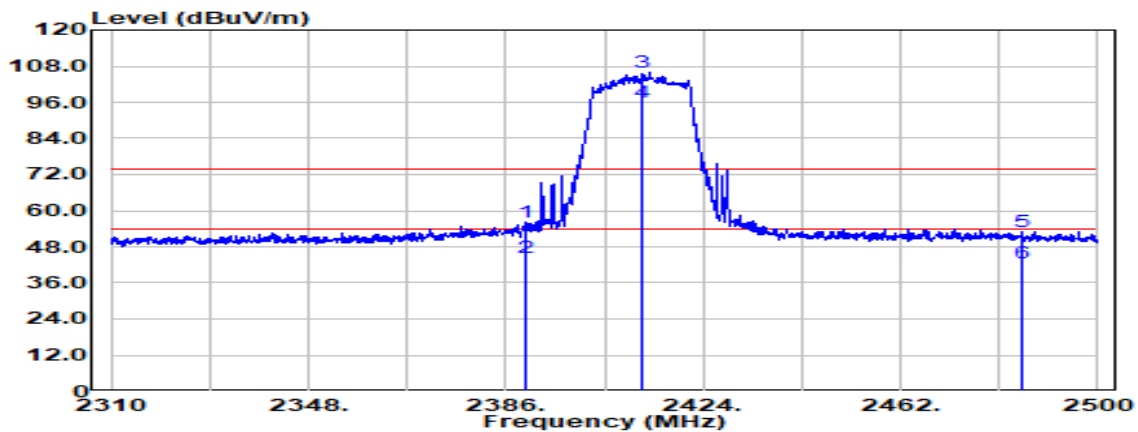

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.705	Peak	43.71	12.48	56.19	74.00	-17.81
2389.705	Average	31.74	12.48	44.22	54.00	-9.78
2412.000	Peak	93.15	12.61	105.75	-	-
2412.000	Average	83.61	12.61	96.21	-	-
2485.275	Peak	40.12	13.09	53.21	74.00	-20.79
2485.275	Average	29.59	13.09	42.68	54.00	-11.32

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE20) CH 2412MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

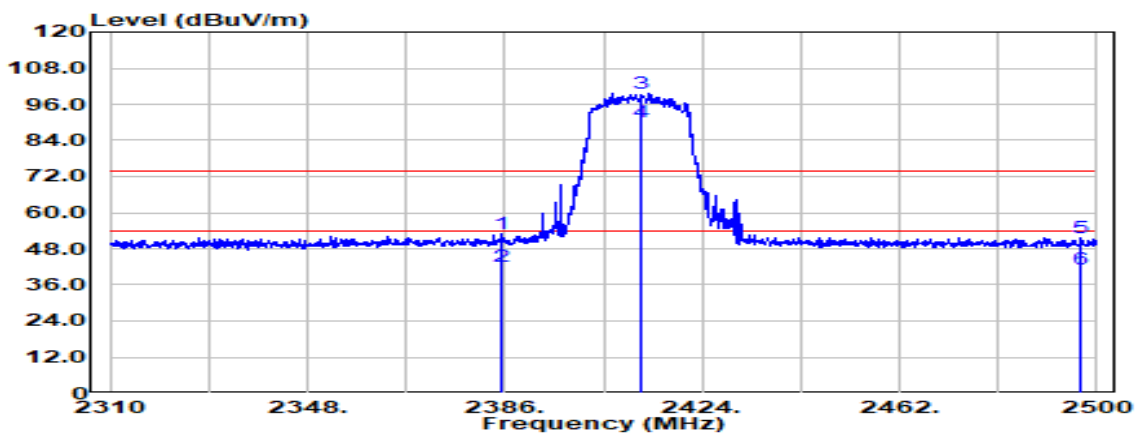

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2385.335	Peak	40.34	12.46	52.80	74.00	-21.20
2385.335	Average	29.80	12.46	42.26	54.00	-11.74
2412.000	Peak	87.23	12.61	99.83	-	-
2412.000	Average	77.55	12.61	90.16	-	-
2496.960	Peak	38.64	13.17	51.81	74.00	-22.19
2496.960	Average	28.23	13.17	41.40	54.00	-12.60

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE20) CH 2462MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

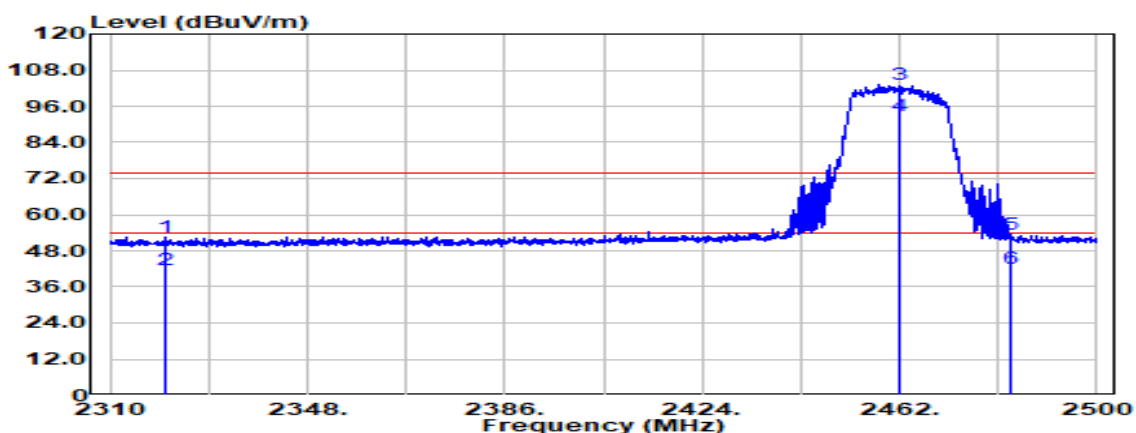

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2320.830	Peak	40.43	12.23	52.66	74.00	-21.34
2320.830	Average	29.43	12.23	41.66	54.00	-12.34
2462.000	Peak	90.48	12.93	103.41	-	-
2462.000	Average	79.86	12.93	92.79	-	-
2483.565	Peak	40.30	13.08	53.37	74.00	-20.63
2483.565	Average	29.15	13.08	42.22	54.00	-11.78

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE20) CH 2462MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

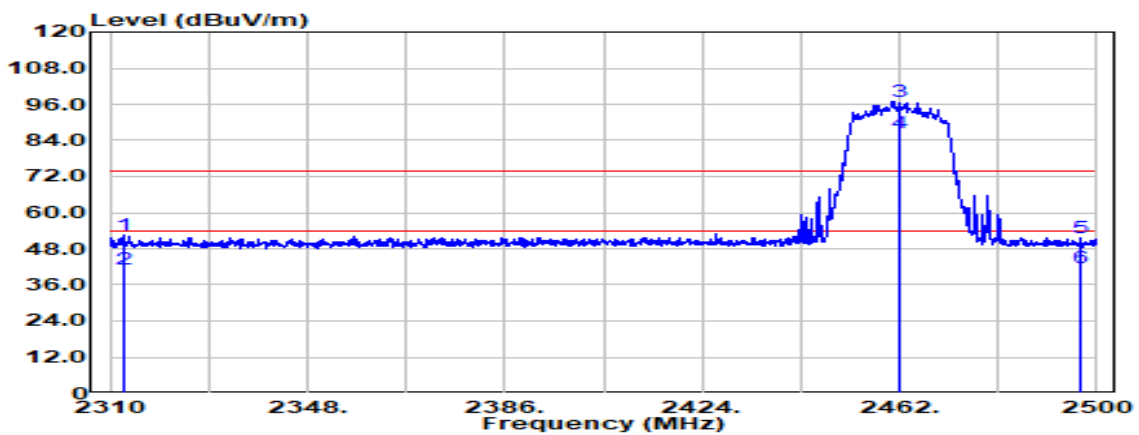

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
2312.565	Peak	40.23	12.22	52.45	74.00	-21.55
2312.565	Average	29.20	12.22	41.42	54.00	-12.58
2462.000	Peak	83.89	12.93	96.82	-	-
2462.000	Average	73.72	12.93	86.66	-	-
2496.960	Peak	38.52	13.17	51.69	74.00	-22.31
2496.960	Average	28.28	13.17	41.45	54.00	-12.55

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

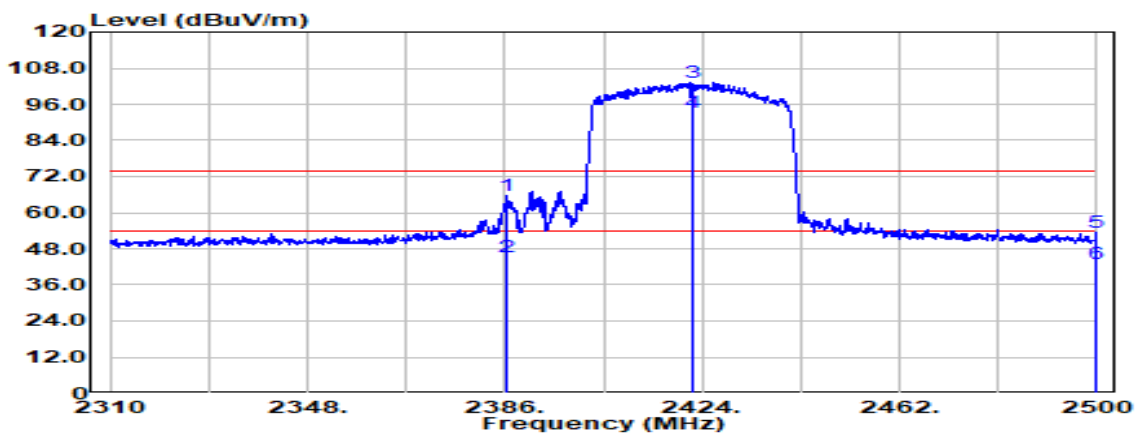

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2386.570	Peak	53.00	12.46	65.46	74.00	-8.54
2386.570	Average	32.69	12.46	45.15	54.00	-8.85
2422.000	Peak	90.51	12.67	103.18	-	-
2422.000	Average	80.81	12.67	93.48	-	-
2499.905	Peak	40.04	13.19	53.23	74.00	-20.77
2499.905	Average	29.74	13.19	42.93	54.00	-11.07

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

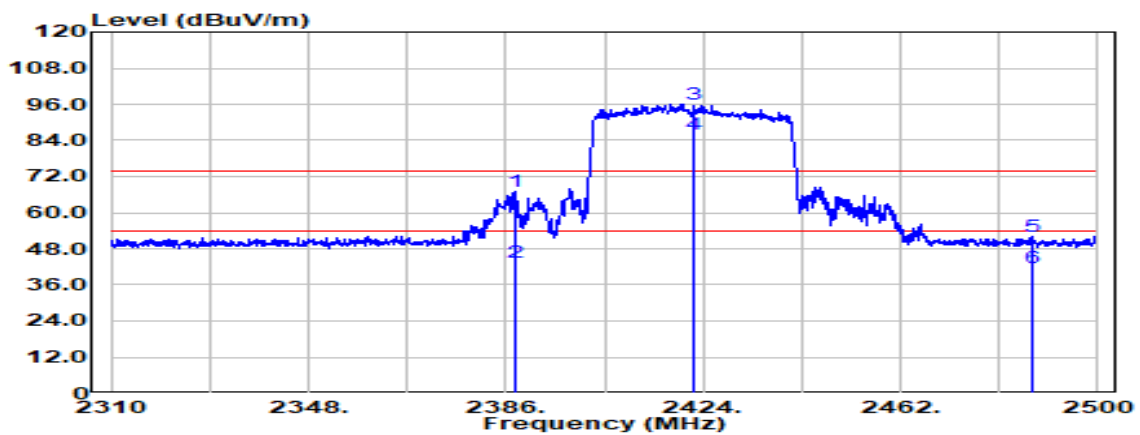

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2387.615	Peak	54.72	12.47	67.19	74.00	-6.81
2387.615	Average	31.11	12.47	43.58	54.00	-10.42
2422.000	Peak	83.49	12.67	96.16	-	-
2422.000	Average	73.27	12.67	85.95	-	-
2487.175	Peak	38.95	13.10	52.05	74.00	-21.95
2487.175	Average	28.38	13.10	41.48	54.00	-12.52

Report No.: TMWK2201000110KR


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

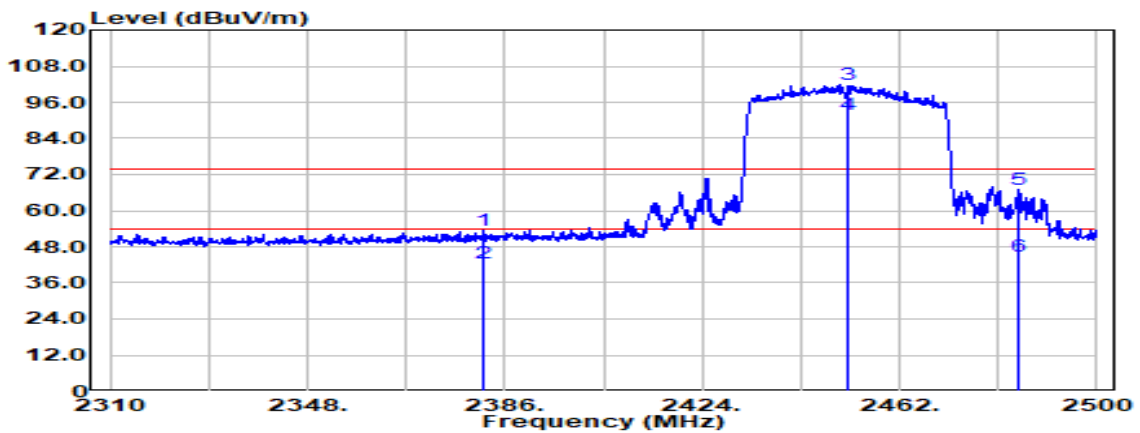

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2381.725	Peak	41.00	12.44	53.44	74.00	-20.56
2381.725	Average	30.11	12.44	42.54	54.00	-11.46
2452.000	Peak	88.82	12.86	101.69	-	-
2452.000	Average	78.94	12.86	91.80	-	-
2484.895	Peak	53.81	13.09	66.90	74.00	-7.10
2484.895	Average	31.53	13.09	44.62	54.00	-9.38

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) Low CH 2452MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

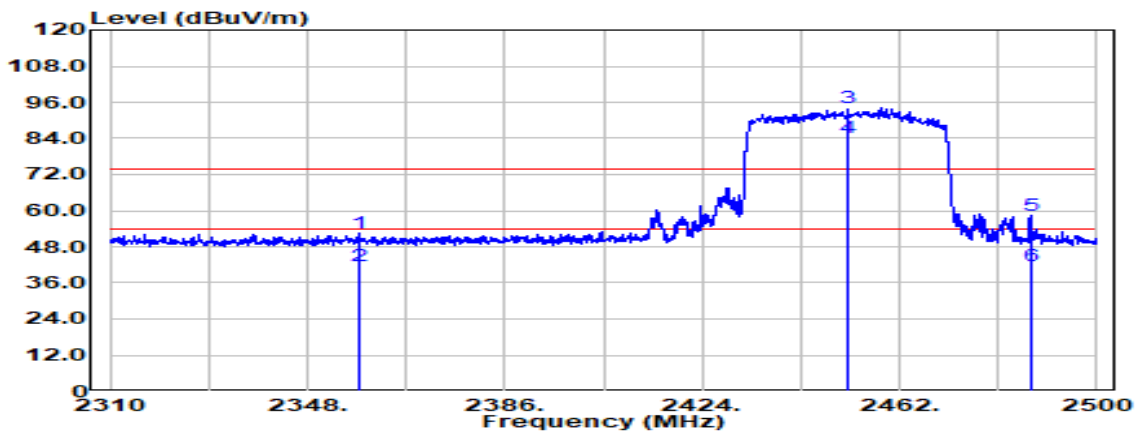


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2357.785	Peak	40.08	12.32	52.40	74.00	-21.60
2357.785	Average	29.37	12.32	41.69	54.00	-12.31
2452.000	Peak	81.16	12.86	94.02	-	-
2452.000	Average	71.27	12.86	84.13	-	-
2487.175	Peak	45.19	13.10	58.29	74.00	-15.71
2487.175	Average	28.63	13.10	41.73	54.00	-12.27

Report No.: TMWK2201000110KR

Below 1G Test Data

BFM OFF

Test Mode	Mode 1	Temp/Hum	25.9(°C)/ 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

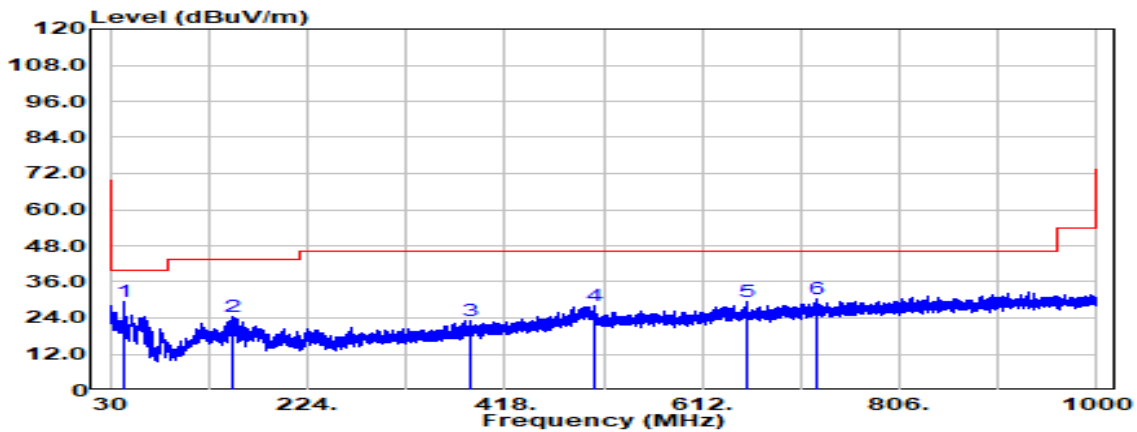


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
42.610	Peak	41.12	-11.74	29.38	40.00	-10.62
150.886	Peak	35.07	-10.67	24.39	43.50	-19.11
383.929	Peak	30.01	-6.98	23.03	46.00	-22.97
506.634	Peak	31.68	-3.82	27.86	46.00	-18.14
655.771	Peak	30.31	-1.10	29.21	46.00	-16.79
724.156	Peak	30.22	-0.05	30.17	46.00	-15.83

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000110KR

Test Mode	Mode 1	Temp/Hum	25.9(°C)/ 56%RH
Test Item	30MHz-1GHz	Test Date	April 28, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

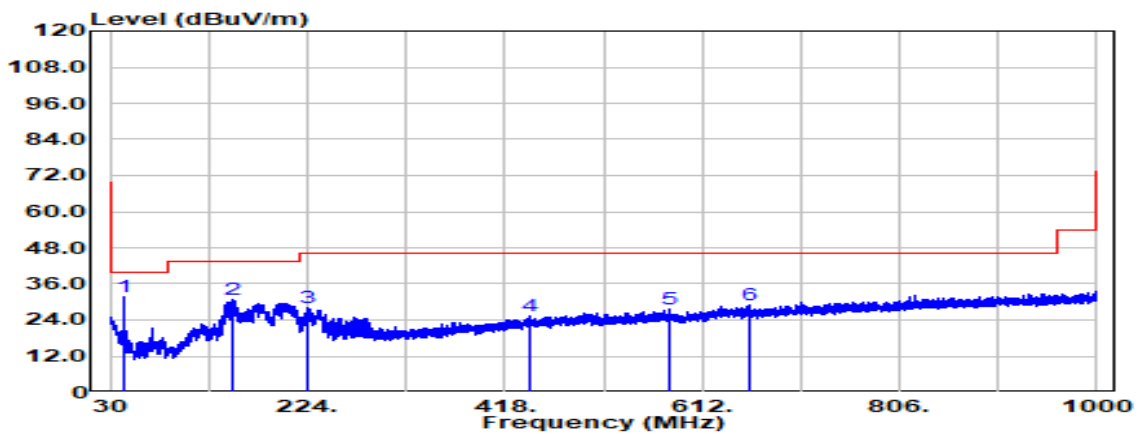

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
42.610	Peak	43.28	-11.74	31.54	40.00	-8.46
150.886	Peak	41.53	-10.67	30.86	43.50	-12.64
224.485	Peak	40.09	-12.03	28.06	46.00	-17.94
443.705	Peak	30.22	-5.01	25.21	46.00	-20.79
580.111	Peak	30.13	-2.66	27.47	46.00	-18.53
659.288	Peak	30.21	-1.17	29.03	46.00	-16.97


Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000110KR

Above 1G Test Data

BFM OFF

Test Mode	IEEE 802.11b CH 2412	Temp/Hum	25.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 19, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

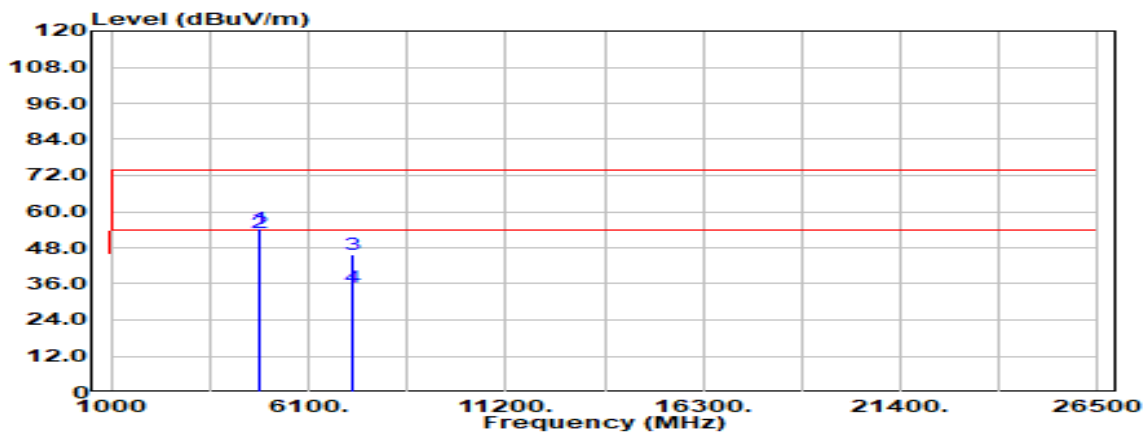


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	44.59	9.53	54.12	74.00	-19.88
4824.000	Average	43.41	9.53	52.94	54.00	-1.06
7236.000	Peak	32.37	13.41	45.78	74.00	-28.22
7236.000	Average	21.35	13.41	34.76	54.00	-19.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11b CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

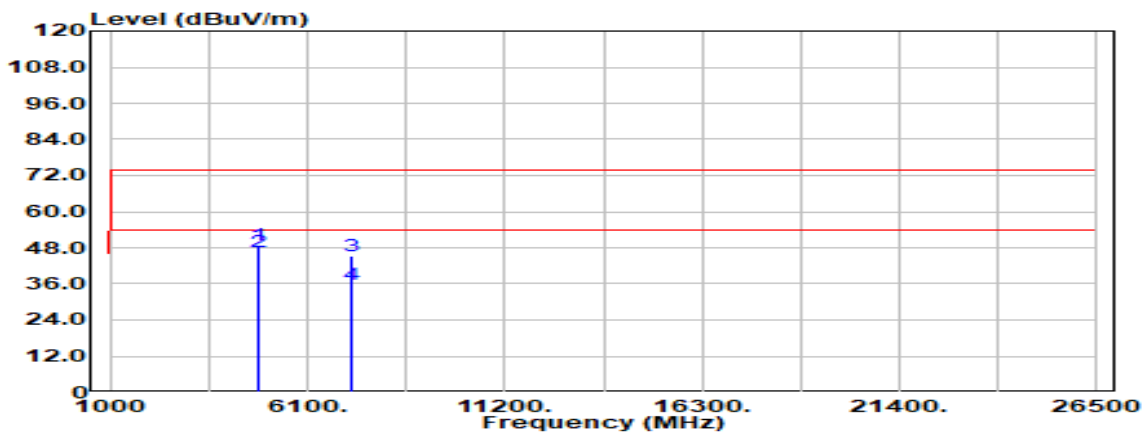


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.000	Peak	39.19	9.53	48.71	74.00	-25.29
4824.000	Average	37.09	9.53	46.62	54.00	-7.38
7236.000	Peak	31.92	13.41	45.33	74.00	-28.67
7236.000	Average	22.56	13.41	35.97	54.00	-18.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11b CH 2437	Temp/Hum	25.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 19, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

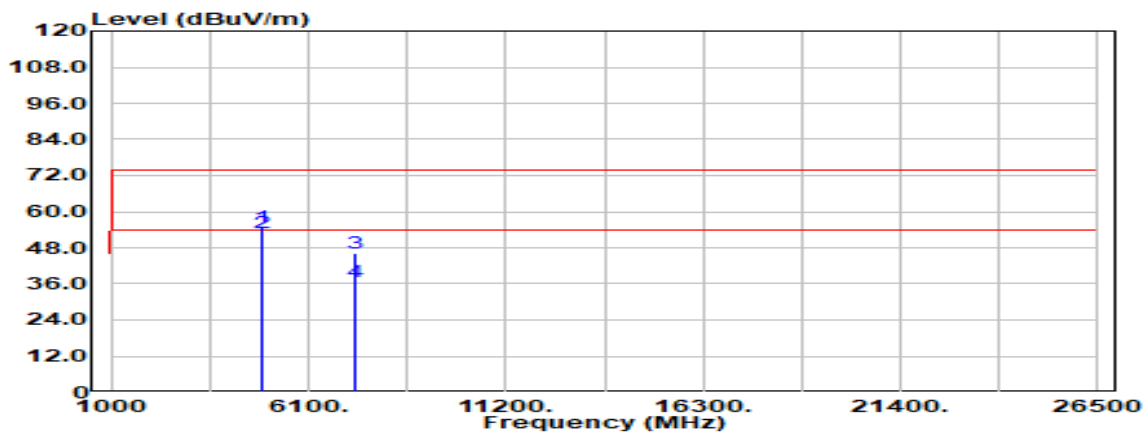


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	45.03	9.60	54.63	74.00	-19.37
4874.000	Average	43.61	9.60	53.21	54.00	-0.79
7311.000	Peak	32.83	13.23	46.06	74.00	-27.94
7311.000	Average	23.58	13.23	36.81	54.00	-17.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11b CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

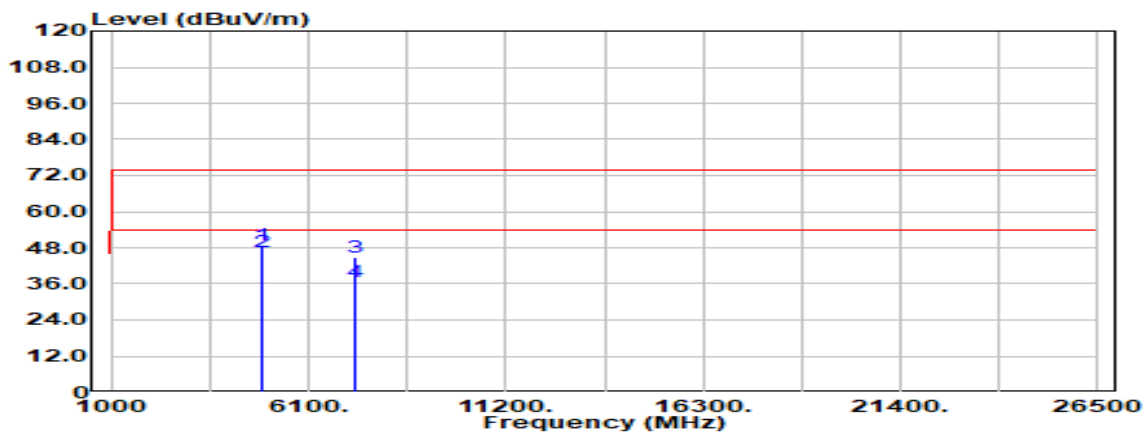


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4874.000	Peak	39.53	9.60	49.13	74.00	-24.87
4874.000	Average	37.11	9.60	46.71	54.00	-7.29
7311.000	Peak	31.58	13.23	44.81	74.00	-29.19
7311.000	Average	23.27	13.23	36.50	54.00	-17.50
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11b CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

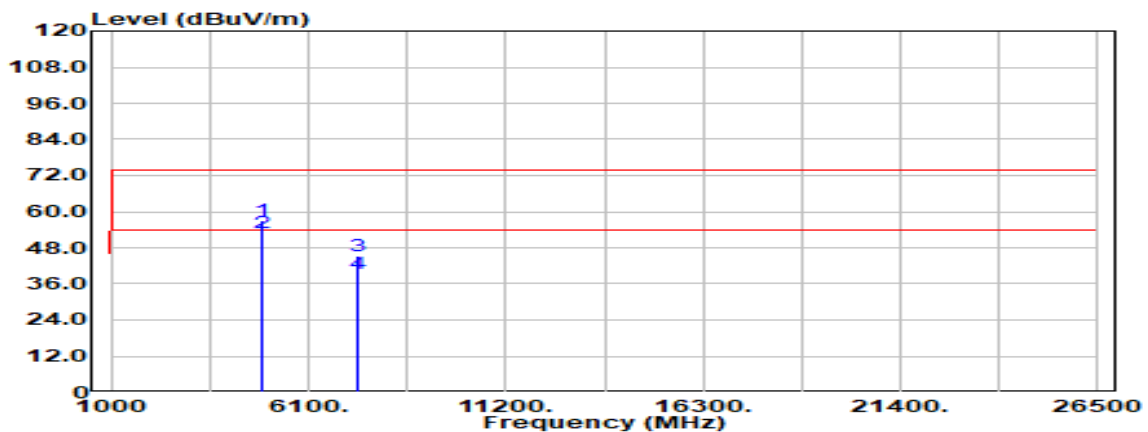


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	47.65	9.63	57.28	74.00	-16.72
4924.000	Average	43.18	9.63	52.81	54.00	-1.19
7386.000	Peak	31.66	13.43	45.09	74.00	-28.91
7386.000	Average	25.74	13.43	39.17	54.00	-14.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11b CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

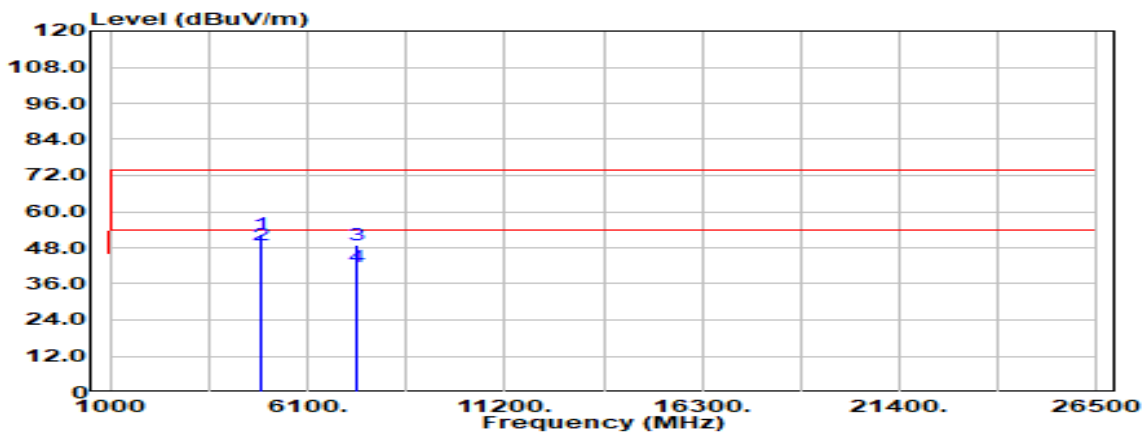


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	42.74	9.63	52.37	74.00	-21.63
4924.000	Average	39.37	9.63	49.00	54.00	-5.00
7386.000	Peak	35.67	13.43	49.10	74.00	-24.90
7386.000	Average	28.31	13.43	41.74	54.00	-12.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

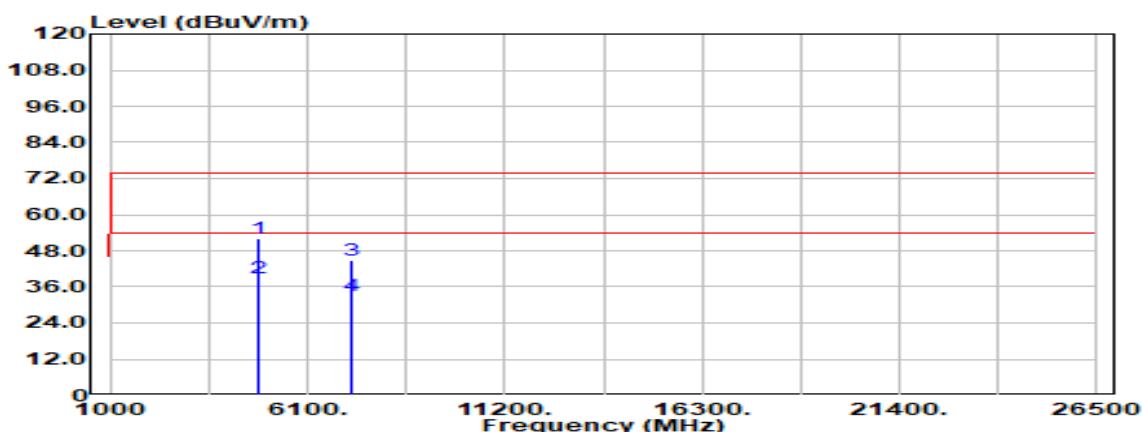


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	42.54	9.53	52.07	74.00	-21.93
4824.000	Average	29.43	9.53	38.96	54.00	-15.04
7236.000	Peak	31.39	13.41	44.79	74.00	-29.21
7236.000	Average	19.49	13.41	32.90	54.00	-21.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

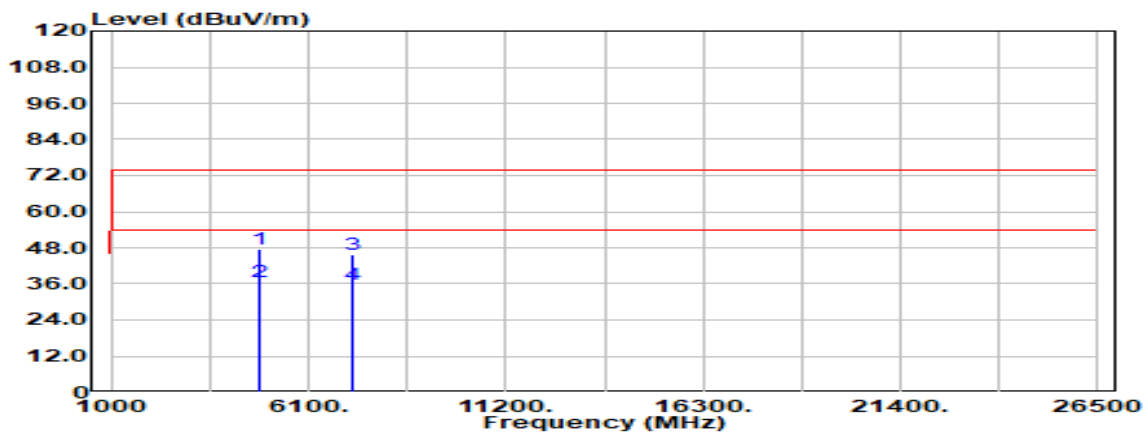


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	38.23	9.53	47.76	74.00	-26.24
4824.000	Average	27.27	9.53	36.80	54.00	-17.20
7236.000	Peak	32.20	13.41	45.60	74.00	-28.40
7236.000	Average	22.32	13.41	35.73	54.00	-18.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

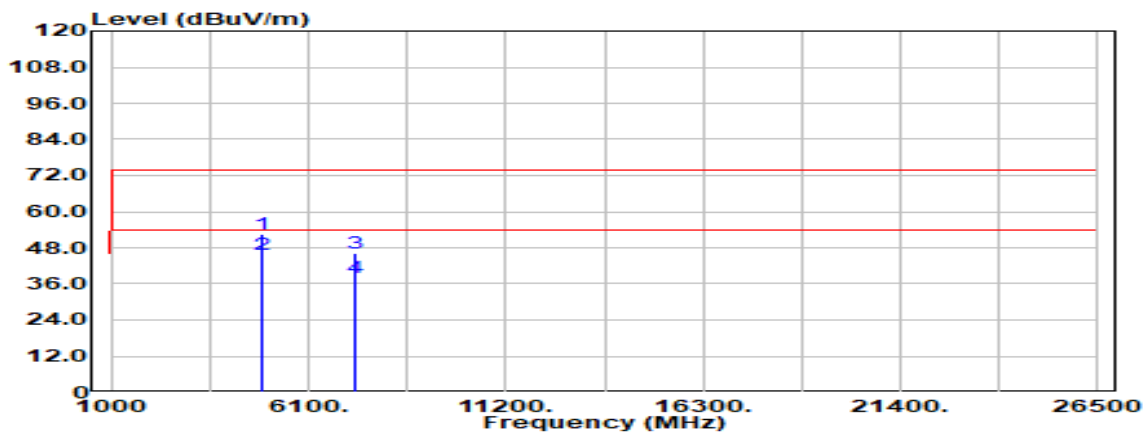


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	43.06	9.60	52.66	74.00	-21.34
4874.000	Average	36.07	9.60	45.67	54.00	-8.33
7311.000	Peak	32.88	13.23	46.11	74.00	-27.89
7311.000	Average	24.90	13.23	38.13	54.00	-15.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

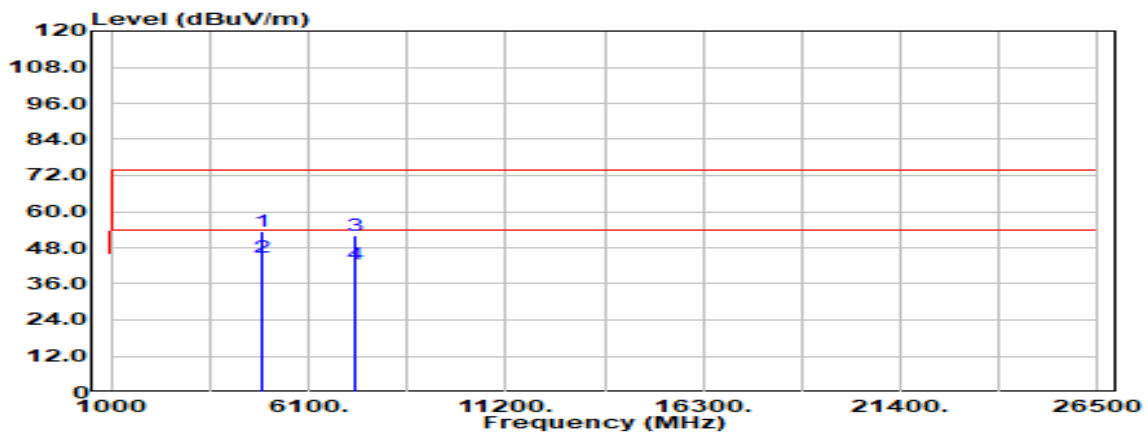


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	43.67	9.60	53.27	74.00	-20.73
4874.000	Average	35.28	9.60	44.88	54.00	-9.12
7311.000	Peak	39.03	13.23	52.26	74.00	-21.74
7311.000	Average	29.40	13.23	42.63	54.00	-11.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

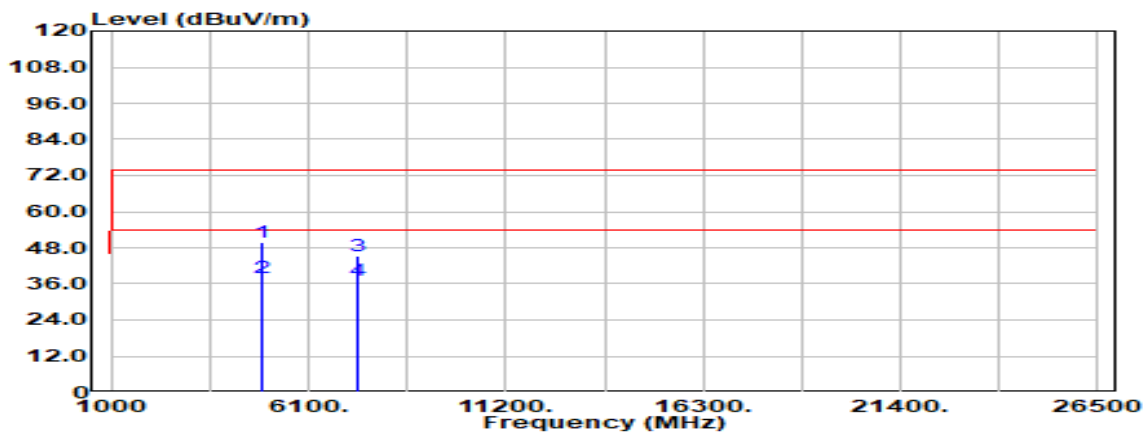


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	40.25	9.63	49.88	74.00	-24.12
4924.000	Average	28.44	9.63	38.07	54.00	-15.93
7386.000	Peak	31.87	13.43	45.30	74.00	-28.70
7386.000	Average	23.50	13.43	36.93	54.00	-17.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11g CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

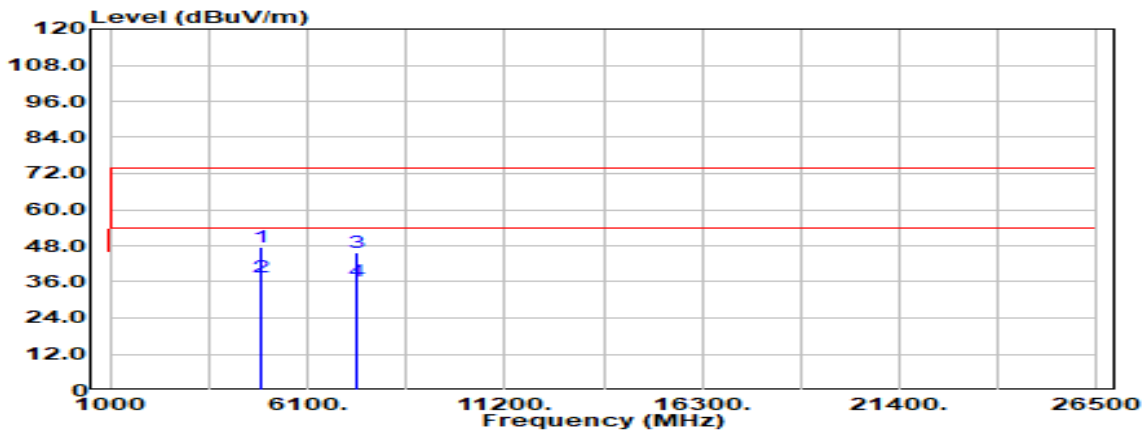


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.000	Peak	37.99	9.63	47.62	74.00	-26.38
4924.000	Average	27.86	9.63	37.49	54.00	-16.51
7386.000	Peak	32.46	13.43	45.89	74.00	-28.11
7386.000	Average	22.85	13.43	36.28	54.00	-17.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

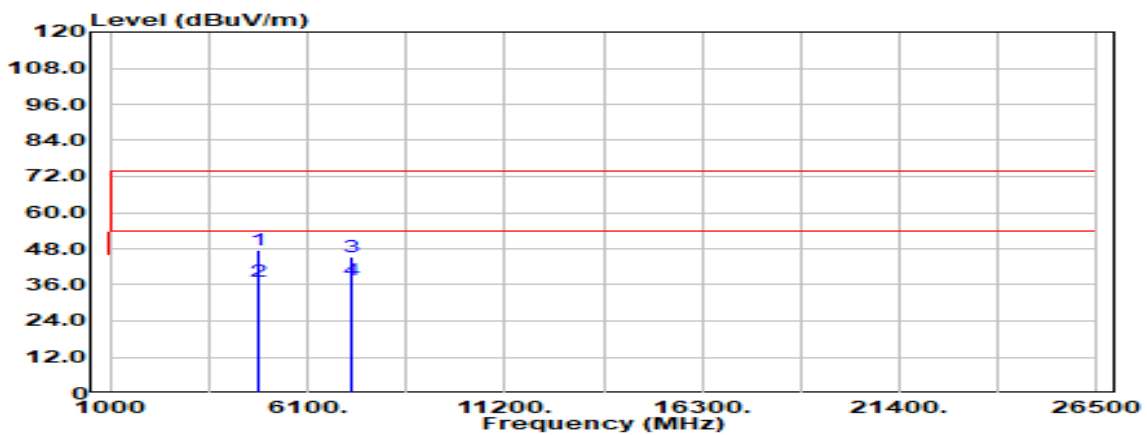


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.000	Peak	37.98	9.53	47.50	74.00	-26.50
4824.000	Average	27.51	9.53	37.04	54.00	-16.96
7236.000	Peak	32.08	13.41	45.49	74.00	-28.51
7236.000	Average	24.39	13.41	37.80	54.00	-16.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

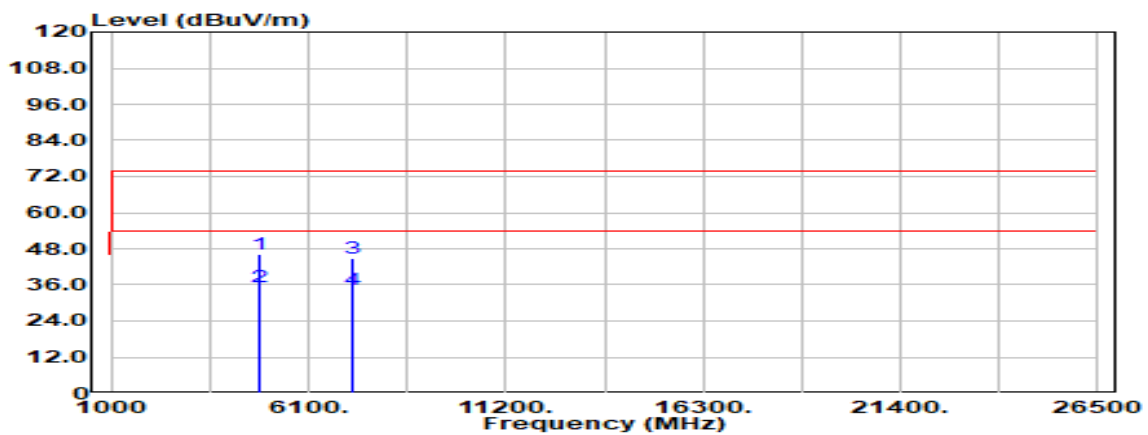


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.000	Peak	36.86	9.53	46.39	74.00	-27.61
4824.000	Average	25.62	9.53	35.15	54.00	-18.85
7236.000	Peak	31.58	13.41	44.99	74.00	-29.01
7236.000	Average	21.13	13.41	34.54	54.00	-19.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

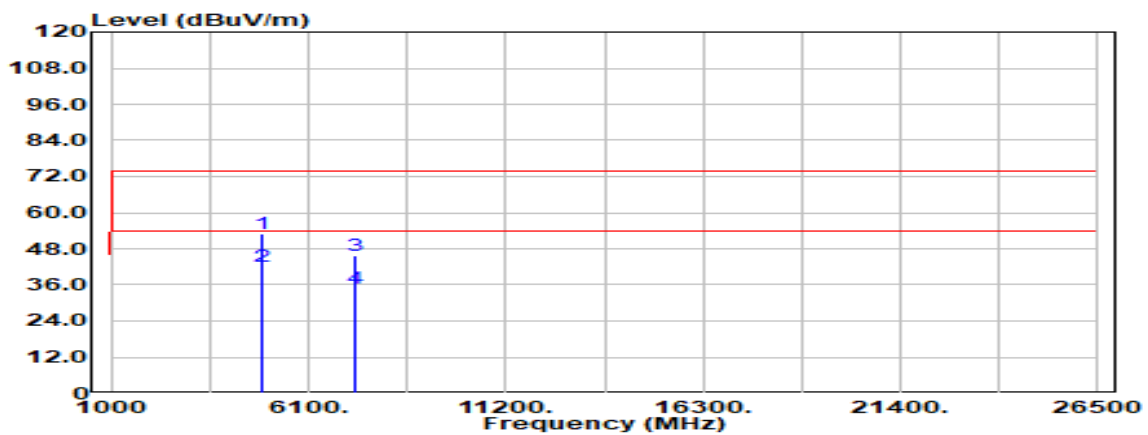


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	43.57	9.60	53.17	74.00	-20.83
4874.000	Average	32.47	9.60	42.07	54.00	-11.93
7311.000	Peak	32.29	13.23	45.53	74.00	-28.47
7311.000	Average	21.42	13.23	34.65	54.00	-19.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

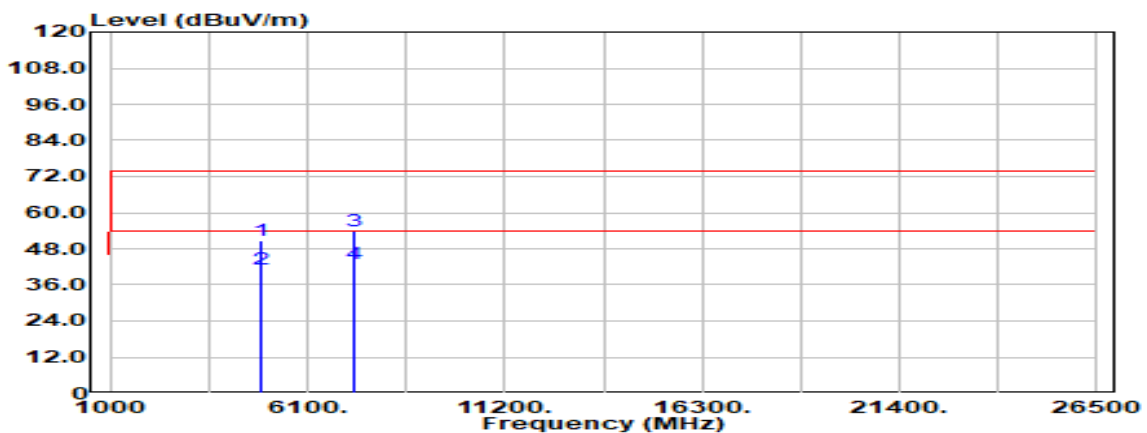


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	41.21	9.60	50.80	74.00	-23.20
4874.000	Average	31.72	9.60	41.32	54.00	-12.68
7311.000	Peak	40.69	13.23	53.92	74.00	-20.08
7311.000	Average	29.97	13.23	43.20	54.00	-10.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

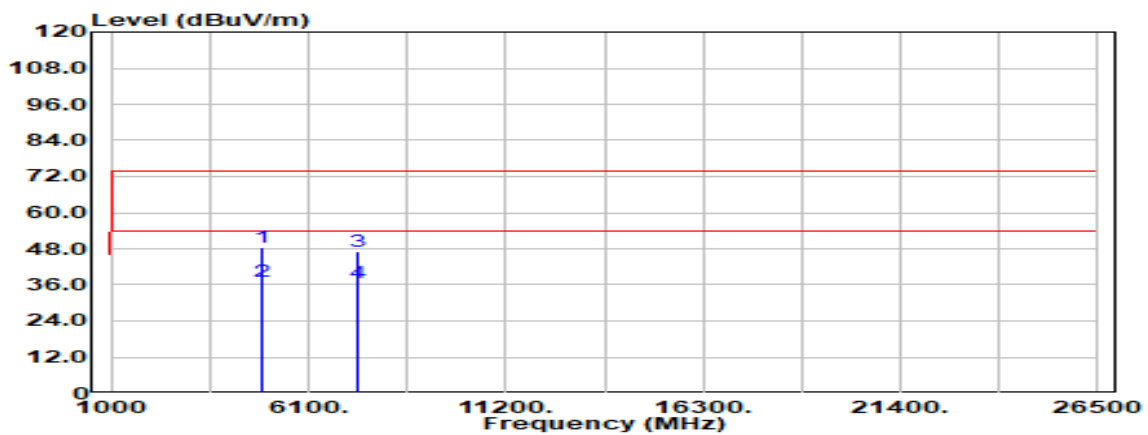


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	38.96	9.63	48.59	74.00	-25.41
4924.000	Average	27.29	9.63	36.92	54.00	-17.08
7386.000	Peak	33.78	13.43	47.21	74.00	-26.79
7386.000	Average	23.22	13.43	36.65	54.00	-17.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

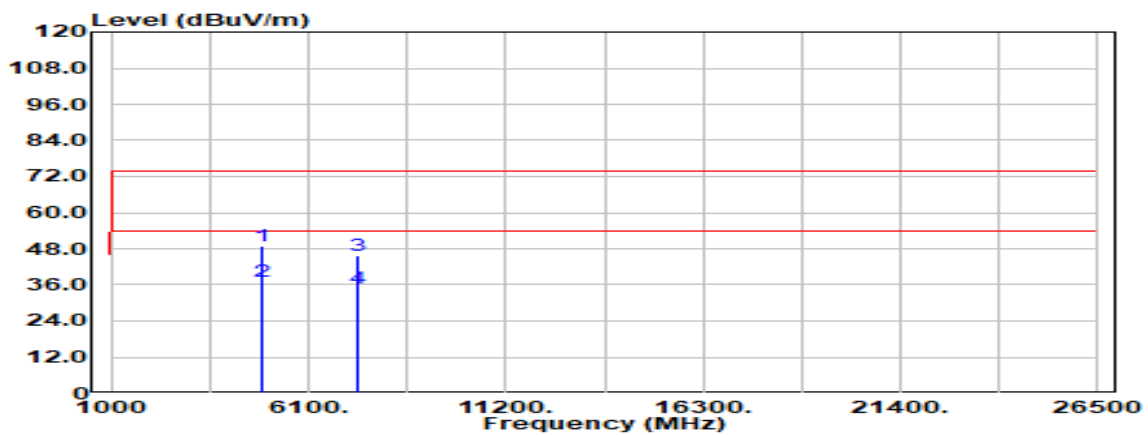


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	39.47	9.63	49.09	74.00	-24.91
4924.000	Average	27.59	9.63	37.22	54.00	-16.78
7386.000	Peak	32.13	13.43	45.56	74.00	-28.44
7386.000	Average	21.66	13.43	35.09	54.00	-18.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

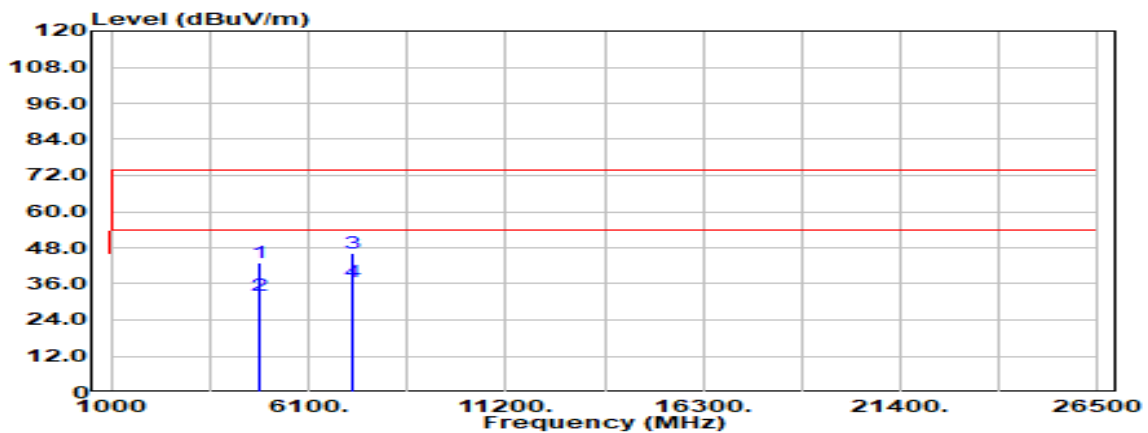


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.23	9.59	42.82	74.00	-31.18
4844.000	Average	22.71	9.59	32.30	54.00	-21.70
7266.000	Peak	32.79	13.32	46.11	74.00	-27.89
7266.000	Average	23.31	13.32	36.63	54.00	-17.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

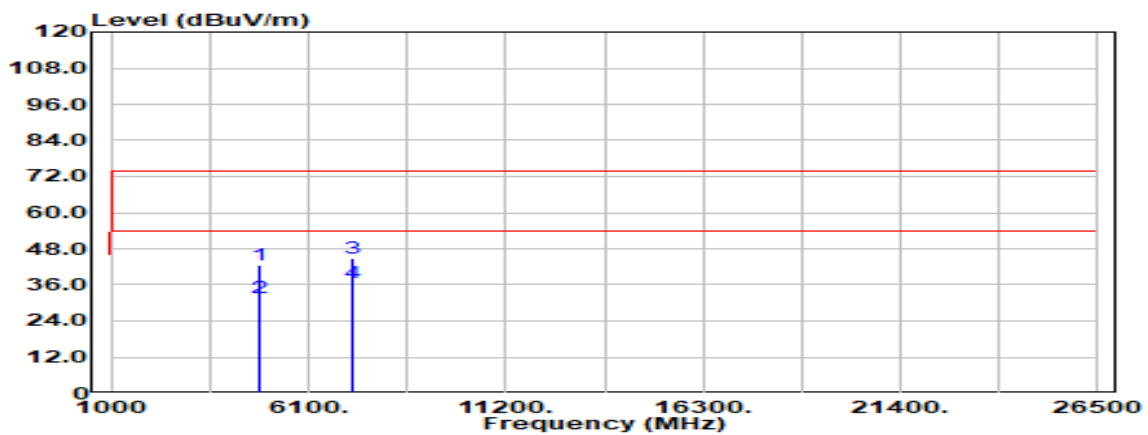


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.04	9.59	42.63	74.00	-31.37
4844.000	Average	22.09	9.59	31.68	54.00	-22.32
7266.000	Peak	31.59	13.32	44.91	74.00	-29.09
7266.000	Average	23.34	13.32	36.66	54.00	-17.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

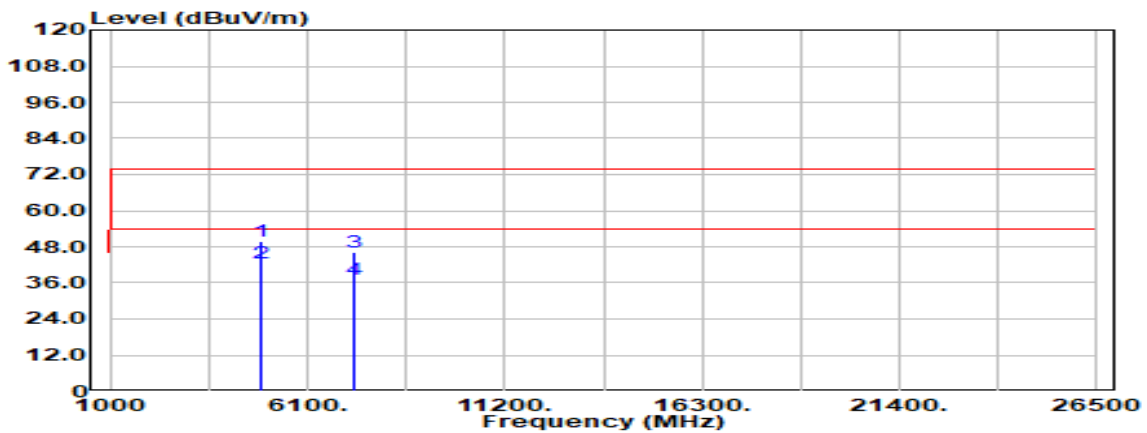


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	40.28	9.60	49.87	74.00	-24.13
4874.000	Average	33.15	9.60	42.75	54.00	-11.25
7311.000	Peak	32.89	13.23	46.12	74.00	-27.88
7311.000	Average	23.80	13.23	37.03	54.00	-16.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

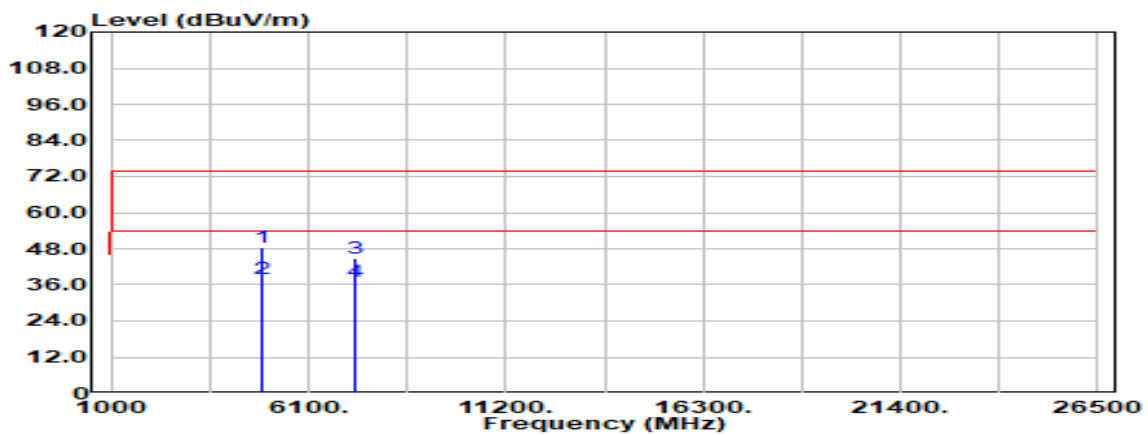


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	38.79	9.60	48.38	74.00	-25.62
4874.000	Average	28.44	9.60	38.04	54.00	-15.96
7311.000	Peak	31.74	13.23	44.97	74.00	-29.03
7311.000	Average	23.69	13.23	36.92	54.00	-17.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

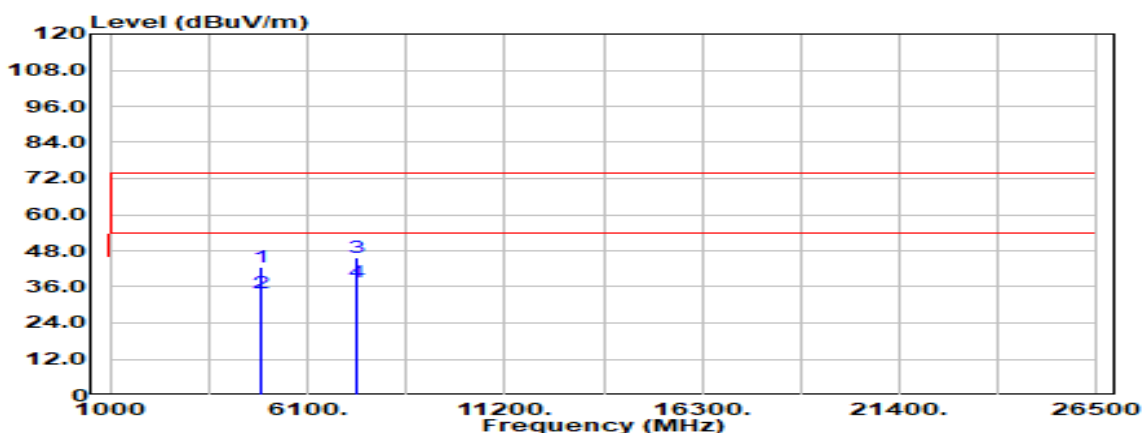


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.000	Peak	32.89	9.59	42.47	74.00	-31.53
4904.000	Average	24.52	9.59	34.11	54.00	-19.89
7356.000	Peak	32.49	13.28	45.77	74.00	-28.23
7356.000	Average	24.31	13.28	37.59	54.00	-16.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

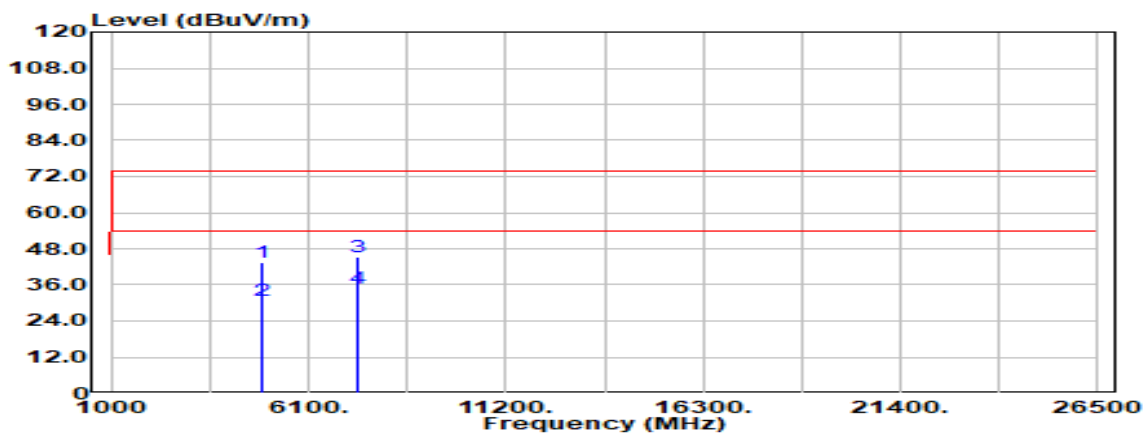


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.000	Peak	33.74	9.59	43.32	74.00	-30.68
4904.000	Average	21.41	9.59	31.00	54.00	-23.00
7356.000	Peak	31.91	13.28	45.19	74.00	-28.81
7356.000	Average	21.49	13.28	34.77	54.00	-19.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

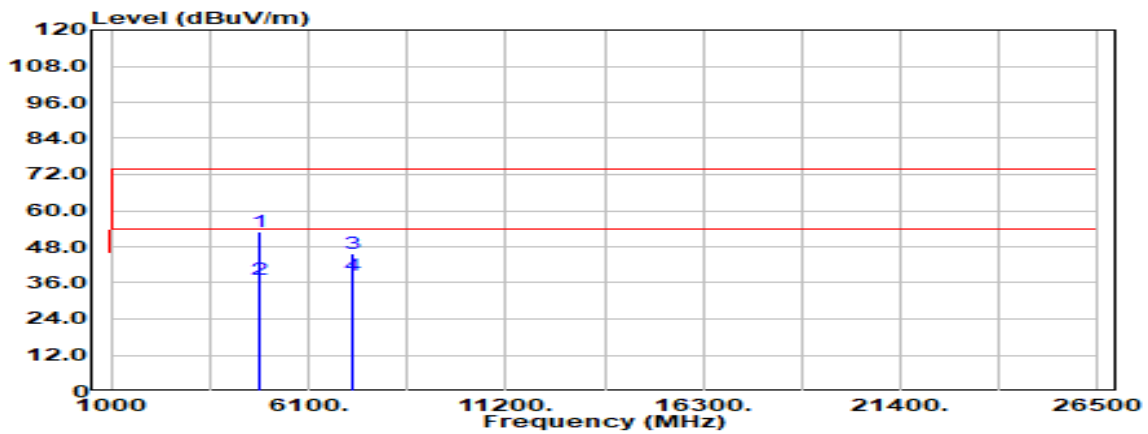


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4824.000	Peak	43.25	9.53	52.78	74.00	-21.22
4824.000	Average	27.41	9.53	36.94	54.00	-17.06
7236.000	Peak	32.54	13.41	45.95	74.00	-28.05
7236.000	Average	24.96	13.41	38.37	54.00	-15.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

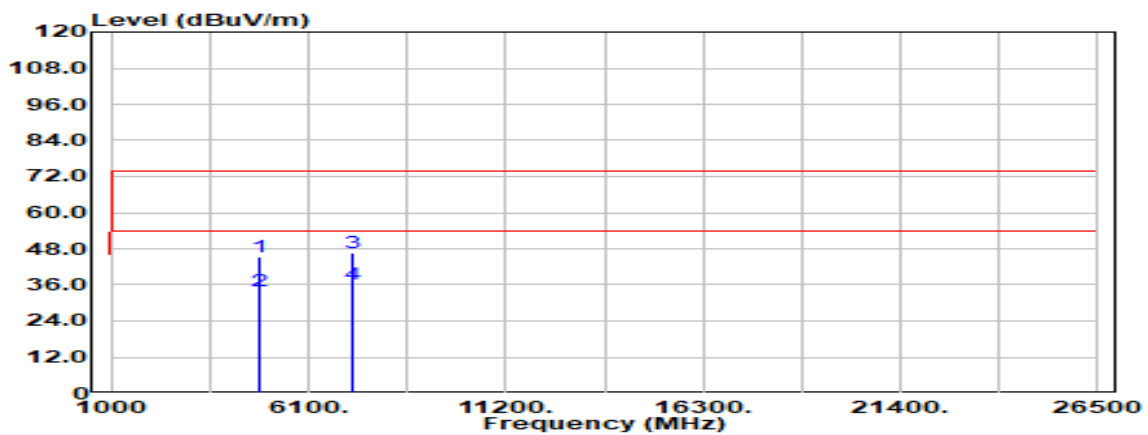


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	35.59	9.53	45.11	74.00	-28.89
4824.000	Average	24.55	9.53	34.08	54.00	-19.92
7236.000	Peak	33.05	13.41	46.46	74.00	-27.54
7236.000	Average	22.61	13.41	36.02	54.00	-17.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

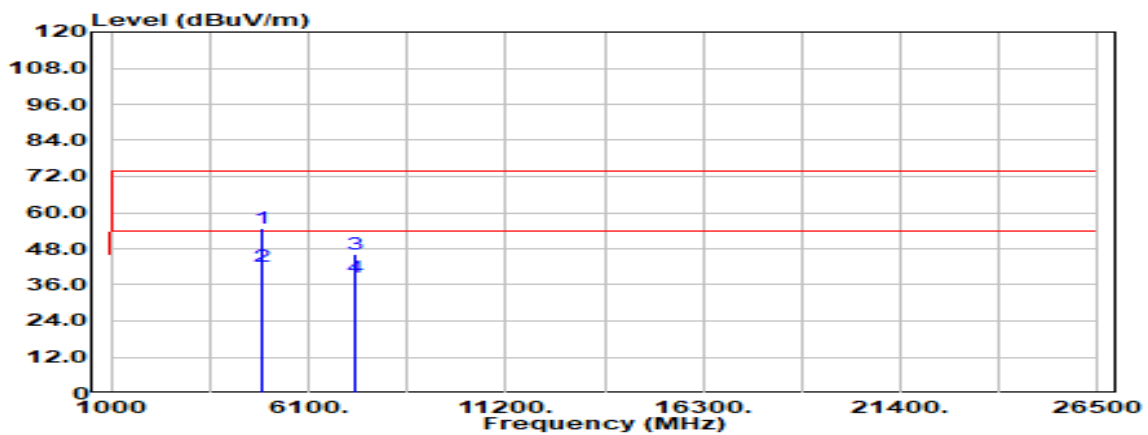


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	45.04	9.60	54.64	74.00	-19.36
4874.000	Average	32.49	9.60	42.09	54.00	-11.91
7311.000	Peak	32.82	13.23	46.06	74.00	-27.94
7311.000	Average	25.10	13.23	38.33	54.00	-15.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

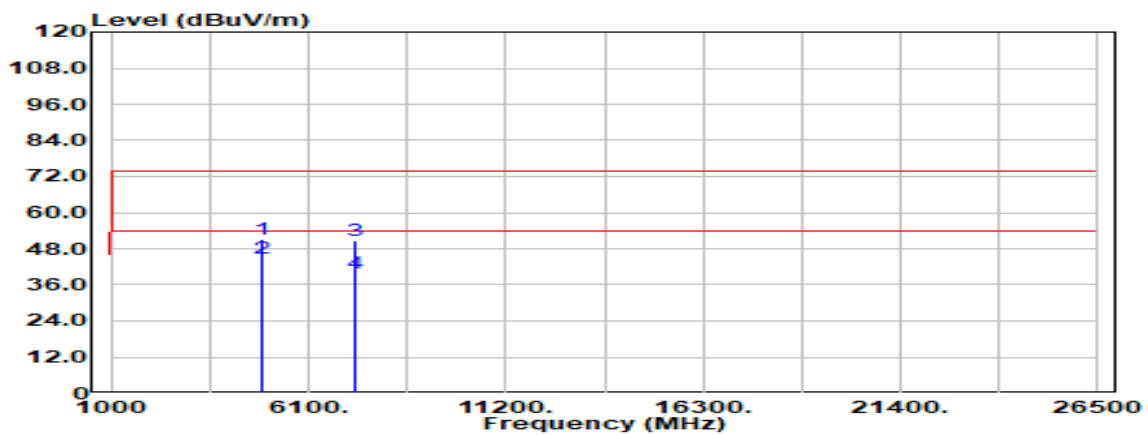


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	41.48	9.60	51.08	74.00	-22.92
4874.000	Average	35.30	9.60	44.90	54.00	-9.10
7311.000	Peak	37.50	13.23	50.73	74.00	-23.27
7311.000	Average	26.81	13.23	40.04	54.00	-13.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

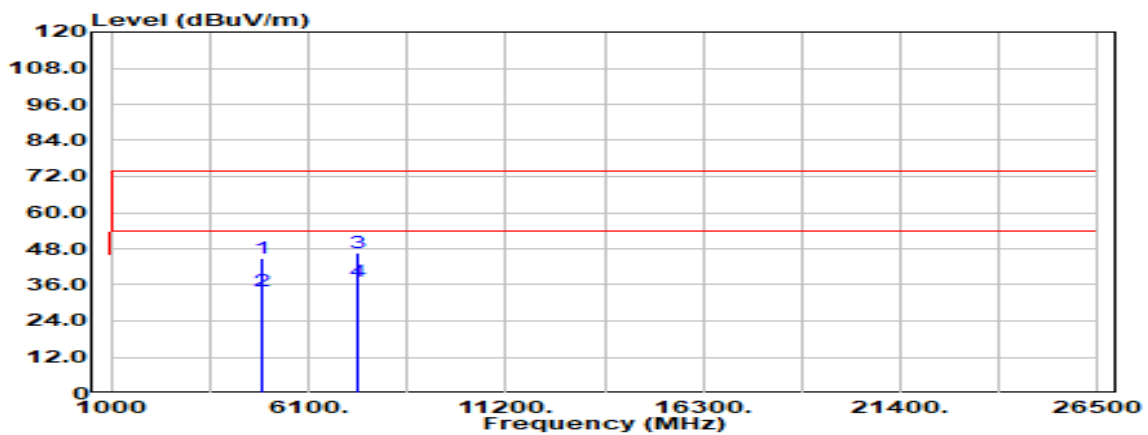


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	35.25	9.63	44.88	74.00	-29.12
4924.000	Average	24.27	9.63	33.90	54.00	-20.10
7386.000	Peak	33.03	13.43	46.46	74.00	-27.54
7386.000	Average	23.66	13.43	37.09	54.00	-16.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

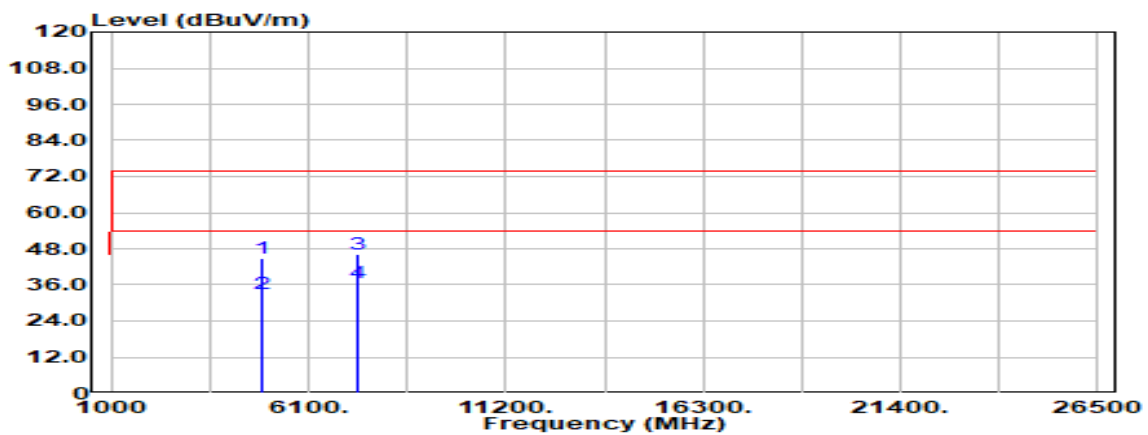


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	35.34	9.63	44.97	74.00	-29.03
4924.000	Average	23.63	9.63	33.26	54.00	-20.74
7386.000	Peak	32.70	13.43	46.13	74.00	-27.87
7386.000	Average	23.40	13.43	36.83	54.00	-17.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

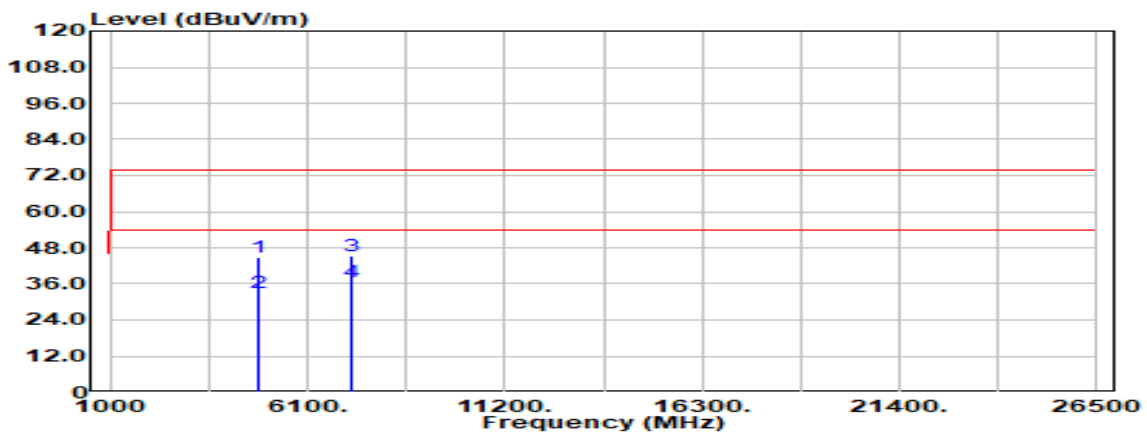


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	35.03	9.59	44.62	74.00	-29.38
4844.000	Average	23.24	9.59	32.83	54.00	-21.17
7266.000	Peak	32.00	13.32	45.32	74.00	-28.68
7266.000	Average	23.31	13.32	36.63	54.00	-17.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

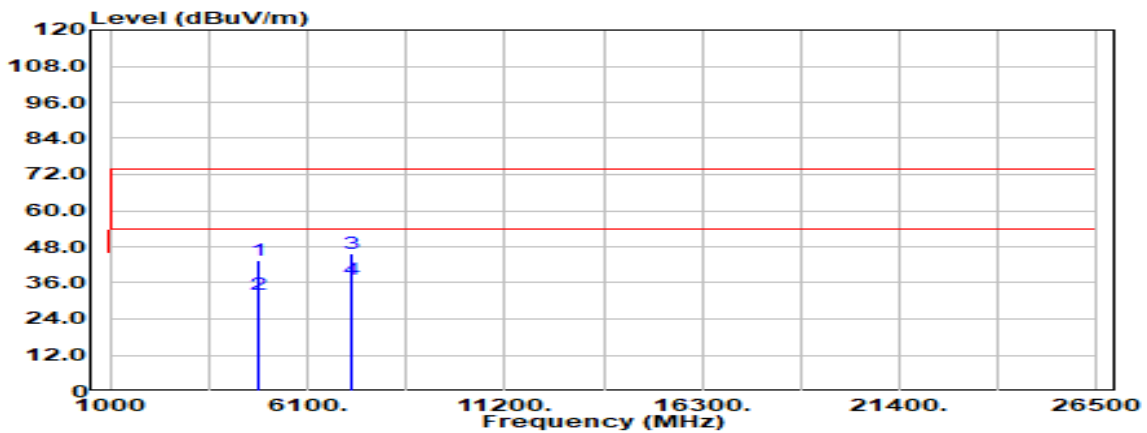


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.76	9.59	43.35	74.00	-30.65
4844.000	Average	22.36	9.59	31.95	54.00	-22.05
7266.000	Peak	32.63	13.32	45.95	74.00	-28.05
7266.000	Average	23.62	13.32	36.94	54.00	-17.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

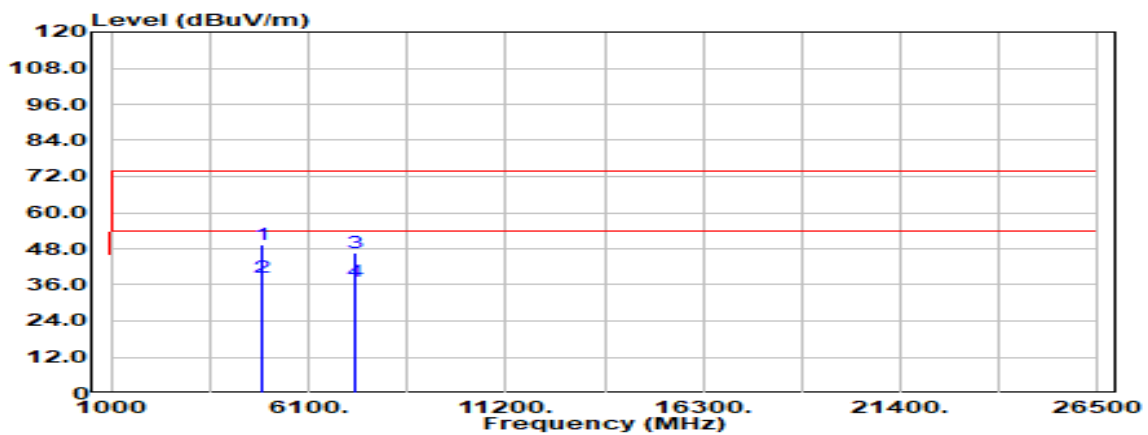


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	39.75	9.60	49.35	74.00	-24.65
4874.000	Average	29.12	9.60	38.72	54.00	-15.28
7311.000	Peak	33.20	13.23	46.44	74.00	-27.56
7311.000	Average	23.94	13.23	37.17	54.00	-16.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

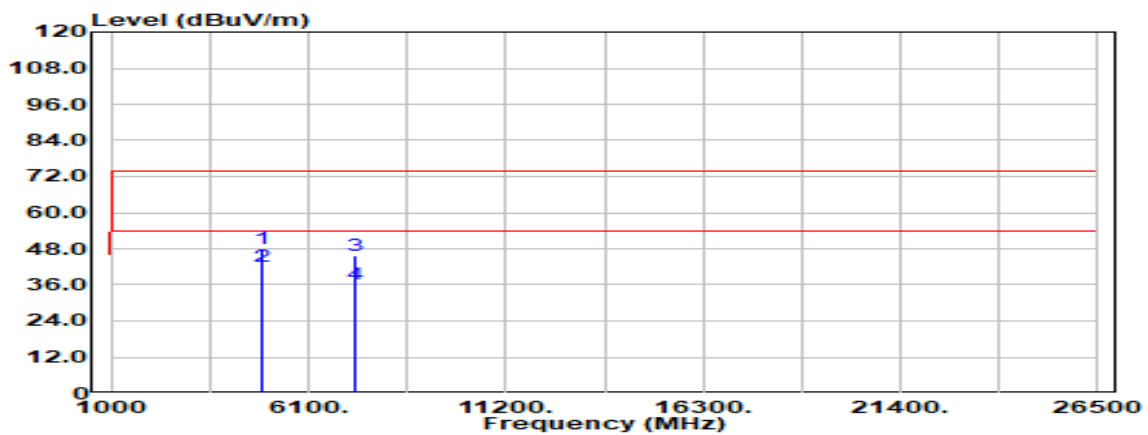


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	38.40	9.60	47.99	74.00	-26.01
4874.000	Average	32.37	9.60	41.97	54.00	-12.03
7311.000	Peak	32.47	13.23	45.70	74.00	-28.30
7311.000	Average	23.01	13.23	36.24	54.00	-17.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

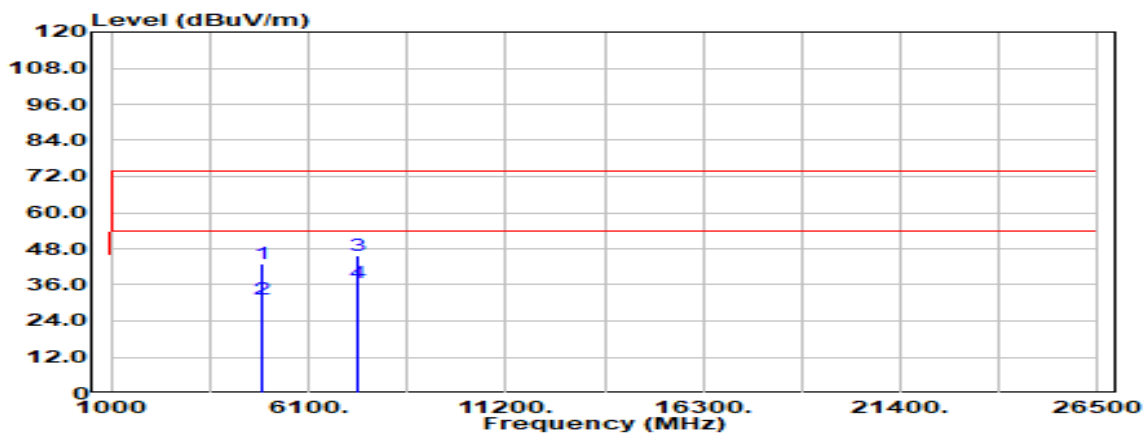


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.000	Peak	33.62	9.59	43.21	74.00	-30.79
4904.000	Average	21.59	9.59	31.18	54.00	-22.82
7356.000	Peak	32.54	13.28	45.82	74.00	-28.18
7356.000	Average	23.55	13.28	36.83	54.00	-17.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	22.5(°C)/ 63%RH
Test Item	Harmonic	Test Date	March 27, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

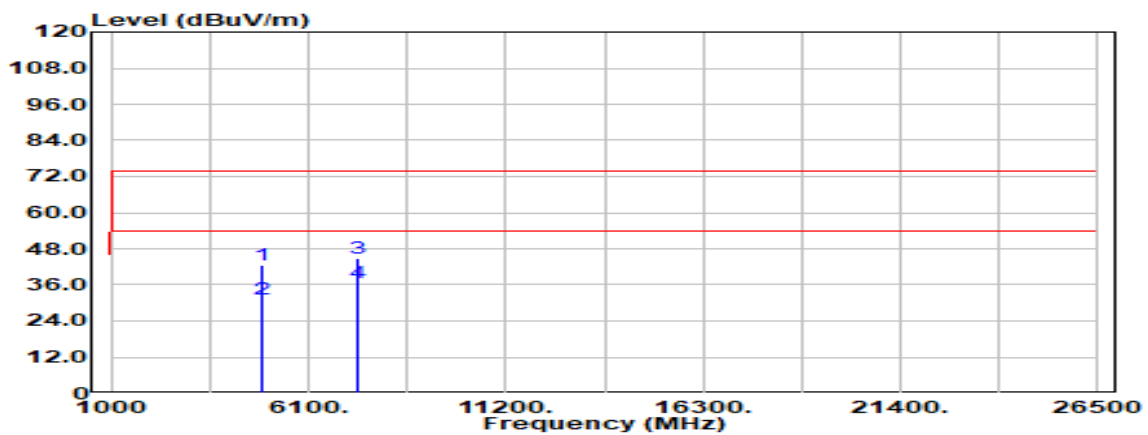

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	33.14	9.59	42.73	74.00	-31.27
4904.000	Average	21.63	9.59	31.22	54.00	-22.78
7356.000	Peak	31.61	13.28	44.89	74.00	-29.11
7356.000	Average	23.18	13.28	36.46	54.00	-17.54
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

BFM ON

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

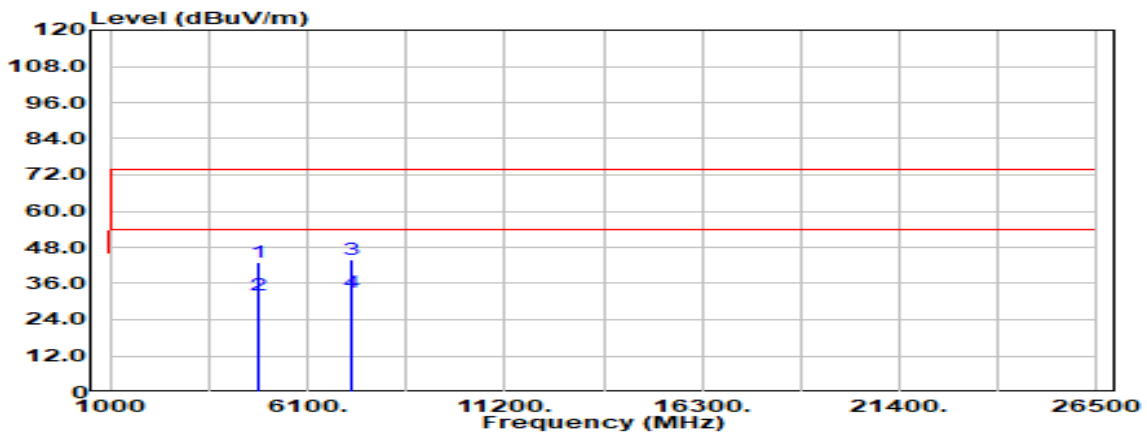


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	33.68	9.53	43.20	74.00	-30.80
4824.000	Average	22.61	9.53	32.14	54.00	-21.86
7236.000	Peak	30.72	13.41	44.12	74.00	-29.88
7236.000	Average	19.82	13.41	33.22	54.00	-20.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

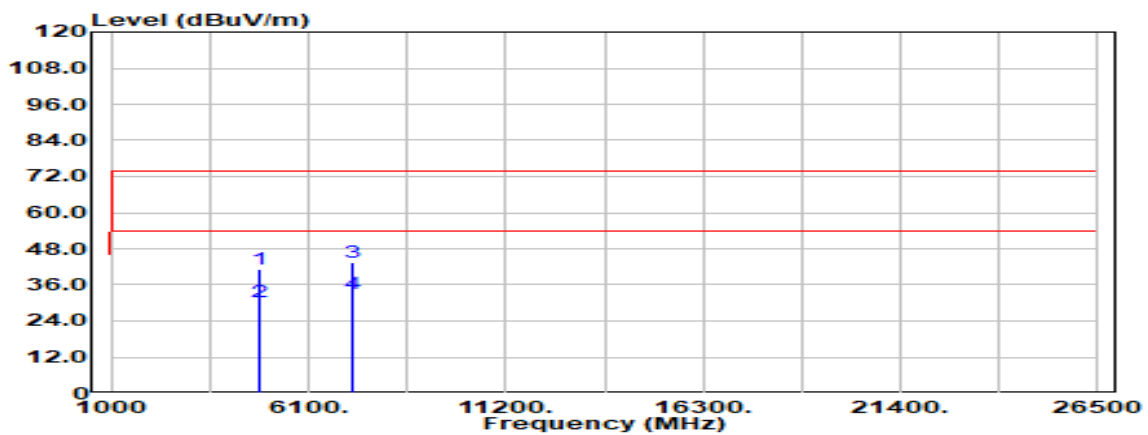


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	31.77	9.53	41.30	74.00	-32.70
4824.000	Average	20.84	9.53	30.37	54.00	-23.63
7236.000	Peak	30.02	13.41	43.42	74.00	-30.58
7236.000	Average	19.66	13.41	33.07	54.00	-20.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

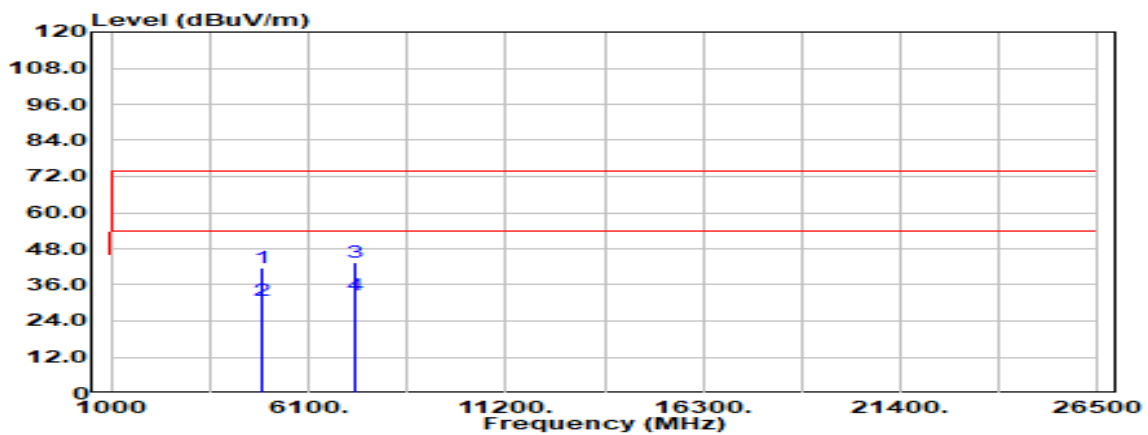


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	32.15	9.60	41.75	74.00	-32.25
4874.000	Average	21.07	9.60	30.67	54.00	-23.33
7311.000	Peak	30.31	13.23	43.55	74.00	-30.45
7311.000	Average	19.40	13.23	32.64	54.00	-21.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

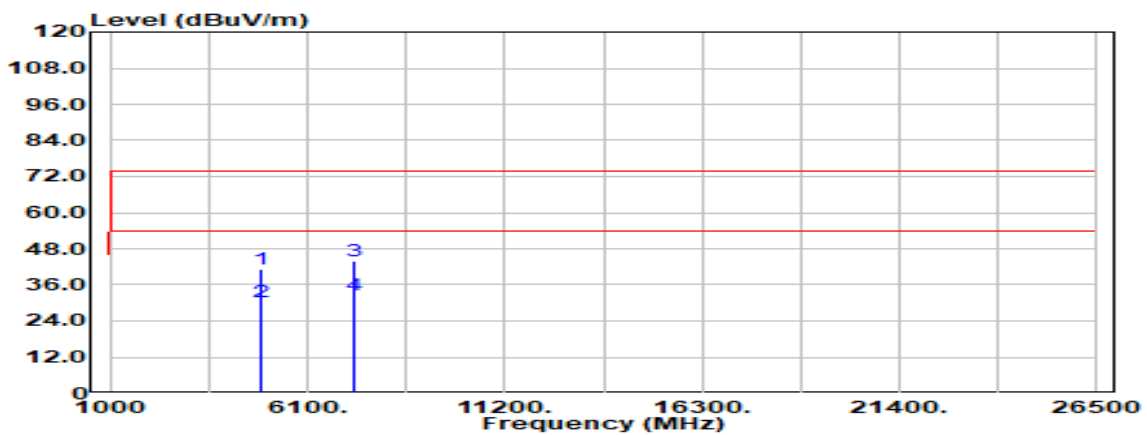


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	31.53	9.60	41.13	74.00	-32.87
4874.000	Average	20.60	9.60	30.20	54.00	-23.80
7311.000	Peak	30.87	13.23	44.11	74.00	-29.89
7311.000	Average	19.29	13.23	32.52	54.00	-21.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

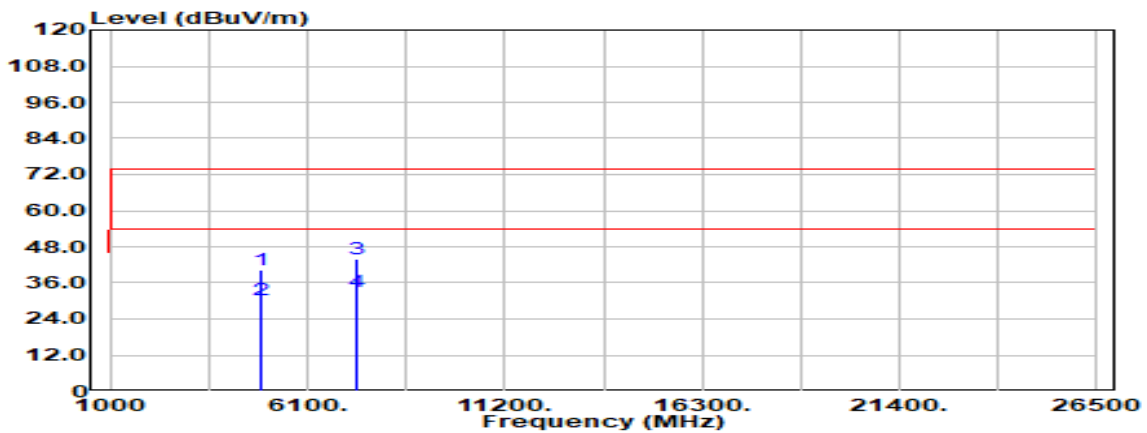


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	30.68	9.63	40.31	74.00	-33.69
4924.000	Average	20.55	9.63	30.18	54.00	-23.82
7386.000	Peak	30.49	13.43	43.92	74.00	-30.08
7386.000	Average	19.63	13.43	33.06	54.00	-20.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

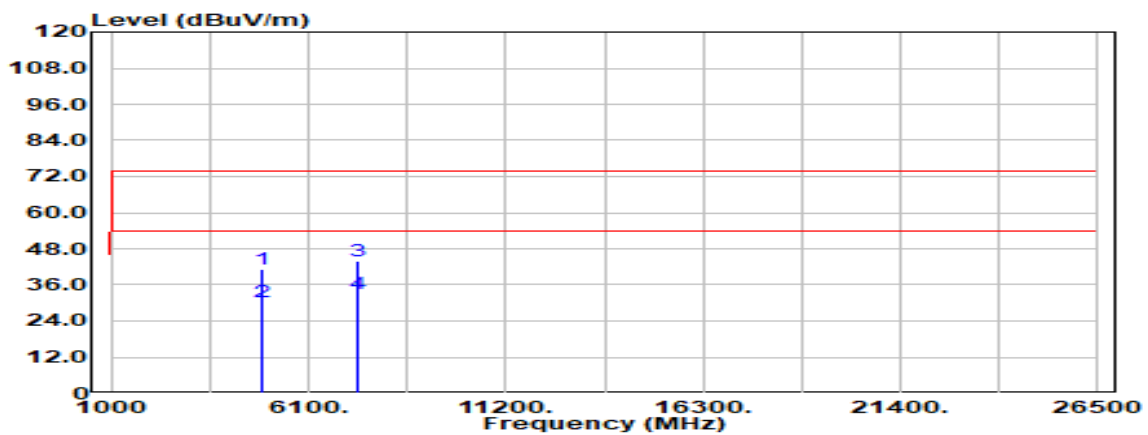


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.000	Peak	31.54	9.63	41.17	74.00	-32.83
4924.000	Average	20.62	9.63	30.25	54.00	-23.75
7386.000	Peak	30.46	13.43	43.89	74.00	-30.11
7386.000	Average	19.60	13.43	33.03	54.00	-20.97
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

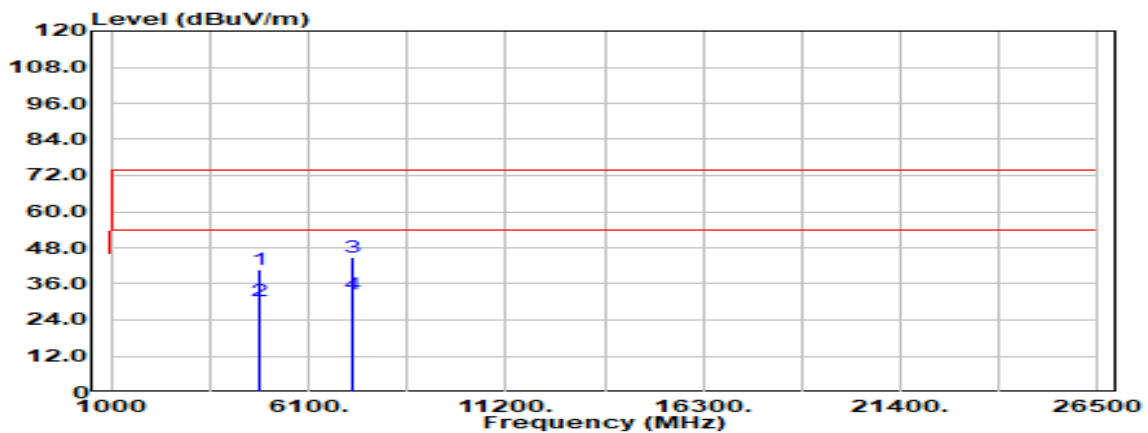


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	31.04	9.59	40.63	74.00	-33.37
4844.000	Average	20.81	9.59	30.40	54.00	-23.60
7266.000	Peak	31.30	13.32	44.61	74.00	-29.39
7266.000	Average	19.39	13.32	32.71	54.00	-21.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

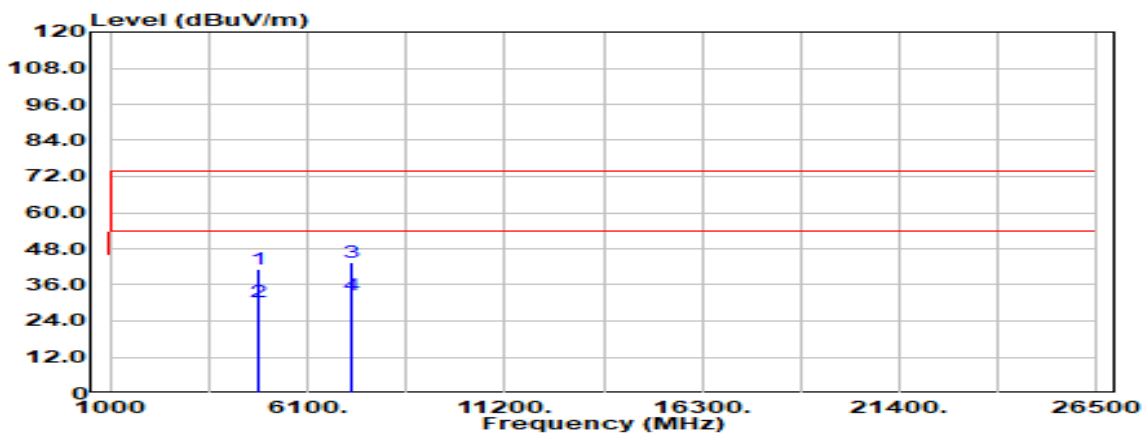


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	31.84	9.59	41.43	74.00	-32.57
4844.000	Average	20.82	9.59	30.41	54.00	-23.59
7266.000	Peak	30.31	13.32	43.63	74.00	-30.37
7266.000	Average	19.40	13.32	32.72	54.00	-21.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

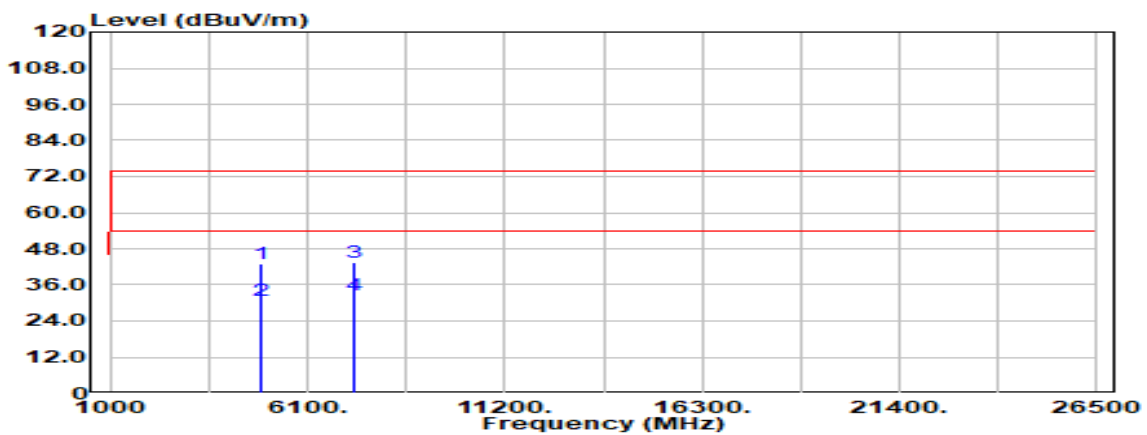


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.29	9.60	42.89	74.00	-31.11
4874.000	Average	21.29	9.60	30.88	54.00	-23.12
7311.000	Peak	30.05	13.23	43.28	74.00	-30.72
7311.000	Average	19.27	13.23	32.51	54.00	-21.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

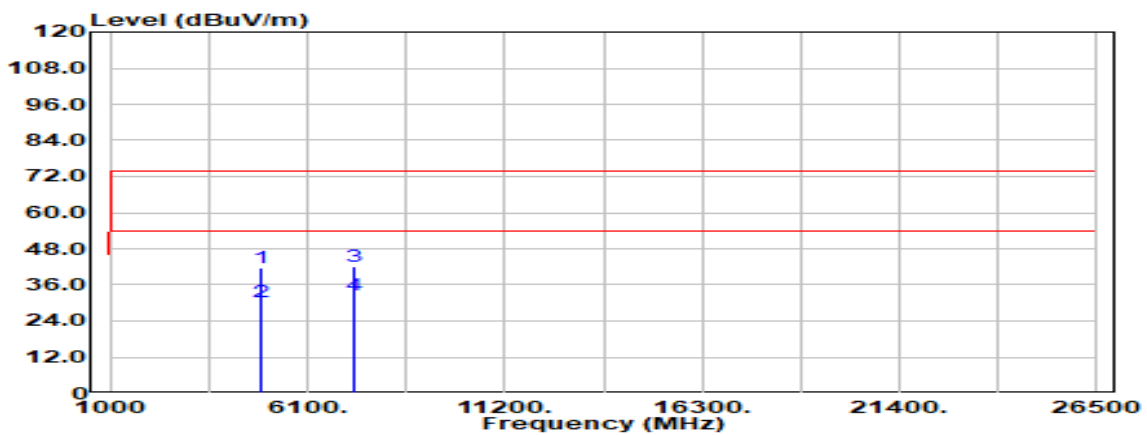


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	31.85	9.60	41.45	74.00	-32.55
4874.000	Average	20.54	9.60	30.14	54.00	-23.86
7311.000	Peak	29.08	13.23	42.31	74.00	-31.69
7311.000	Average	19.23	13.23	32.47	54.00	-21.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

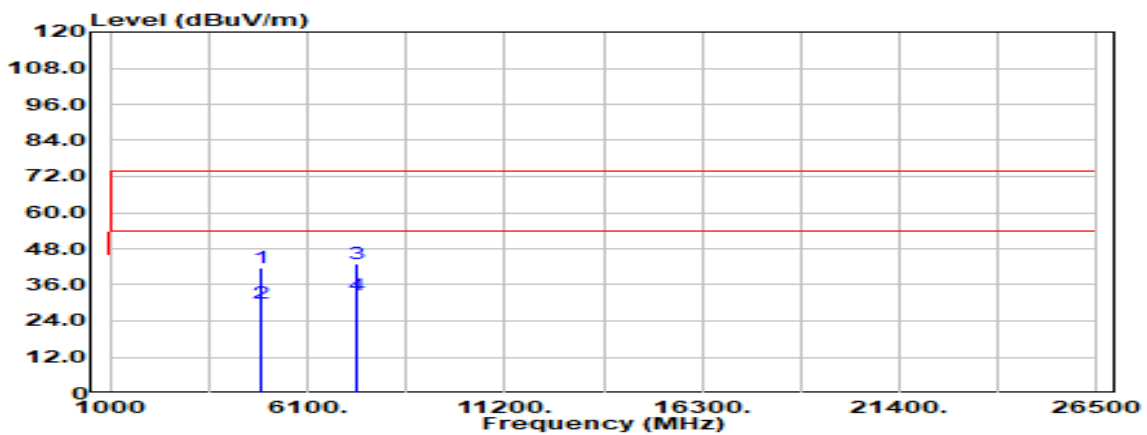


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.000	Peak	32.20	9.59	41.79	74.00	-32.21
4904.000	Average	20.43	9.59	30.02	54.00	-23.98
7356.000	Peak	29.66	13.28	42.94	74.00	-31.06
7356.000	Average	19.40	13.28	32.68	54.00	-21.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

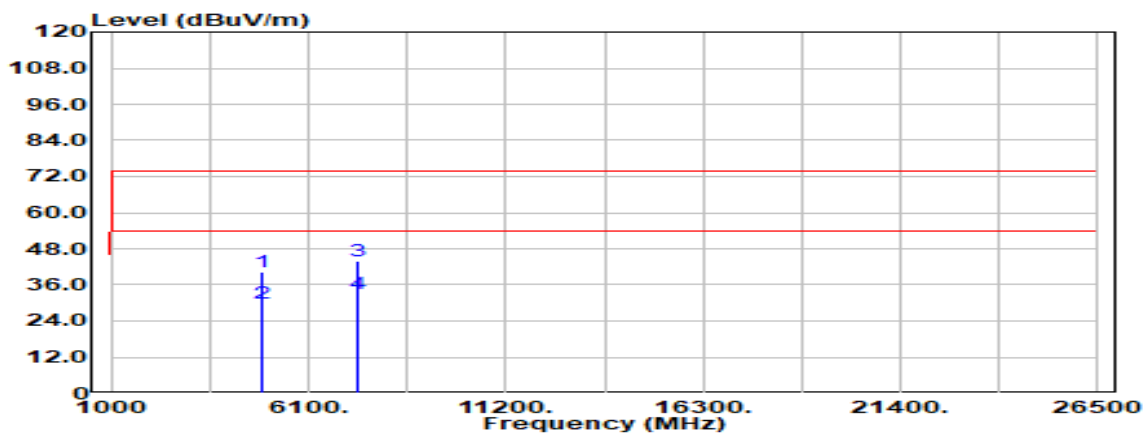


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	30.75	9.59	40.33	74.00	-33.67
4904.000	Average	20.39	9.59	29.98	54.00	-24.02
7356.000	Peak	30.70	13.28	43.98	74.00	-30.02
7356.000	Average	19.58	13.28	32.86	54.00	-21.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

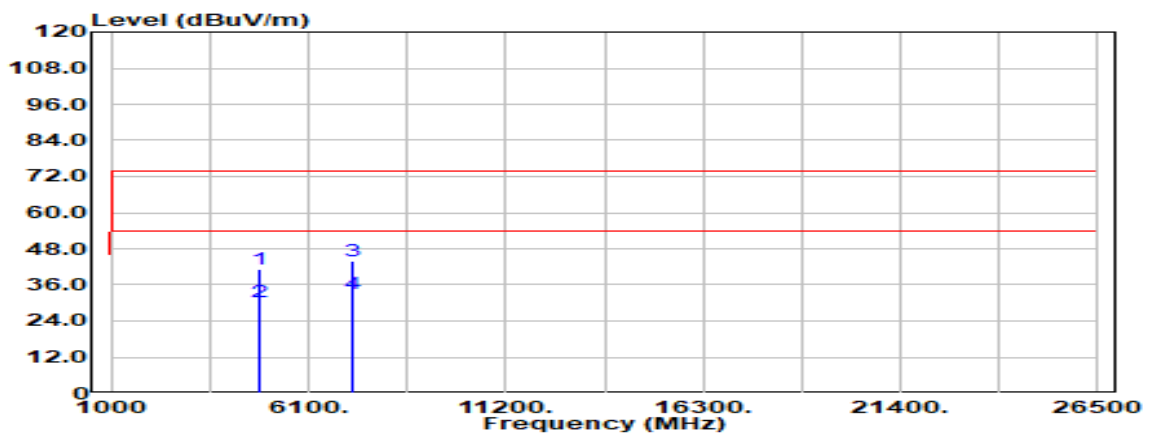


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	31.74	9.53	41.27	74.00	-32.73
4824.000	Average	20.73	9.53	30.26	54.00	-23.74
7236.000	Peak	30.54	13.41	43.95	74.00	-30.05
7236.000	Average	19.72	13.41	33.12	54.00	-20.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

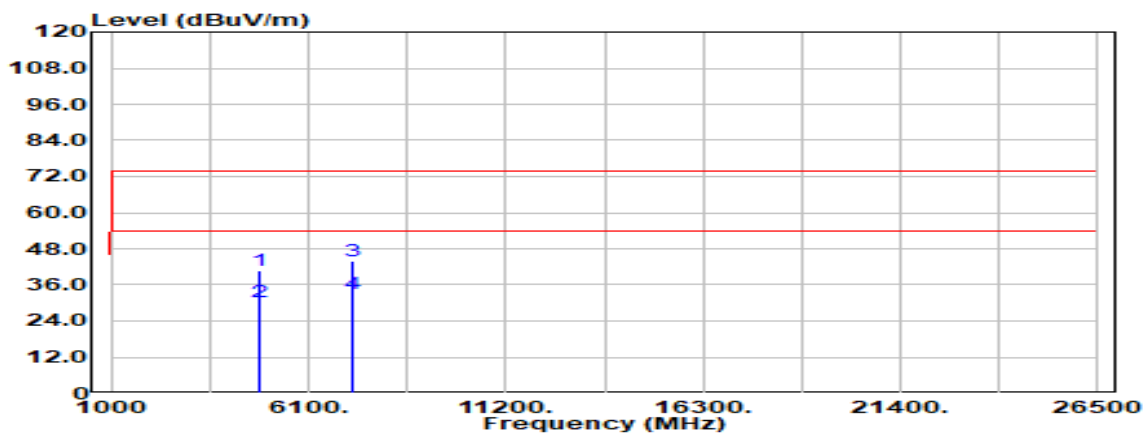


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	31.36	9.53	40.89	74.00	-33.11
4824.000	Average	20.80	9.53	30.33	54.00	-23.67
7236.000	Peak	30.64	13.41	44.05	74.00	-29.95
7236.000	Average	19.65	13.41	33.06	54.00	-20.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

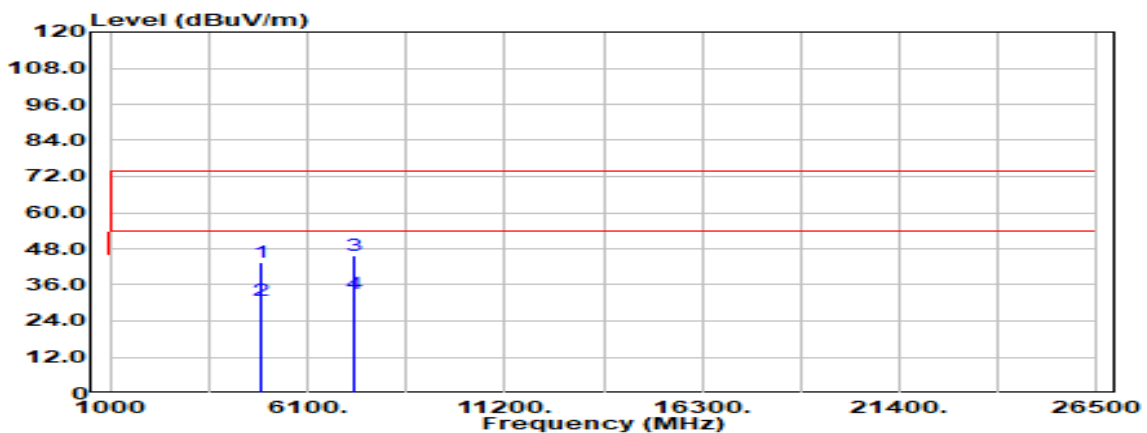


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.67	9.60	43.27	74.00	-30.73
4874.000	Average	21.23	9.60	30.83	54.00	-23.17
7311.000	Peak	32.62	13.23	45.85	74.00	-28.15
7311.000	Average	19.97	13.23	33.20	54.00	-20.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

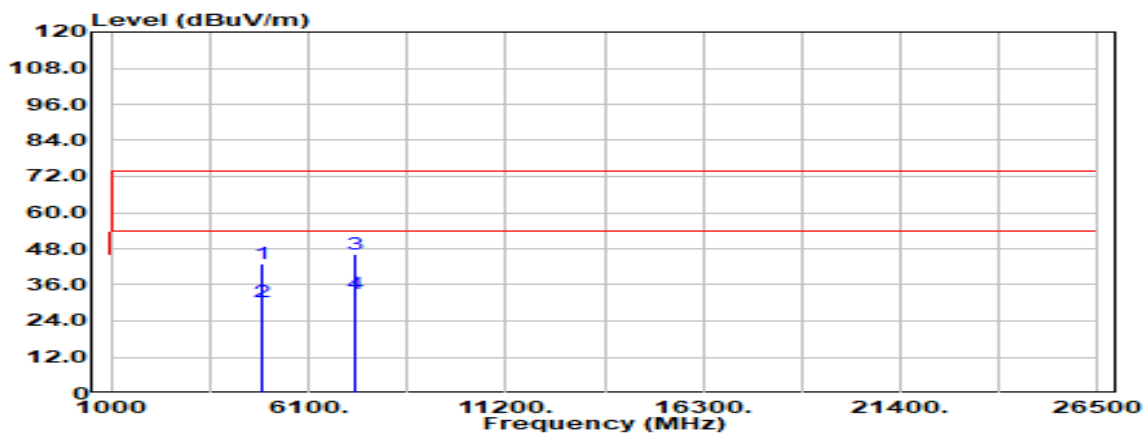


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.44	9.60	43.03	74.00	-30.97
4874.000	Average	20.97	9.60	30.57	54.00	-23.43
7311.000	Peak	32.98	13.23	46.21	74.00	-27.79
7311.000	Average	20.04	13.23	33.27	54.00	-20.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

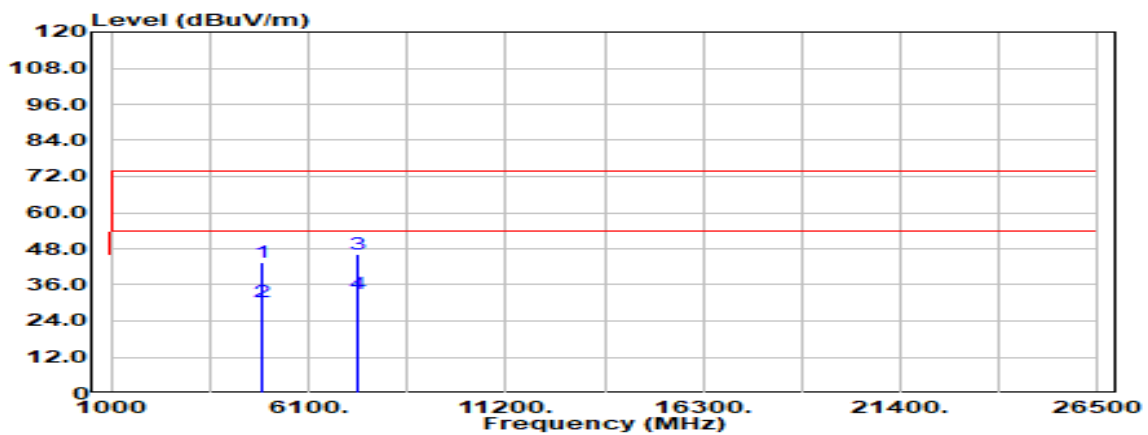


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	33.80	9.63	43.43	74.00	-30.57
4924.000	Average	20.93	9.63	30.56	54.00	-23.44
7386.000	Peak	32.86	13.43	46.29	74.00	-27.71
7386.000	Average	19.72	13.43	33.15	54.00	-20.85
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

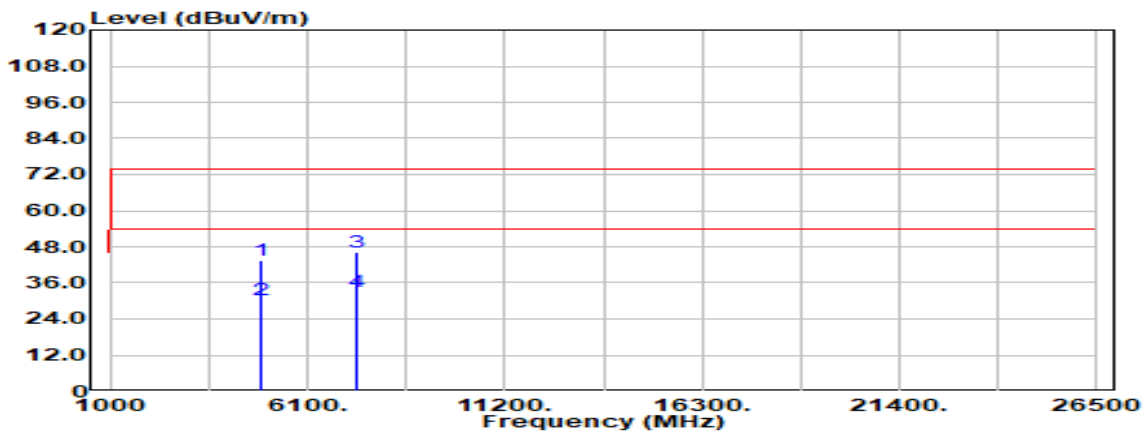


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	34.03	9.63	43.66	74.00	-30.34
4924.000	Average	20.80	9.63	30.43	54.00	-23.57
7386.000	Peak	32.88	13.43	46.31	74.00	-27.69
7386.000	Average	19.73	13.43	33.16	54.00	-20.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

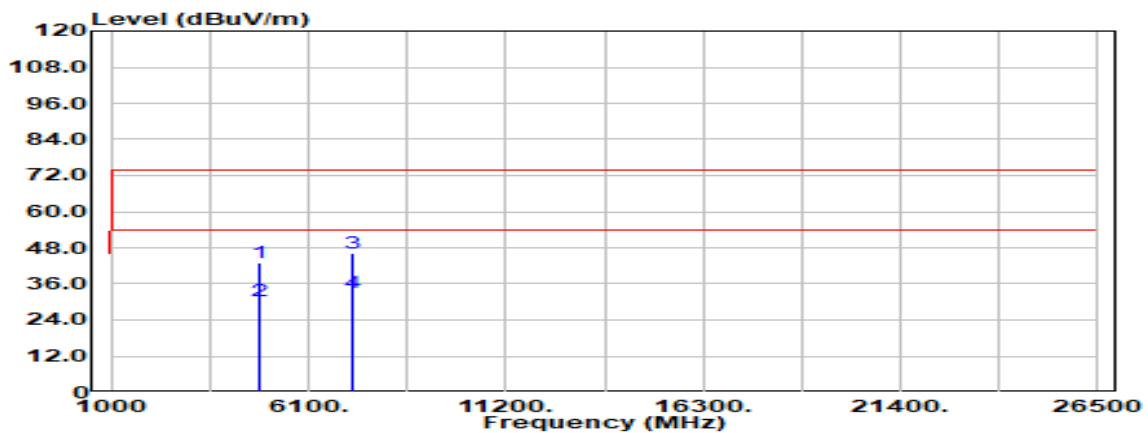


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.62	9.59	43.21	74.00	-30.79
4844.000	Average	20.73	9.59	30.32	54.00	-23.68
7266.000	Peak	32.67	13.32	45.99	74.00	-28.01
7266.000	Average	19.73	13.32	33.05	54.00	-20.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

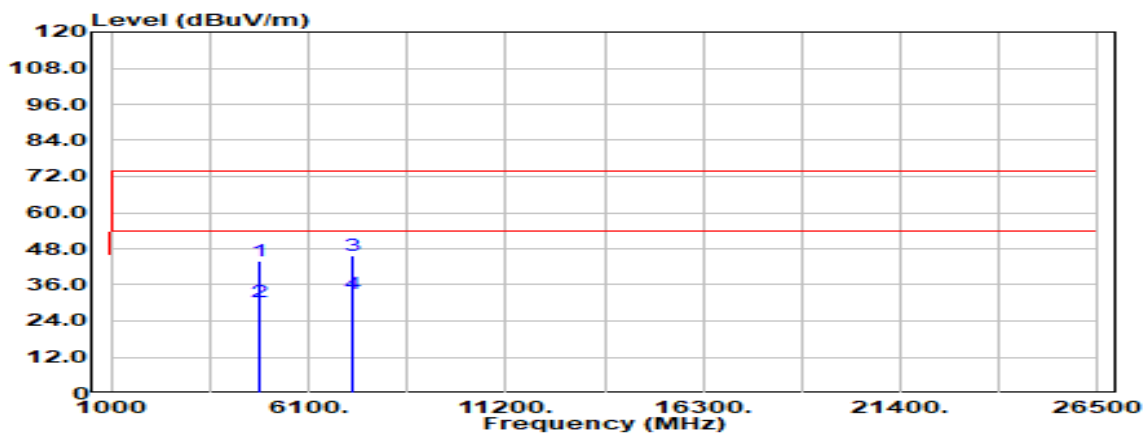


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.000	Peak	34.29	9.59	43.88	74.00	-30.12
4844.000	Average	20.79	9.59	30.38	54.00	-23.62
7266.000	Peak	32.54	13.32	45.86	74.00	-28.14
7266.000	Average	19.71	13.32	33.03	54.00	-20.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

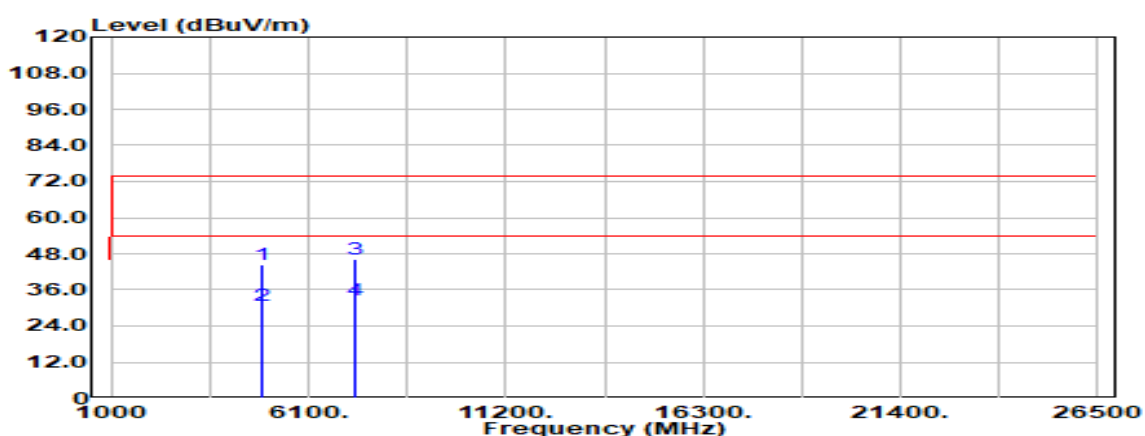


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	34.66	9.60	44.25	74.00	-29.75
4874.000	Average	21.07	9.60	30.67	54.00	-23.33
7311.000	Peak	32.85	13.23	46.08	74.00	-27.92
7311.000	Average	19.22	13.23	32.45	54.00	-21.55
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

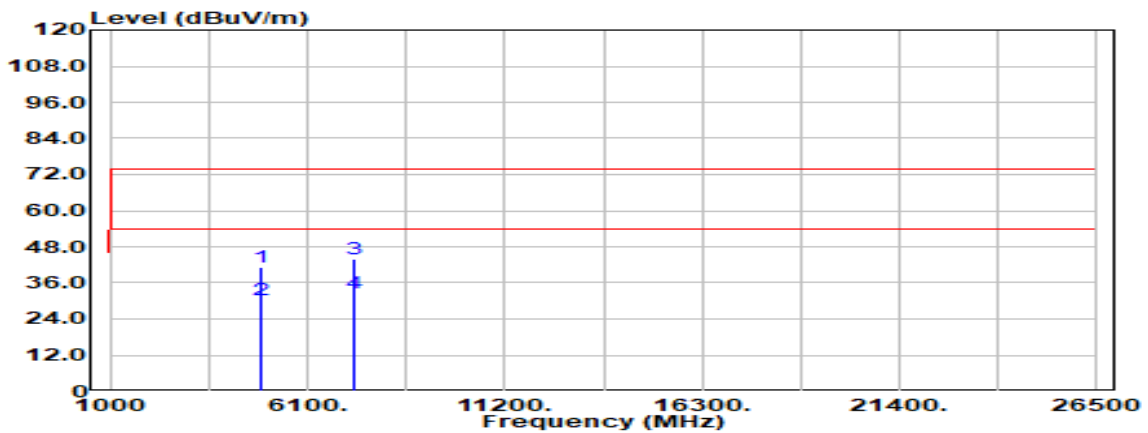


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	31.59	9.60	41.18	74.00	-32.82
4874.000	Average	20.76	9.60	30.36	54.00	-23.64
7311.000	Peak	30.57	13.23	43.81	74.00	-30.19
7311.000	Average	19.31	13.23	32.55	54.00	-21.45
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

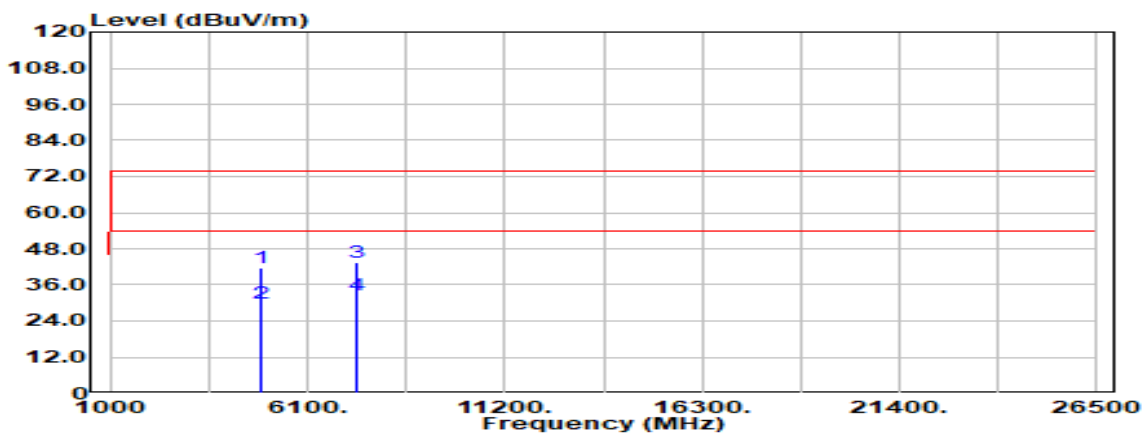


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4904.000	Peak	32.03	9.59	41.62	74.00	-32.38
4904.000	Average	20.43	9.59	30.02	54.00	-23.98
7356.000	Peak	30.12	13.28	43.40	74.00	-30.60
7356.000	Average	19.41	13.28	32.69	54.00	-21.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Harmonic	Test Date	April 12, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

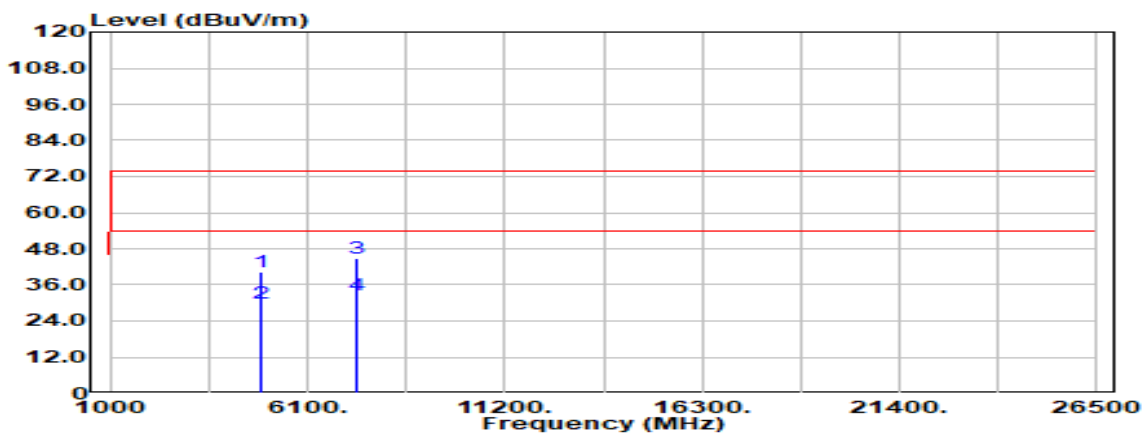

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	30.88	9.59	40.47	74.00	-33.53
4904.000	Average	20.43	9.59	30.01	54.00	-23.99
7356.000	Peak	31.68	13.28	44.96	74.00	-29.04
7356.000	Average	19.52	13.28	32.80	54.00	-21.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -