


| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5270 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

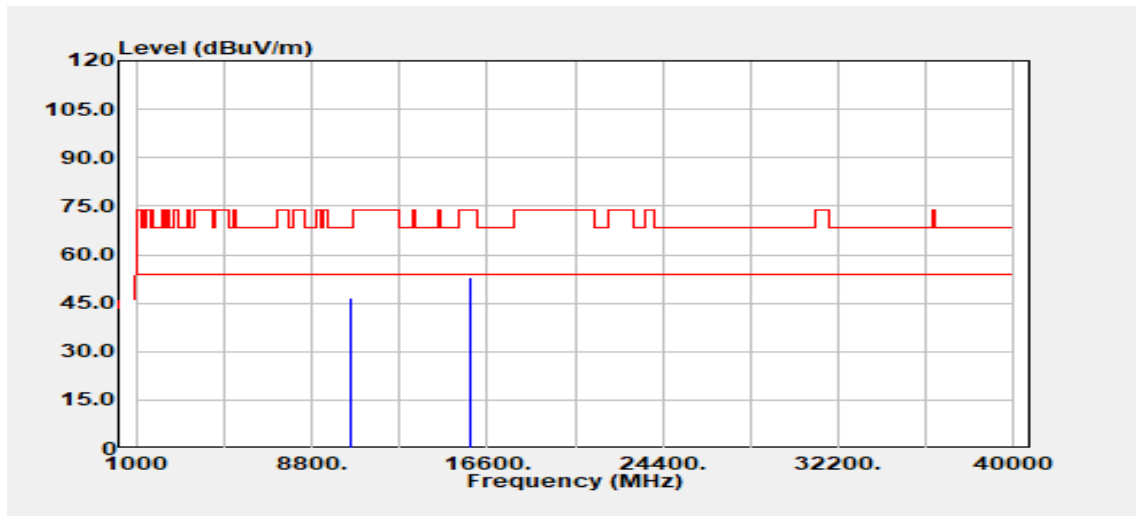


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 35.22 | 11.41 | 46.63 | 68.20 | -21.57 |
| 15810.00 | Peak | 39.00 | 14.04 | 53.04 | 74.00 | -20.96 |
| 15810.00 | Average | 30.02 | 14.04 | 44.06 | 54.00 | -9.94 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5270 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

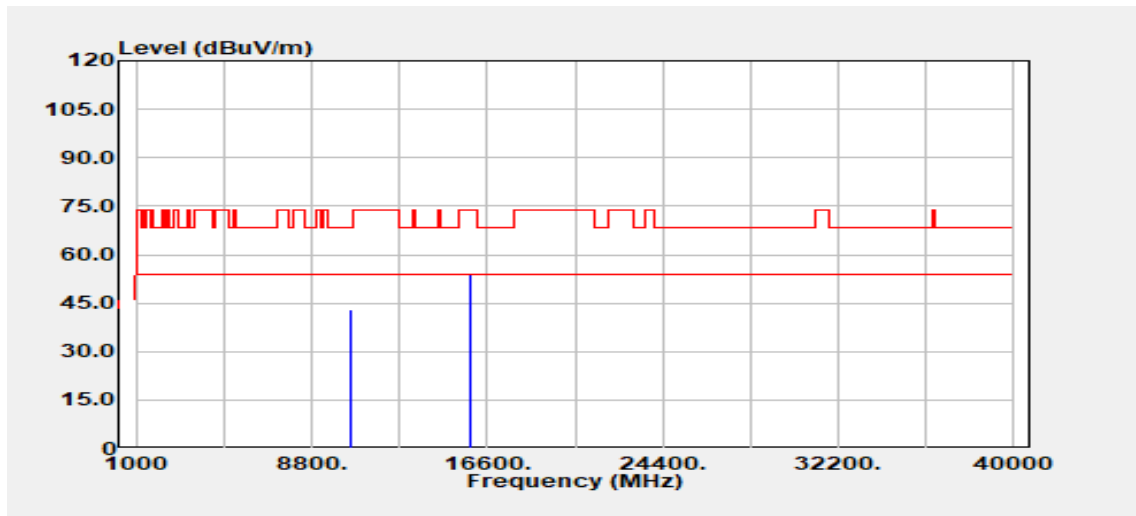


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 31.54 | 11.41 | 42.95 | 68.20 | -25.25 |
| 15810.00 | Peak | 39.67 | 14.04 | 53.71 | 74.00 | -20.29 |
| 15810.00 | Average | 30.10 | 14.04 | 44.14 | 54.00 | -9.86 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5310 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

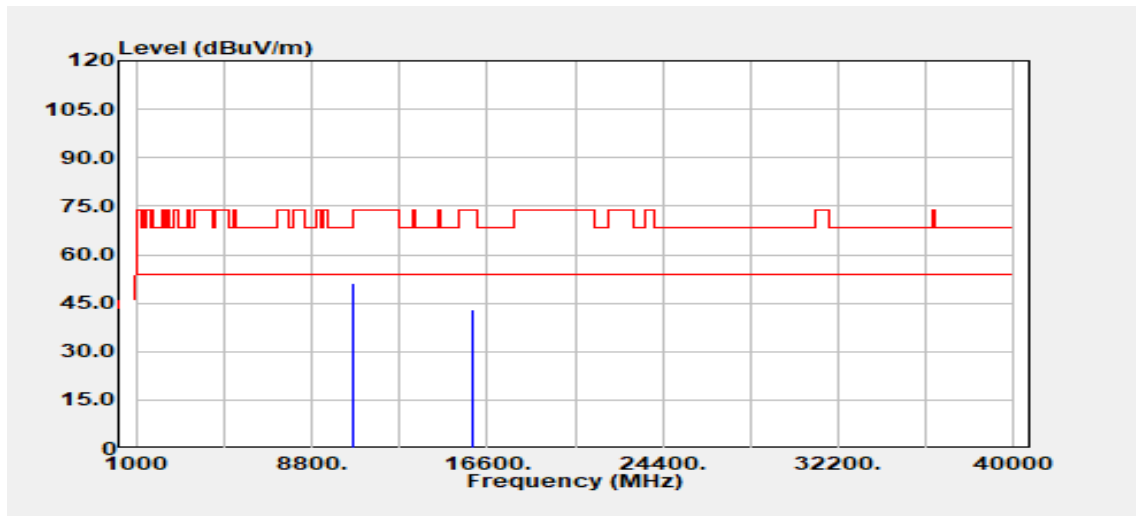


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 39.64 | 11.52 | 51.16 | 74.00 | -22.84 |
| 10620.00 | Average | 30.02 | 11.52 | 41.54 | 54.00 | -12.46 |
| 15930.00 | Peak | 28.11 | 14.81 | 42.92 | 74.00 | -31.08 |
| 15930.00 | Average | 21.22 | 14.81 | 36.03 | 54.00 | -17.97 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5310 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

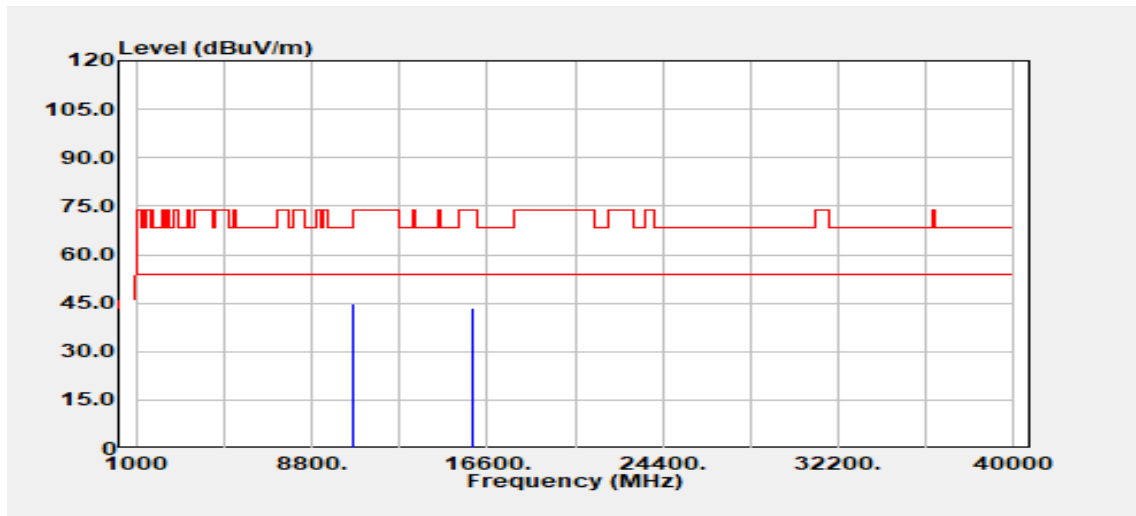


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 33.33 | 11.52 | 44.84 | 74.00 | -29.16 |
| 10620.00 | Average | 25.75 | 11.52 | 37.27 | 54.00 | -16.73 |
| 15930.00 | Peak | 28.84 | 14.81 | 43.65 | 74.00 | -30.35 |
| 15930.00 | Average | 21.17 | 14.81 | 35.98 | 54.00 | -18.02 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5290 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

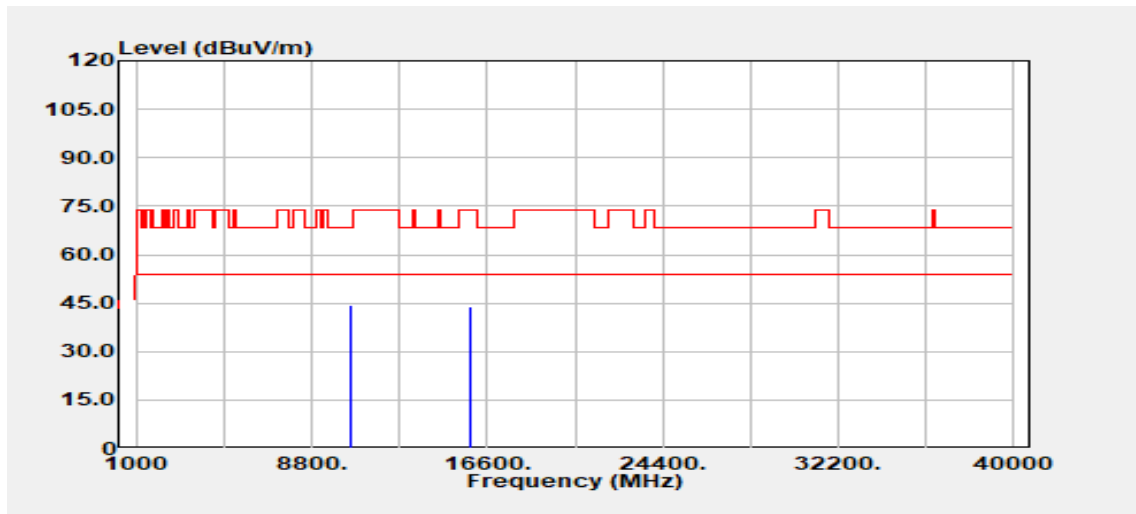


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 32.95 | 11.48 | 44.43 | 68.20 | -23.77 |
| 15870.00 | Peak | 29.81 | 14.34 | 44.15 | 74.00 | -29.85 |
| 15870.00 | Average | 20.37 | 14.34 | 34.71 | 54.00 | -19.29 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5290 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

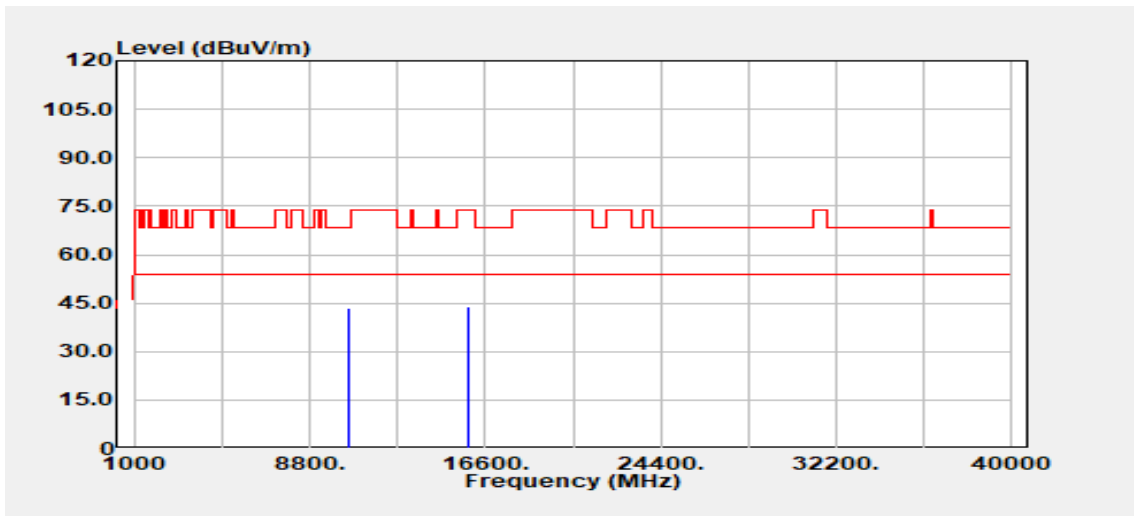


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 31.94 | 11.48 | 43.42 | 68.20 | -24.78 |
| 15870.00 | Peak | 29.81 | 14.34 | 44.15 | 74.00 | -29.85 |
| 15870.00 | Average | 20.32 | 14.34 | 34.66 | 54.00 | -19.34 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5250 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

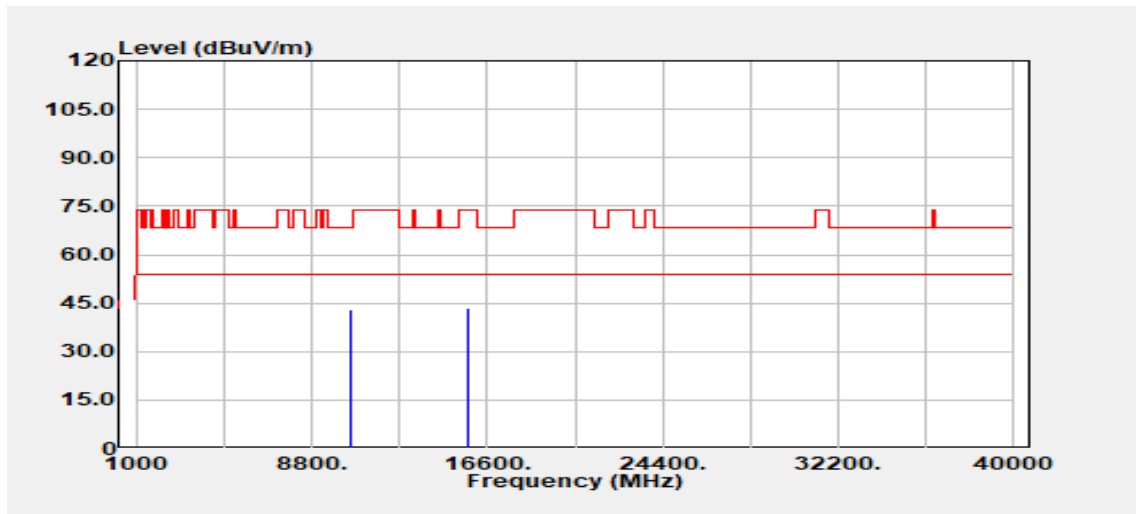


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.60 | 11.41 | 43.01 | 68.20 | -25.19 |
| 15750.00 | Peak | 29.13 | 14.22 | 43.35 | 74.00 | -30.65 |
| 15750.00 | Average | 21.13 | 14.22 | 35.35 | 54.00 | -18.65 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5250 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

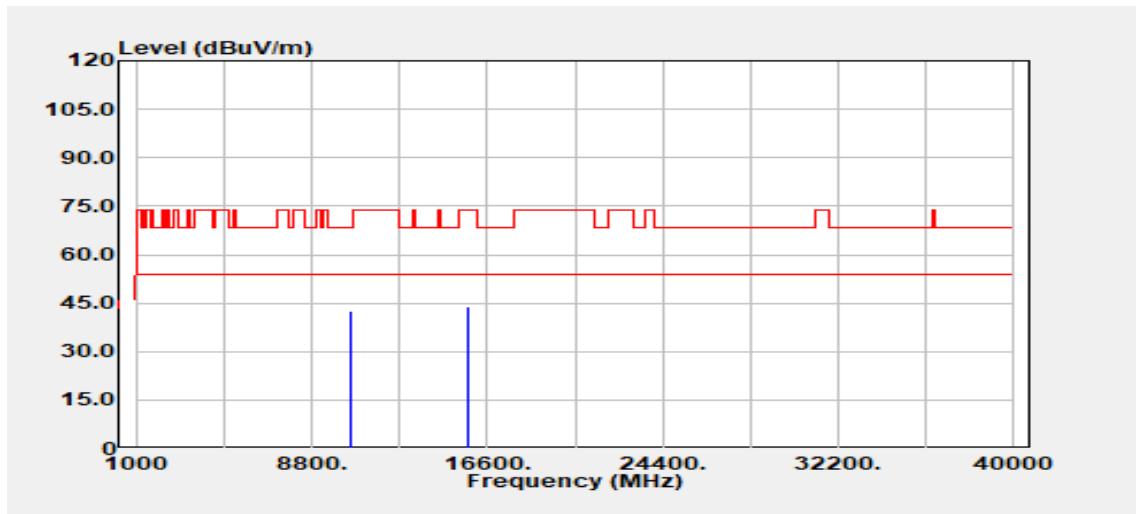


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.34 | 11.41 | 42.75 | 68.20 | -25.45 |
| 15750.00 | Peak | 29.74 | 14.22 | 43.96 | 74.00 | -30.04 |
| 15750.00 | Average | 20.50 | 14.22 | 34.72 | 54.00 | -19.28 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

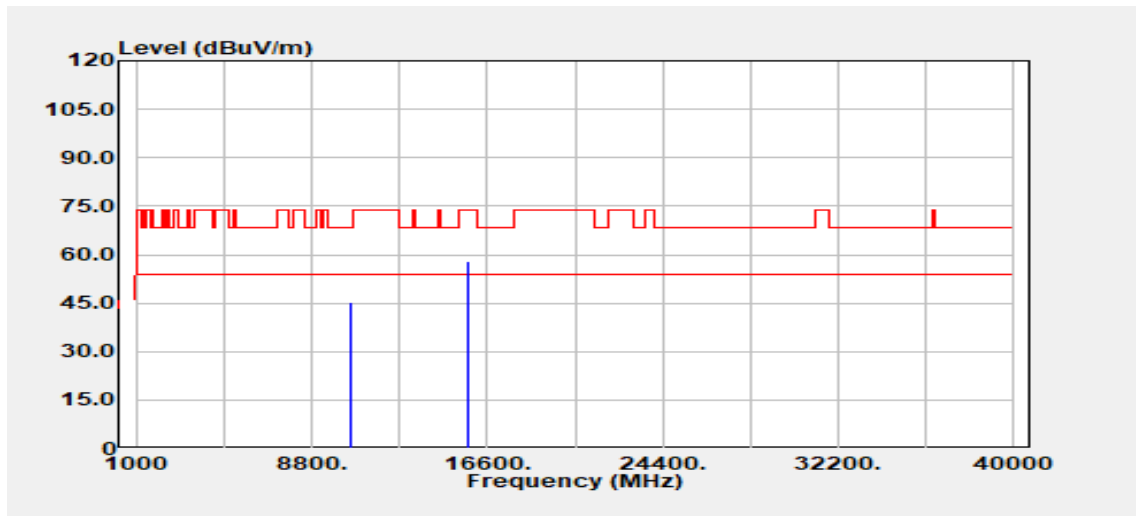


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 33.66 | 11.41 | 45.07 | 68.20 | -23.13 |
| 15780.00 | Peak | 43.80 | 14.08 | 57.88 | 74.00 | -16.12 |
| 15780.00 | Average | 35.57 | 14.08 | 49.65 | 54.00 | -4.35 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

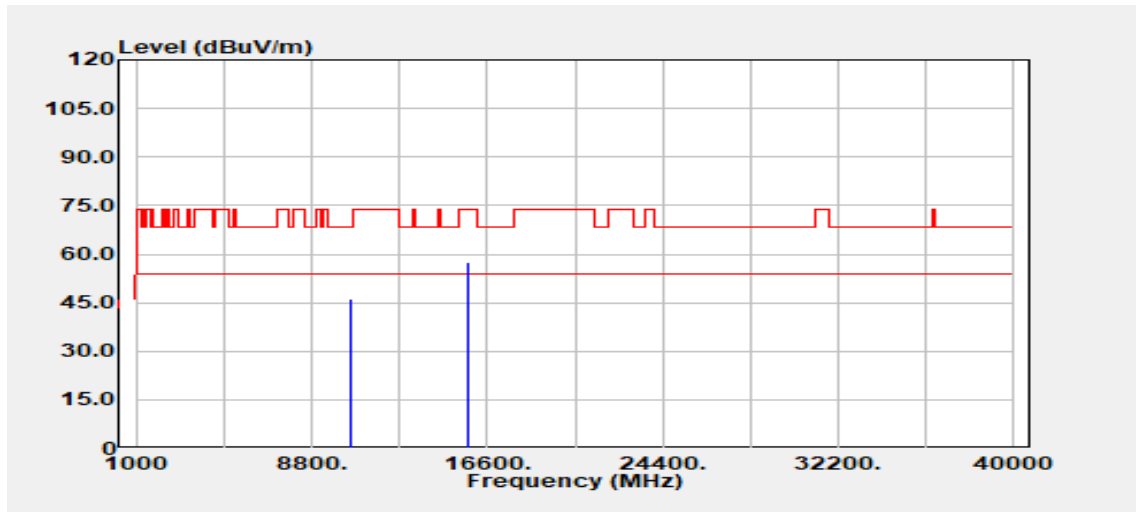


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 34.67 | 11.41 | 46.08 | 68.20 | -22.12 |
| 15780.00 | Peak | 43.21 | 14.08 | 57.29 | 74.00 | -16.71 |
| 15780.00 | Average | 34.85 | 14.08 | 48.93 | 54.00 | -5.07 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5300 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

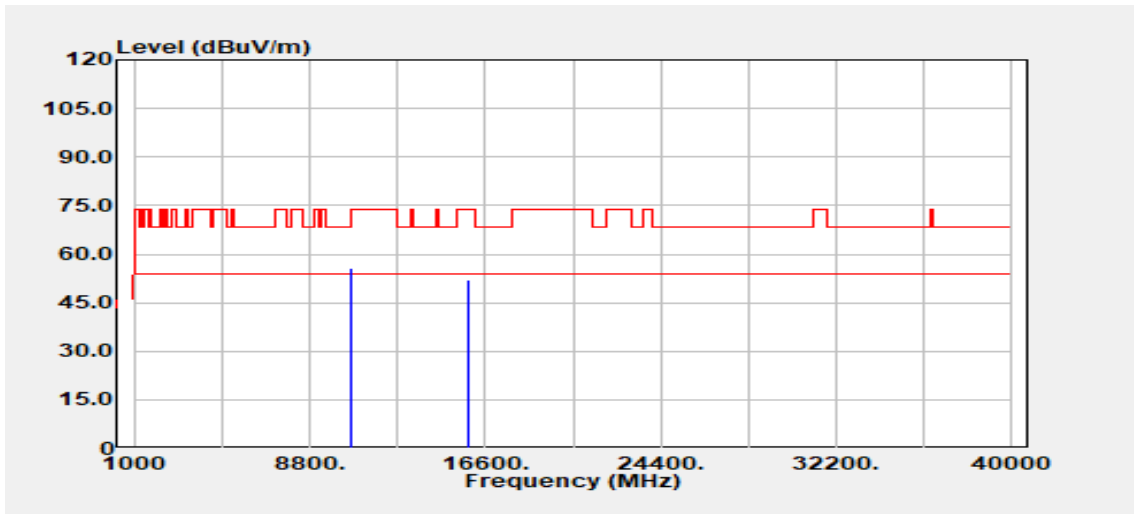


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 44.33 | 11.53 | 55.86 | 68.20 | -12.34 |
| 10600.00 | Average | 35.57 | 11.53 | 47.10 | 54.00 | -6.90 |
| 15900.00 | Peak | 37.46 | 14.45 | 51.91 | 74.00 | -22.09 |
| 15900.00 | Average | 32.23 | 14.45 | 46.68 | 54.00 | -7.32 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5300 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

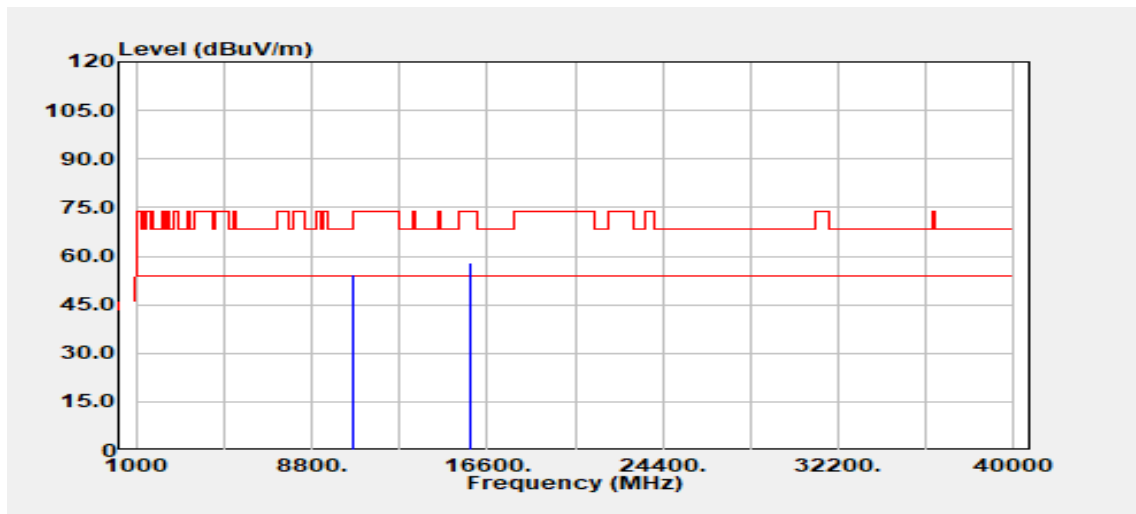


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 42.61 | 11.53 | 54.14 | 68.20 | -14.06 |
| 10600.00 | Average | 33.85 | 11.53 | 45.38 | 54.00 | -8.62 |
| 15900.00 | Peak | 43.60 | 14.45 | 58.05 | 74.00 | -15.95 |
| 15900.00 | Average | 34.35 | 14.45 | 48.80 | 54.00 | -5.20 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

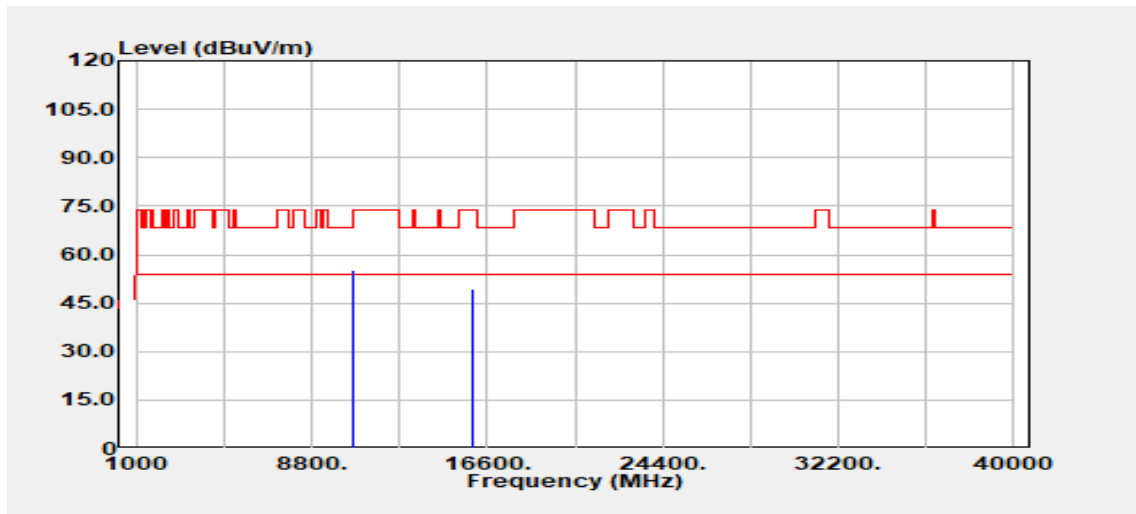


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 43.74 | 11.50 | 55.24 | 74.00 | -18.76 |
| 10640.00 | Average | 34.62 | 11.50 | 46.12 | 54.00 | -7.88 |
| 15960.00 | Peak | 34.15 | 15.09 | 49.24 | 74.00 | -24.76 |
| 15960.00 | Average | 25.99 | 15.09 | 41.08 | 54.00 | -12.92 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

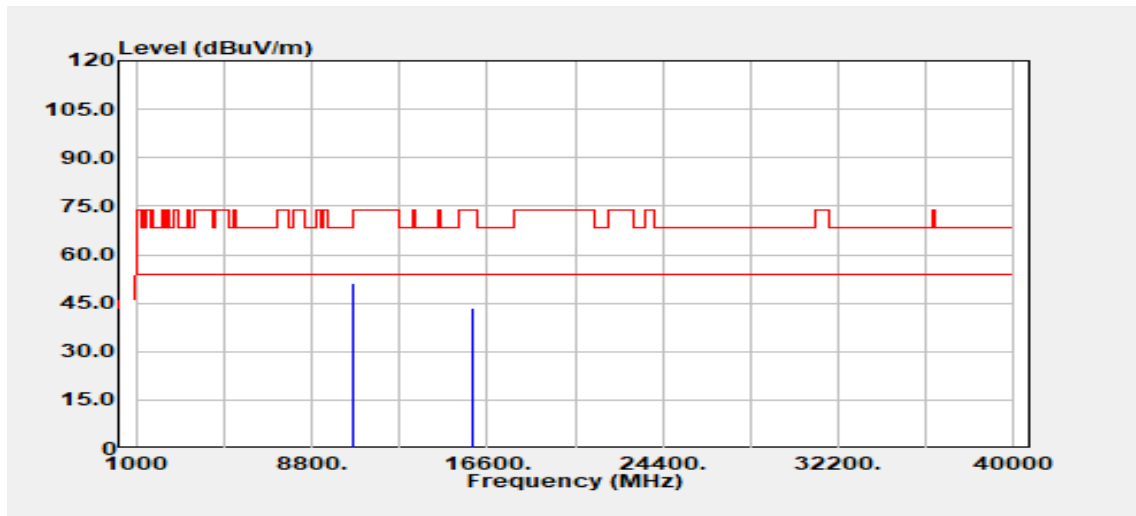


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 39.86 | 11.50 | 51.36 | 74.00 | -22.64 |
| 10640.00 | Average | 31.44 | 11.50 | 42.94 | 54.00 | -11.06 |
| 15960.00 | Peak | 28.21 | 15.09 | 43.29 | 74.00 | -30.71 |
| 15960.00 | Average | 20.90 | 15.09 | 35.99 | 54.00 | -18.01 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5270 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

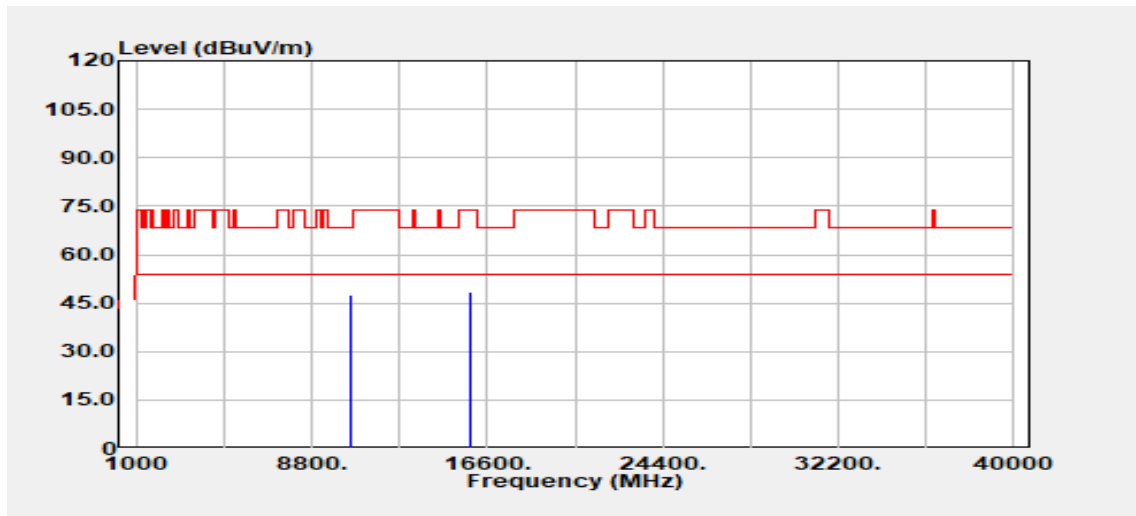


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 36.27 | 11.41 | 47.68 | 68.20 | -20.52 |
| 15810.00 | Peak | 34.25 | 14.04 | 48.29 | 74.00 | -25.71 |
| 15810.00 | Average | 34.37 | 14.04 | 48.40 | 54.00 | -5.60 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5270 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

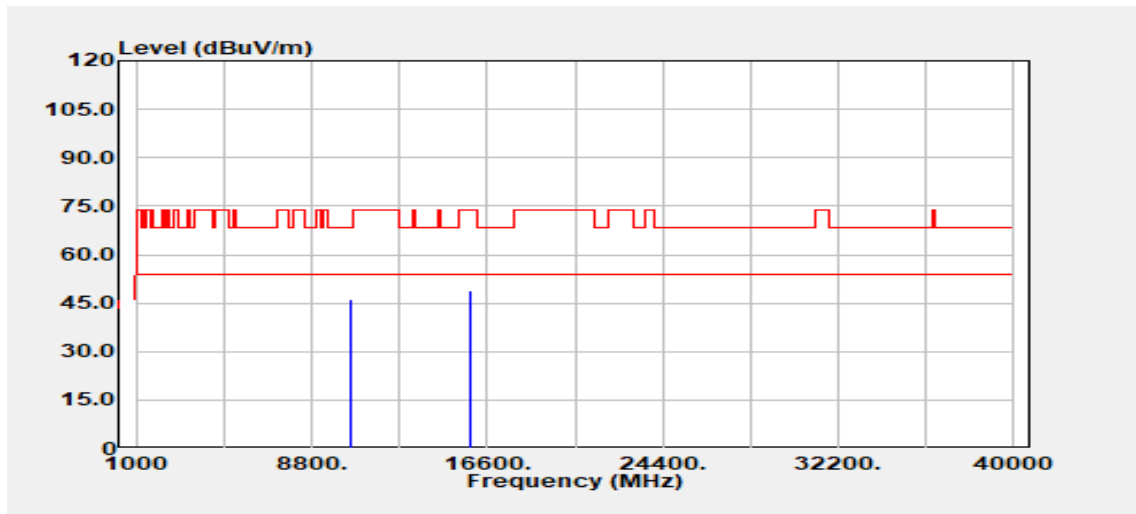


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 34.70 | 11.41 | 46.11 | 68.20 | -22.09 |
| 15810.00 | Peak | 34.33 | 14.04 | 48.36 | 74.00 | -25.64 |
| 15810.00 | Average | 34.76 | 14.04 | 48.80 | 54.00 | -5.20 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

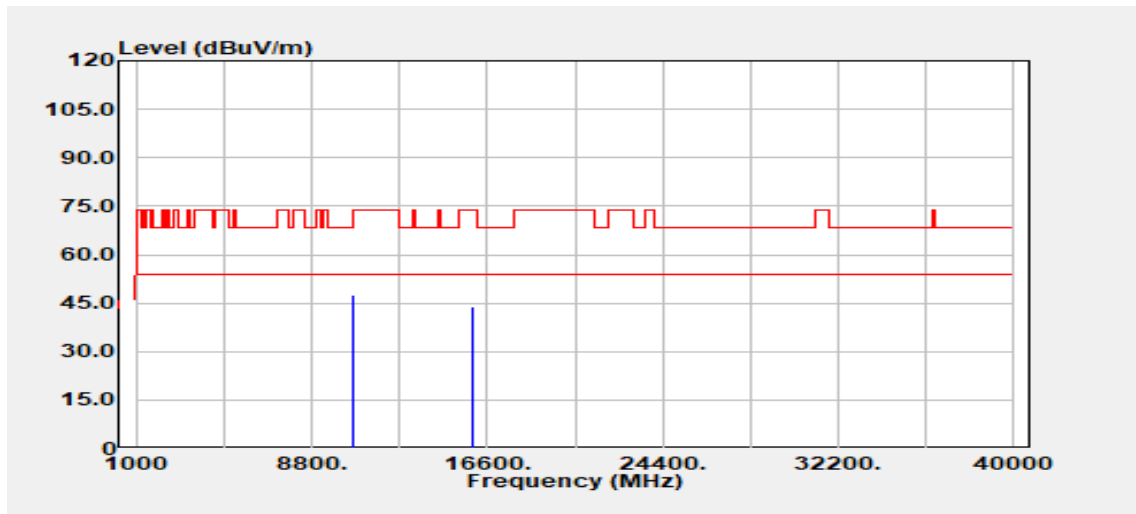


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 35.92 | 11.52 | 47.44 | 74.00 | -26.56 |
| 10620.00 | Average | 29.46 | 11.52 | 40.98 | 54.00 | -13.02 |
| 15930.00 | Peak | 28.90 | 14.81 | 43.72 | 74.00 | -30.28 |
| 15930.00 | Average | 24.47 | 14.81 | 39.29 | 54.00 | -14.71 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

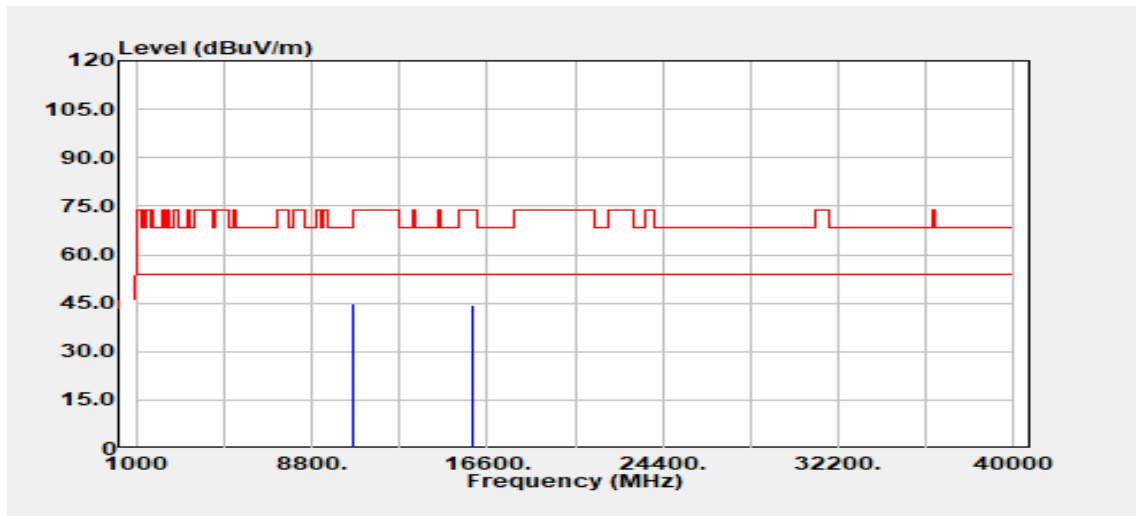


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 33.28 | 11.52 | 44.79 | 74.00 | -29.21 |
| 10620.00 | Average | 26.50 | 11.52 | 38.02 | 54.00 | -15.98 |
| 15930.00 | Peak | 29.73 | 14.81 | 44.54 | 74.00 | -29.46 |
| 15930.00 | Average | 25.03 | 14.81 | 39.84 | 54.00 | -14.16 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

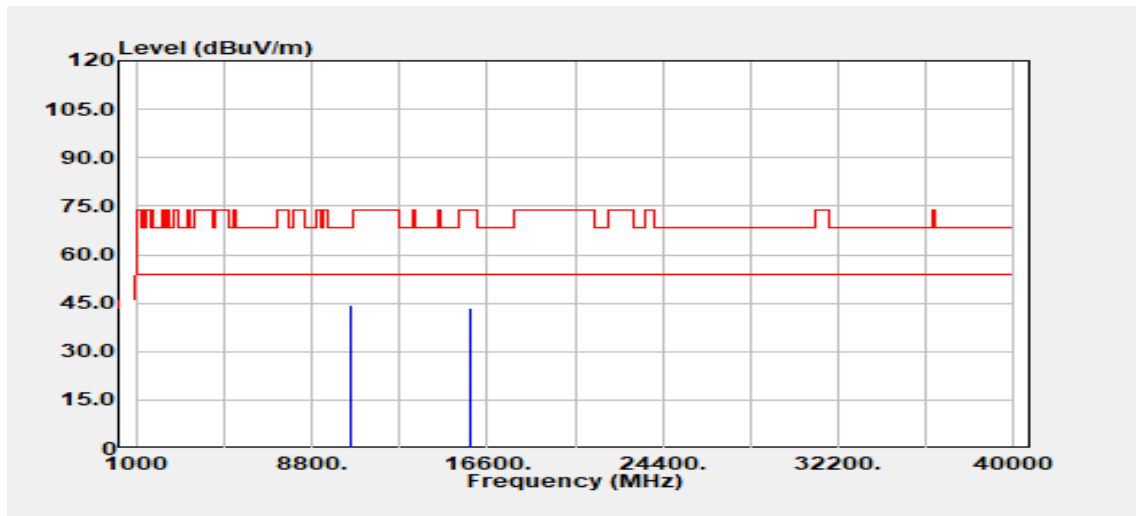


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 32.90 | 11.48 | 44.38 | 68.20 | -23.82 |
| 15870.00 | Peak | 29.12 | 14.34 | 43.46 | 74.00 | -30.54 |
| 15870.00 | Average | 23.27 | 14.34 | 37.61 | 54.00 | -16.39 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

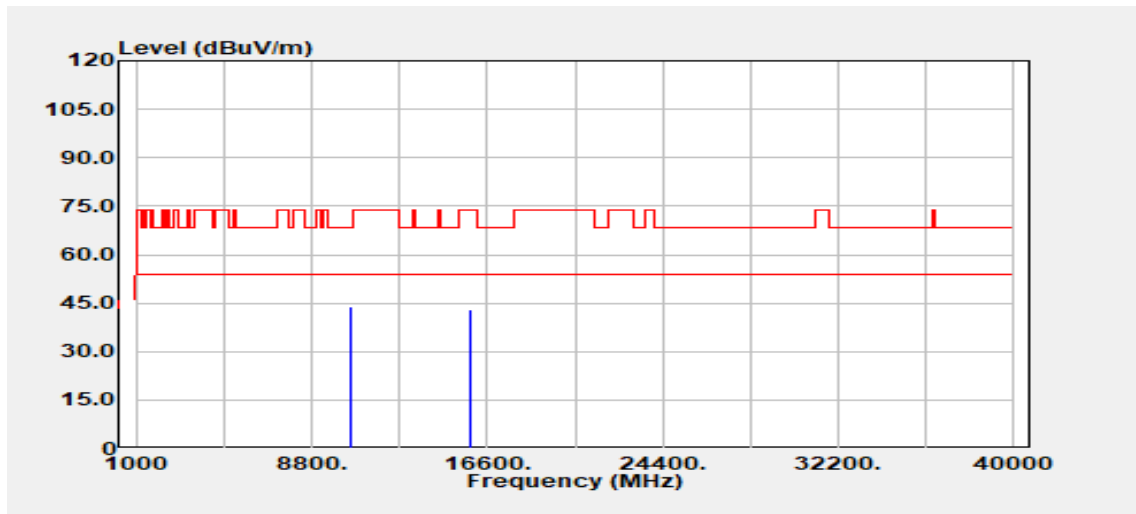


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 32.38 | 11.48 | 43.86 | 68.20 | -24.34 |
| 15870.00 | Peak | 28.54 | 14.34 | 42.88 | 74.00 | -31.12 |
| 15870.00 | Average | 23.36 | 14.34 | 37.70 | 54.00 | -16.30 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5250 MHz | Temp/Hum | 24.1°C) / 58%RH |
| Test Item | Harmonic | Test Date | March 31, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

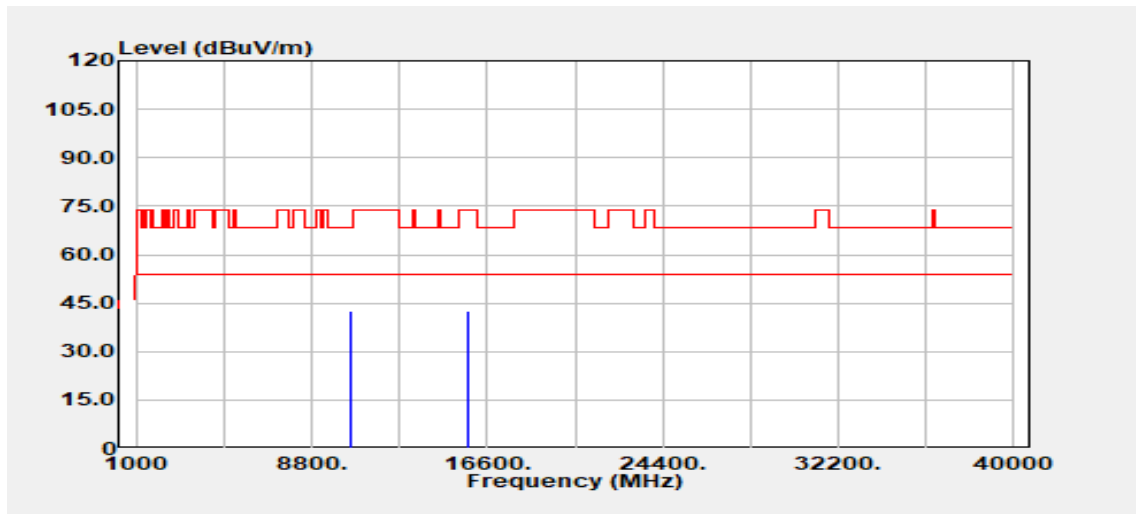


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.33 | 11.41 | 42.74 | 68.20 | -25.46 |
| 15750.00 | Peak | 28.42 | 14.22 | 42.64 | 74.00 | -31.36 |
| 15750.00 | Average | 23.28 | 14.22 | 37.50 | 54.00 | -16.50 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5250 MHz | Temp/Hum | 24.1°C) / 58%RH |
| Test Item | Harmonic | Test Date | March 31, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

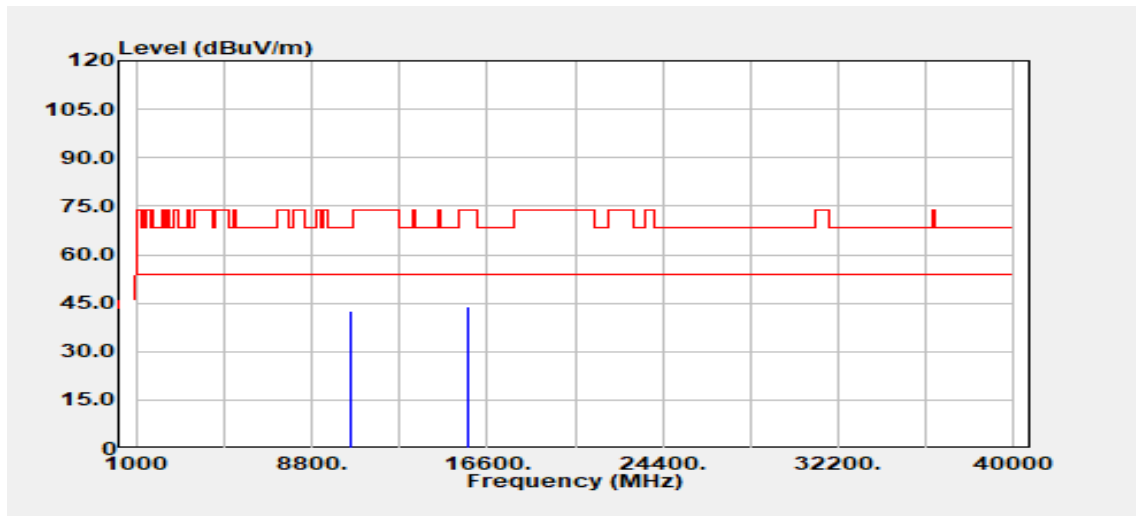

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.18 | 11.41 | 42.59 | 68.20 | -25.61 |
| 15750.00 | Peak | 29.91 | 14.22 | 44.13 | 74.00 | -29.87 |
| 15750.00 | Average | 23.55 | 14.22 | 37.77 | 54.00 | -16.23 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(1) Chain 0:

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum | 21.8(°C)/ 53%RH |
| Test Item | Harmonic | Test Date | April 3, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

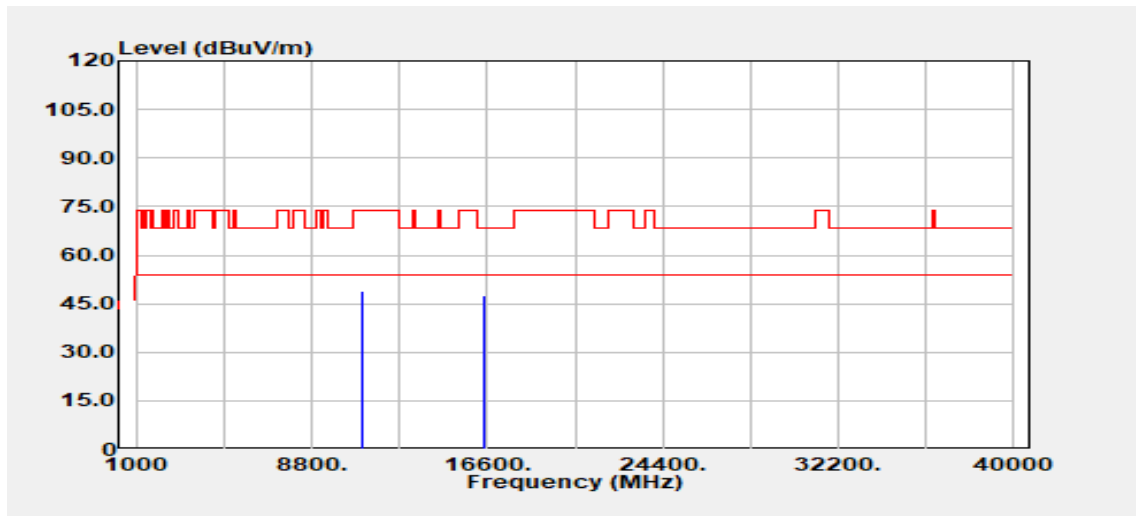


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 36.53 | 12.42 | 48.95 | 74.00 | -25.05 |
| 11000.00 | Average | 29.62 | 12.42 | 42.04 | 54.00 | -11.96 |
| 16500.00 | Peak | 28.73 | 18.70 | 47.43 | 68.20 | -20.77 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum | 21.8(°C)/ 53%RH |
| Test Item | Harmonic | Test Date | April 3, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

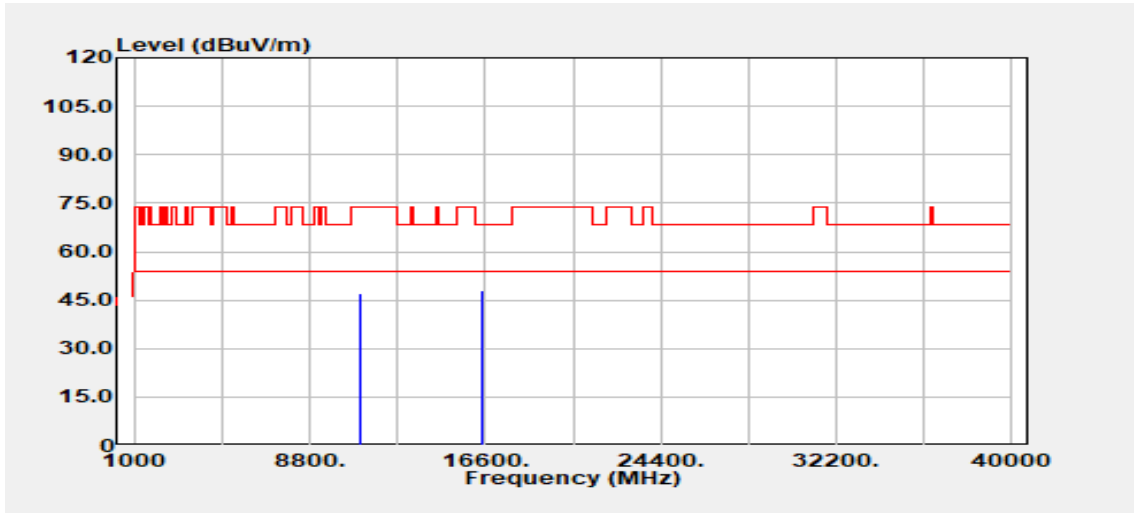


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 34.87 | 12.42 | 47.29 | 74.00 | -26.71 |
| 11000.00 | Average | 27.43 | 12.42 | 39.85 | 54.00 | -14.15 |
| 16500.00 | Peak | 29.07 | 18.70 | 47.77 | 68.20 | -20.43 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5580 MHz | Temp/Hum | 22.0(°C)/ 58%RH |
| Test Item | Harmonics | Test Date | April 6, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

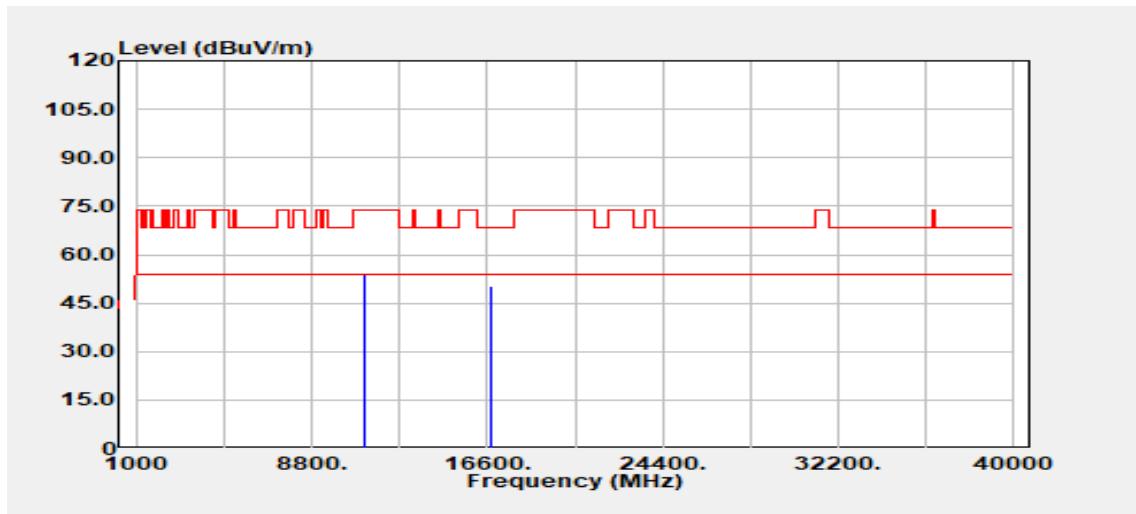


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 41.36 | 12.48 | 53.84 | 74.00 | -20.16 |
| 11160.00 | Average | 31.30 | 12.48 | 43.78 | 54.00 | -10.22 |
| 16740.00 | Peak | 29.41 | 20.88 | 50.29 | 68.20 | -17.91 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5580 MHz | Temp/Hum | 22.0(°C)/ 58%RH |
| Test Item | Harmonic | Test Date | April 6, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

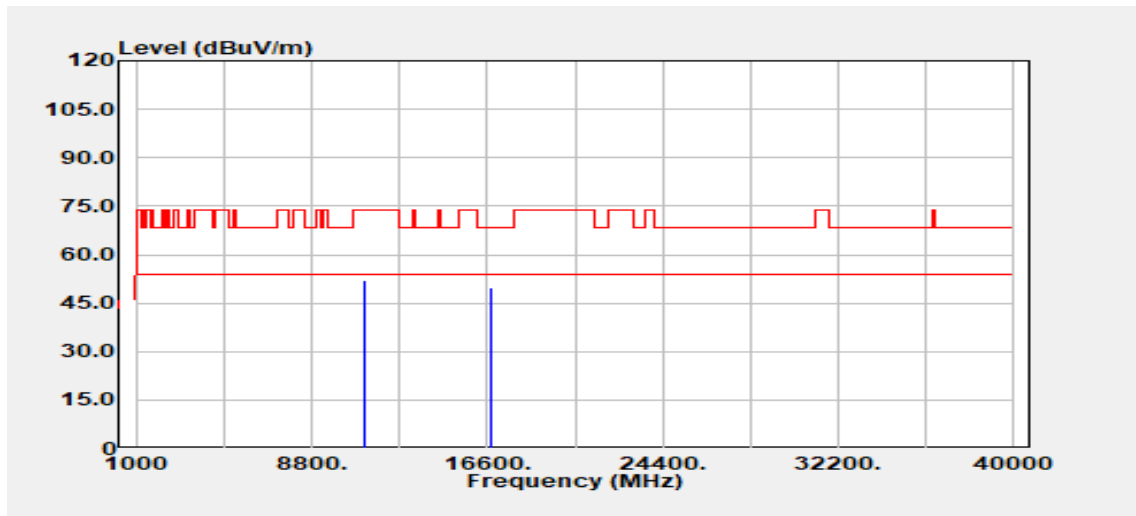


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 39.58 | 12.48 | 52.06 | 74.00 | -21.94 |
| 11160.00 | Average | 28.59 | 12.48 | 41.07 | 54.00 | -12.93 |
| 16740.00 | Peak | 29.14 | 20.88 | 50.02 | 68.20 | -18.18 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum | 22.0(°C)/ 58%RH |
| Test Item | Harmonic | Test Date | April 6, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

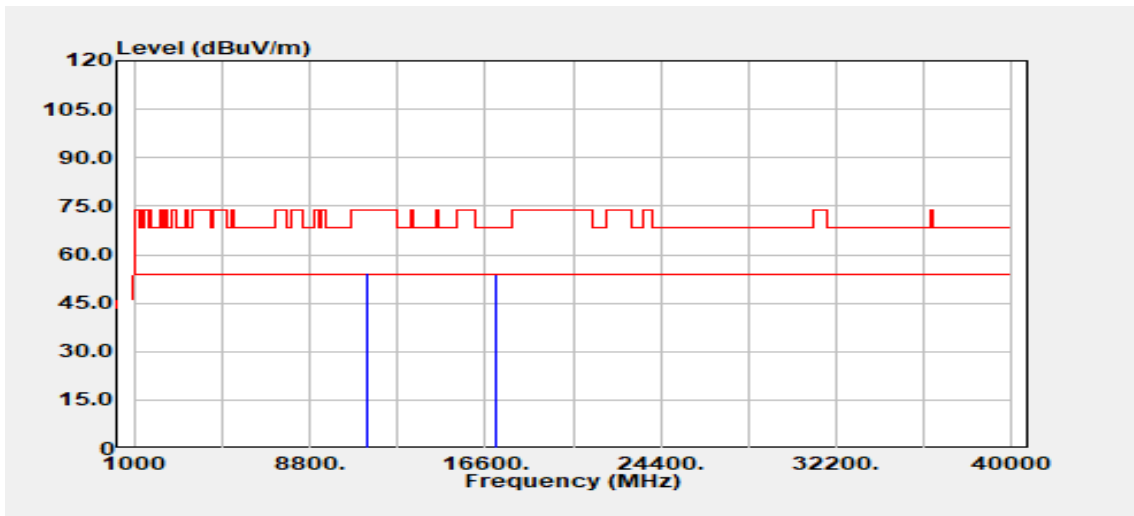


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 41.83 | 12.39 | 54.22 | 74.00 | -19.78 |
| 11400.00 | Average | 31.83 | 12.39 | 44.22 | 54.00 | -9.78 |
| 17100.00 | Peak | 28.27 | 25.62 | 53.89 | 68.20 | -14.31 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum | 22.0(°C)/ 58%RH |
| Test Item | Harmonic | Test Date | April 6, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

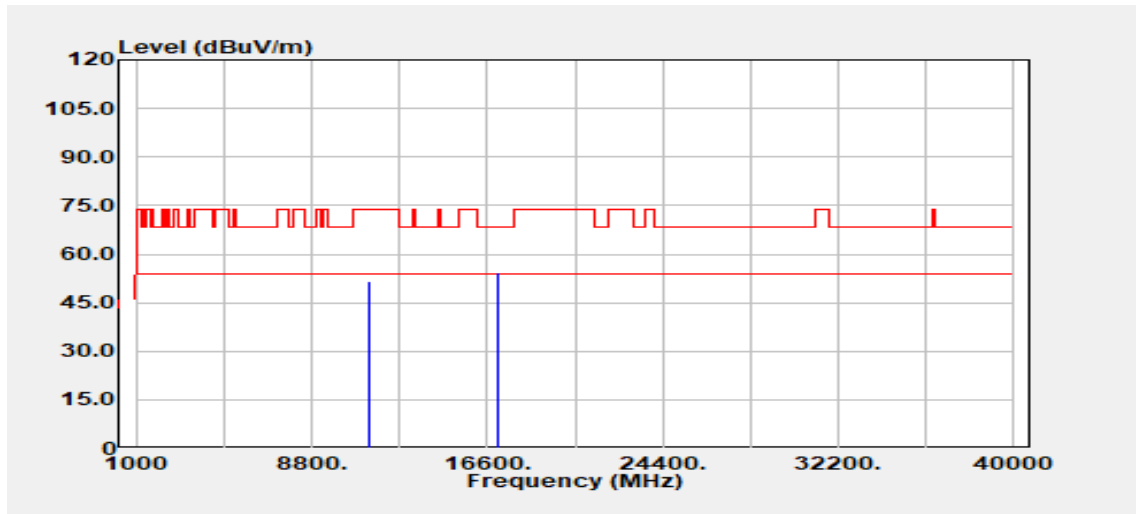

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 39.33 | 12.39 | 51.72 | 74.00 | -22.28 |
| 11400.00 | Average | 29.66 | 12.39 | 42.05 | 54.00 | -11.95 |
| 17100.00 | Peak | 28.71 | 25.62 | 54.33 | 68.20 | -13.87 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(2) Chain 1:

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

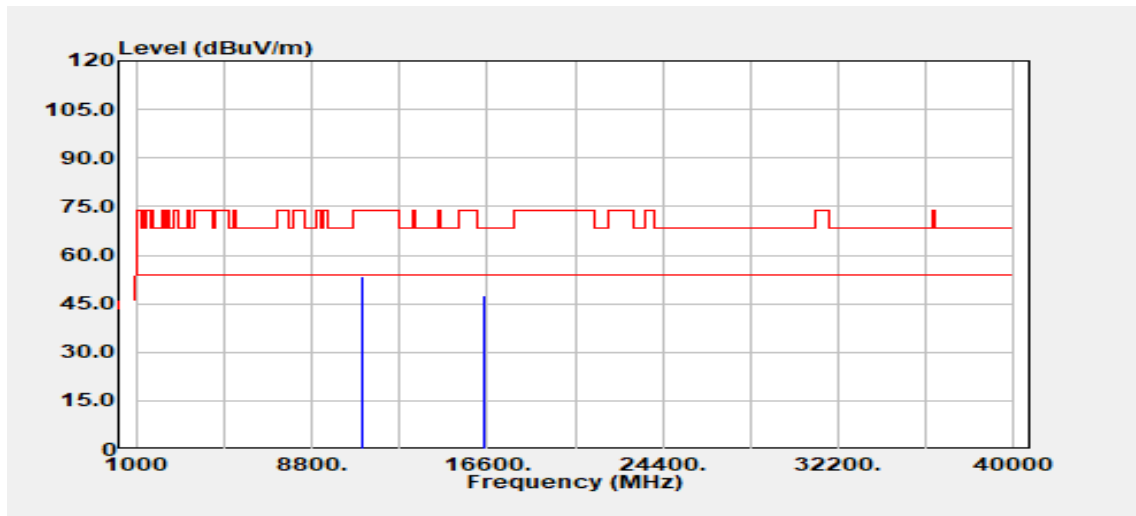


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 40.88 | 12.42 | 53.30 | 74.00 | -20.70 |
| 11000.00 | Average | 32.02 | 12.42 | 44.44 | 54.00 | -9.56 |
| 16500.00 | Peak | 28.71 | 18.70 | 47.41 | 68.20 | -20.79 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

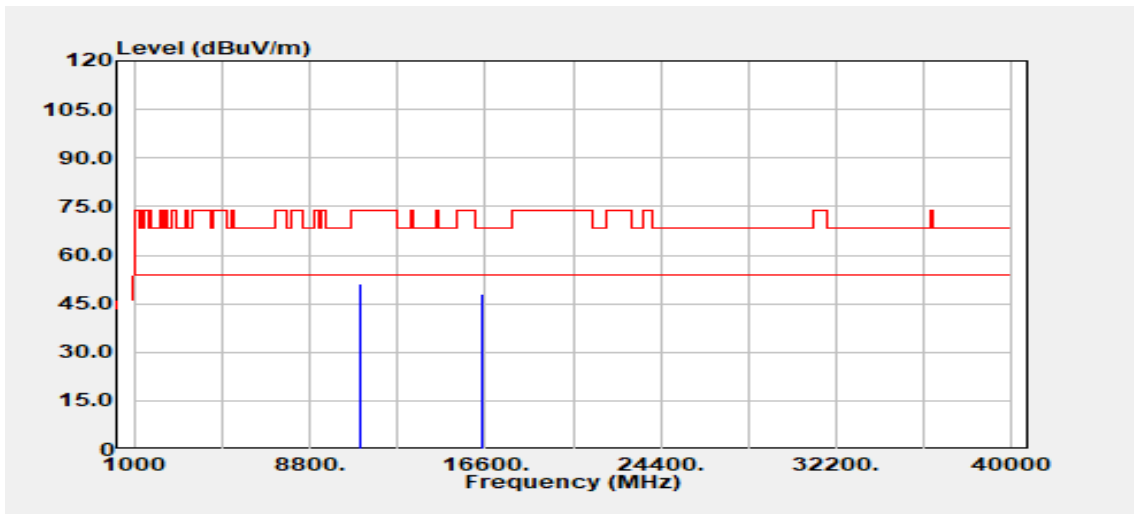


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 38.57 | 12.42 | 50.99 | 74.00 | -23.01 |
| 11000.00 | Average | 30.36 | 12.42 | 42.78 | 54.00 | -11.22 |
| 16500.00 | Peak | 29.21 | 18.70 | 47.91 | 68.20 | -20.29 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonics | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

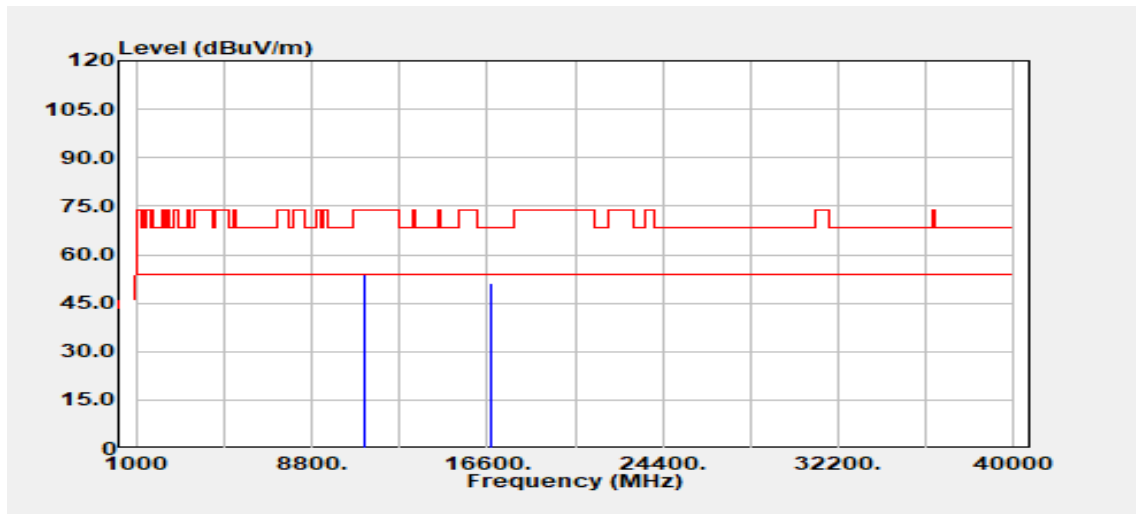


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 41.19 | 12.48 | 53.67 | 74.00 | -20.33 |
| 11160.00 | Average | 33.46 | 12.48 | 45.94 | 54.00 | -8.06 |
| 16740.00 | Peak | 30.09 | 20.88 | 50.96 | 68.20 | -17.24 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

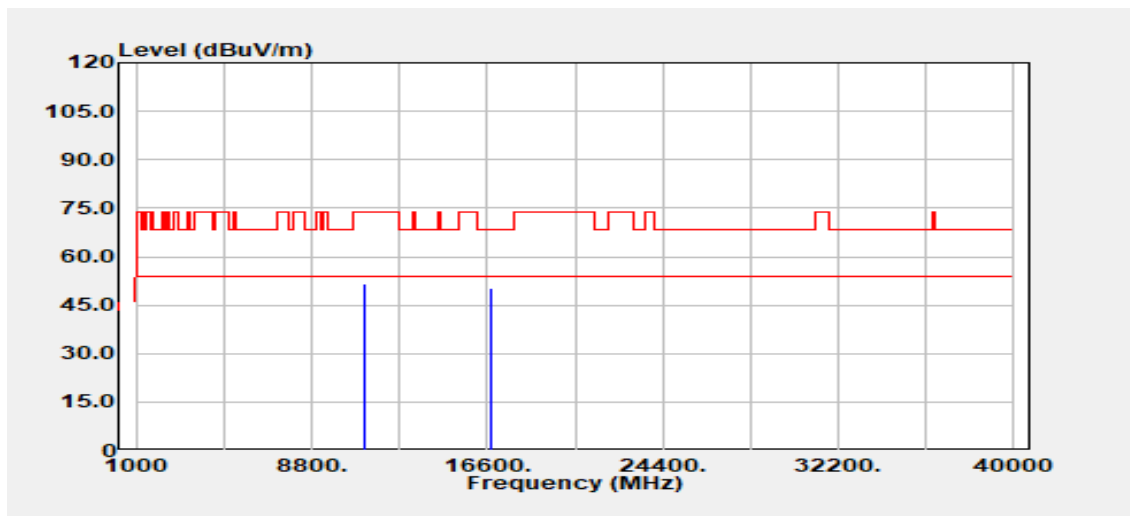


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 38.96 | 12.48 | 51.43 | 74.00 | -22.57 |
| 11160.00 | Average | 29.46 | 12.48 | 41.94 | 54.00 | -12.06 |
| 16740.00 | Peak | 29.26 | 20.88 | 50.14 | 68.20 | -18.06 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

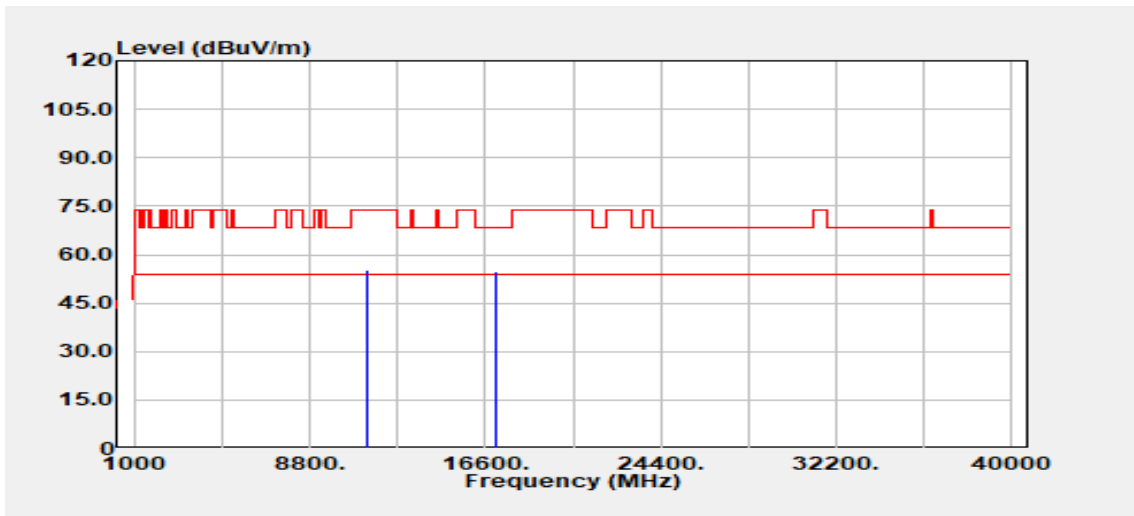


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 42.78 | 12.39 | 55.17 | 74.00 | -18.83 |
| 11400.00 | Average | 33.27 | 12.39 | 45.66 | 54.00 | -8.34 |
| 17100.00 | Peak | 29.18 | 25.62 | 54.80 | 68.20 | -13.40 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Czerny Lin |
| Detector | Peak & Average | | |

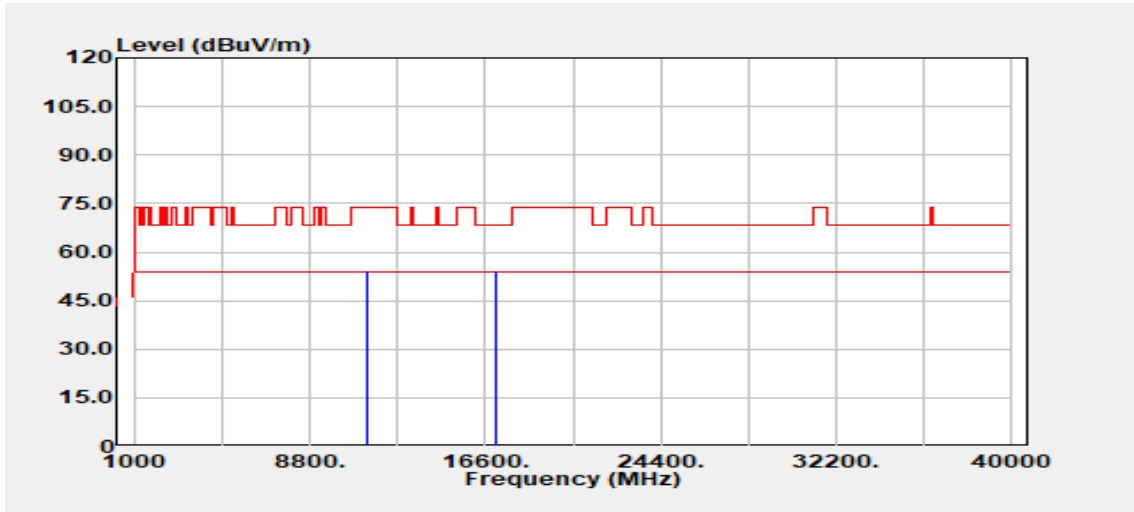

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 41.73 | 12.39 | 54.12 | 74.00 | -19.89 |
| 11400.00 | Average | 29.77 | 12.39 | 42.16 | 54.00 | -11.84 |
| 17100.00 | Peak | 28.70 | 25.62 | 54.32 | 68.20 | -13.88 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(3) MIMO:

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

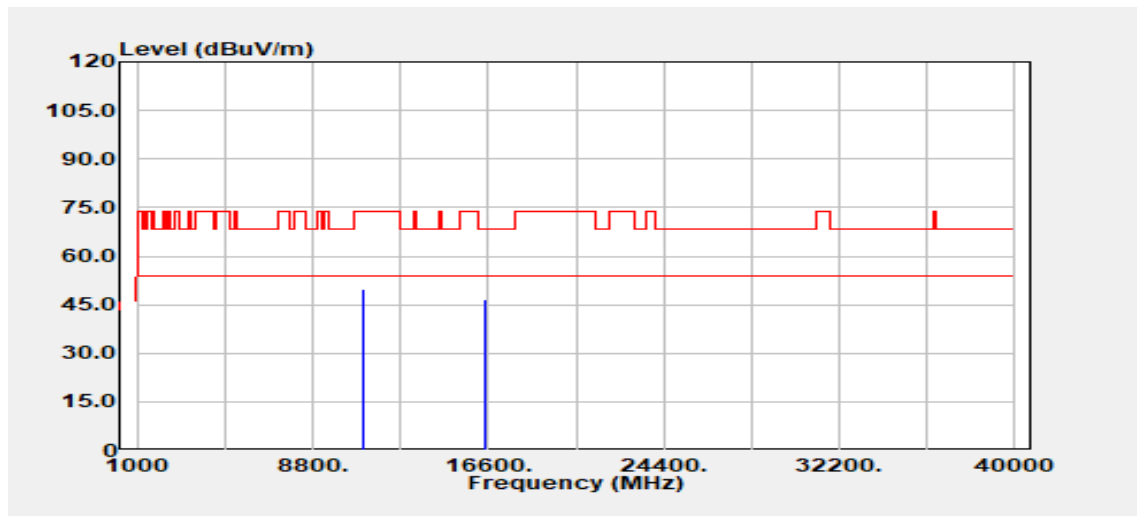


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 37.56 | 12.42 | 49.98 | 74.00 | -24.02 |
| 11000.00 | Average | 33.96 | 12.42 | 46.38 | 54.00 | -7.62 |
| 16500.00 | Peak | 27.83 | 18.70 | 46.53 | 68.20 | -21.67 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

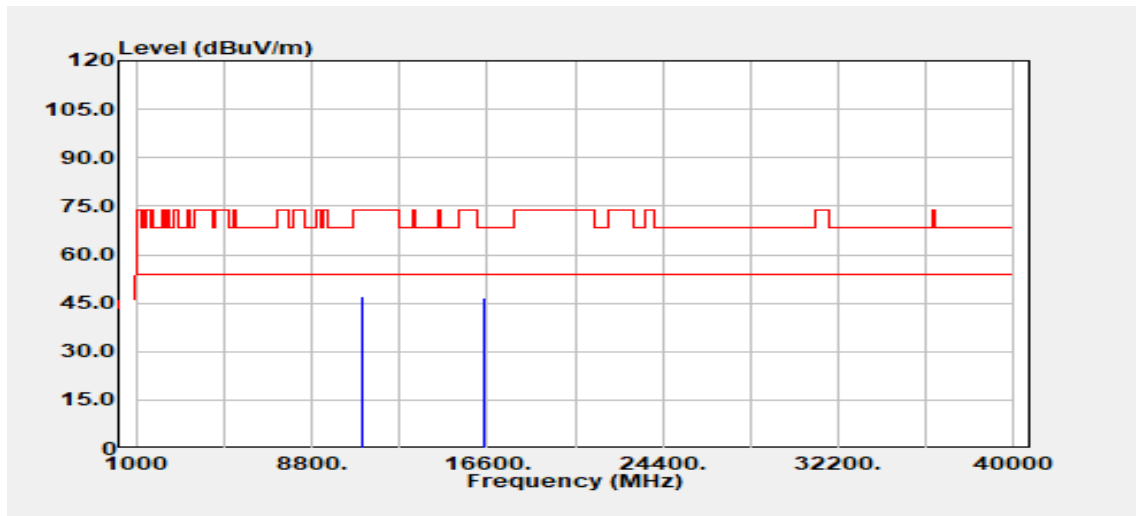


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 34.53 | 12.42 | 46.95 | 74.00 | -27.05 |
| 11000.00 | Average | 30.70 | 12.42 | 43.12 | 54.00 | -10.88 |
| 16500.00 | Peak | 27.75 | 18.70 | 46.45 | 68.20 | -21.75 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

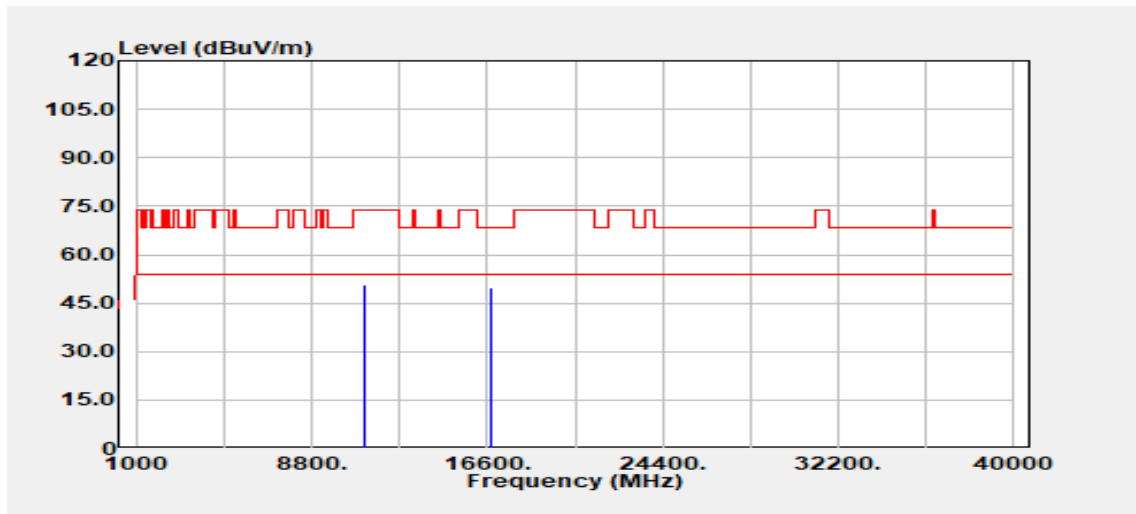


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 38.33 | 12.48 | 50.80 | 74.00 | -23.20 |
| 11160.00 | Average | 34.35 | 12.48 | 46.83 | 54.00 | -7.17 |
| 16740.00 | Peak | 28.72 | 20.88 | 49.60 | 68.20 | -18.60 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

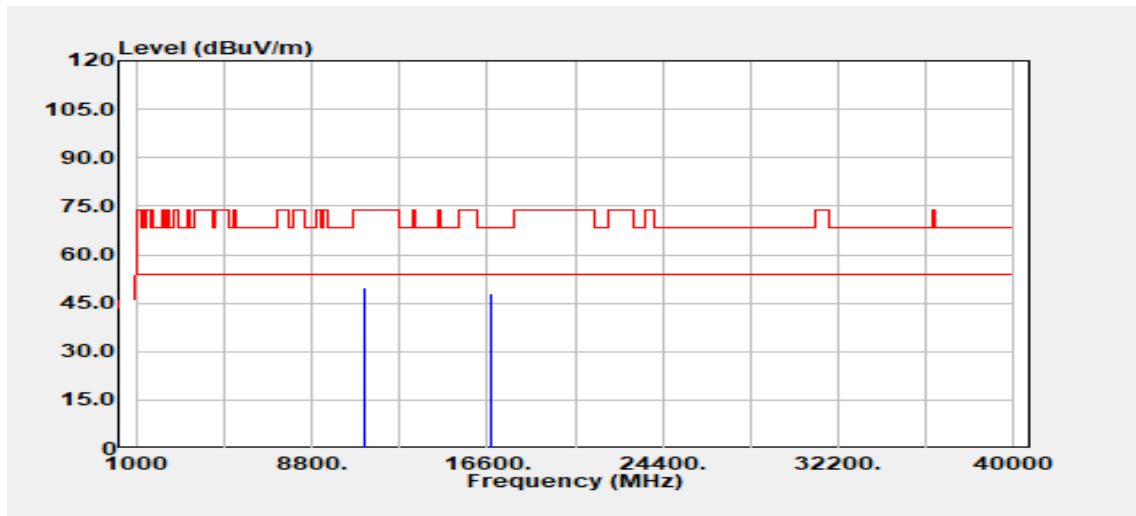


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 37.35 | 12.48 | 49.82 | 74.00 | -24.18 |
| 11160.00 | Average | 31.66 | 12.48 | 44.14 | 54.00 | -9.86 |
| 16740.00 | Peak | 27.35 | 20.88 | 48.22 | 68.20 | -19.98 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

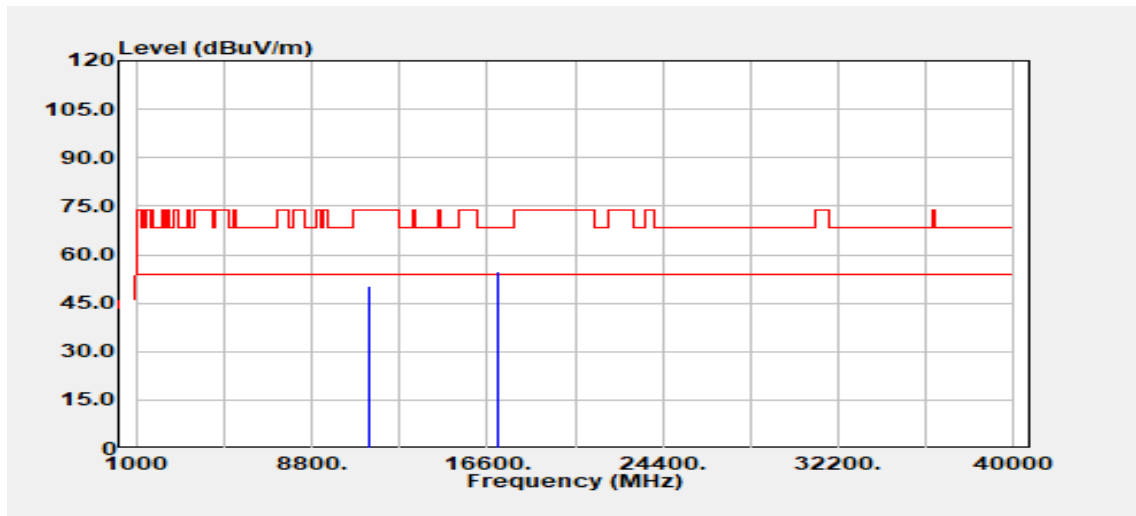


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 37.95 | 12.39 | 50.34 | 74.00 | -23.66 |
| 11400.00 | Average | 33.23 | 12.39 | 45.62 | 54.00 | -8.38 |
| 17100.00 | Peak | 29.00 | 25.62 | 54.62 | 68.20 | -13.58 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

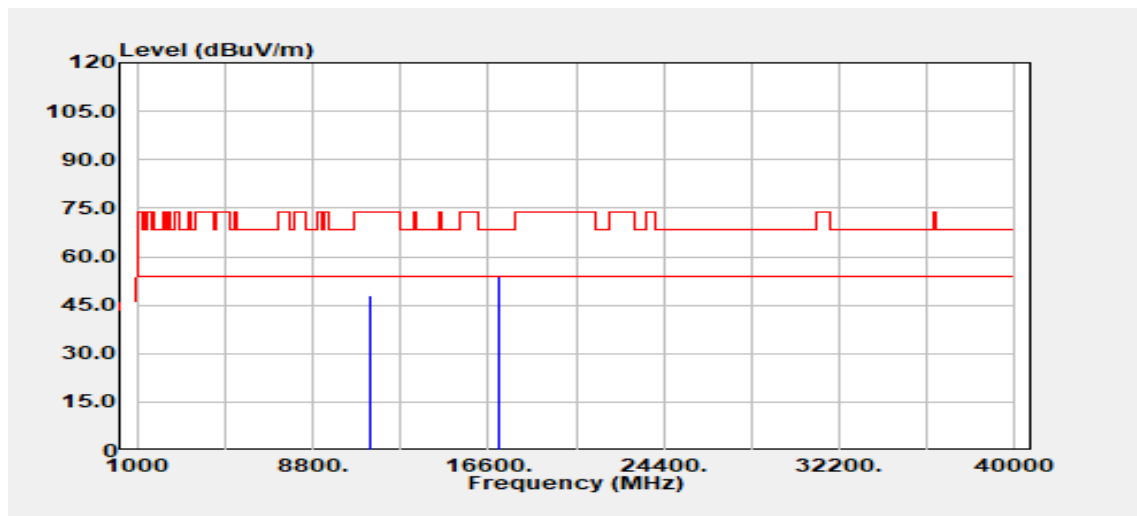


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 35.66 | 12.39 | 48.05 | 74.00 | -25.95 |
| 11400.00 | Average | 30.09 | 12.39 | 42.48 | 54.00 | -11.52 |
| 17100.00 | Peak | 28.21 | 25.62 | 53.83 | 68.20 | -14.37 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5510 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

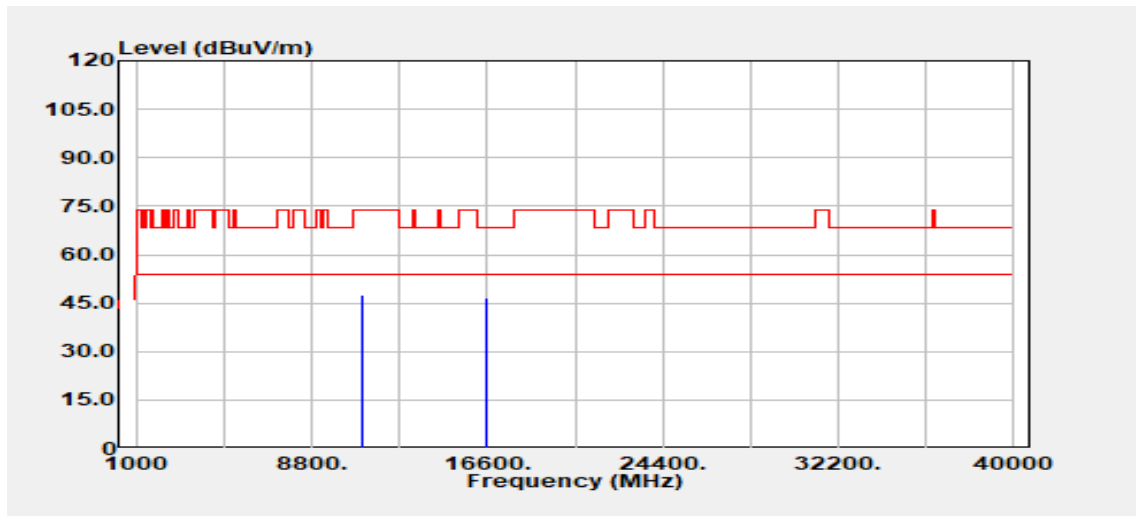


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBUV/m) | Limit @3m (dBUV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 35.38 | 12.39 | 47.77 | 74.00 | -26.23 |
| 11020.00 | Average | 29.92 | 12.39 | 42.31 | 54.00 | -11.69 |
| 16530.00 | Peak | 27.91 | 18.66 | 46.58 | 68.20 | -21.62 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5510 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

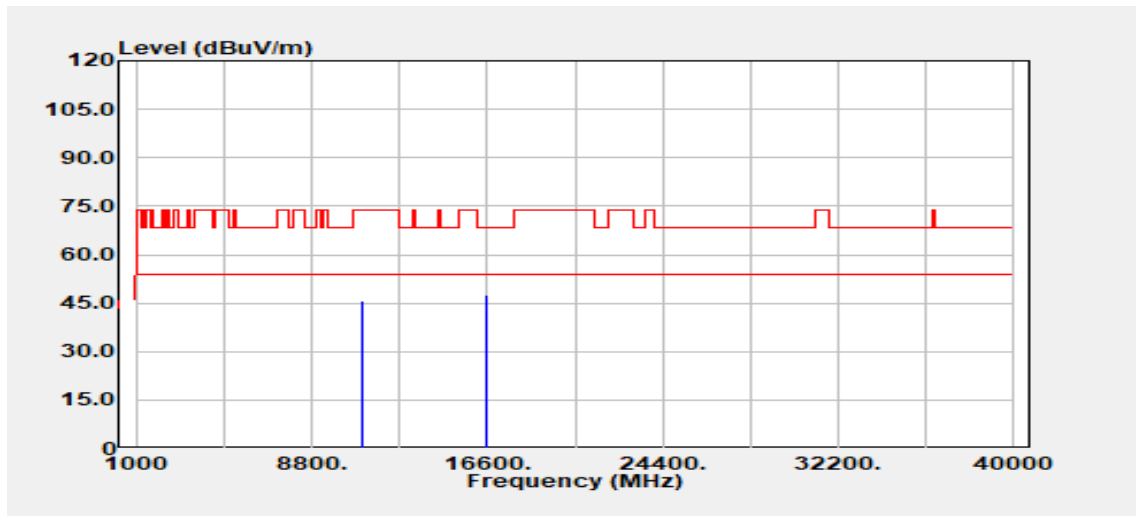


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 33.48 | 12.39 | 45.87 | 74.00 | -28.13 |
| 11020.00 | Average | 27.47 | 12.39 | 39.86 | 54.00 | -14.14 |
| 16530.00 | Peak | 29.03 | 18.66 | 47.69 | 68.20 | -20.51 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5550 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

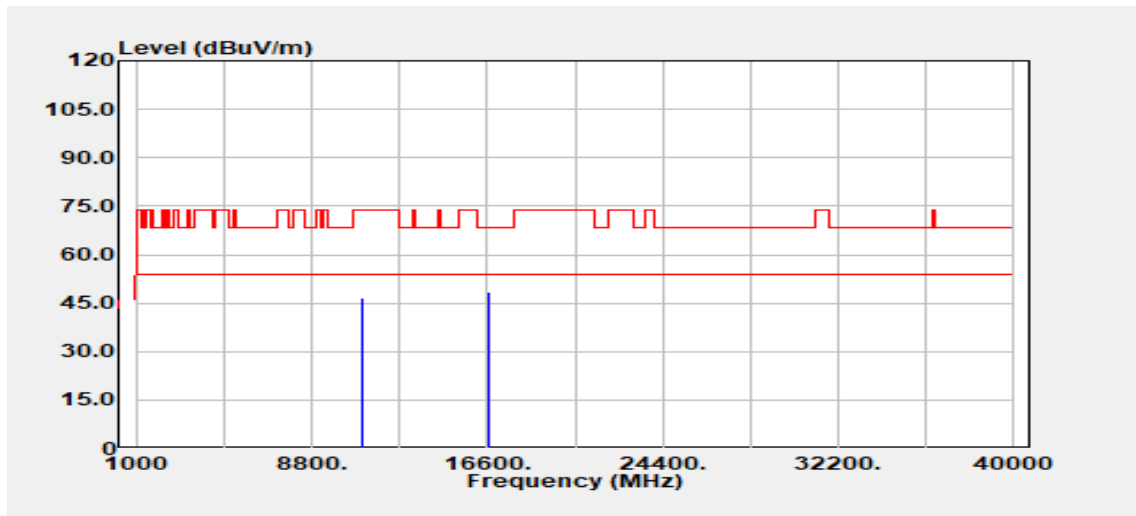


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 34.06 | 12.60 | 46.66 | 74.00 | -27.34 |
| 11100.00 | Average | 29.50 | 12.60 | 42.10 | 54.00 | -11.90 |
| 16650.00 | Peak | 28.63 | 19.99 | 48.61 | 68.20 | -19.59 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5550 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

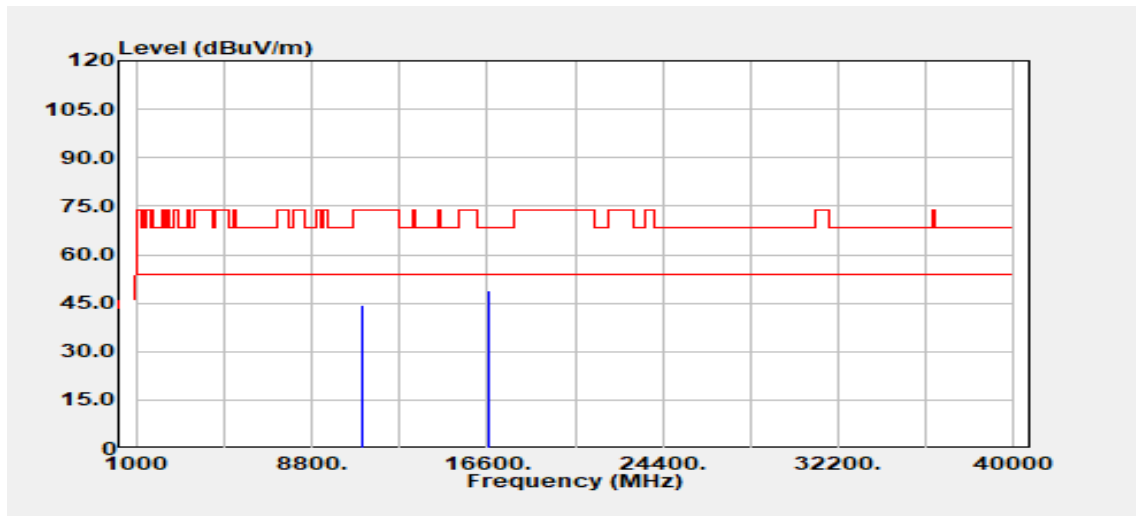


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 31.88 | 12.60 | 44.48 | 74.00 | -29.52 |
| 11100.00 | Average | 27.16 | 12.60 | 39.76 | 54.00 | -14.24 |
| 16650.00 | Peak | 28.86 | 19.99 | 48.84 | 68.20 | -19.36 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5670 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

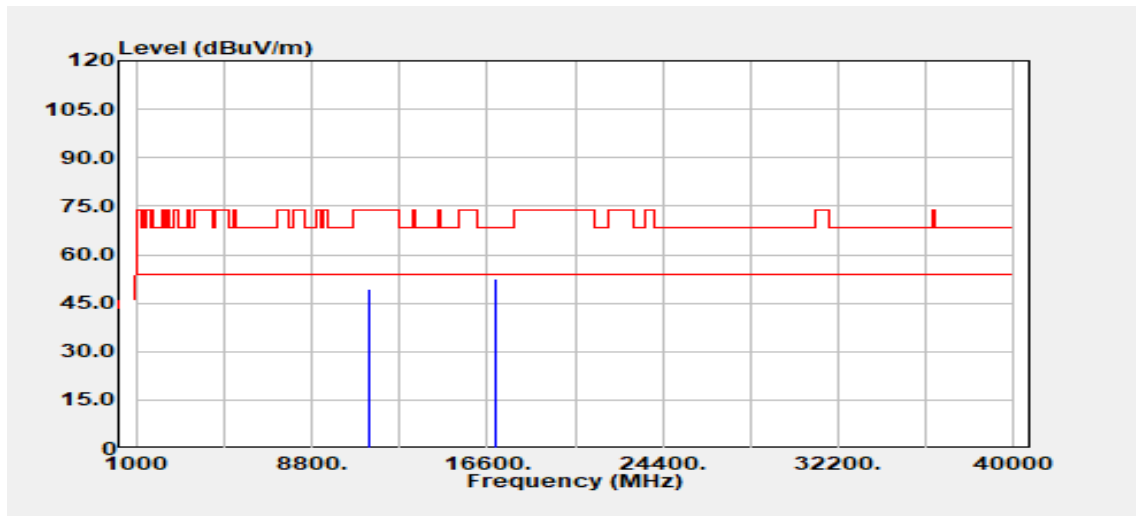


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 36.85 | 12.55 | 49.41 | 74.00 | -24.59 |
| 11340.00 | Average | 31.11 | 12.55 | 43.66 | 54.00 | -10.34 |
| 17010.00 | Peak | 27.37 | 25.32 | 52.69 | 68.20 | -15.51 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5670 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

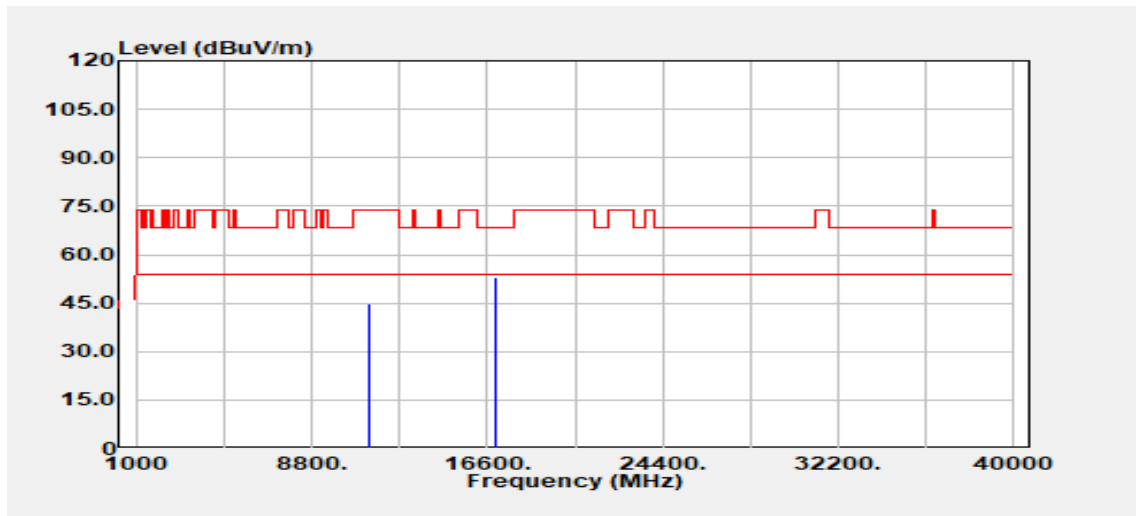


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 32.17 | 12.55 | 44.72 | 74.00 | -29.28 |
| 11340.00 | Average | 28.17 | 12.55 | 40.73 | 54.00 | -13.27 |
| 17010.00 | Peak | 27.84 | 25.32 | 53.16 | 68.20 | -15.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

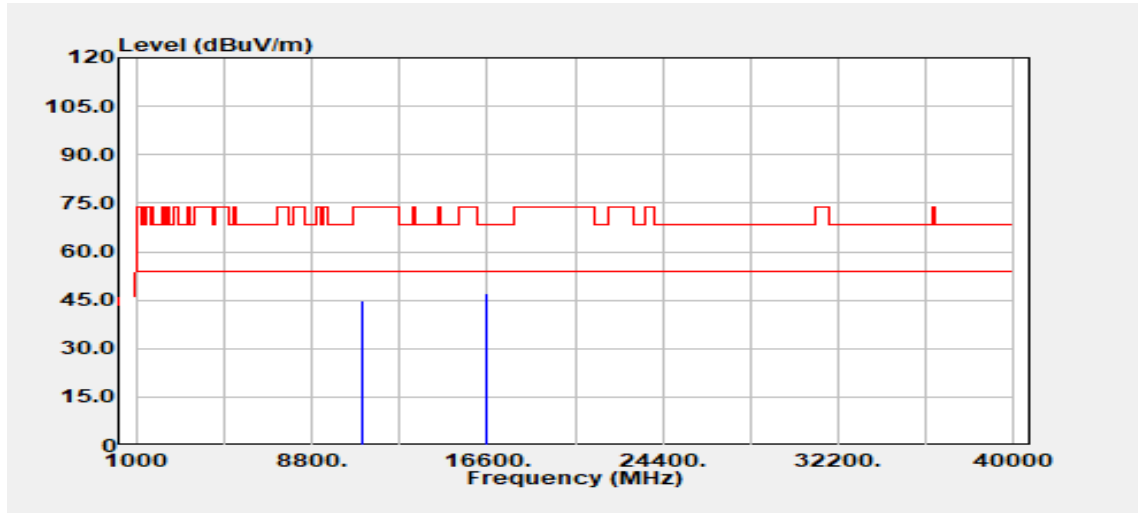


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 32.64 | 12.40 | 45.04 | 74.00 | -28.96 |
| 11060.00 | Average | 26.58 | 12.40 | 38.98 | 54.00 | -15.02 |
| 16590.00 | Peak | 27.71 | 19.22 | 46.93 | 68.20 | -21.27 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

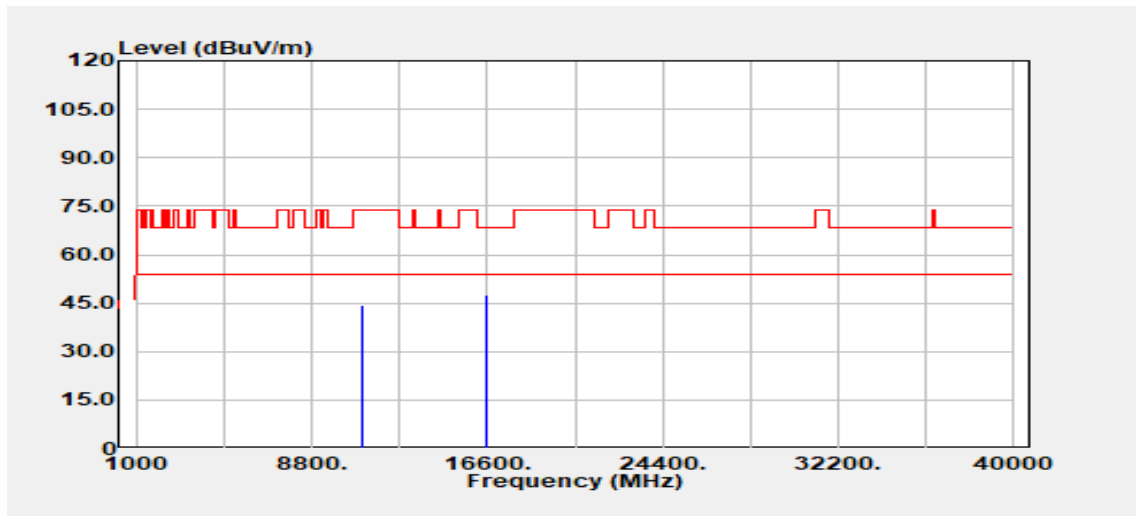


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 31.98 | 12.40 | 44.37 | 74.00 | -29.63 |
| 11060.00 | Average | 25.67 | 12.40 | 38.07 | 54.00 | -15.93 |
| 16590.00 | Peak | 28.52 | 19.22 | 47.75 | 68.20 | -20.45 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5610 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

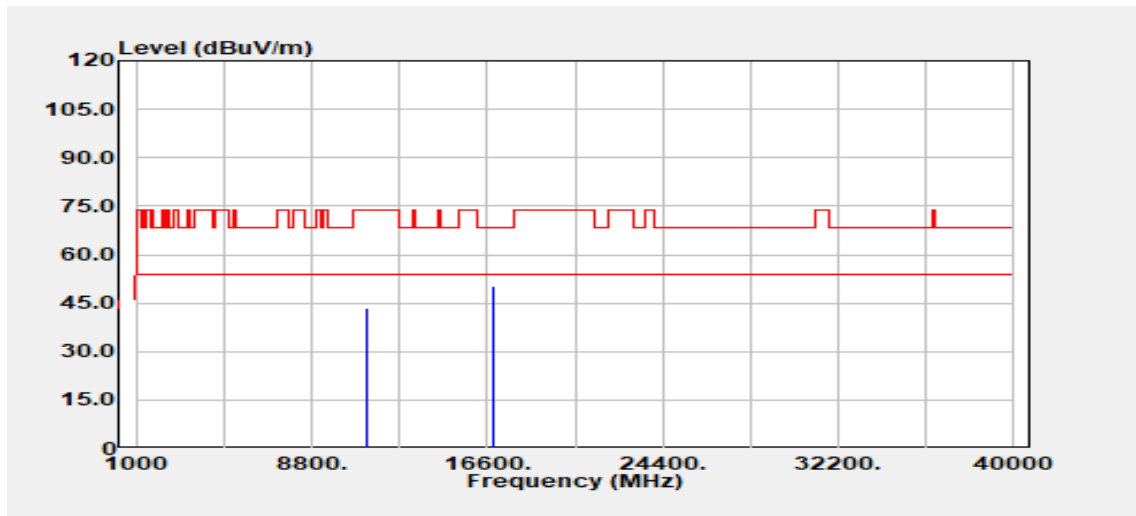


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 30.66 | 12.60 | 43.27 | 74.00 | -30.73 |
| 11220.00 | Average | 28.64 | 12.60 | 41.24 | 54.00 | -12.76 |
| 16830.00 | Peak | 28.34 | 22.01 | 50.35 | 68.20 | -17.85 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5610 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

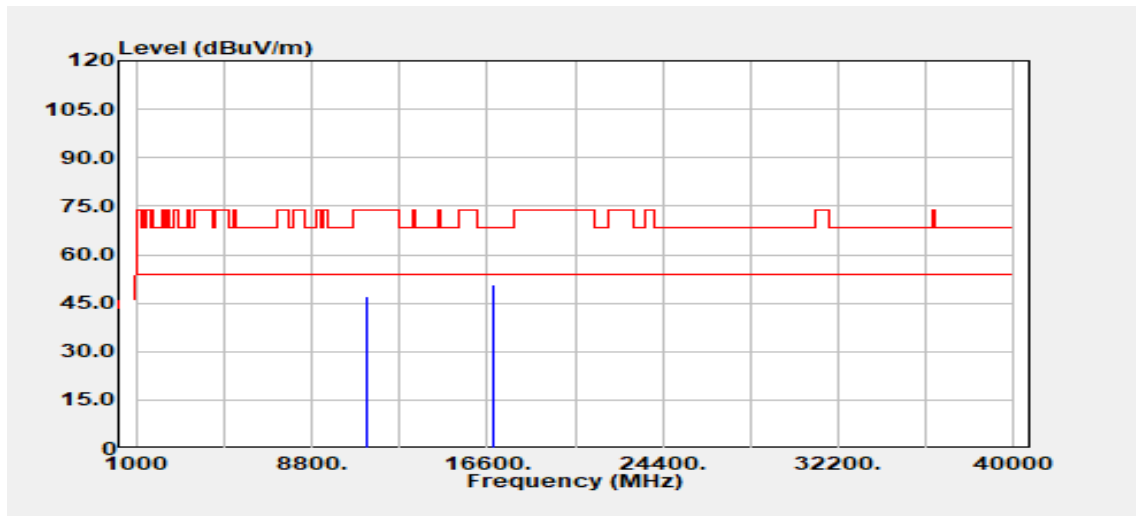


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 34.32 | 12.60 | 46.92 | 74.00 | -27.08 |
| 11220.00 | Average | 27.25 | 12.60 | 39.86 | 54.00 | -14.14 |
| 16830.00 | Peak | 28.64 | 22.01 | 50.65 | 68.20 | -17.55 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5570 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

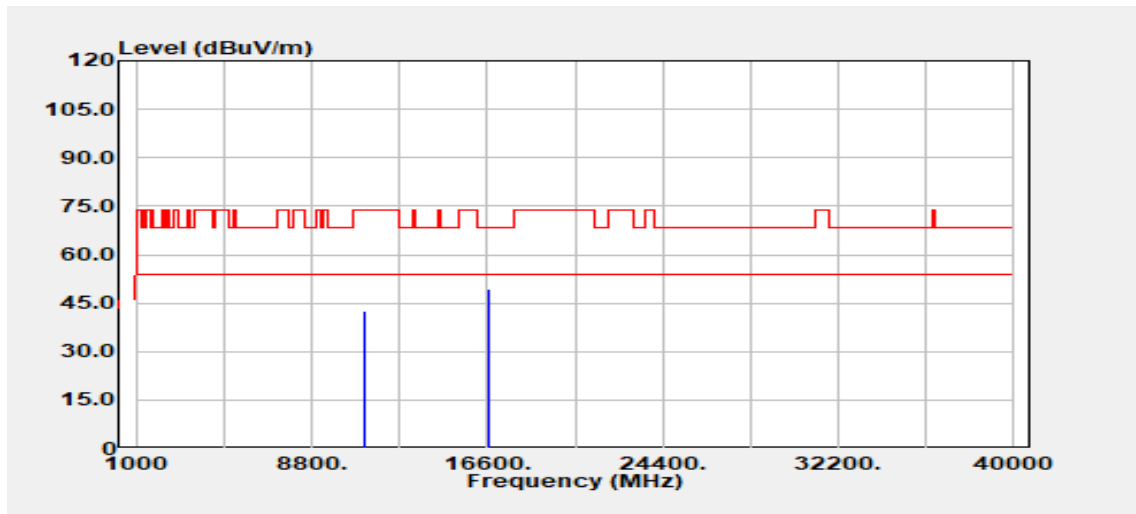


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 30.08 | 12.49 | 42.57 | 74.00 | -31.43 |
| 11140.00 | Average | 24.86 | 12.49 | 37.34 | 54.00 | -16.66 |
| 16710.00 | Peak | 28.53 | 20.67 | 49.19 | 68.20 | -19.01 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 570 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

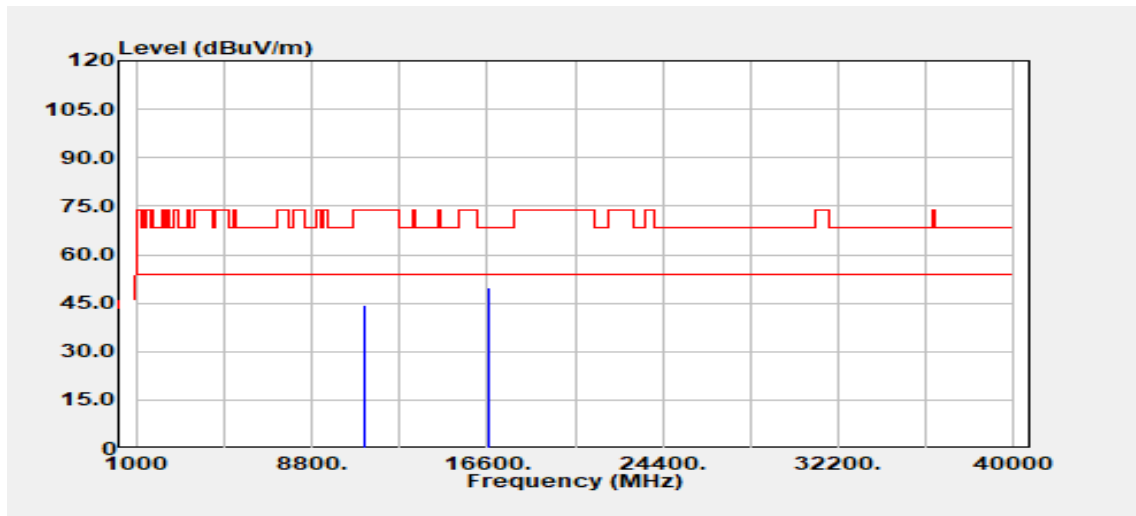


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 31.78 | 12.49 | 44.27 | 74.00 | -29.73 |
| 11140.00 | Average | 24.57 | 12.49 | 37.06 | 54.00 | -16.94 |
| 16710.00 | Peak | 29.23 | 20.67 | 49.90 | 68.20 | -18.30 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

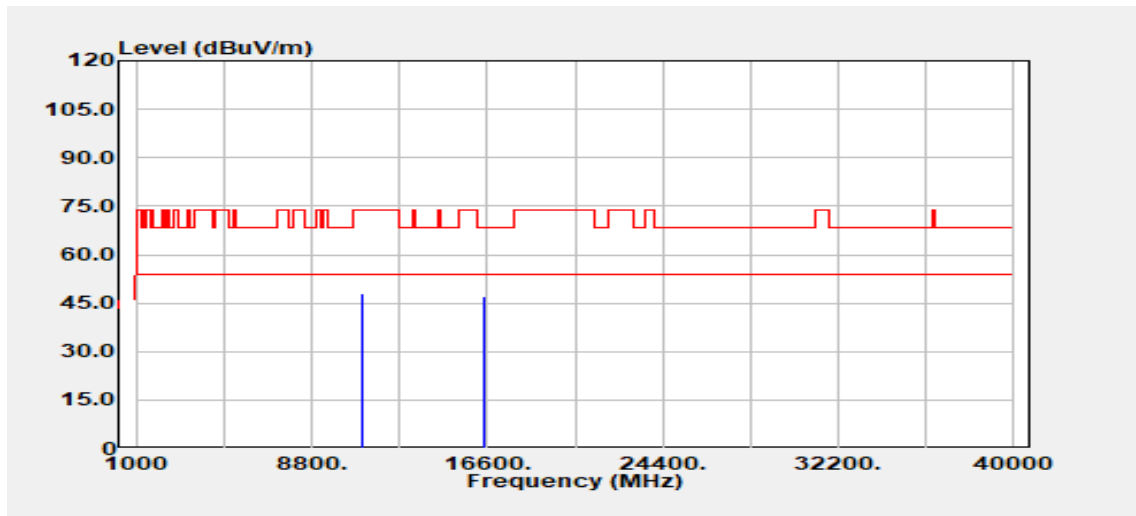


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 35.61 | 12.42 | 48.03 | 74.00 | -25.97 |
| 11000.00 | Average | 31.54 | 12.42 | 43.96 | 54.00 | -10.04 |
| 16500.00 | Peak | 28.56 | 18.70 | 47.26 | 68.20 | -20.94 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

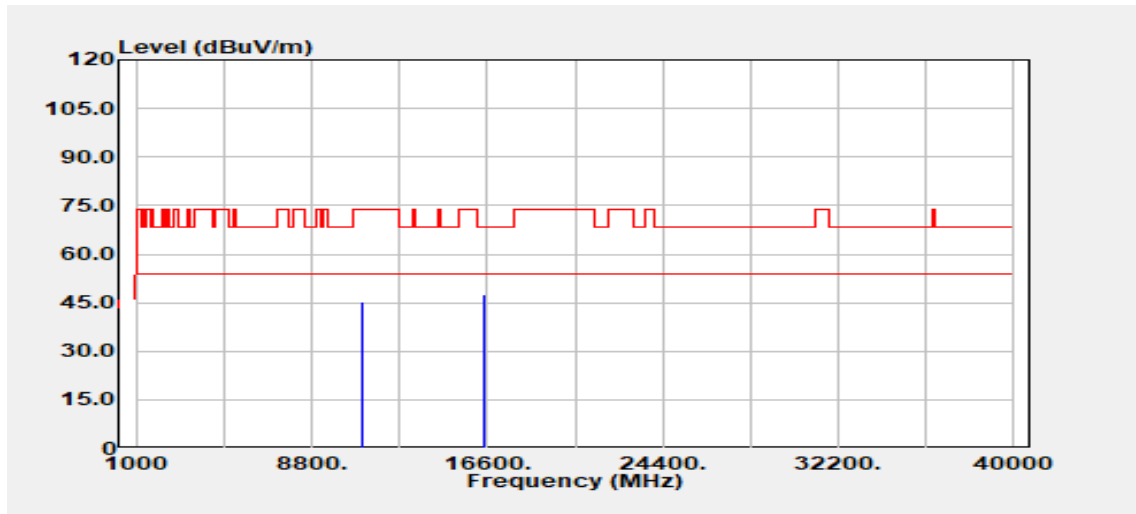


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11000.00 | Peak | 32.83 | 12.42 | 45.25 | 74.00 | -28.75 |
| 11000.00 | Average | 29.26 | 12.42 | 41.68 | 54.00 | -12.32 |
| 16500.00 | Peak | 28.69 | 18.70 | 47.39 | 68.20 | -20.81 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

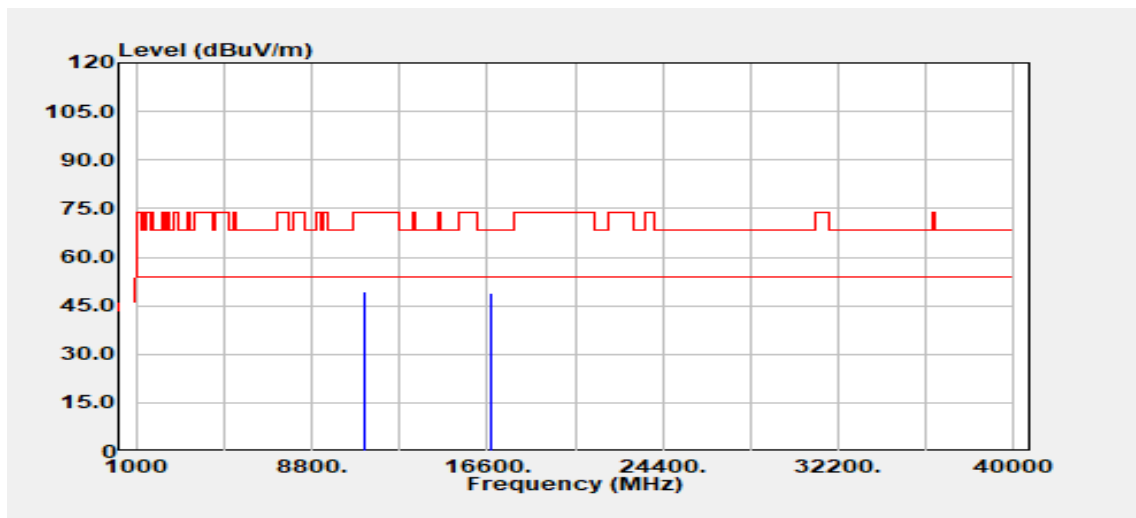


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 36.77 | 12.48 | 49.24 | 74.00 | -24.76 |
| 11160.00 | Average | 32.90 | 12.48 | 45.38 | 54.00 | -8.62 |
| 16740.00 | Peak | 27.89 | 20.88 | 48.77 | 68.20 | -19.43 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5580 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

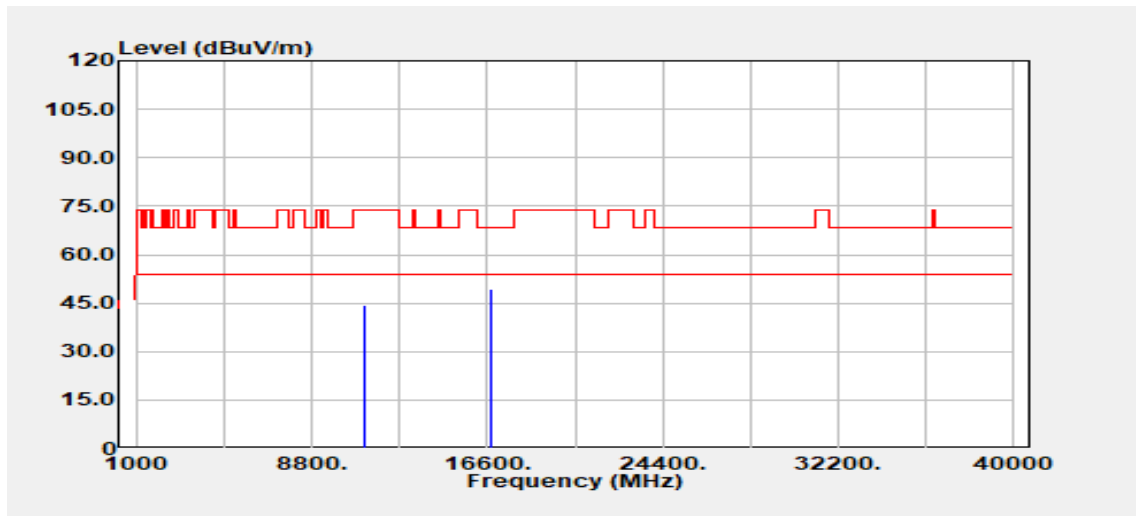


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 31.77 | 12.48 | 44.24 | 74.00 | -29.76 |
| 11160.00 | Average | 29.09 | 12.48 | 41.56 | 54.00 | -12.44 |
| 16740.00 | Peak | 28.26 | 20.88 | 49.13 | 68.20 | -19.07 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

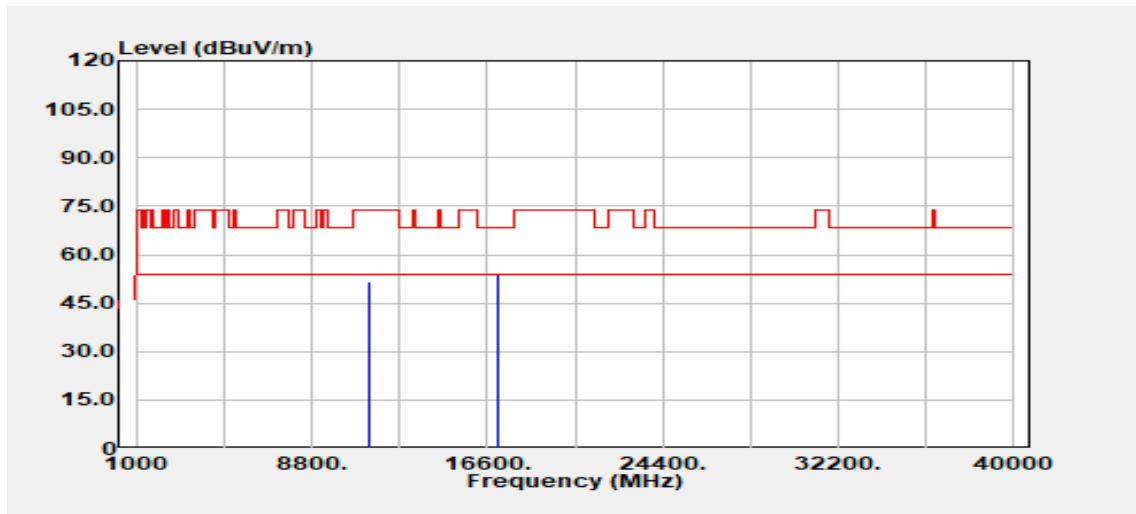


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBUV/m) | Limit @3m (dBUV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 39.14 | 12.39 | 51.53 | 74.00 | -22.47 |
| 11400.00 | Average | 34.03 | 12.39 | 46.42 | 54.00 | -7.58 |
| 17100.00 | Peak | 28.49 | 25.62 | 54.11 | 68.20 | -14.09 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

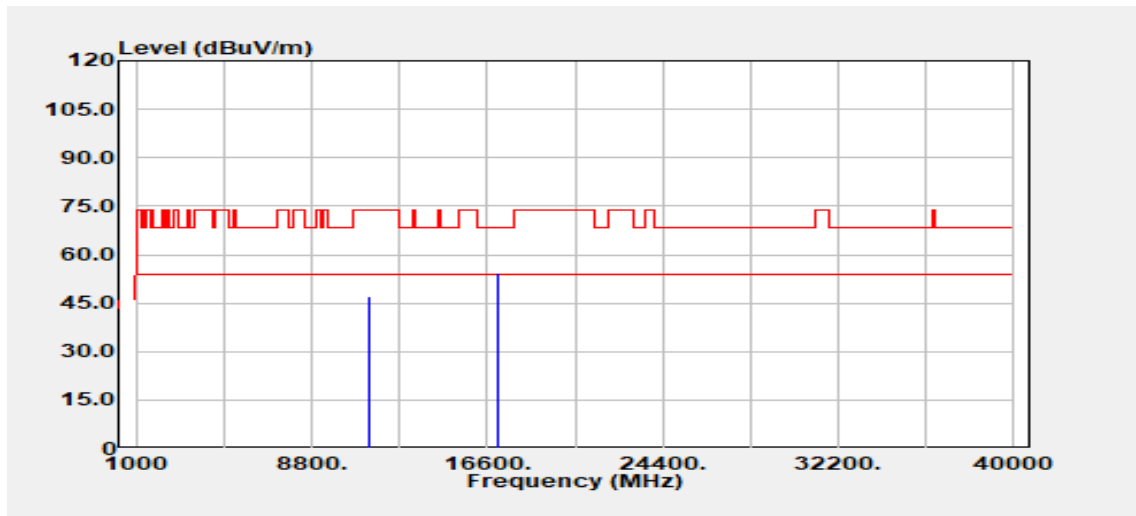


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 34.83 | 12.39 | 47.22 | 74.00 | -26.78 |
| 11400.00 | Average | 28.47 | 12.39 | 40.86 | 54.00 | -13.14 |
| 17100.00 | Peak | 28.82 | 25.62 | 54.44 | 68.20 | -13.76 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz_ | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

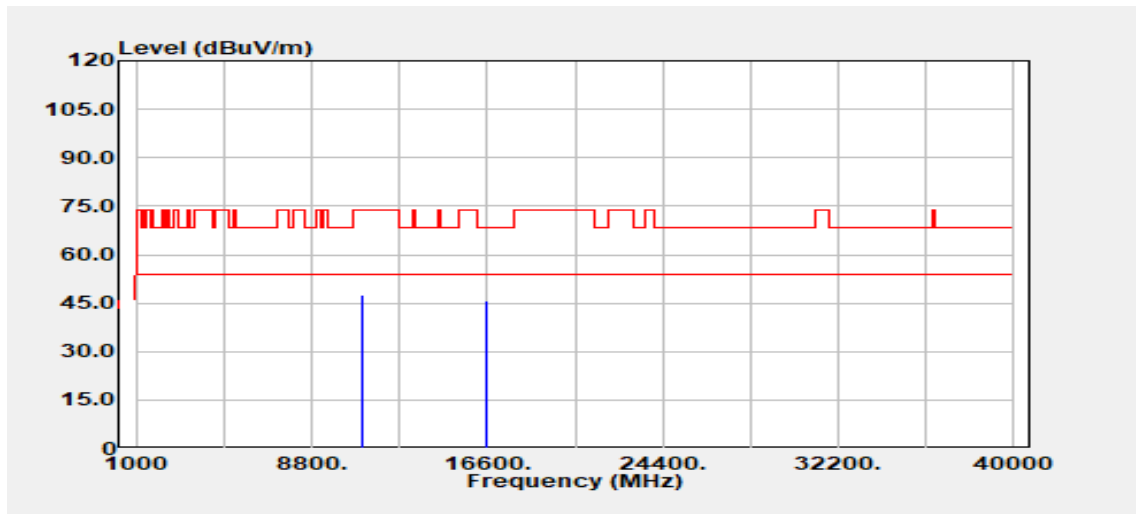


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 35.12 | 12.39 | 47.51 | 74.00 | -26.49 |
| 11020.00 | Average | 31.44 | 12.39 | 43.83 | 54.00 | -10.17 |
| 16530.00 | Peak | 27.23 | 18.66 | 45.89 | 68.20 | -22.31 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz_ | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

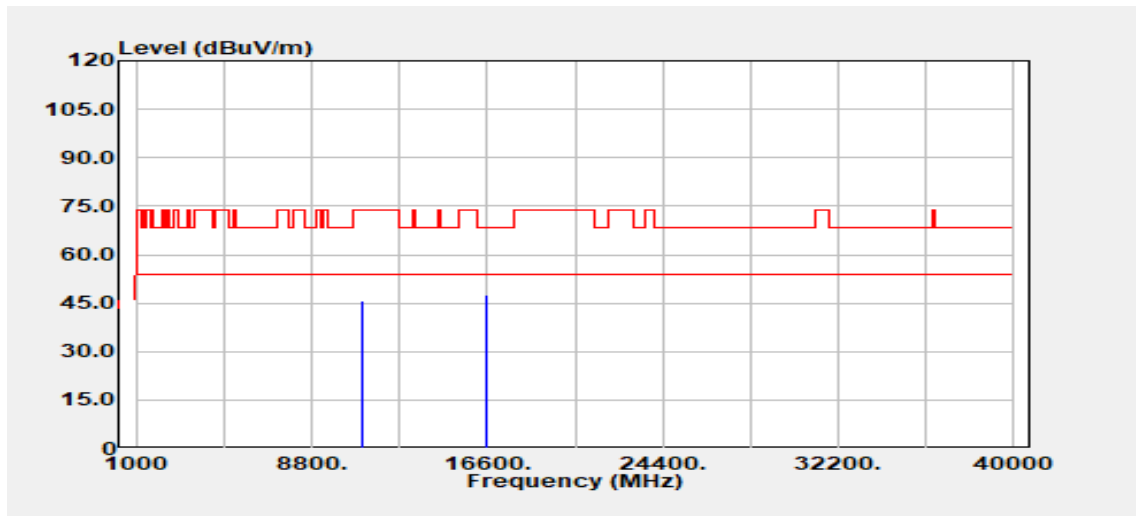


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 31.72 | 12.39 | 44.11 | 74.00 | -29.89 |
| 11020.00 | Average | 33.33 | 12.39 | 45.72 | 54.00 | -8.28 |
| 16530.00 | Peak | 28.81 | 18.66 | 47.47 | 68.20 | -20.73 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5550 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

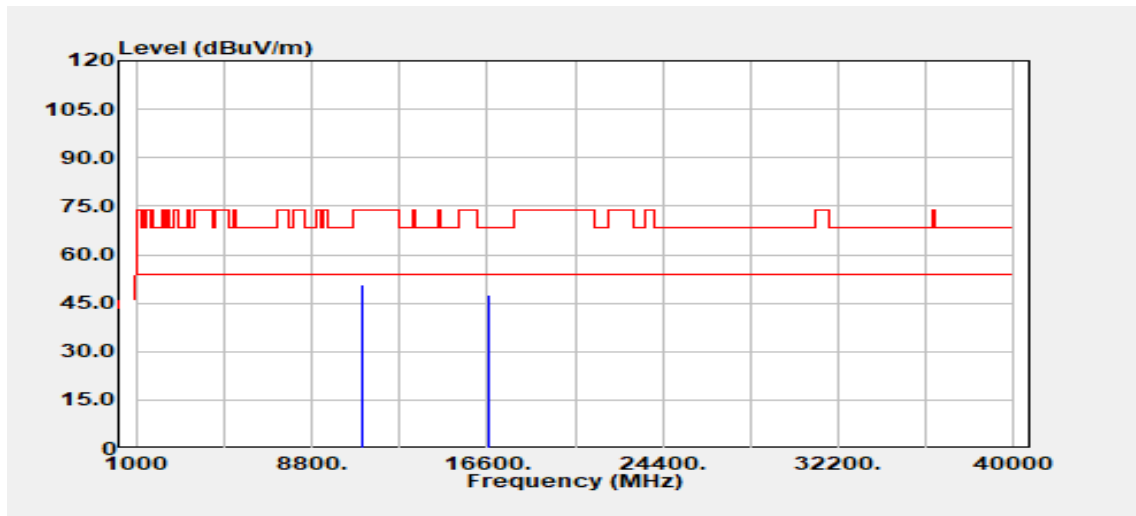


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11100.00 | Peak | 37.89 | 12.60 | 50.49 | 74.00 | -23.51 |
| 11100.00 | Average | 30.44 | 12.60 | 43.04 | 54.00 | -10.96 |
| 16650.00 | Peak | 27.67 | 19.99 | 47.66 | 68.20 | -20.54 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5550 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

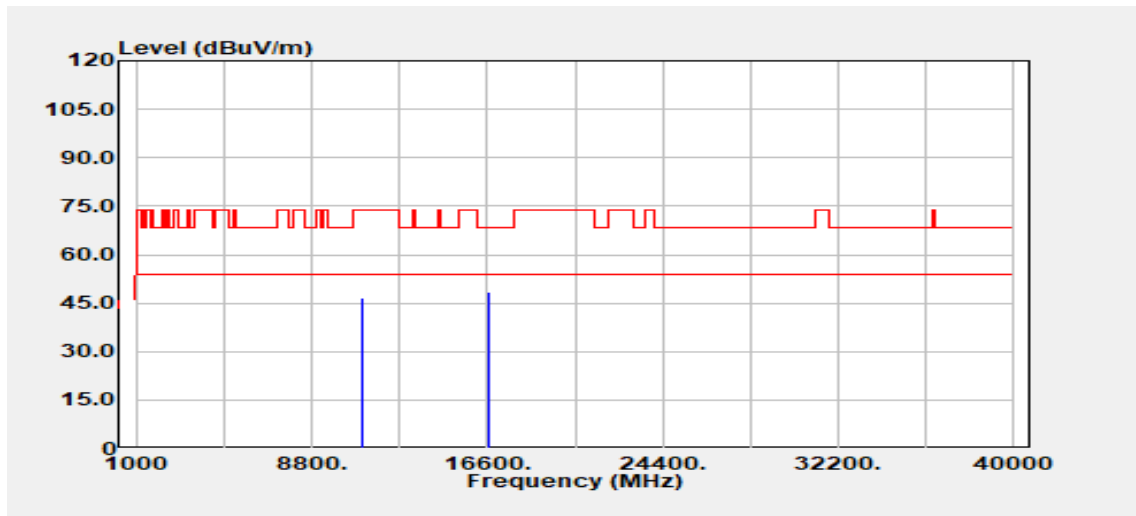


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 34.04 | 12.60 | 46.64 | 74.00 | -27.36 |
| 11100.00 | Average | 28.90 | 12.60 | 41.50 | 54.00 | -12.50 |
| 16650.00 | Peak | 28.62 | 19.99 | 48.60 | 68.20 | -19.60 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz_ | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

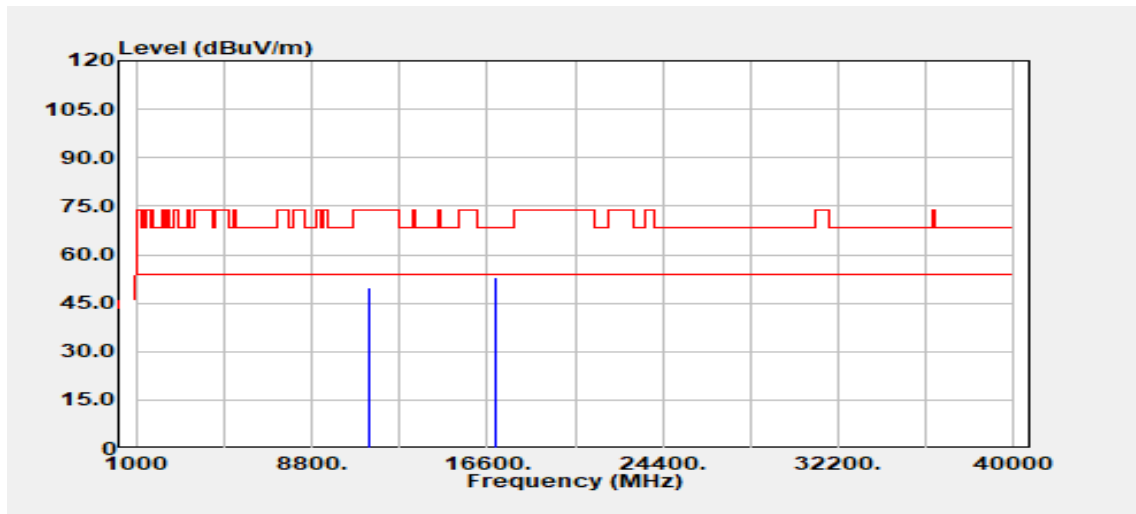


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 37.14 | 12.55 | 49.70 | 74.00 | -24.30 |
| 11340.00 | Average | 32.08 | 12.55 | 44.63 | 54.00 | -9.37 |
| 17010.00 | Peak | 27.57 | 25.32 | 52.89 | 68.20 | -15.31 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

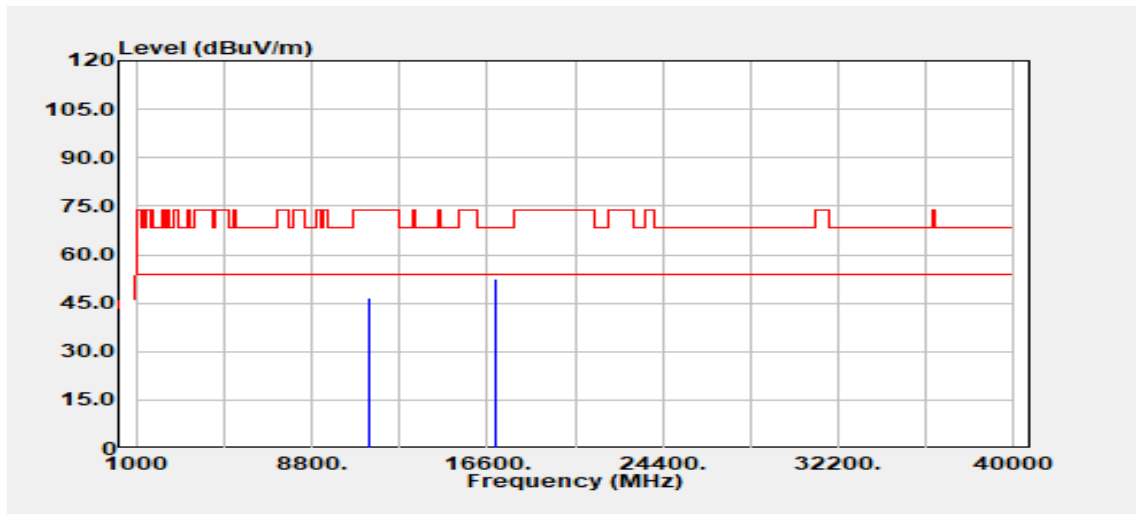


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 34.11 | 12.55 | 46.66 | 74.00 | -27.34 |
| 11340.00 | Average | 29.92 | 12.55 | 42.47 | 54.00 | -11.53 |
| 17010.00 | Peak | 27.16 | 25.32 | 52.48 | 68.20 | -15.72 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

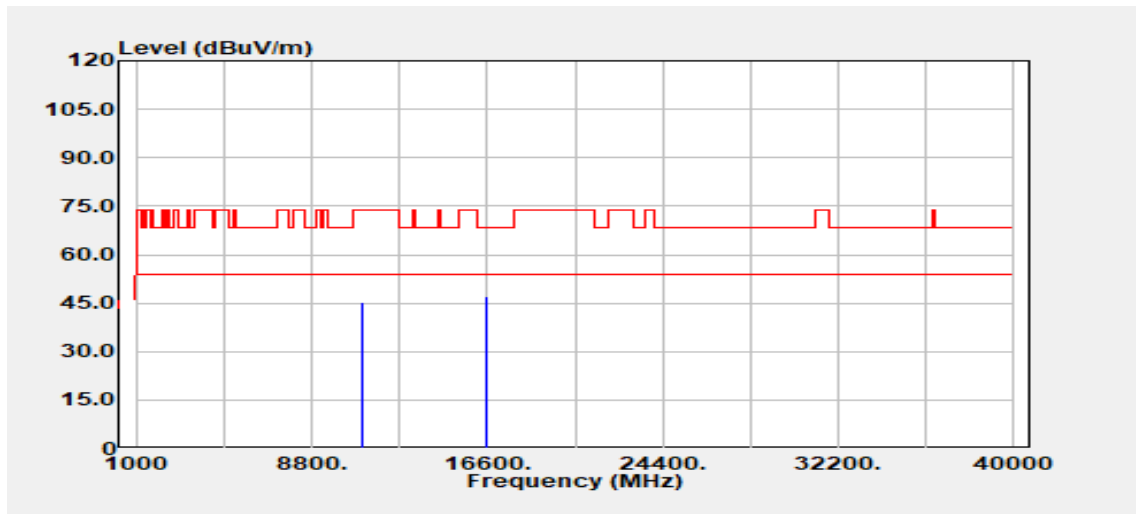


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 32.70 | 12.40 | 45.10 | 74.00 | -28.90 |
| 11060.00 | Average | 26.72 | 12.40 | 39.12 | 54.00 | -14.88 |
| 16590.00 | Peak | 27.94 | 19.22 | 47.16 | 68.20 | -21.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

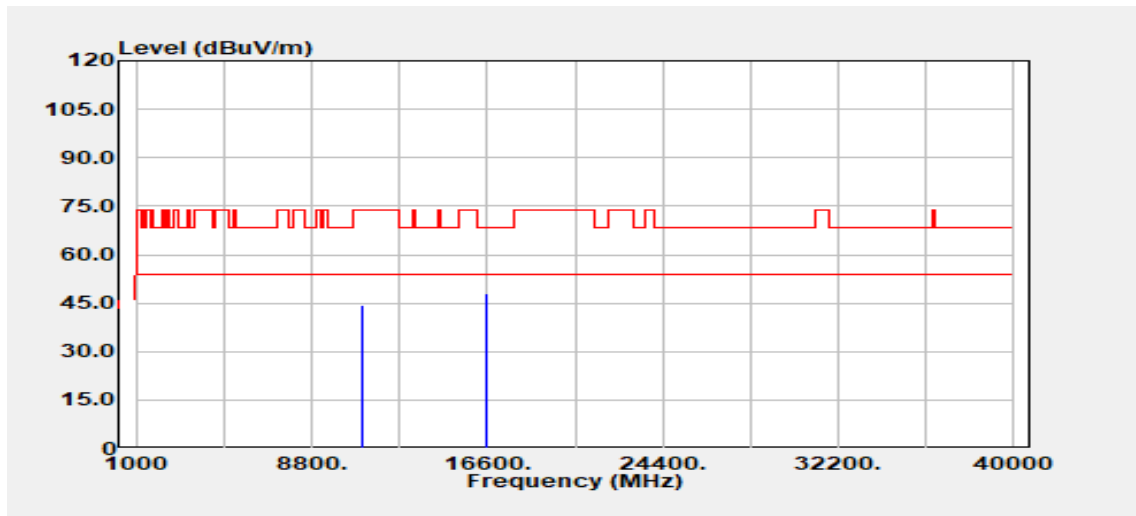


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 32.08 | 12.40 | 44.48 | 74.00 | -29.52 |
| 11060.00 | Average | 25.67 | 12.40 | 38.07 | 54.00 | -15.93 |
| 16590.00 | Peak | 28.78 | 19.22 | 48.00 | 68.20 | -20.20 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5610 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

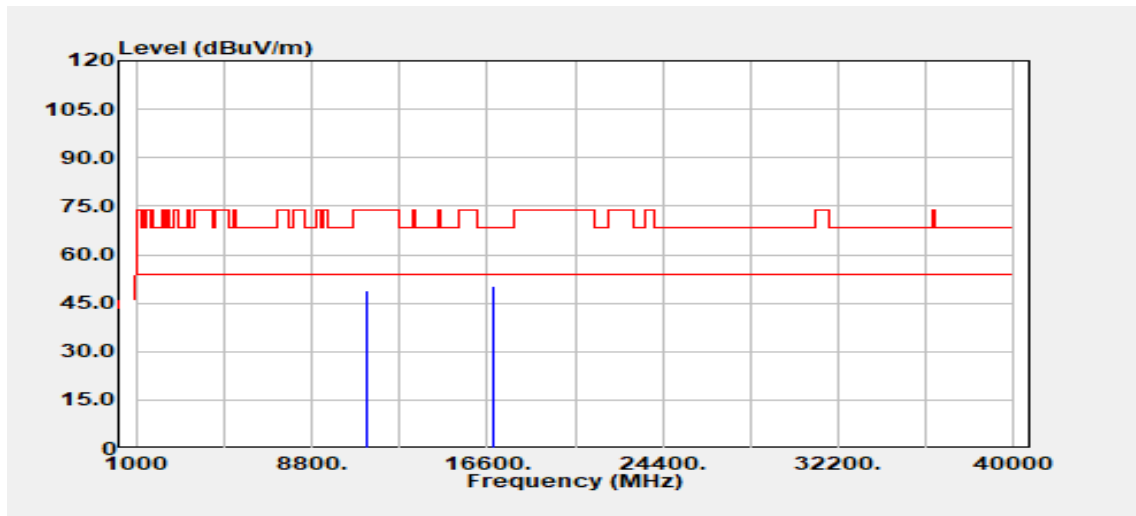


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 36.38 | 12.60 | 48.98 | 74.00 | -25.02 |
| 11220.00 | Average | 32.69 | 12.60 | 45.29 | 54.00 | -8.71 |
| 16830.00 | Peak | 28.06 | 22.01 | 50.07 | 68.20 | -18.13 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5610 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

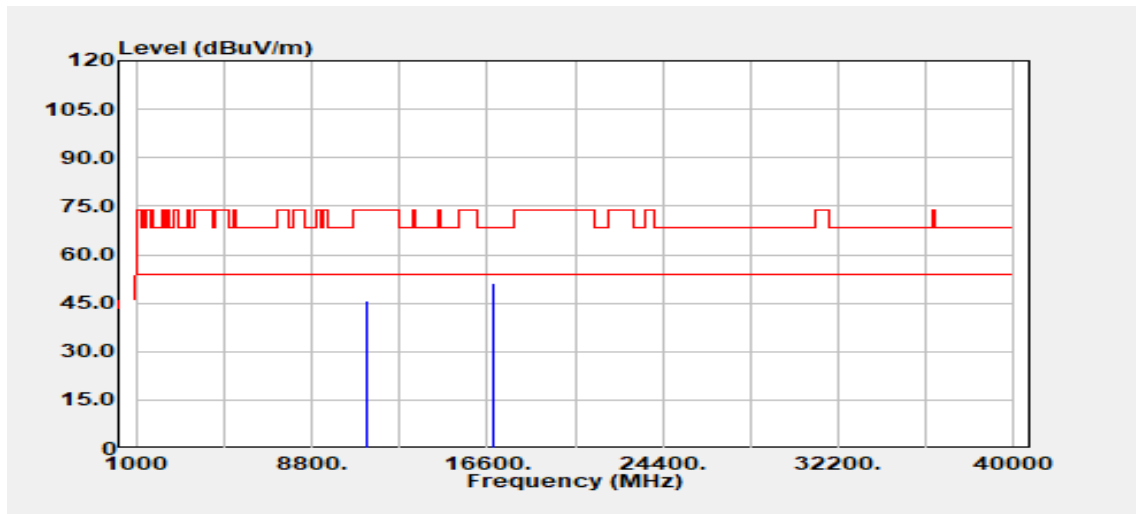


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 33.04 | 12.60 | 45.64 | 74.00 | -28.36 |
| 11220.00 | Average | 28.92 | 12.60 | 41.52 | 54.00 | -12.48 |
| 16830.00 | Peak | 29.37 | 22.01 | 51.37 | 68.20 | -16.83 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5570 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

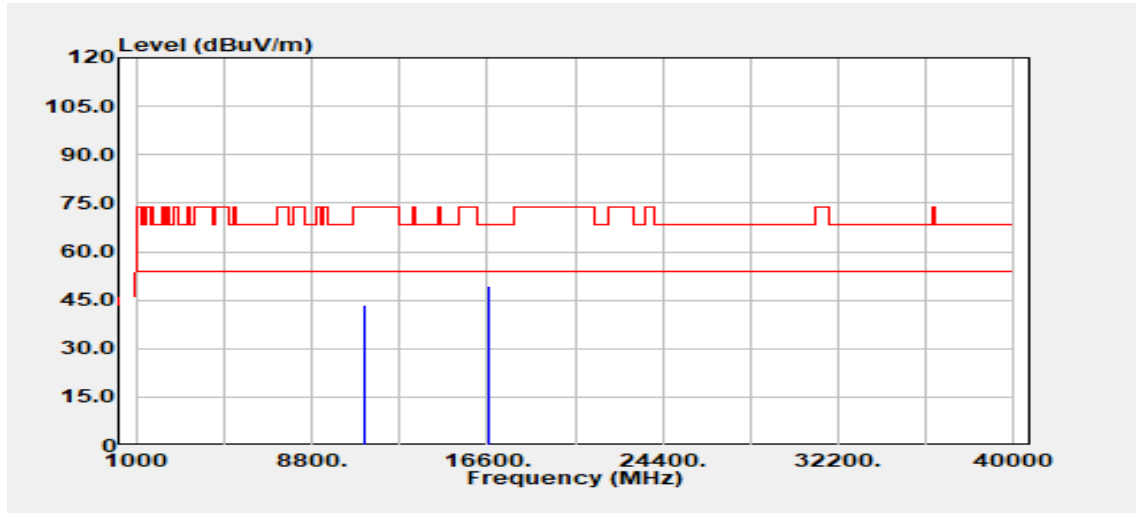


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 30.94 | 12.49 | 43.43 | 74.00 | -30.57 |
| 11140.00 | Average | 24.40 | 12.49 | 36.89 | 54.00 | -17.11 |
| 16710.00 | Peak | 28.49 | 20.67 | 49.16 | 68.20 | -19.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5570 MHz | Temp/Hum | 21.8(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | April 7, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

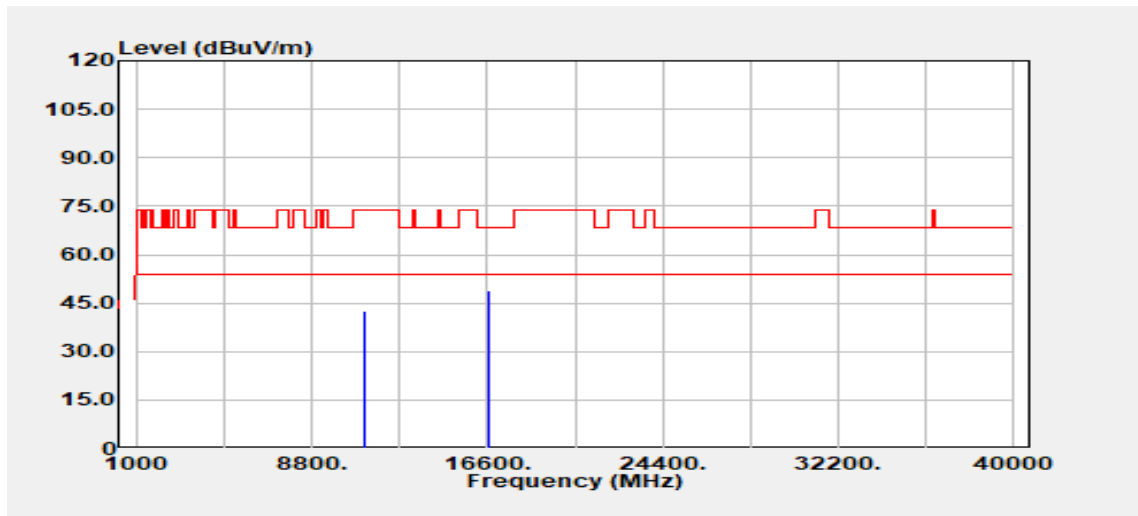

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 30.29 | 12.49 | 42.78 | 74.00 | -31.22 |
| 11140.00 | Average | 24.26 | 12.49 | 36.75 | 54.00 | -17.25 |
| 16710.00 | Peak | 28.07 | 20.67 | 48.74 | 68.20 | -19.46 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(1) Chain 0:

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5745 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

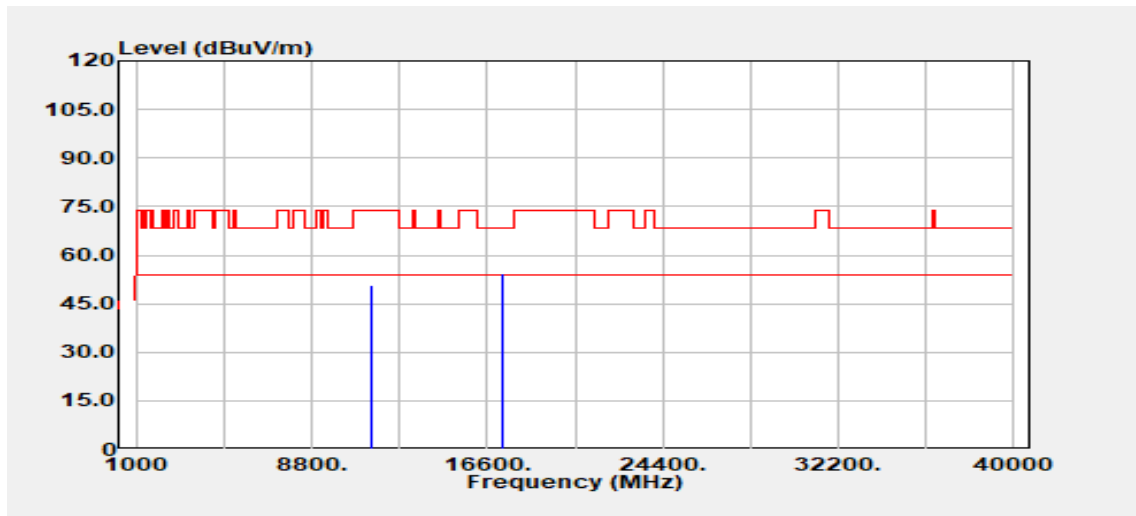


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 38.25 | 12.39 | 50.64 | 74.00 | -23.36 |
| 11490.00 | Average | 32.97 | 12.39 | 45.36 | 54.00 | -8.64 |
| 17235.00 | Peak | 28.19 | 26.10 | 54.30 | 68.20 | -13.90 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

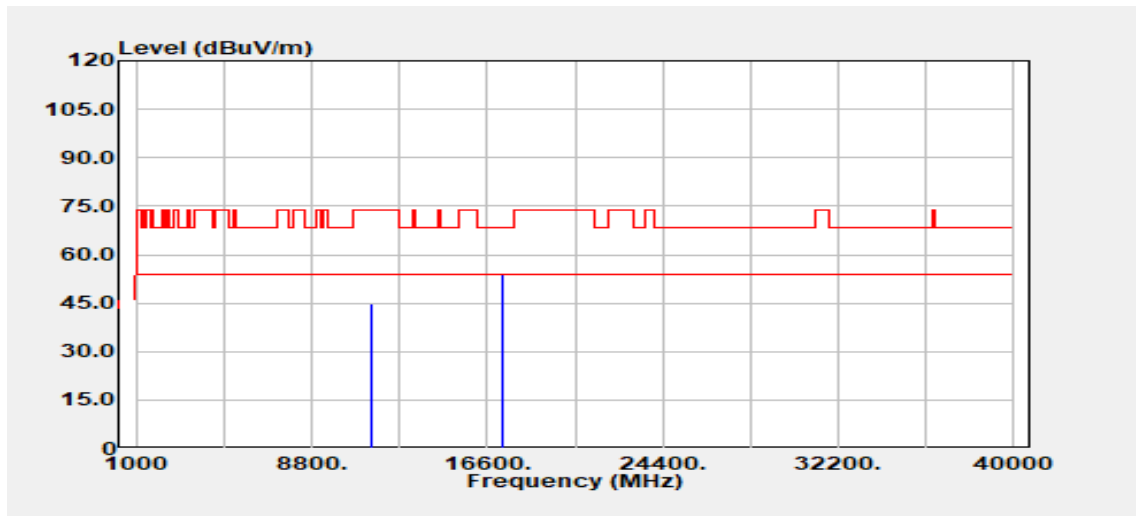


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 32.58 | 12.39 | 44.97 | 74.00 | -29.03 |
| 11490.00 | Average | 28.07 | 12.39 | 40.46 | 54.00 | -13.54 |
| 17235.00 | Peak | 27.96 | 26.10 | 54.06 | 68.20 | -14.14 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5785 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonics | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

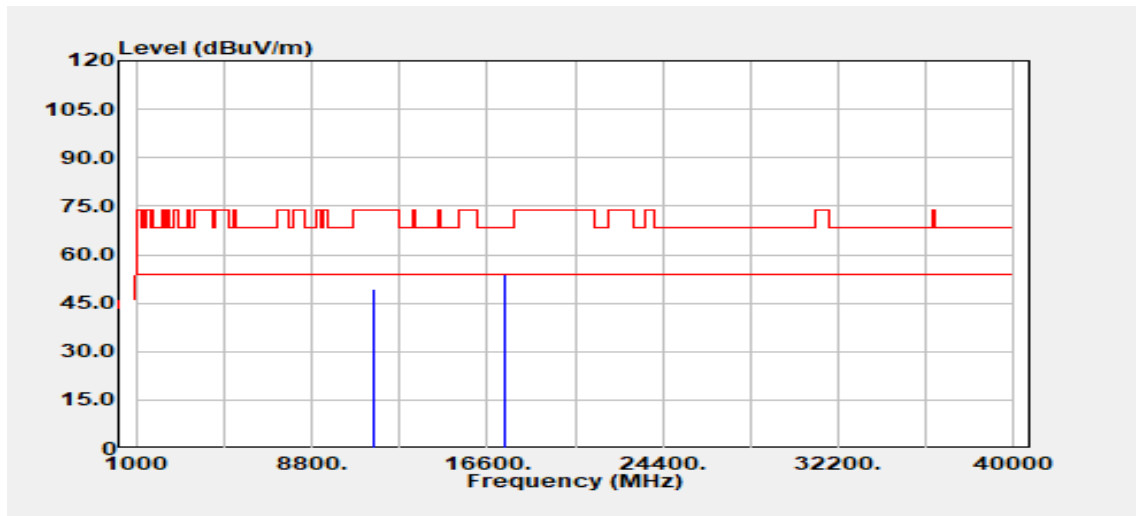


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 37.08 | 12.49 | 49.57 | 74.00 | -24.43 |
| 11570.00 | Average | 32.57 | 12.49 | 45.06 | 54.00 | -8.94 |
| 17355.00 | Peak | 28.63 | 25.47 | 54.10 | 68.20 | -14.10 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5785 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

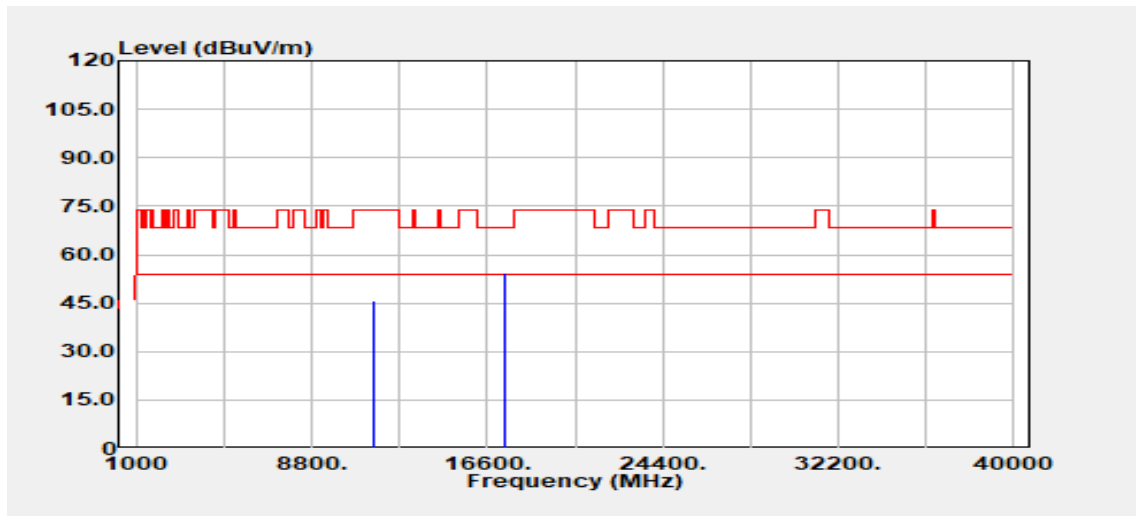


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 33.23 | 12.49 | 45.72 | 74.00 | -28.28 |
| 11570.00 | Average | 28.49 | 12.49 | 40.98 | 54.00 | -13.02 |
| 17355.00 | Peak | 28.92 | 25.47 | 54.39 | 68.20 | -13.81 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

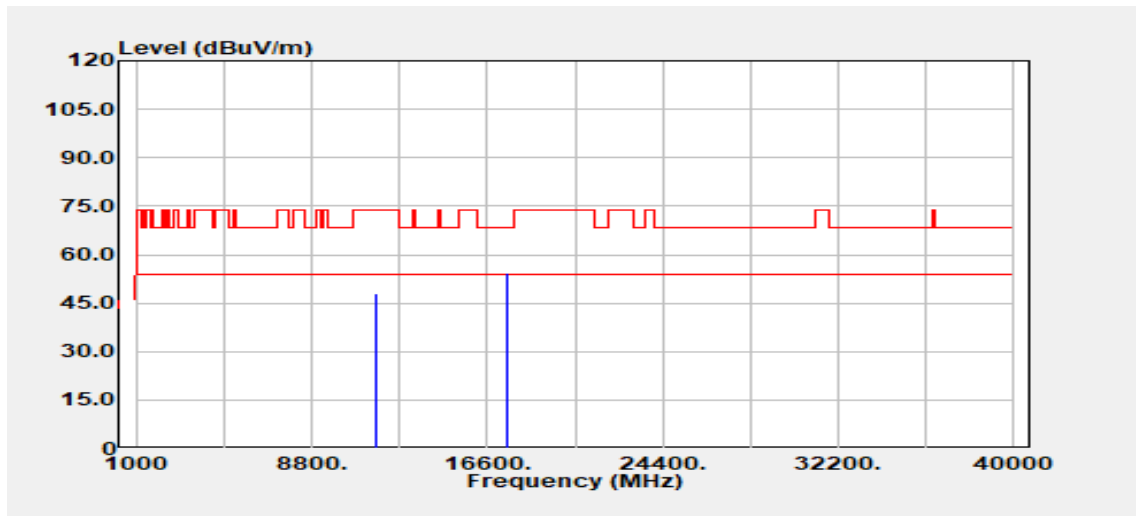


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 35.75 | 12.43 | 48.17 | 74.00 | -25.83 |
| 11650.00 | Average | 30.73 | 12.43 | 43.15 | 54.00 | -10.85 |
| 17475.00 | Peak | 29.28 | 25.06 | 54.34 | 68.20 | -13.86 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

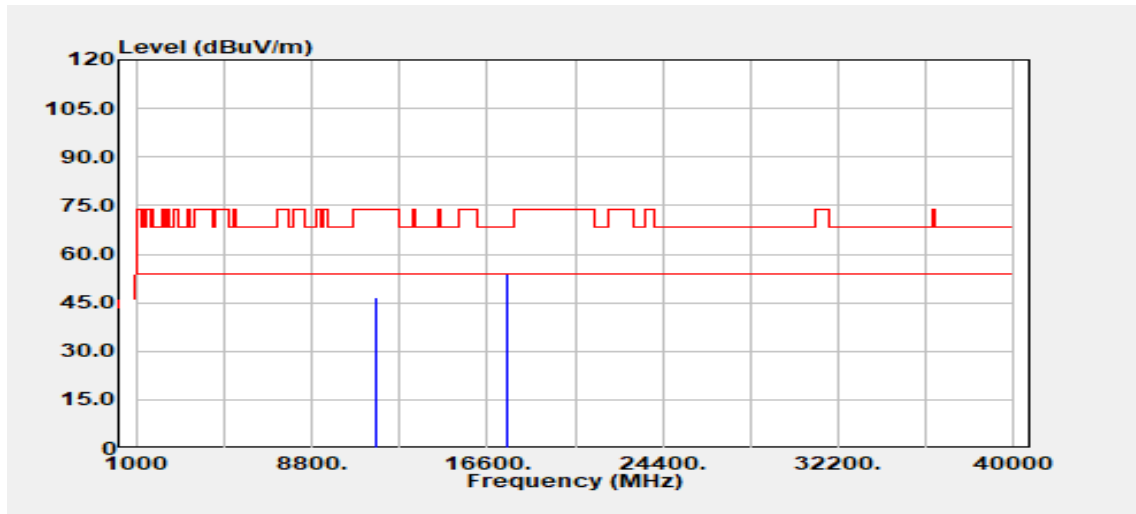

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 34.16 | 12.43 | 46.58 | 74.00 | -27.42 |
| 11650.00 | Average | 29.60 | 12.43 | 42.03 | 54.00 | -11.97 |
| 17475.00 | Peak | 28.81 | 25.06 | 53.87 | 68.20 | -14.33 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(2) Chain 1:

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5745 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

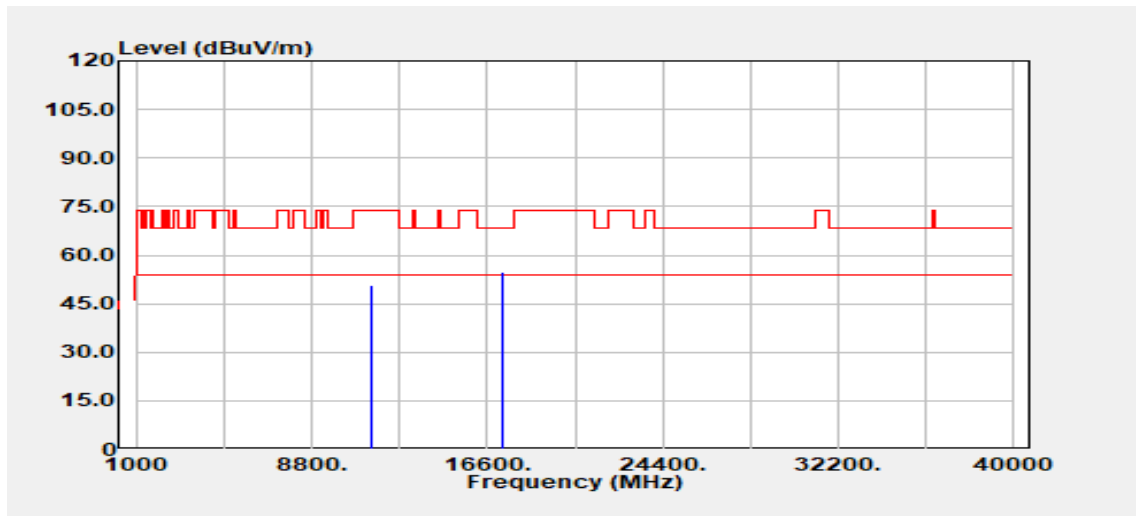


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 38.26 | 12.39 | 50.65 | 74.00 | -23.35 |
| 11490.00 | Average | 33.53 | 12.39 | 45.92 | 54.00 | -8.08 |
| 17235.00 | Peak | 28.64 | 26.10 | 54.74 | 68.20 | -13.46 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5745 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

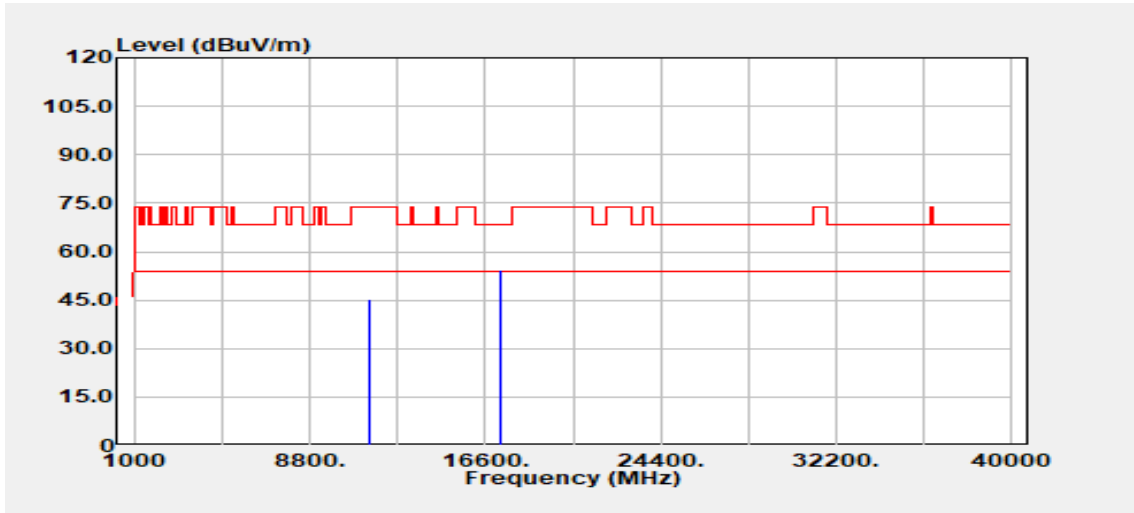


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 32.77 | 12.39 | 45.16 | 74.00 | -28.84 |
| 11490.00 | Average | 29.53 | 12.39 | 41.92 | 54.00 | -12.08 |
| 17235.00 | Peak | 28.19 | 26.10 | 54.29 | 68.20 | -13.91 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5785 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonics | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

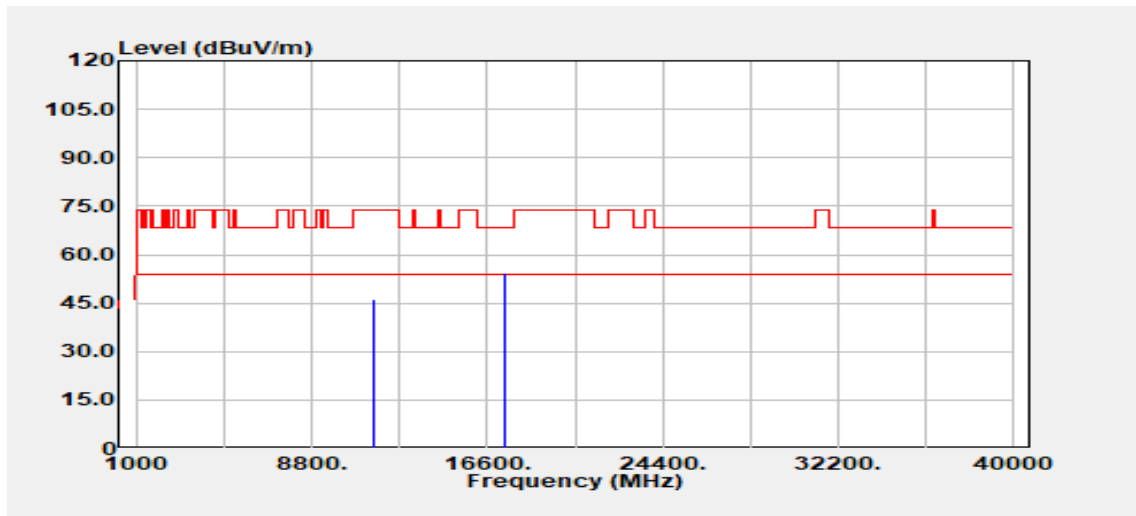


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 33.56 | 12.49 | 46.05 | 74.00 | -27.95 |
| 11570.00 | Average | 33.14 | 12.49 | 45.63 | 54.00 | -8.37 |
| 17355.00 | Peak | 28.70 | 25.47 | 54.17 | 68.20 | -14.03 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5785 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

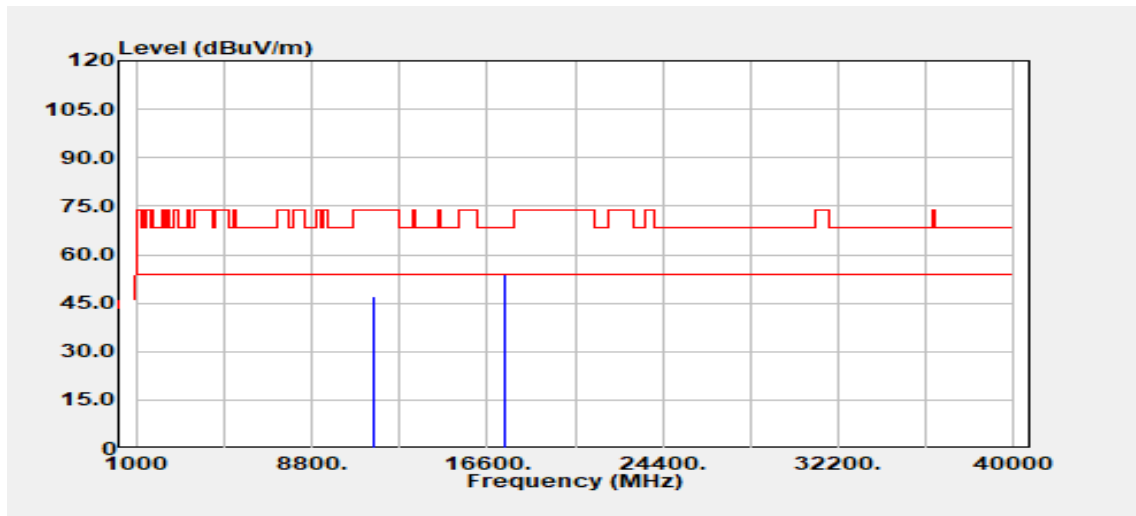


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 34.51 | 12.49 | 47.00 | 74.00 | -27.00 |
| 11570.00 | Average | 29.41 | 12.49 | 41.90 | 54.00 | -12.10 |
| 17355.00 | Peak | 28.45 | 25.47 | 53.92 | 68.20 | -14.28 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

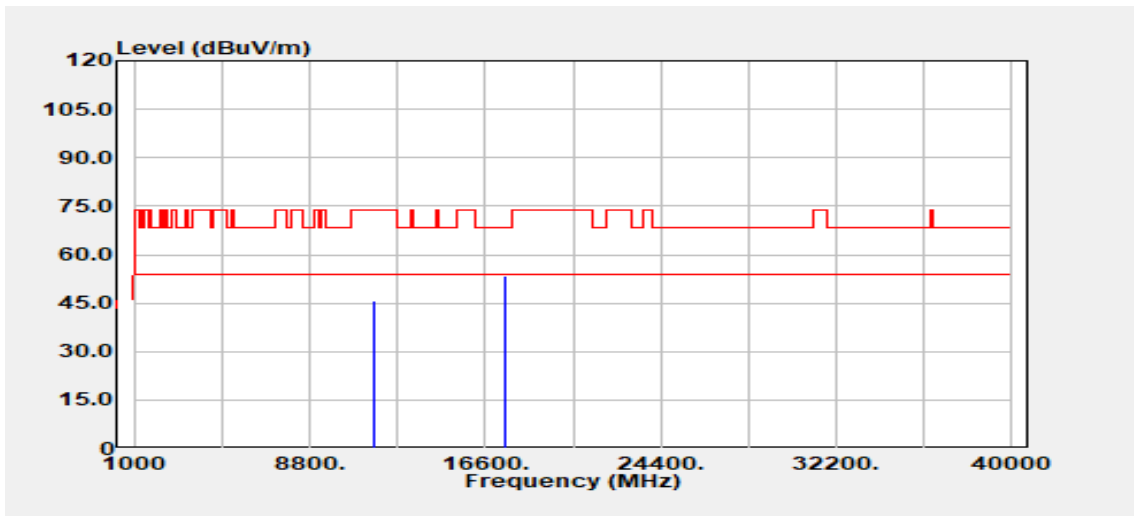


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 33.49 | 12.43 | 45.92 | 74.00 | -28.08 |
| 11650.00 | Average | 32.00 | 12.43 | 44.42 | 54.00 | -9.58 |
| 17475.00 | Peak | 28.32 | 25.06 | 53.38 | 68.20 | -14.82 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum | 23.5(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | March 29, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

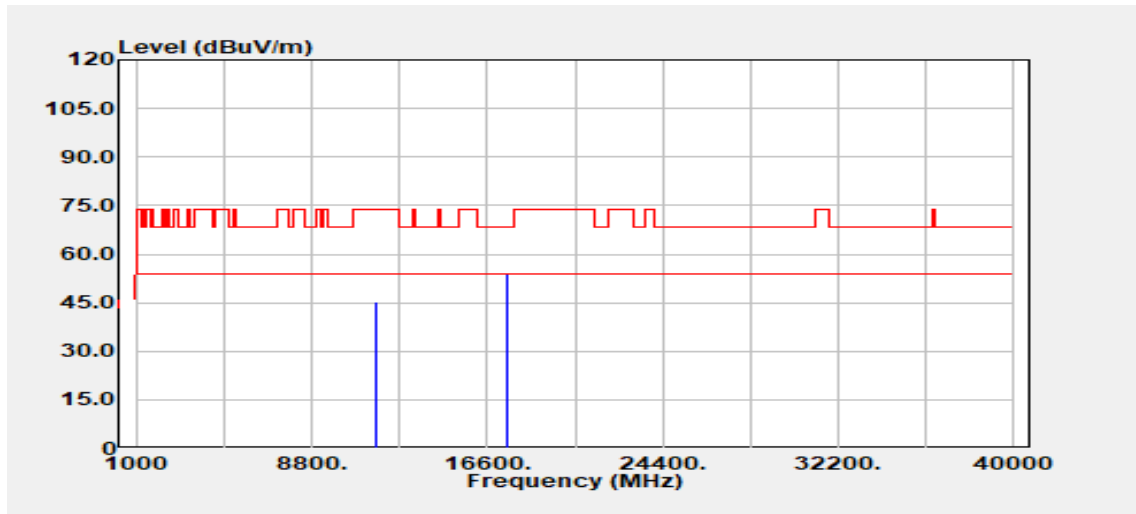

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 32.82 | 12.43 | 45.24 | 74.00 | -28.76 |
| 11650.00 | Average | 30.16 | 12.43 | 42.58 | 54.00 | -11.42 |
| 17475.00 | Peak | 28.65 | 25.06 | 53.71 | 68.20 | -14.49 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(3) MIMO:

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5745 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

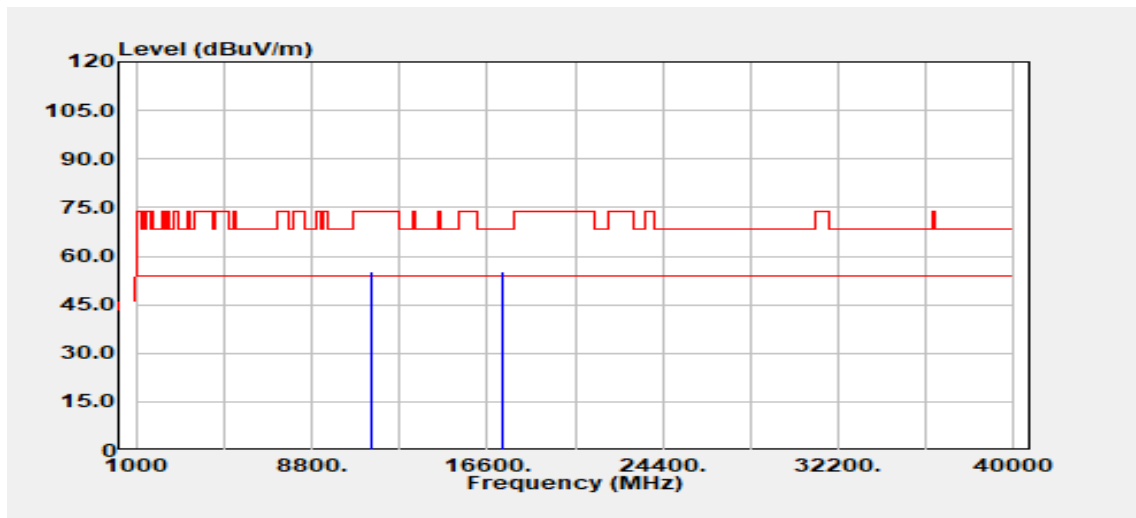


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 42.71 | 12.39 | 55.10 | 74.00 | -18.90 |
| 11490.00 | Average | 33.83 | 12.39 | 46.22 | 54.00 | -7.78 |
| 17235.00 | Peak | 29.20 | 26.10 | 55.30 | 68.20 | -12.90 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5745 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

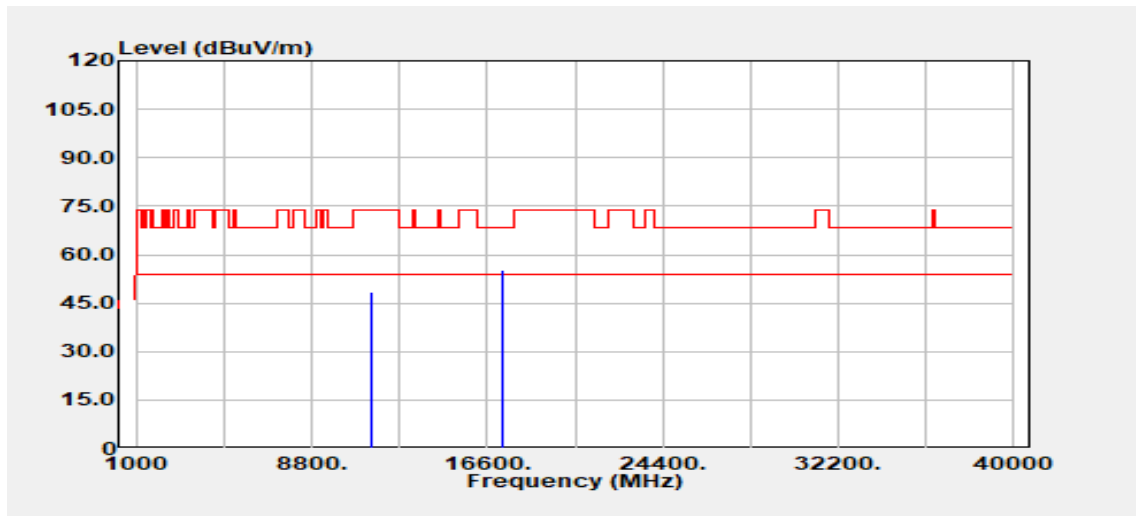


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 35.88 | 12.39 | 48.27 | 74.00 | -25.73 |
| 11490.00 | Average | 30.33 | 12.39 | 42.72 | 54.00 | -11.28 |
| 17235.00 | Peak | 29.26 | 26.10 | 55.36 | 68.20 | -12.84 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5785 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

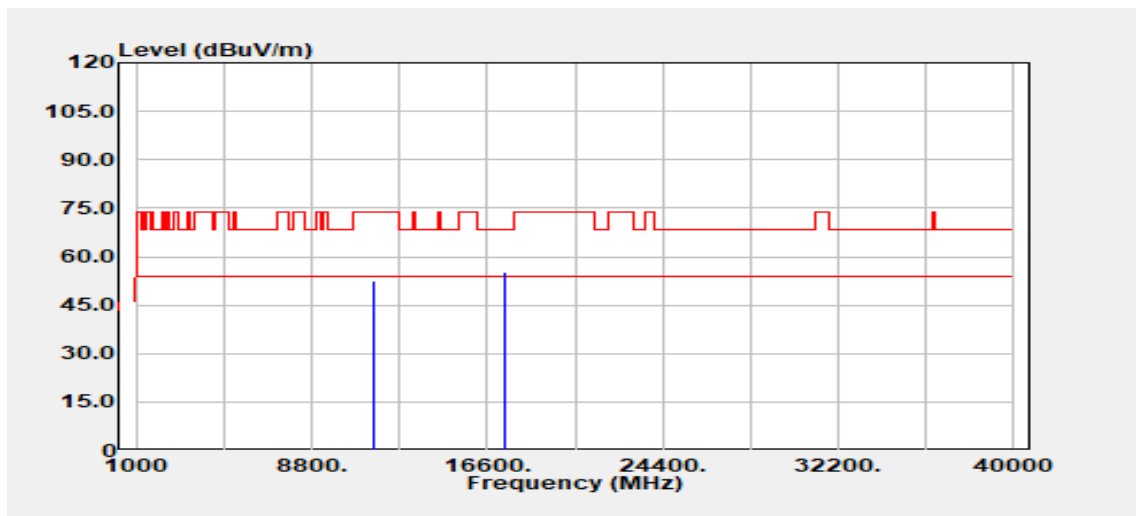


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 40.07 | 12.49 | 52.56 | 74.00 | -21.44 |
| 11570.00 | Average | 33.26 | 12.49 | 45.75 | 54.00 | -8.25 |
| 17355.00 | Peak | 29.69 | 25.47 | 55.16 | 68.20 | -13.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5785 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

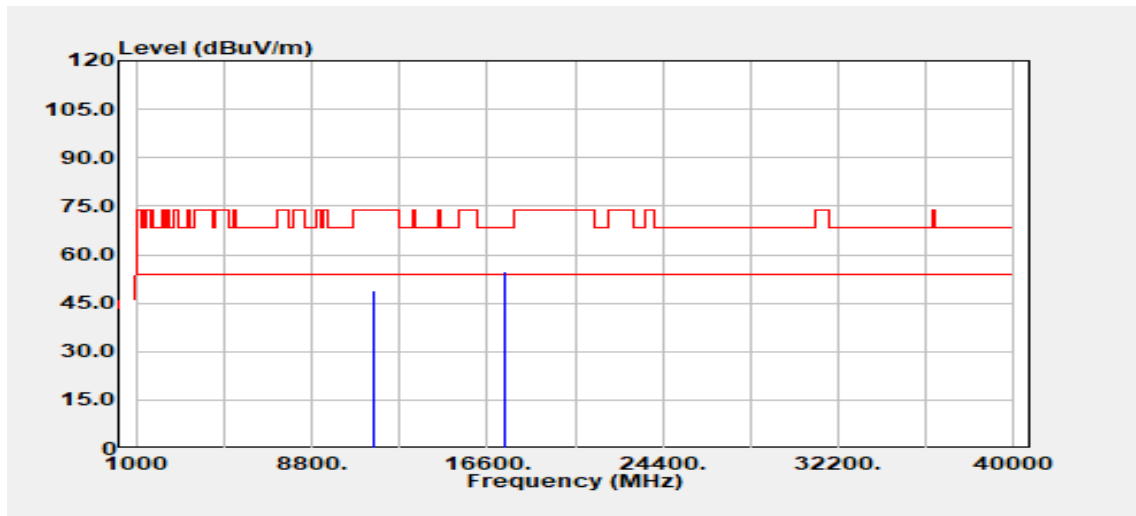


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 36.32 | 12.49 | 48.81 | 74.00 | -25.19 |
| 11570.00 | Average | 30.02 | 12.49 | 42.51 | 54.00 | -11.49 |
| 17355.00 | Peak | 29.22 | 25.47 | 54.69 | 68.20 | -13.51 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5825 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

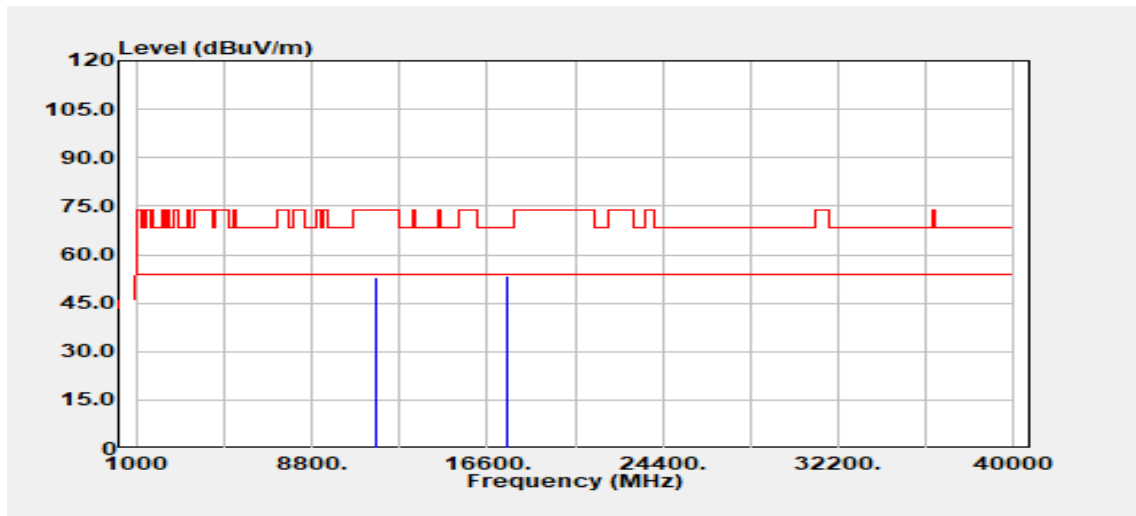


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 40.37 | 12.43 | 52.80 | 74.00 | -21.21 |
| 11650.00 | Average | 33.93 | 12.43 | 46.36 | 54.00 | -7.65 |
| 17475.00 | Peak | 28.34 | 25.06 | 53.40 | 68.20 | -14.80 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5825 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

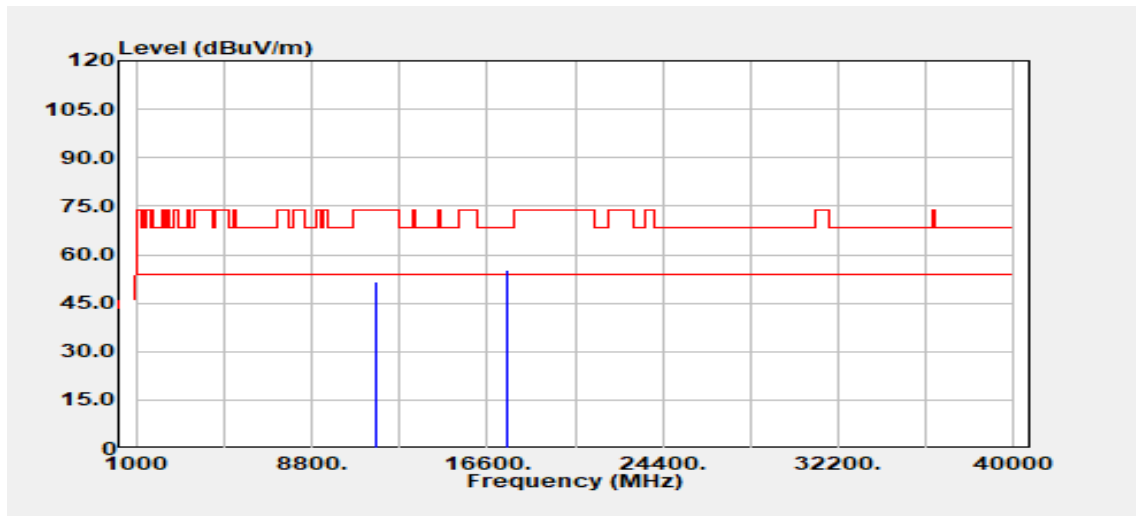


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 39.03 | 12.43 | 51.45 | 74.00 | -22.55 |
| 11650.00 | Average | 31.54 | 12.43 | 43.97 | 54.00 | -10.04 |
| 17475.00 | Peak | 30.34 | 25.06 | 55.40 | 68.20 | -12.80 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5755 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

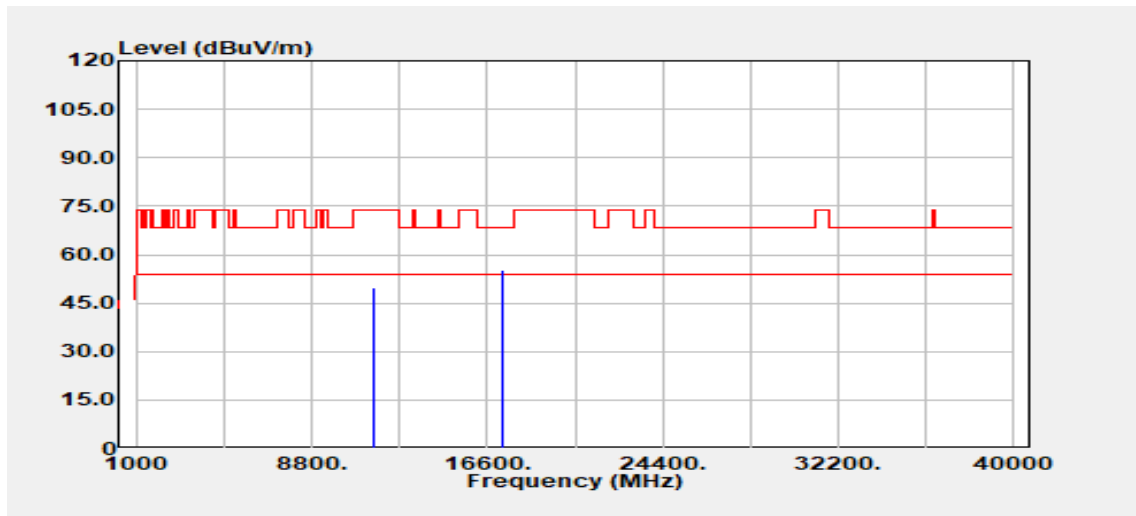


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 37.33 | 12.43 | 49.76 | 74.00 | -24.24 |
| 11510.00 | Average | 31.32 | 12.43 | 43.75 | 54.00 | -10.25 |
| 17265.00 | Peak | 29.29 | 26.14 | 55.43 | 68.20 | -12.77 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5755 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

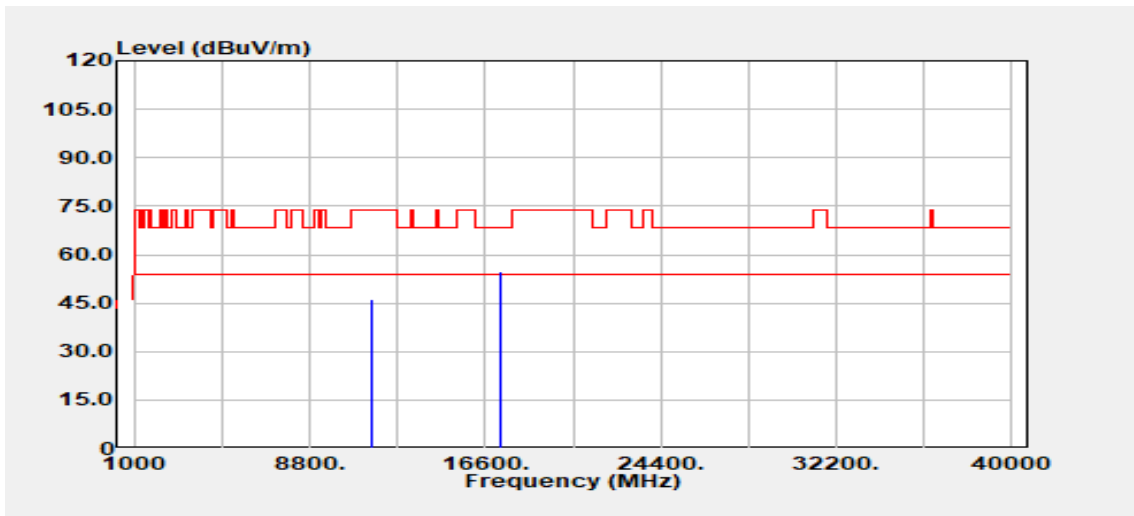


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 33.93 | 12.43 | 46.36 | 74.00 | -27.64 |
| 11510.00 | Average | 27.69 | 12.43 | 40.12 | 54.00 | -13.88 |
| 17265.00 | Peak | 28.72 | 26.14 | 54.86 | 68.20 | -13.34 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5795 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

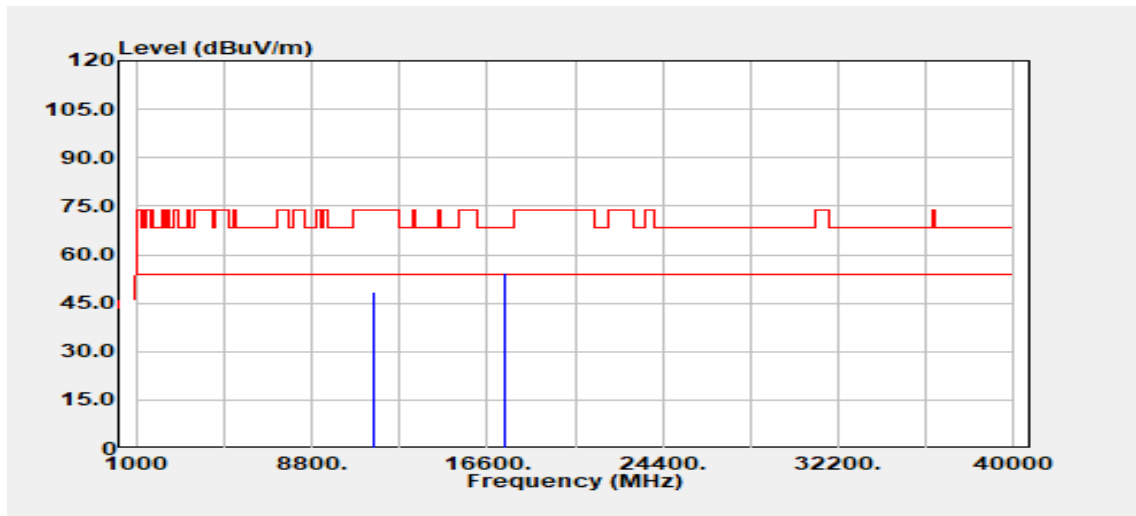


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11590.00 | Peak | 36.15 | 12.48 | 48.63 | 74.00 | -25.37 |
| 11590.00 | Average | 28.69 | 12.48 | 41.17 | 54.00 | -12.83 |
| 17385.00 | Peak | 29.12 | 25.27 | 54.38 | 68.20 | -13.82 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5795 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

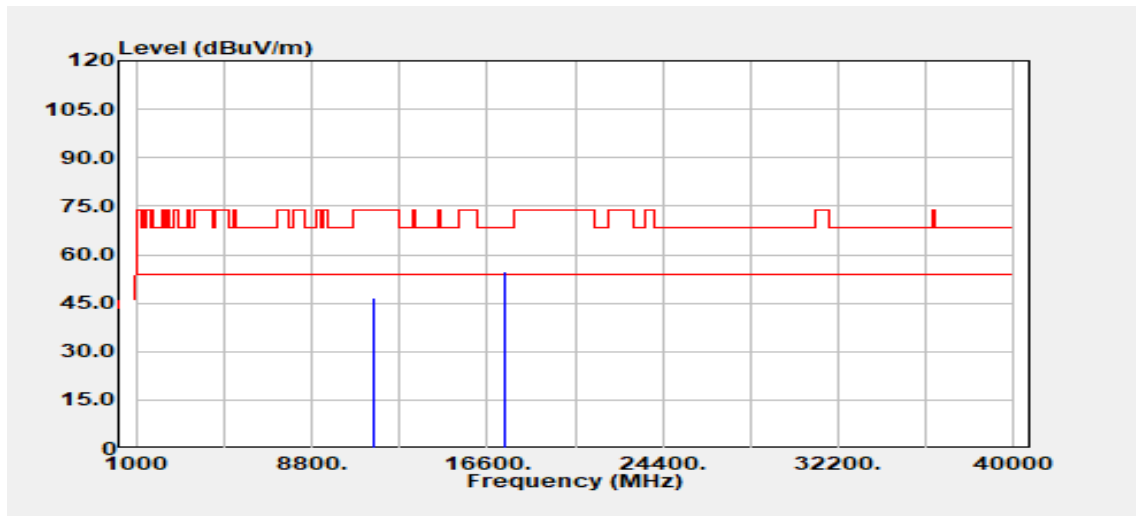


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 34.18 | 12.48 | 46.65 | 74.00 | -27.35 |
| 11590.00 | Average | 27.06 | 12.48 | 39.54 | 54.00 | -14.46 |
| 17385.00 | Peak | 29.61 | 25.27 | 54.88 | 68.20 | -13.32 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

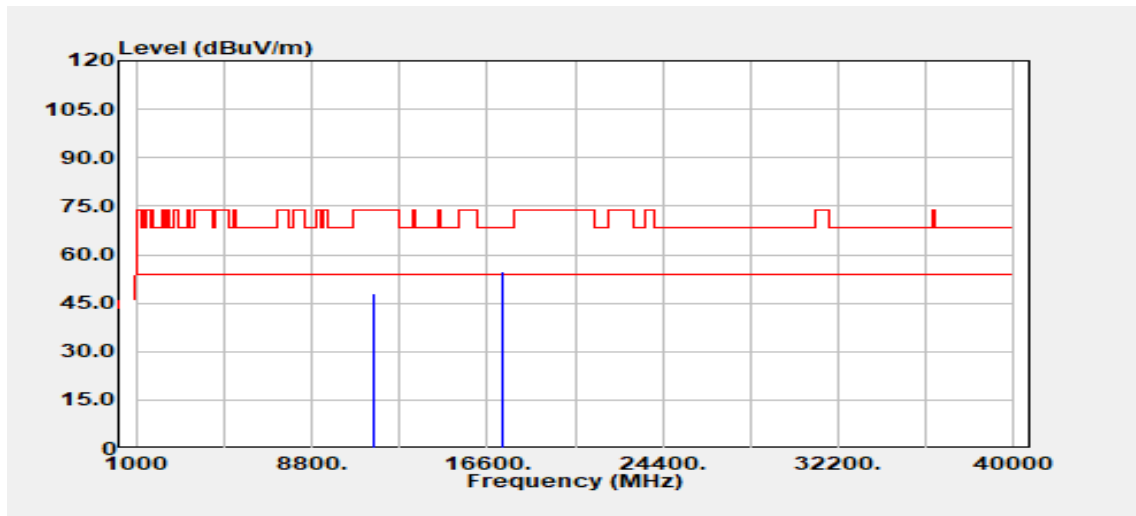


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 35.63 | 12.51 | 48.13 | 74.00 | -25.87 |
| 11550.00 | Average | 27.24 | 12.51 | 39.75 | 54.00 | -14.26 |
| 17325.00 | Peak | 29.16 | 25.79 | 54.95 | 68.20 | -13.25 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

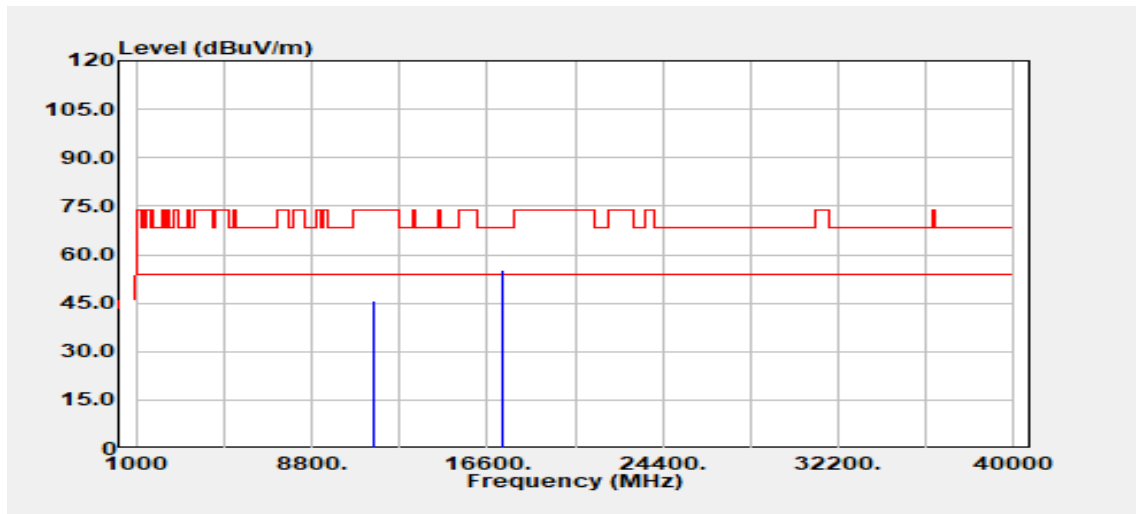


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 33.38 | 12.51 | 45.89 | 74.00 | -28.11 |
| 11550.00 | Average | 25.99 | 12.51 | 38.50 | 54.00 | -15.51 |
| 17325.00 | Peak | 29.42 | 25.79 | 55.21 | 68.20 | -12.99 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

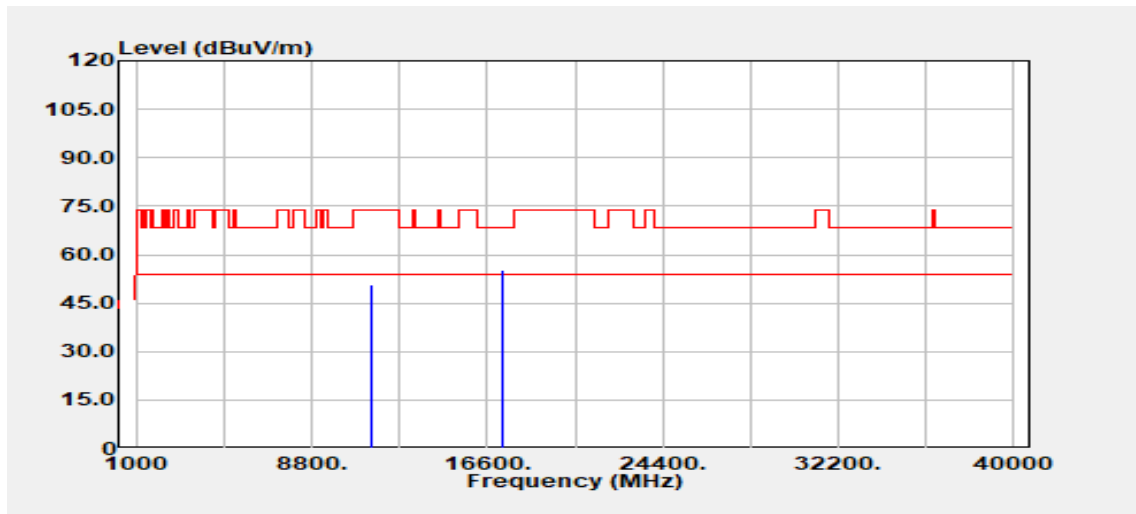


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 38.46 | 12.39 | 50.85 | 74.00 | -23.15 |
| 11490.00 | Average | 33.28 | 12.39 | 45.67 | 54.00 | -8.33 |
| 17235.00 | Peak | 29.11 | 26.10 | 55.22 | 68.20 | -12.98 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

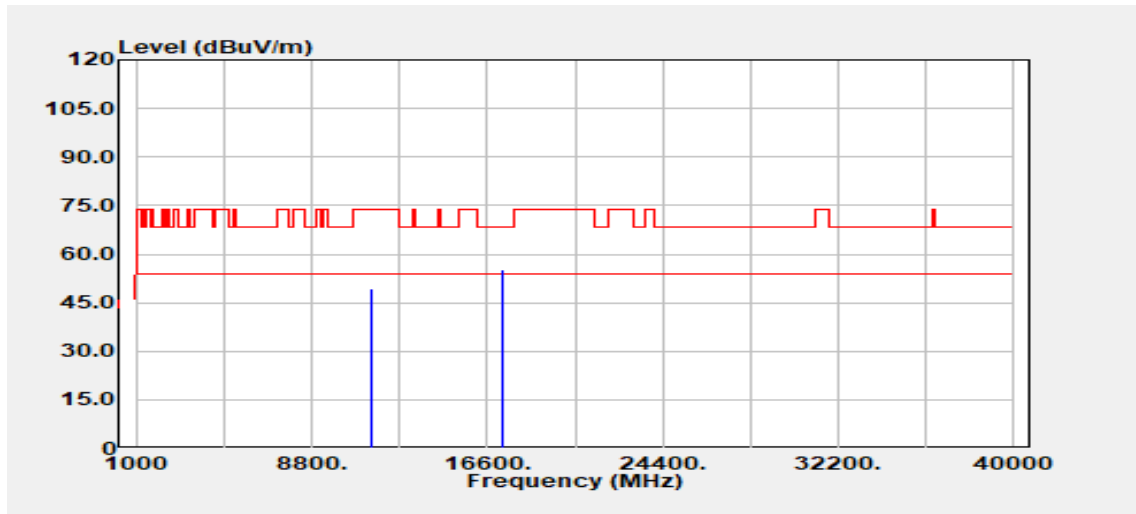


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 37.01 | 12.39 | 49.40 | 74.00 | -24.60 |
| 11490.00 | Average | 30.65 | 12.39 | 43.04 | 54.00 | -10.96 |
| 17235.00 | Peak | 29.13 | 26.10 | 55.24 | 68.20 | -12.96 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5785 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

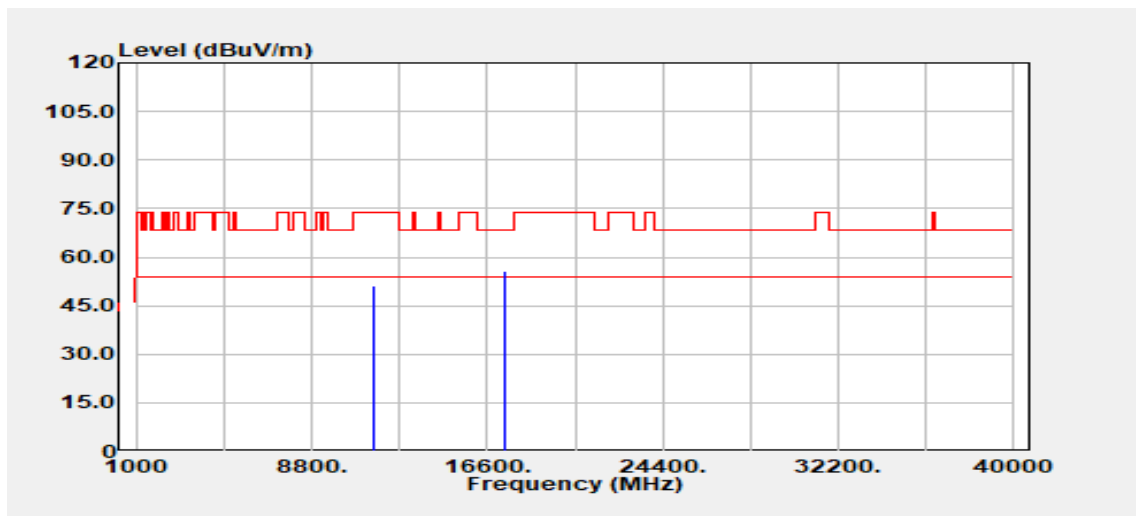


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 38.73 | 12.49 | 51.22 | 74.00 | -22.78 |
| 11570.00 | Average | 33.49 | 12.49 | 45.98 | 54.00 | -8.02 |
| 17355.00 | Peak | 30.43 | 25.47 | 55.90 | 68.20 | -12.30 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5785 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

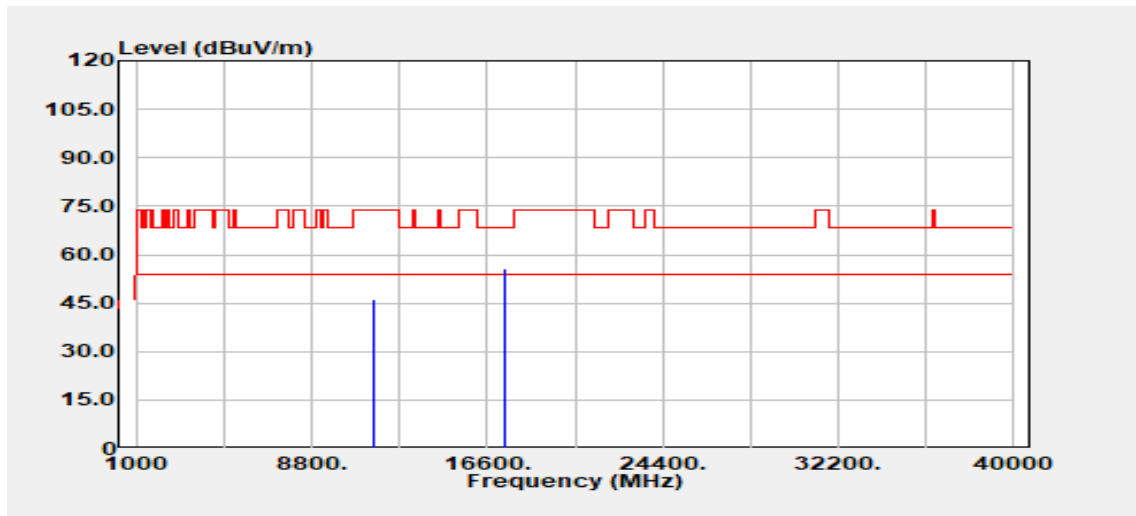


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 33.60 | 12.49 | 46.10 | 74.00 | -27.90 |
| 11570.00 | Average | 28.33 | 12.49 | 40.82 | 54.00 | -13.18 |
| 17355.00 | Peak | 30.37 | 25.47 | 55.84 | 68.20 | -12.36 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5825 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

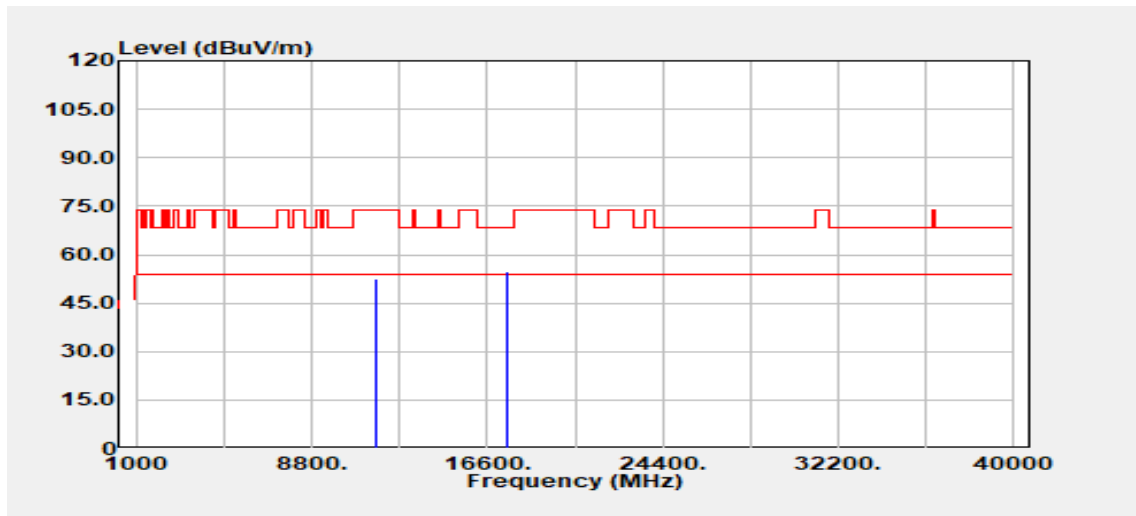


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 39.99 | 12.43 | 52.42 | 74.00 | -21.58 |
| 11650.00 | Average | 33.57 | 12.43 | 46.00 | 54.00 | -8.01 |
| 17475.00 | Peak | 29.90 | 25.06 | 54.96 | 68.20 | -13.24 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5825 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

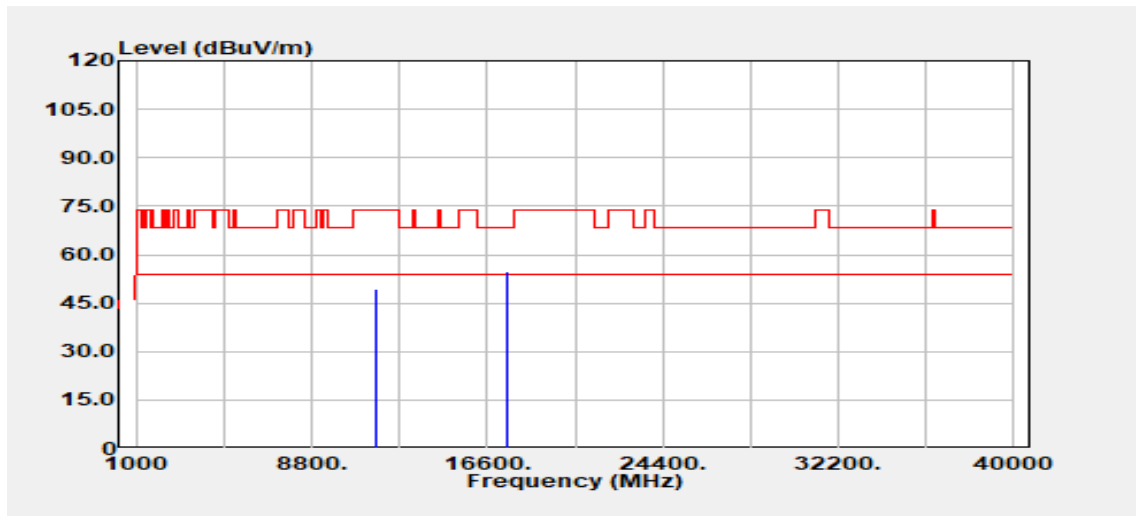


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 36.82 | 12.43 | 49.24 | 74.00 | -24.76 |
| 11650.00 | Average | 30.30 | 12.43 | 42.72 | 54.00 | -11.28 |
| 17475.00 | Peak | 29.82 | 25.06 | 54.88 | 68.20 | -13.32 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5755 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

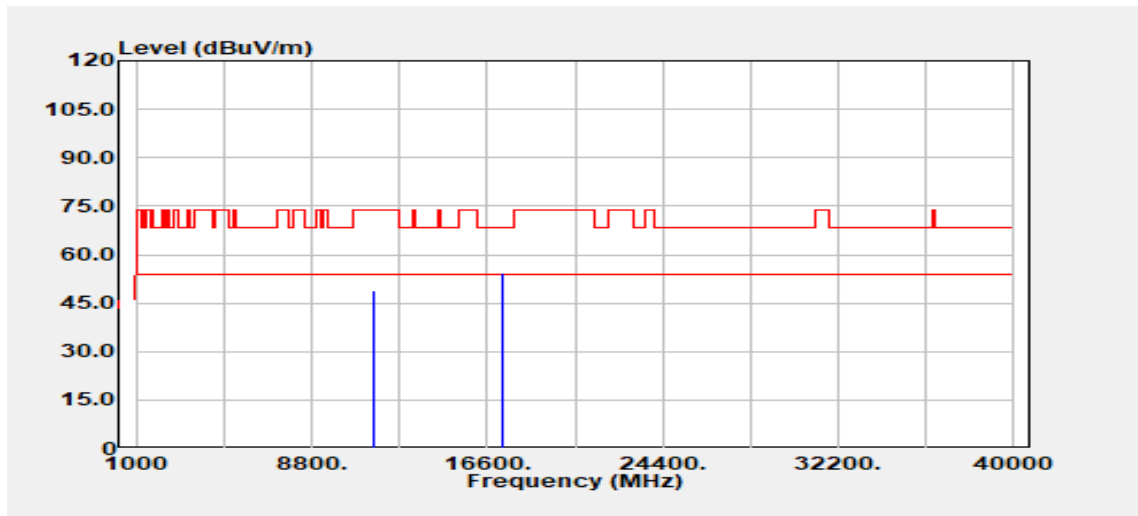


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 36.39 | 12.43 | 48.82 | 74.00 | -25.18 |
| 11510.00 | Average | 29.82 | 12.43 | 42.25 | 54.00 | -11.75 |
| 17265.00 | Peak | 28.16 | 26.14 | 54.30 | 68.20 | -13.90 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5755 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

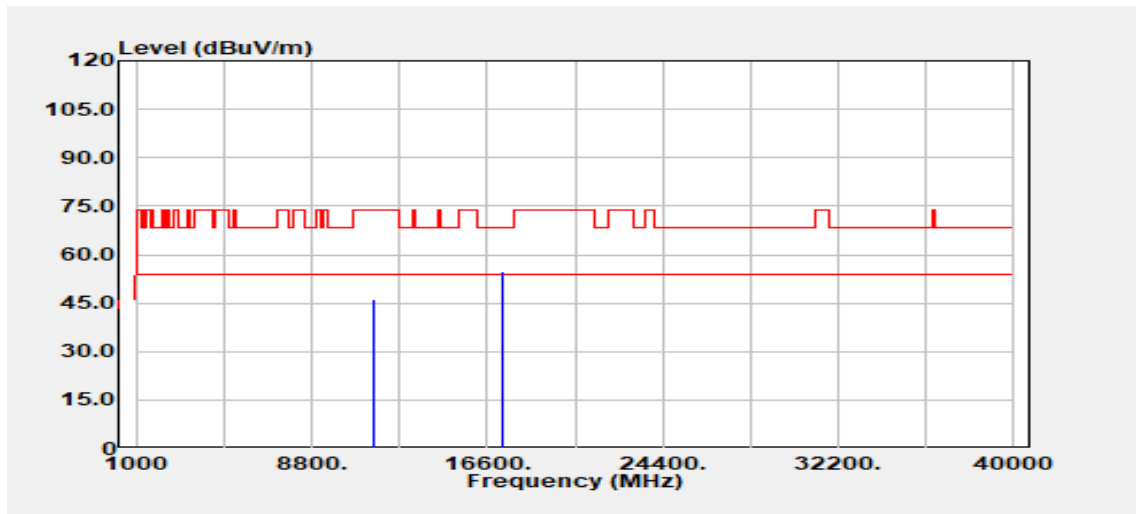


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 33.98 | 12.43 | 46.41 | 74.00 | -27.59 |
| 11510.00 | Average | 27.06 | 12.43 | 39.49 | 54.00 | -14.51 |
| 17265.00 | Peak | 28.61 | 26.14 | 54.75 | 68.20 | -13.45 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5795 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

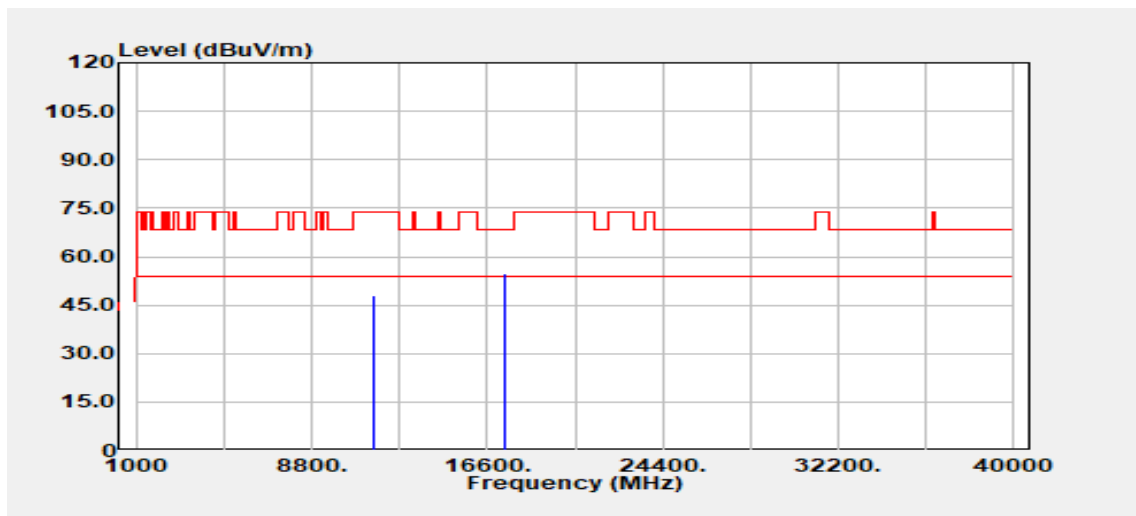


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 35.31 | 12.48 | 47.79 | 74.00 | -26.21 |
| 11590.00 | Average | 29.71 | 12.48 | 42.19 | 54.00 | -11.81 |
| 17385.00 | Peak | 29.51 | 25.27 | 54.78 | 68.20 | -13.42 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5795 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

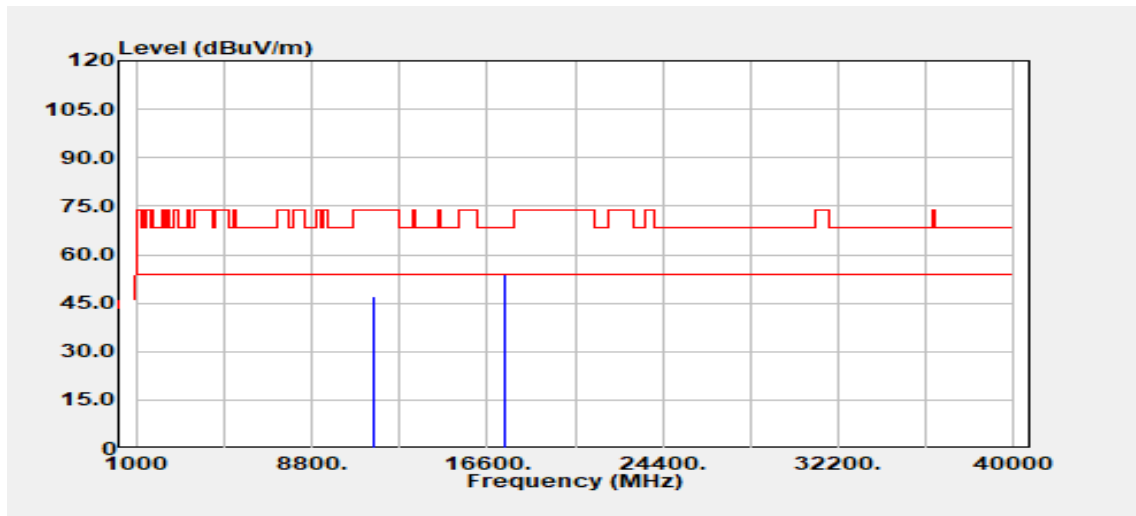


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 34.54 | 12.48 | 47.01 | 74.00 | -26.99 |
| 11590.00 | Average | 27.99 | 12.48 | 40.47 | 54.00 | -13.53 |
| 17385.00 | Peak | 28.66 | 25.27 | 53.93 | 68.20 | -14.27 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5775 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

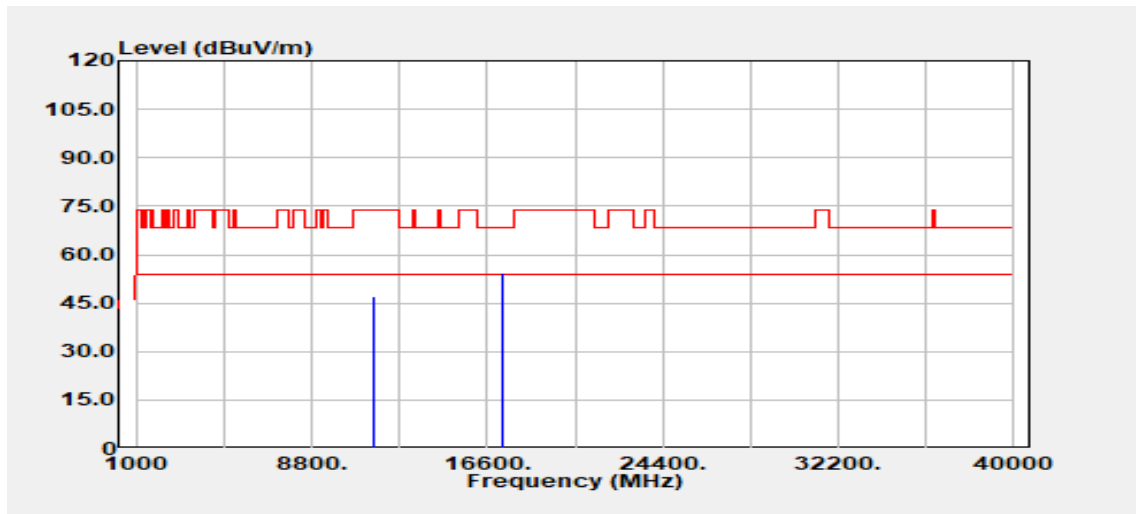


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 34.43 | 12.51 | 46.93 | 74.00 | -27.07 |
| 11550.00 | Average | 27.71 | 12.51 | 40.22 | 54.00 | -13.79 |
| 17325.00 | Peak | 28.41 | 25.79 | 54.20 | 68.20 | -14.00 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5775 MHz | Temp/Hum | 23.2(°C)/ 61%RH |
| Test Item | Harmonic | Test Date | March 30, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

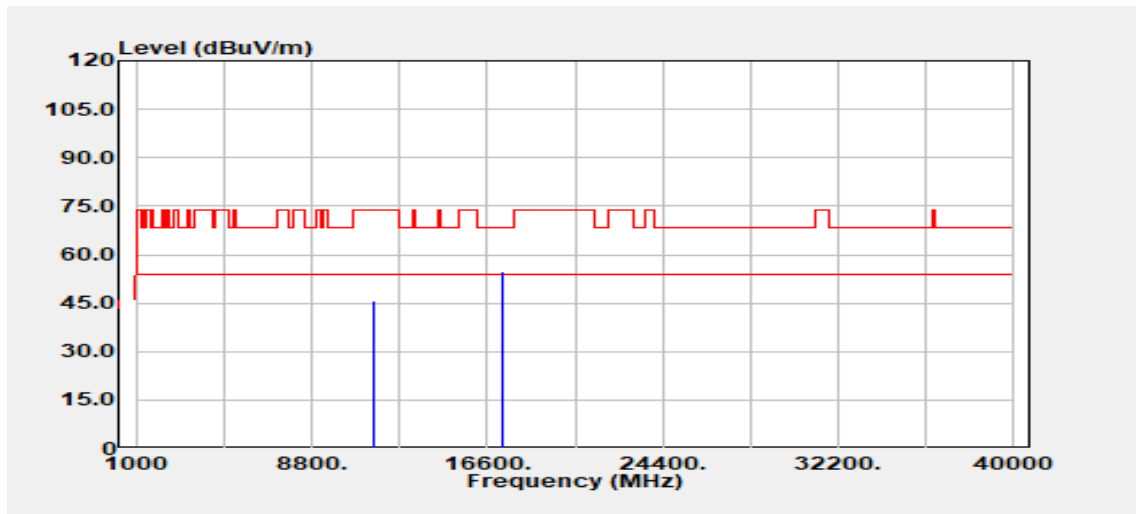

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 33.34 | 12.51 | 45.85 | 74.00 | -28.15 |
| 11550.00 | Average | 25.21 | 12.51 | 37.72 | 54.00 | -16.29 |
| 17325.00 | Peak | 28.80 | 25.79 | 54.59 | 68.20 | -13.61 |
| N/A | | | | | | |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(4) Co-Location:

| | | | |
|-----------|---|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 Mode (2452MHz)+ IEEE 802.11ax HE20(Band 1-5180MHz) | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | April 13, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

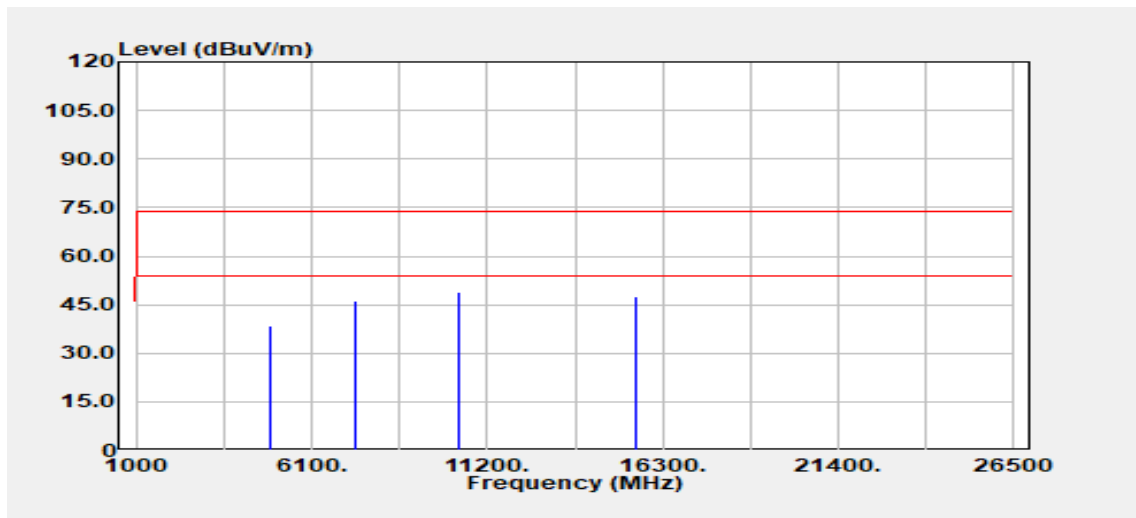


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBUV/m) | Limit @3m (dBUV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 4904.00 | Peak | 36.81 | 1.81 | 38.62 | 74.00 | -35.38 |
| 4904.00 | Average | 28.41 | 1.81 | 30.22 | 54.00 | -23.78 |
| 7356.00 | Peak | 38.42 | 7.65 | 46.07 | 74.00 | -27.93 |
| 7356.00 | Average | 35.50 | 7.65 | 43.15 | 54.00 | -10.85 |
| 10360.00 | Peak | 37.61 | 11.26 | 48.87 | 74.00 | -25.13 |
| 15540.00 | Peak | 35.14 | 12.38 | 47.52 | 74.00 | -26.48 |
| 15540.00 | Average | 30.73 | 12.38 | 43.11 | 54.00 | -10.89 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 Mode (2452MHz)+ IEEE 802.11ax HE20(Band 1-5180MHz) | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | April 13, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

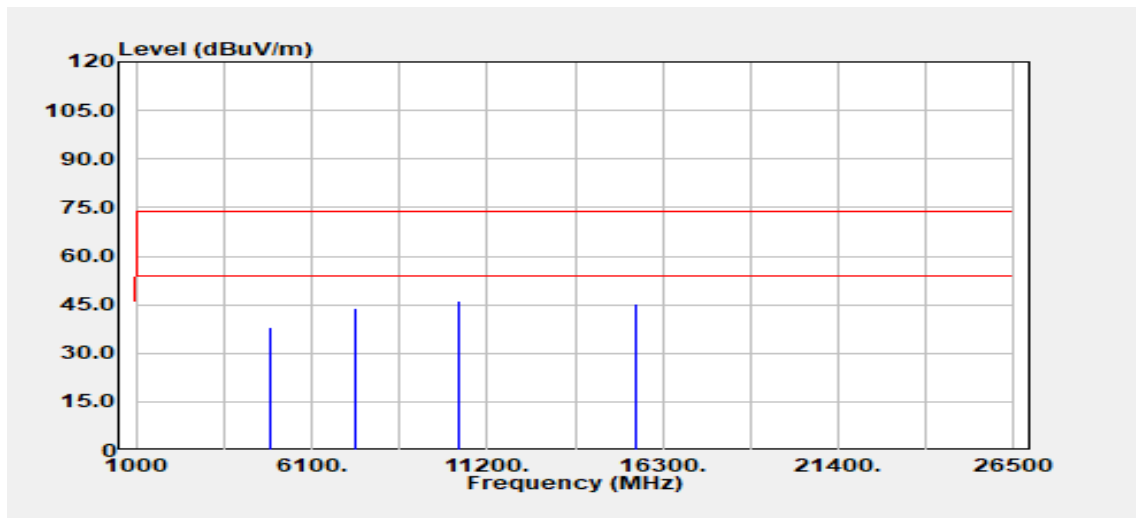


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 4904.00 | Peak | 36.42 | 1.81 | 38.23 | 74.00 | -35.77 |
| 4904.00 | Average | 27.97 | 1.81 | 29.78 | 54.00 | -24.22 |
| 7356.00 | Peak | 36.16 | 7.65 | 43.81 | 74.00 | -30.19 |
| 7356.00 | Average | 33.44 | 7.65 | 41.09 | 54.00 | -12.91 |
| 10360.00 | Peak | 34.87 | 11.26 | 46.13 | 74.00 | -27.87 |
| 15540.00 | Peak | 33.08 | 12.38 | 45.45 | 74.00 | -28.55 |
| 15540.00 | Average | 28.39 | 12.38 | 40.77 | 54.00 | -13.23 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 Mode (Band 1-5180MHz)+ IEEE 802.11ax HE40(2452MHz) | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | April 13, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

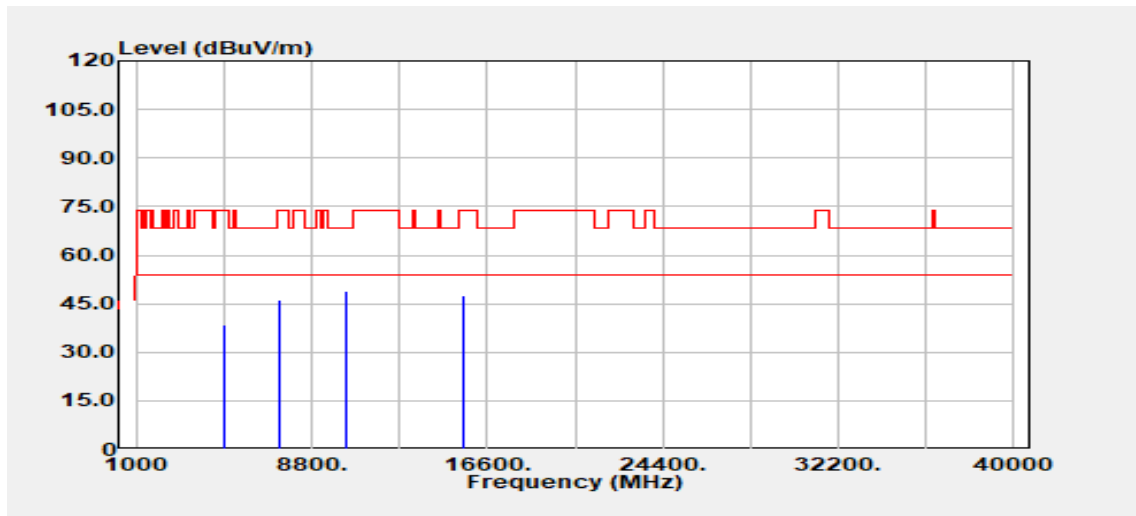


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 4904.00 | Peak | 36.81 | 1.81 | 38.62 | 74.00 | -35.38 |
| 4904.00 | Average | 28.41 | 1.81 | 30.22 | 54.00 | -23.78 |
| 7356.00 | Peak | 38.42 | 7.65 | 46.07 | 74.00 | -27.93 |
| 7356.00 | Average | 35.50 | 7.65 | 43.15 | 54.00 | -10.85 |
| 10360.00 | Peak | 37.61 | 11.26 | 48.87 | 68.20 | -19.33 |
| 15540.00 | Peak | 35.14 | 12.38 | 47.52 | 74.00 | -26.48 |
| 15540.00 | Average | 30.73 | 12.38 | 43.11 | 54.00 | -10.89 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 Mode (Band 1-5180MHz)+ IEEE 802.11ax HE40(2452MHz) | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | April 13, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

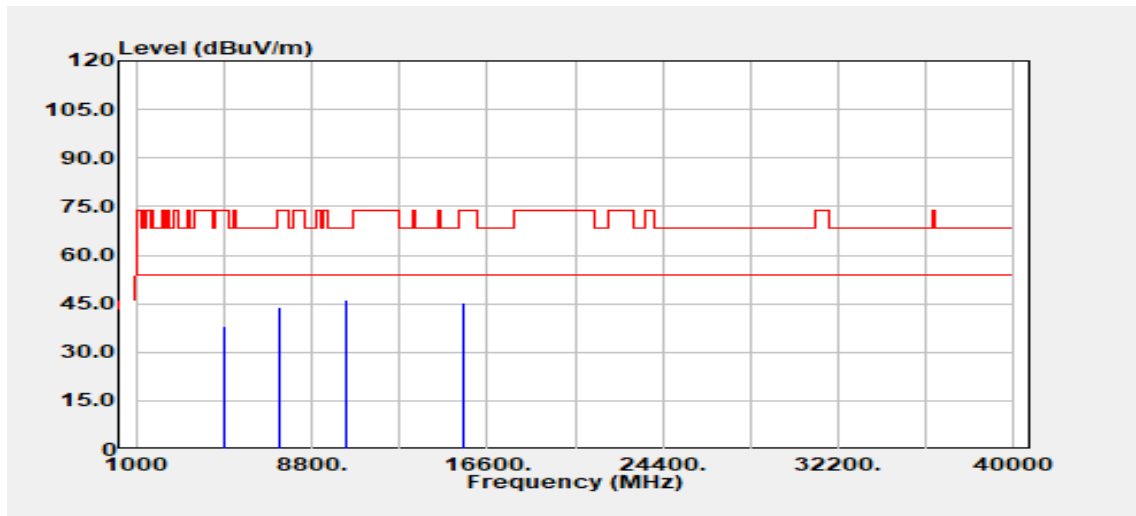

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 4904.00 | Peak | 36.42 | 1.81 | 38.23 | 74.00 | -35.77 |
| 4904.00 | Average | 27.97 | 1.81 | 29.78 | 54.00 | -24.22 |
| 7356.00 | Peak | 36.16 | 7.65 | 43.81 | 74.00 | -30.19 |
| 7356.00 | Average | 33.44 | 7.65 | 41.09 | 54.00 | -12.91 |
| 10360.00 | Peak | 34.87 | 11.26 | 46.13 | 68.20 | -22.07 |
| 15540.00 | Peak | 33.08 | 12.38 | 45.45 | 74.00 | -28.55 |
| 15540.00 | Average | 28.39 | 12.38 | 40.77 | 54.00 | -13.23 |


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Above 1G Test Data: Beamforming

Test Data for UNII-1

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5180 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 15, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

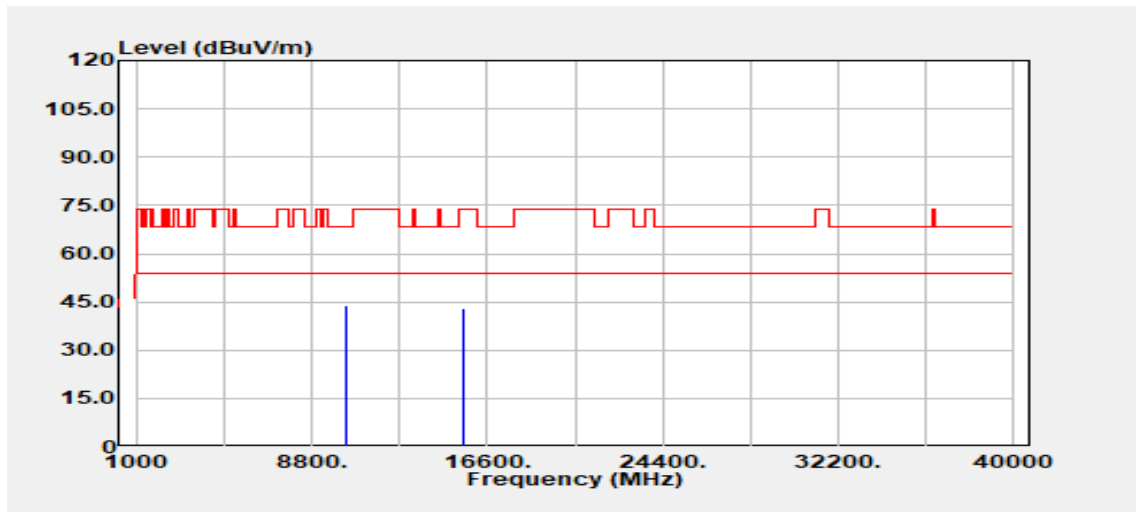


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10360.00 | Peak | 32.58 | 11.26 | 43.84 | 68.20 | -24.36 |
| 15540.00 | Peak | 30.54 | 12.38 | 42.92 | 74.00 | -31.08 |
| 15540.00 | Average | 22.02 | 12.38 | 34.40 | 54.00 | -19.60 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5180 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 15, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

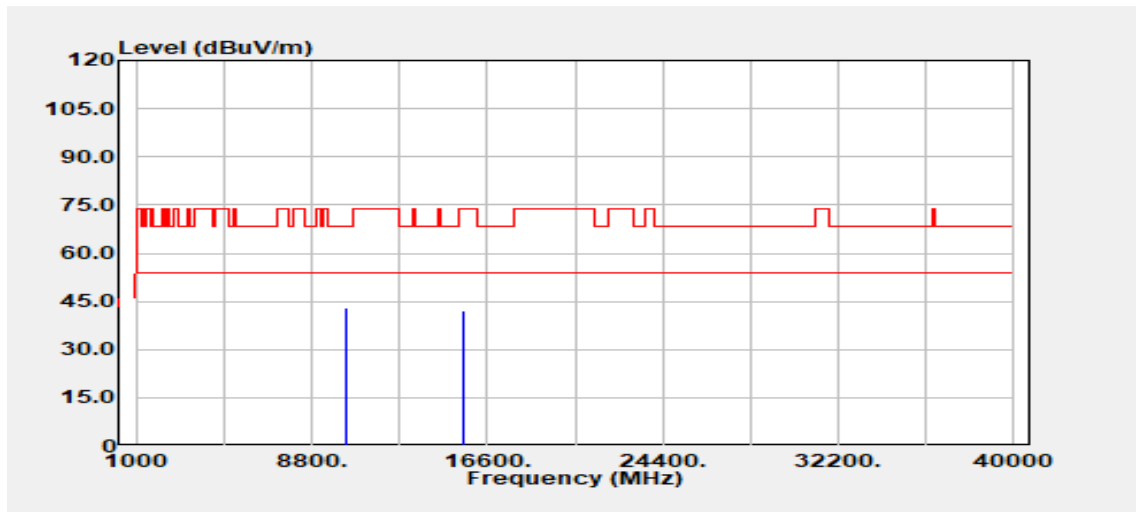


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBUV/m) | Limit @3m (dBUV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10360.00 | Peak | 31.54 | 11.26 | 42.80 | 68.20 | -25.40 |
| 15540.00 | Peak | 29.94 | 12.38 | 42.32 | 74.00 | -31.68 |
| 15540.00 | Average | 21.89 | 12.38 | 34.27 | 54.00 | -19.73 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5220 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

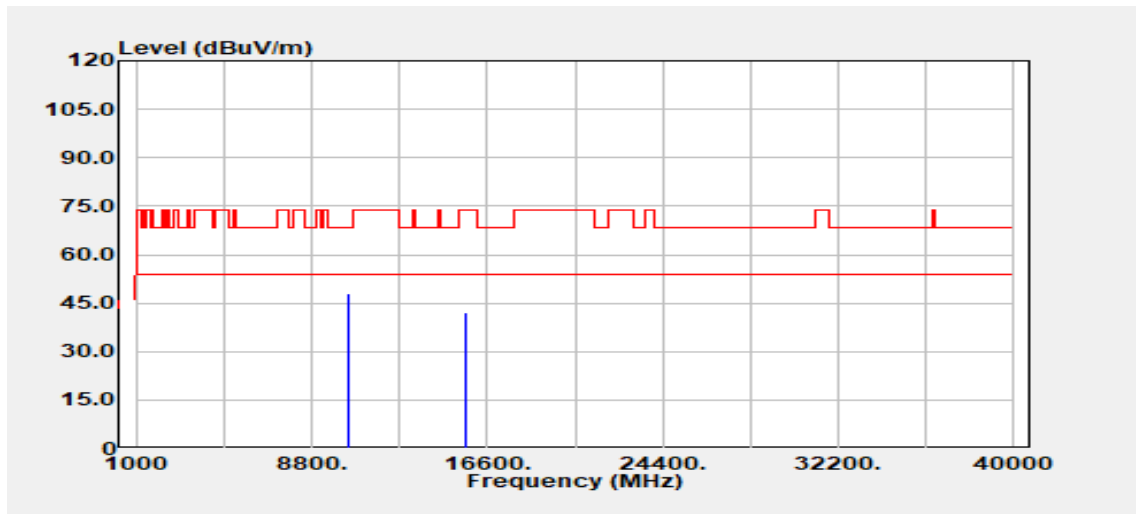


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10440.00 | Peak | 36.93 | 11.25 | 48.18 | 68.20 | -20.02 |
| 15660.00 | Peak | 28.80 | 13.53 | 42.33 | 74.00 | -31.67 |
| 15660.00 | Average | 23.43 | 13.53 | 36.96 | 54.00 | -17.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5220 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

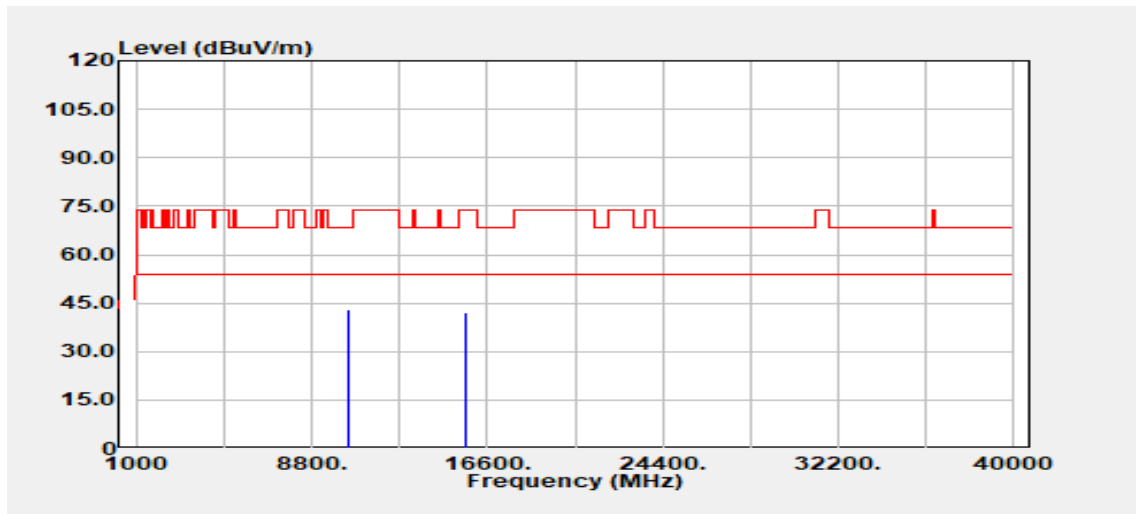


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10440.00 | Peak | 31.65 | 11.25 | 42.90 | 68.20 | -25.30 |
| 15660.00 | Peak | 28.41 | 13.53 | 41.94 | 74.00 | -32.06 |
| 15660.00 | Average | 23.49 | 13.53 | 37.01 | 54.00 | -16.99 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5240 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

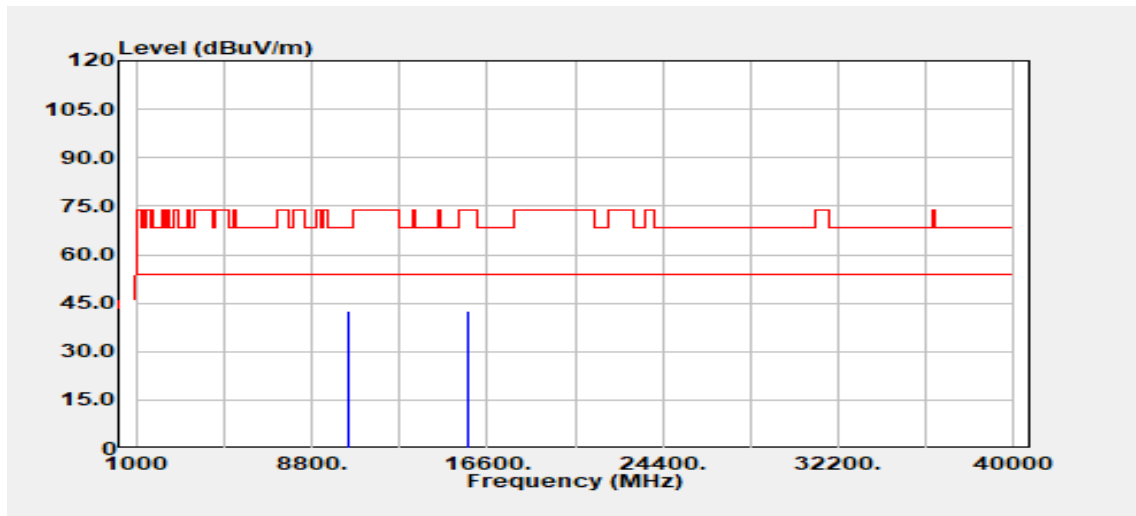


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10480.00 | Peak | 31.28 | 11.35 | 42.63 | 68.20 | -25.57 |
| 15720.00 | Peak | 28.36 | 14.11 | 42.47 | 74.00 | -31.53 |
| 15720.00 | Average | 23.20 | 14.11 | 37.30 | 54.00 | -16.70 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5240 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

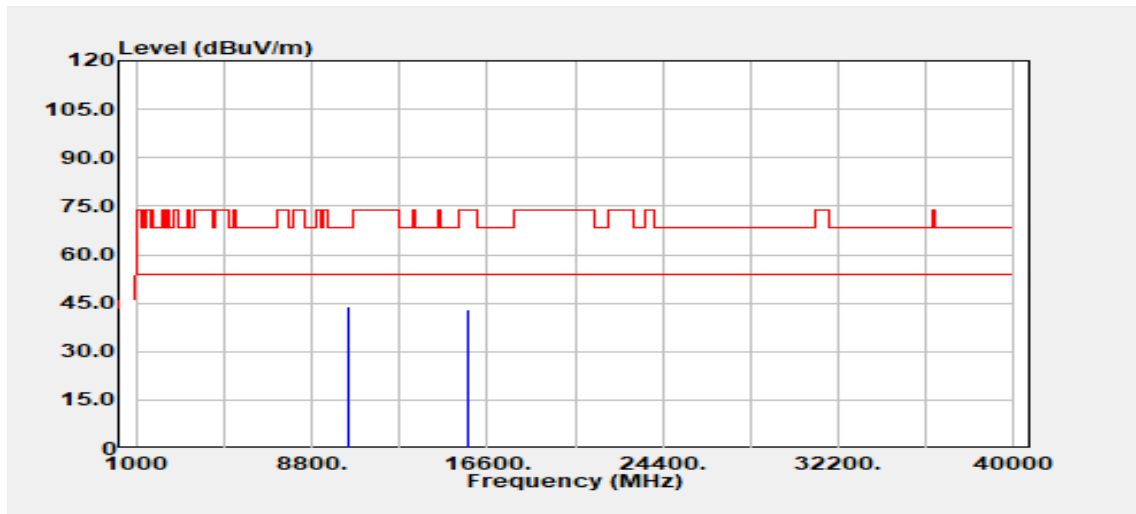


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10480.00 | Peak | 32.36 | 11.35 | 43.71 | 68.20 | -24.49 |
| 15720.00 | Peak | 28.83 | 14.11 | 42.94 | 74.00 | -31.06 |
| 15720.00 | Average | 23.07 | 14.11 | 37.18 | 54.00 | -16.82 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5190 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

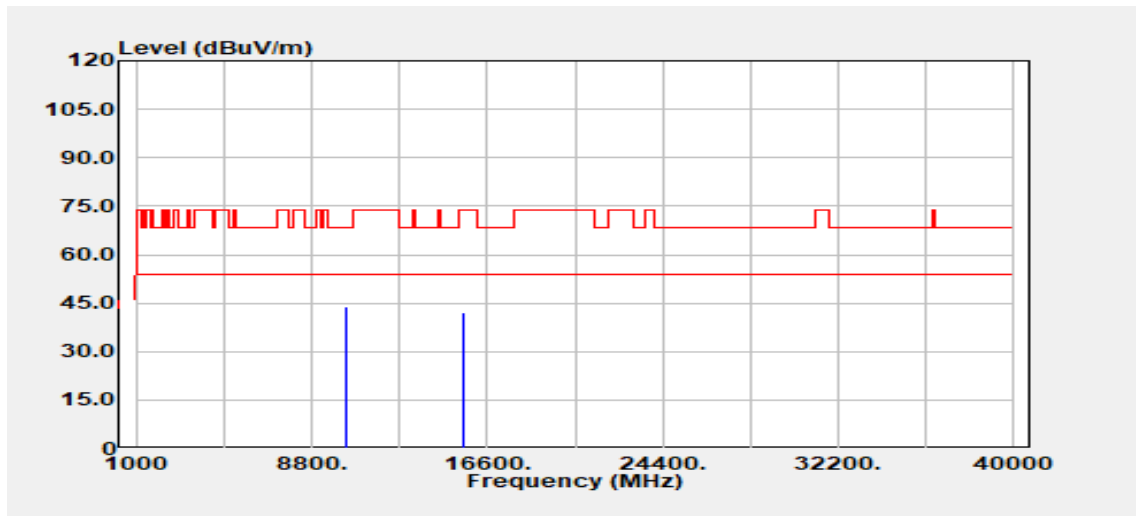


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10380.00 | Peak | 32.57 | 11.22 | 43.78 | 68.20 | -24.42 |
| 15570.00 | Peak | 29.76 | 12.41 | 42.18 | 74.00 | -31.82 |
| 15570.00 | Average | 23.49 | 12.41 | 35.90 | 54.00 | -18.10 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5190 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

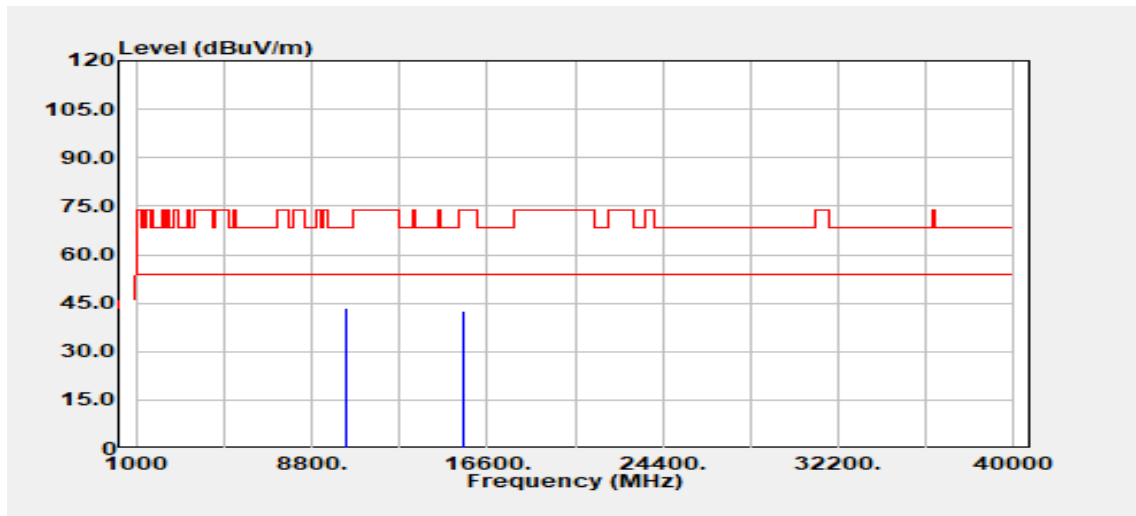


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10380.00 | Peak | 32.32 | 11.22 | 43.54 | 68.20 | -24.66 |
| 15570.00 | Peak | 30.04 | 12.41 | 42.46 | 74.00 | -31.54 |
| 15570.00 | Average | 22.84 | 12.41 | 35.25 | 54.00 | -18.75 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5230 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

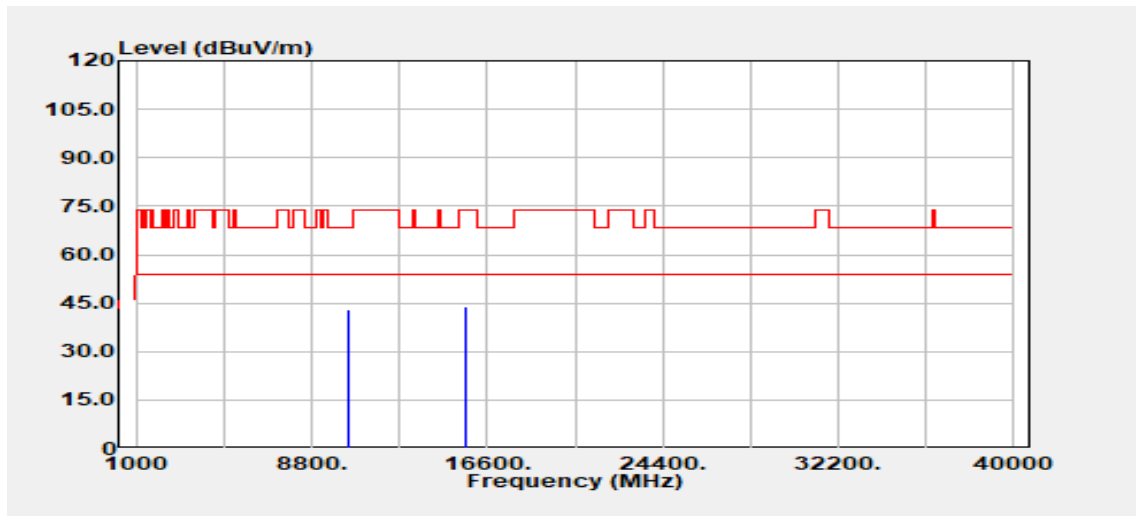


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10460.00 | Peak | 31.70 | 11.30 | 42.99 | 68.20 | -25.21 |
| 15690.00 | Peak | 29.94 | 13.90 | 43.84 | 74.00 | -30.16 |
| 15690.00 | Average | 22.45 | 13.90 | 36.35 | 54.00 | -17.65 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5230 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

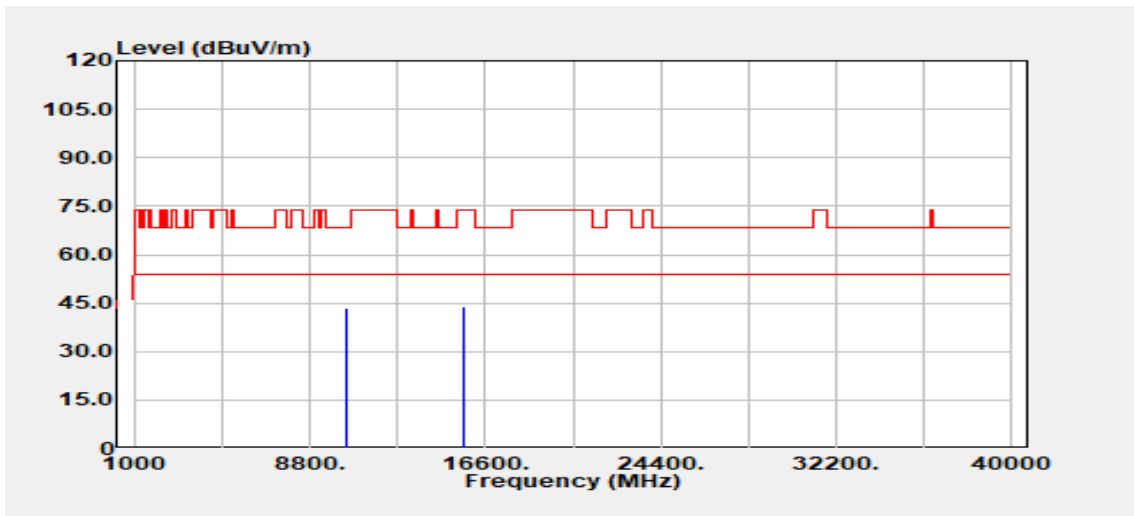


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10460.00 | Peak | 32.00 | 11.30 | 43.30 | 68.20 | -24.90 |
| 15690.00 | Peak | 29.90 | 13.90 | 43.80 | 74.00 | -30.20 |
| 15690.00 | Average | 22.41 | 13.90 | 36.31 | 54.00 | -17.69 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

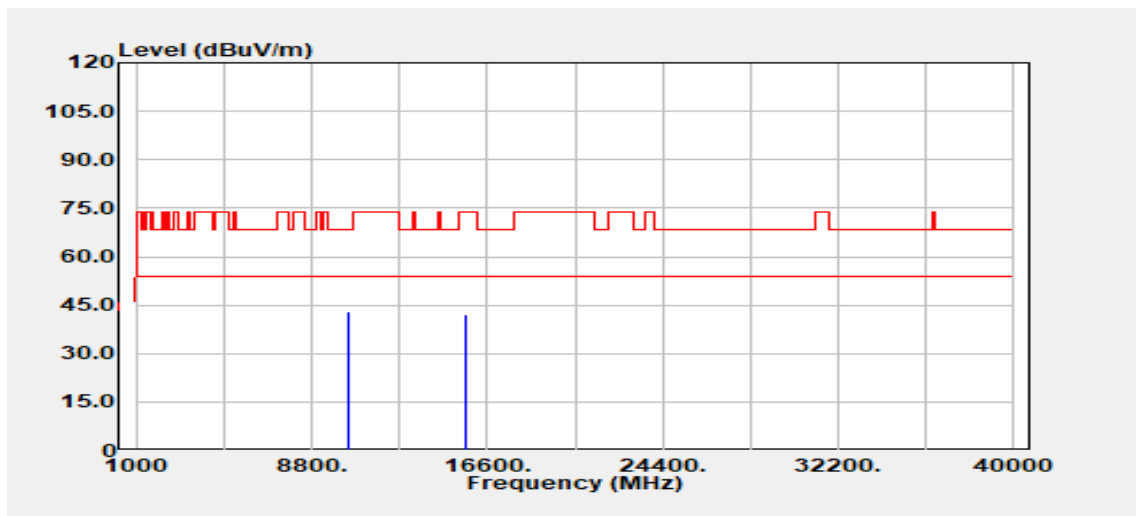


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10420.00 | Peak | 31.75 | 11.21 | 42.96 | 68.20 | -25.24 |
| 15630.00 | Peak | 29.06 | 13.06 | 42.12 | 74.00 | -31.88 |
| 15630.00 | Average | 23.58 | 13.06 | 36.64 | 54.00 | -17.36 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5210 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

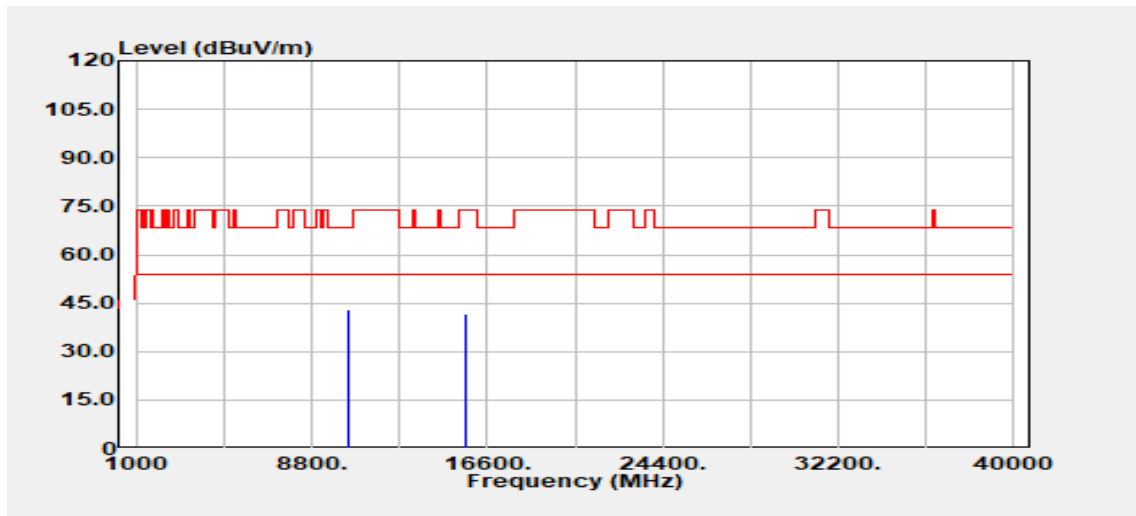


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10420.00 | Peak | 31.99 | 11.21 | 43.20 | 68.20 | -25.00 |
| 15630.00 | Peak | 28.48 | 13.06 | 41.54 | 74.00 | -32.46 |
| 15630.00 | Average | 23.57 | 13.06 | 36.62 | 54.00 | -17.38 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

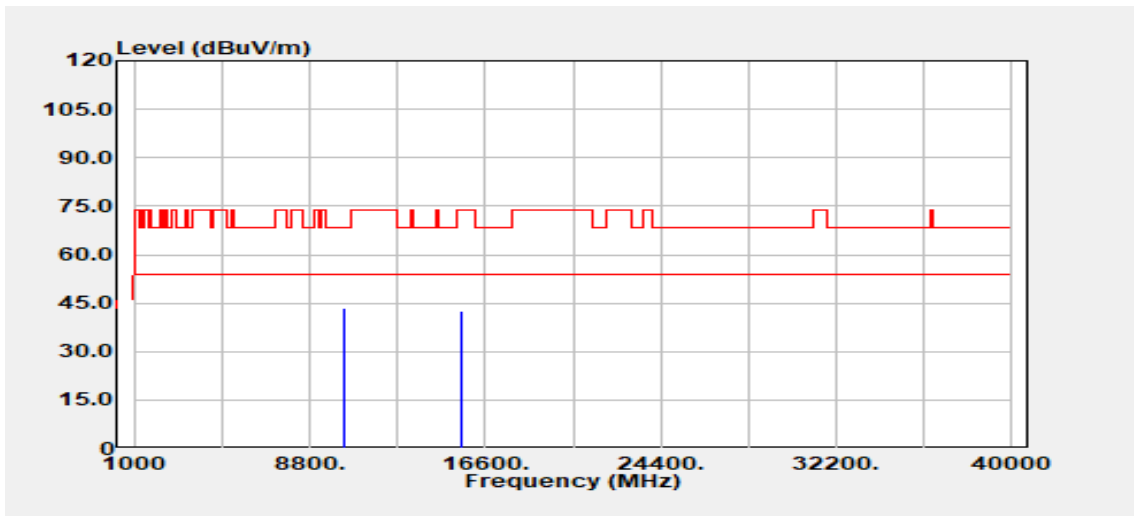


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10360.00 | Peak | 32.03 | 11.26 | 43.29 | 68.20 | -24.91 |
| 15540.00 | Peak | 30.34 | 12.38 | 42.72 | 74.00 | -31.28 |
| 15540.00 | Average | 22.46 | 12.38 | 34.84 | 54.00 | -19.16 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5180 MHz_ | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

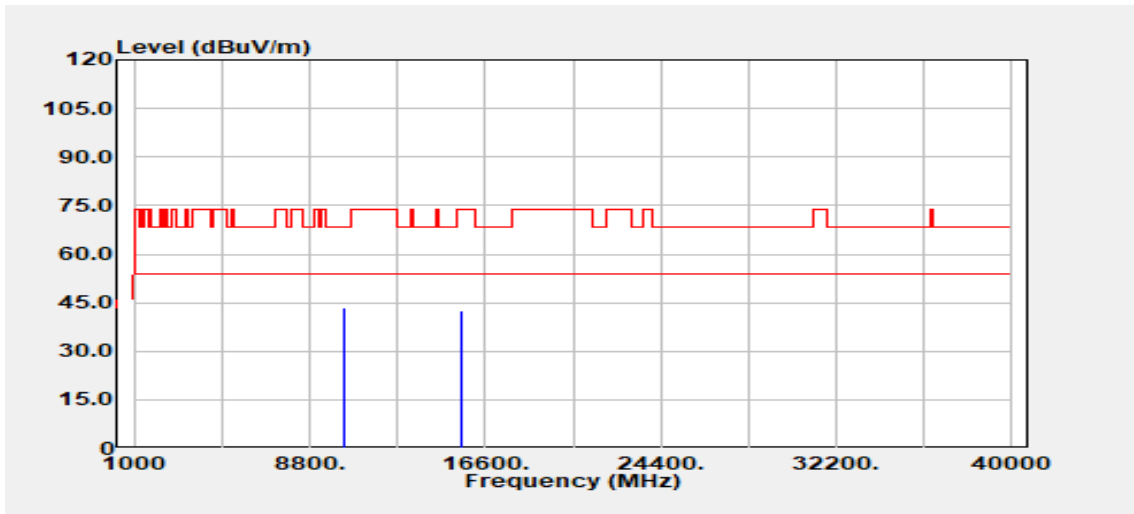


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10360.00 | Peak | 32.16 | 11.26 | 43.42 | 68.20 | -24.78 |
| 15540.00 | Peak | 30.05 | 12.38 | 42.43 | 74.00 | -31.57 |
| 15540.00 | Average | 22.01 | 12.38 | 34.39 | 54.00 | -19.61 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5220 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

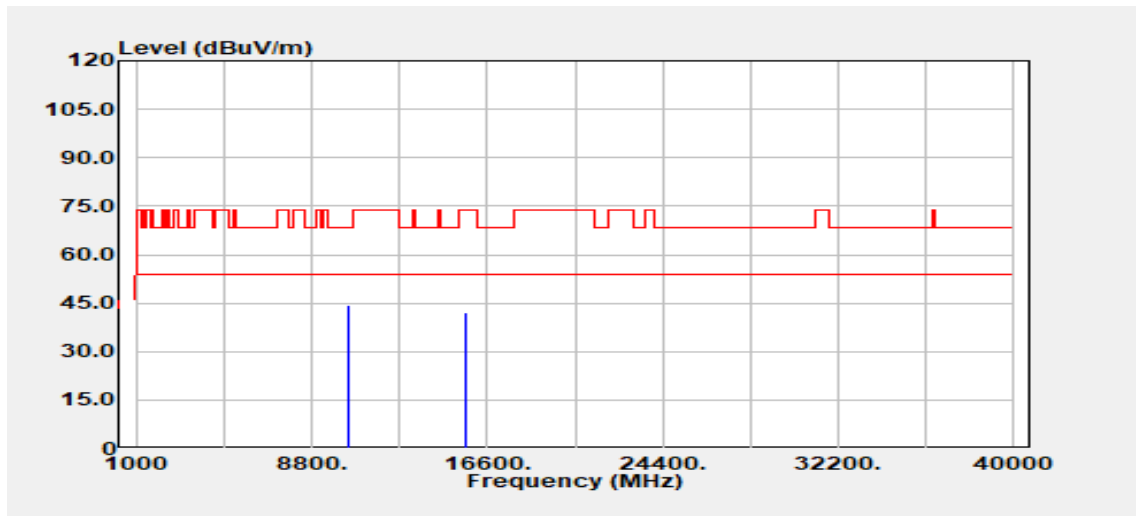


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10440.00 | Peak | 33.05 | 11.25 | 44.30 | 68.20 | -23.90 |
| 15660.00 | Peak | 28.42 | 13.53 | 41.95 | 74.00 | -32.05 |
| 15660.00 | Average | 22.74 | 13.53 | 36.27 | 54.00 | -17.73 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5220 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

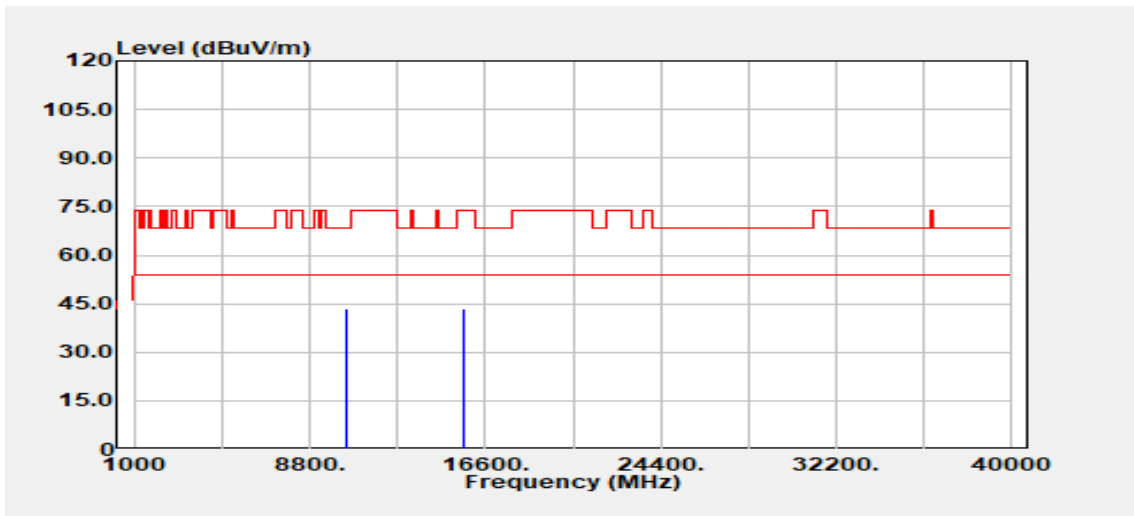


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10440.00 | Peak | 32.23 | 11.25 | 43.48 | 68.20 | -24.72 |
| 15660.00 | Peak | 29.86 | 13.53 | 43.39 | 74.00 | -30.61 |
| 15660.00 | Average | 22.81 | 13.53 | 36.34 | 54.00 | -17.66 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5240 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

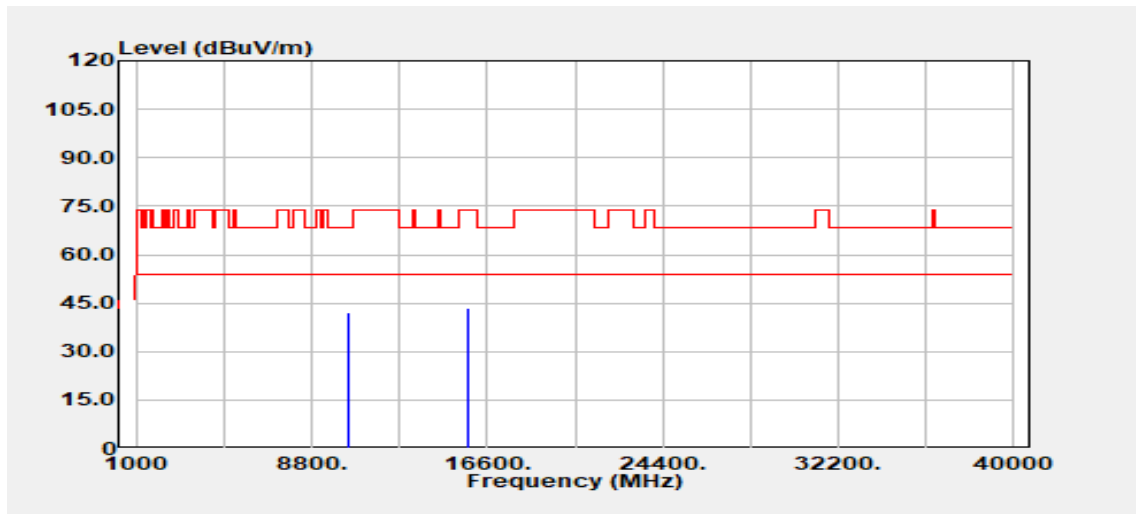


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10480.00 | Peak | 31.61 | 11.35 | 42.96 | 68.20 | -25.24 |
| 15720.00 | Peak | 28.82 | 14.11 | 42.93 | 74.00 | -31.07 |
| 15720.00 | Average | 22.58 | 14.11 | 36.69 | 54.00 | -17.31 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5240 MHz_ | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

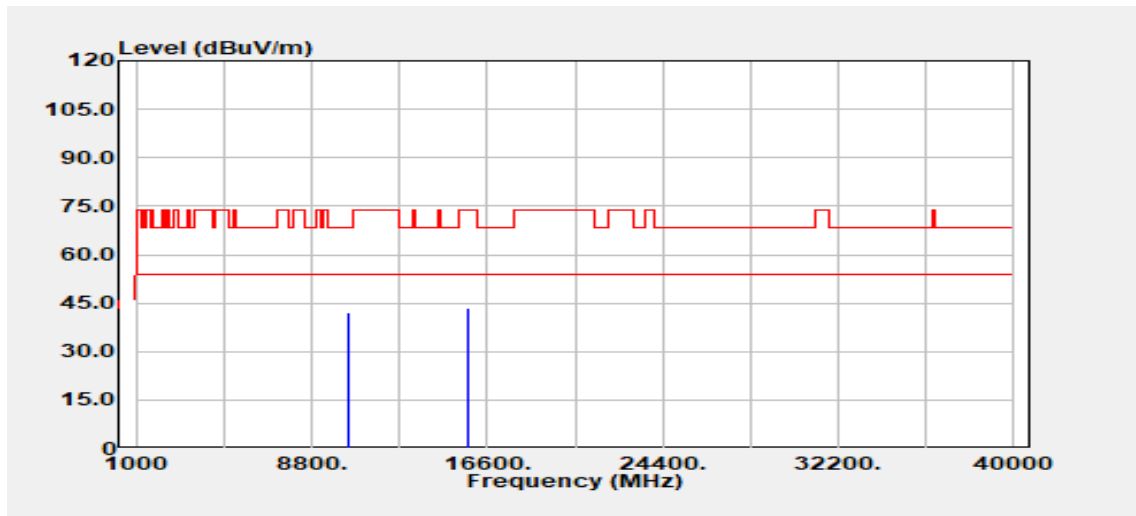


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10480.00 | Peak | 30.63 | 11.35 | 41.98 | 68.20 | -26.22 |
| 15720.00 | Peak | 29.16 | 14.11 | 43.27 | 74.00 | -30.73 |
| 15720.00 | Average | 23.01 | 14.11 | 37.12 | 54.00 | -16.88 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | March 30, 2022 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

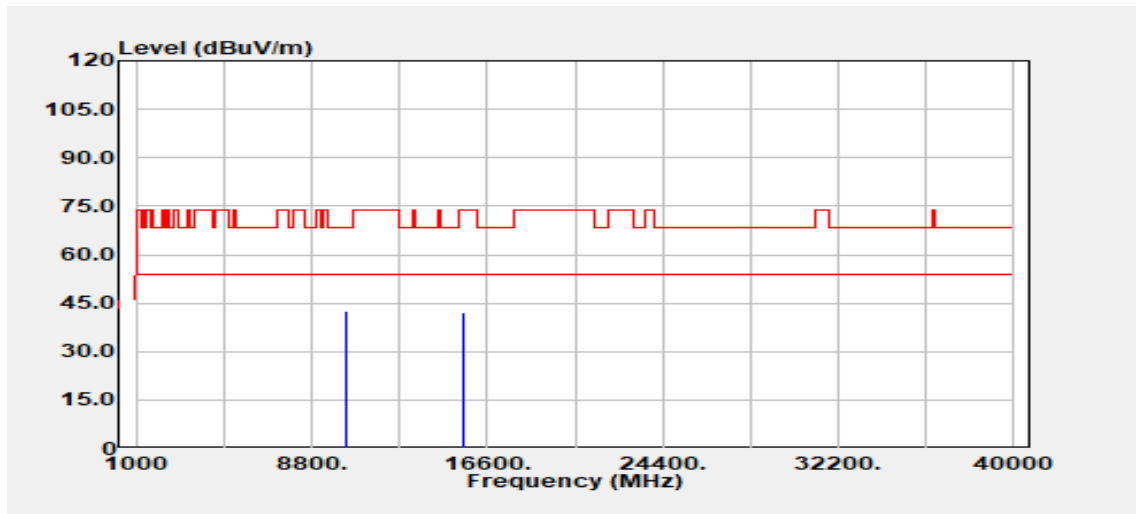


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10380.00 | Peak | 31.56 | 11.22 | 42.77 | 68.20 | -25.43 |
| 15570.00 | Peak | 29.75 | 12.41 | 42.16 | 74.00 | -31.84 |
| 15570.00 | Average | 25.00 | 12.41 | 37.41 | 54.00 | -16.59 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5190 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | March 30, 2022 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

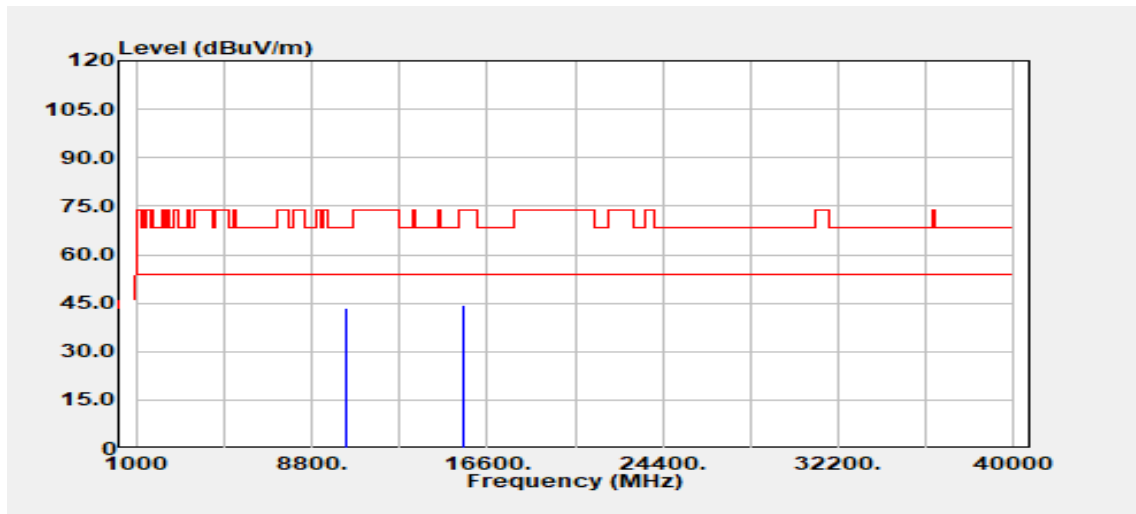


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10380.00 | Peak | 32.07 | 11.22 | 43.29 | 68.20 | -24.91 |
| 15570.00 | Peak | 31.79 | 12.41 | 44.21 | 74.00 | -29.79 |
| 15570.00 | Average | 23.85 | 12.41 | 36.26 | 54.00 | -17.74 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5230 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

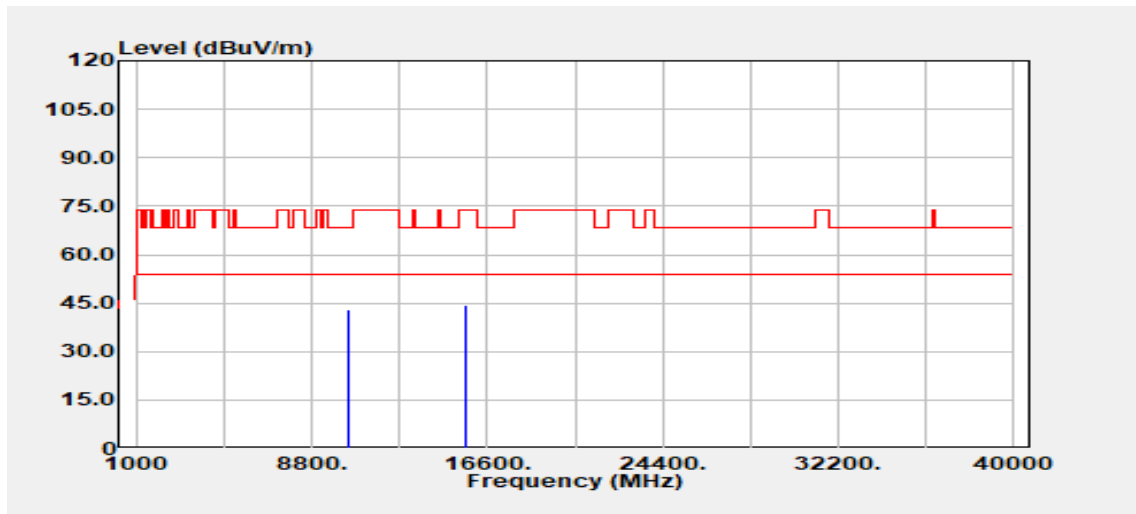


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10460.00 | Peak | 31.91 | 11.30 | 43.20 | 68.20 | -25.00 |
| 15690.00 | Peak | 30.64 | 13.90 | 44.55 | 74.00 | -29.45 |
| 15690.00 | Average | 23.50 | 13.90 | 37.41 | 54.00 | -16.59 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5230 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

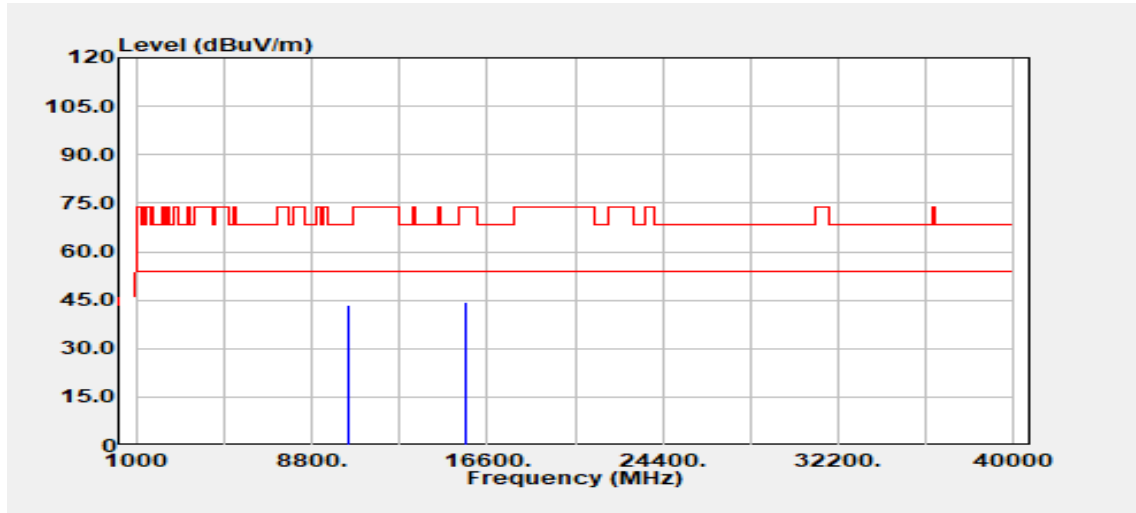


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10460.00 | Peak | 32.12 | 11.30 | 43.42 | 68.20 | -24.78 |
| 15690.00 | Peak | 30.51 | 13.90 | 44.42 | 74.00 | -29.58 |
| 15690.00 | Average | 24.13 | 13.90 | 38.03 | 54.00 | -15.97 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

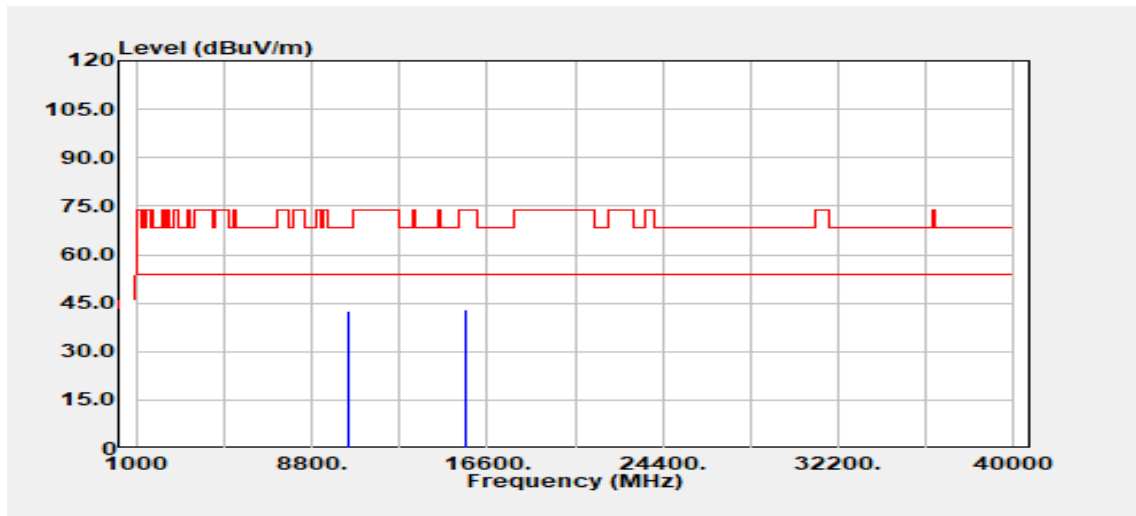


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10420.00 | Peak | 31.15 | 11.21 | 42.36 | 68.20 | -25.84 |
| 15630.00 | Peak | 29.84 | 13.06 | 42.90 | 74.00 | -31.10 |
| 15630.00 | Average | 23.81 | 13.06 | 36.87 | 54.00 | -17.13 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5210 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

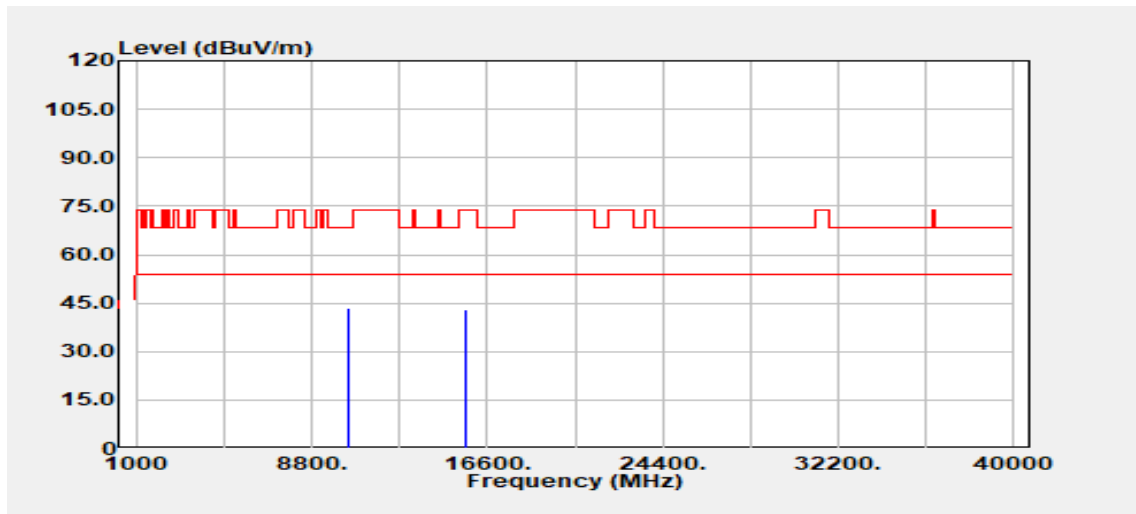


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10420.00 | Peak | 32.19 | 11.21 | 43.40 | 68.20 | -24.80 |
| 15630.00 | Peak | 29.85 | 13.06 | 42.90 | 74.00 | -31.10 |
| 15630.00 | Average | 23.93 | 13.06 | 36.98 | 54.00 | -17.02 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5260 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

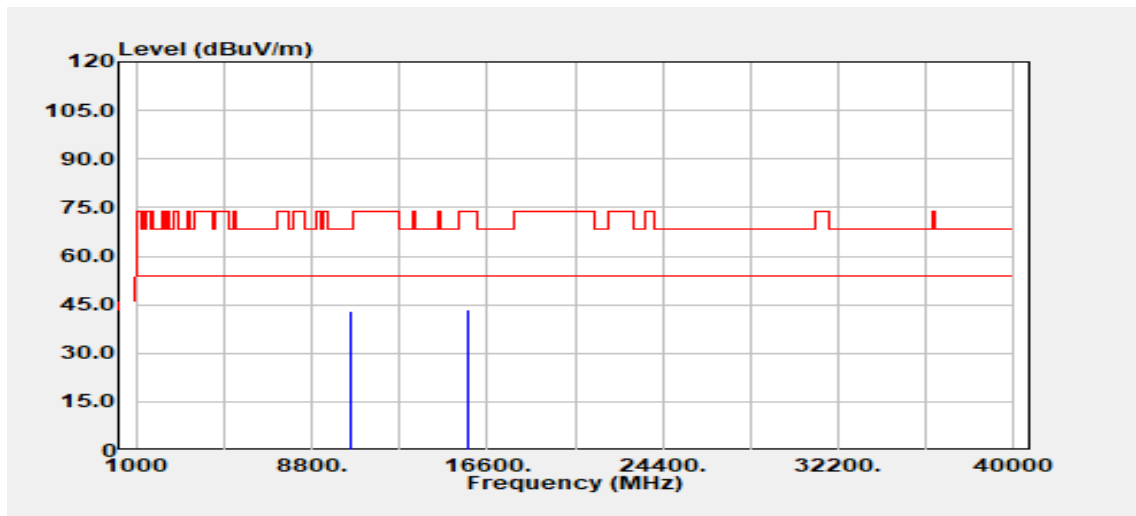


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 31.67 | 11.41 | 43.08 | 68.20 | -25.12 |
| 15780.00 | Peak | 29.26 | 14.08 | 43.33 | 74.00 | -30.67 |
| 15780.00 | Average | 23.19 | 14.08 | 37.26 | 54.00 | -16.74 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5260 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

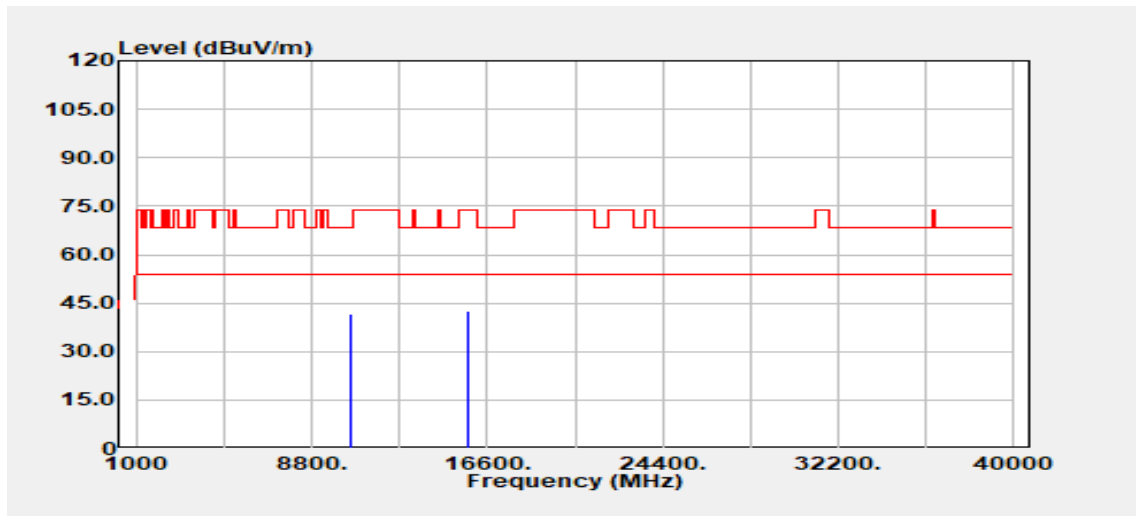


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 30.44 | 11.41 | 41.85 | 68.20 | -26.35 |
| 15780.00 | Peak | 28.67 | 14.08 | 42.75 | 74.00 | -31.25 |
| 15780.00 | Average | 23.38 | 14.08 | 37.45 | 54.00 | -16.55 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5300 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

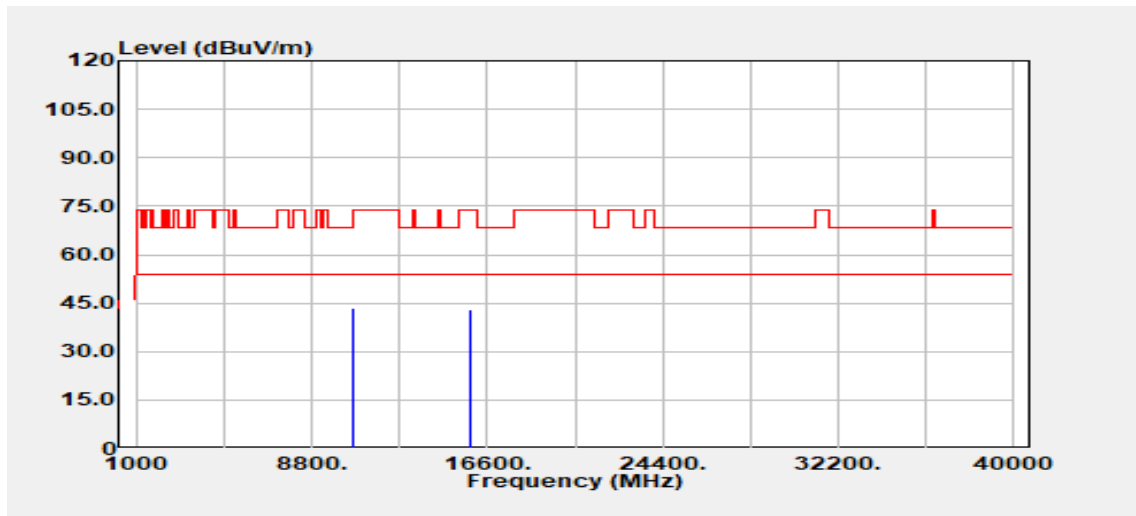


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 31.97 | 11.53 | 43.50 | 68.20 | -24.70 |
| 15900.00 | Peak | 28.44 | 14.45 | 42.89 | 74.00 | -31.11 |
| 15900.00 | Average | 23.53 | 14.45 | 37.98 | 54.00 | -16.02 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5300 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

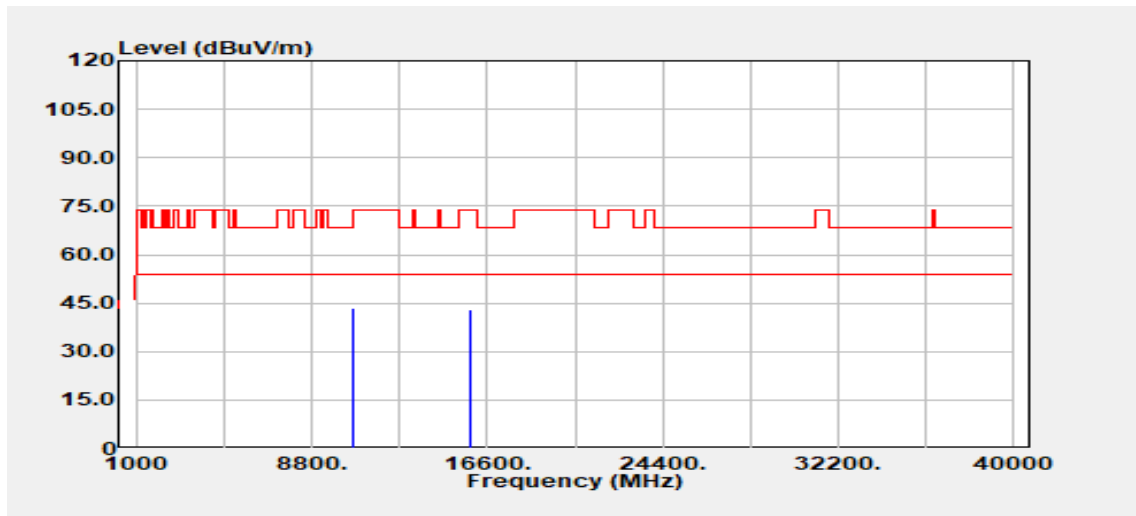


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 31.90 | 11.53 | 43.43 | 68.20 | -24.77 |
| 15900.00 | Peak | 28.35 | 14.45 | 42.80 | 74.00 | -31.20 |
| 15900.00 | Average | 23.54 | 14.45 | 37.99 | 54.00 | -16.01 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5320 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

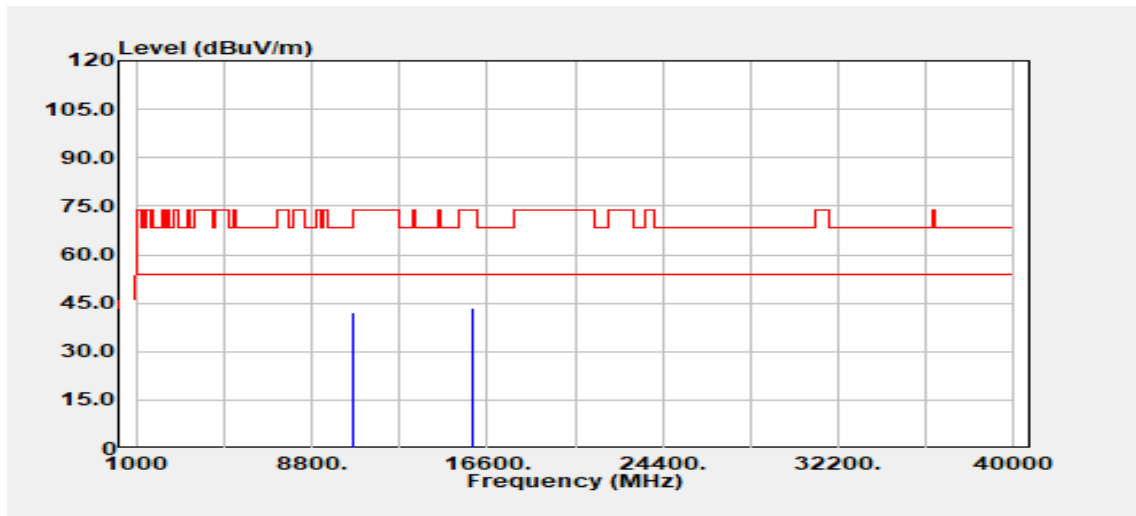


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 30.77 | 11.50 | 42.27 | 74.00 | -31.73 |
| 10640.00 | Average | 26.69 | 11.50 | 38.20 | 54.00 | -15.80 |
| 15960.00 | Peak | 28.22 | 15.09 | 43.31 | 74.00 | -30.69 |
| 15960.00 | Average | 23.52 | 15.09 | 38.61 | 54.00 | -15.39 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5320 MHz | Temp/Hum | 23.2(°C)/ 60%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

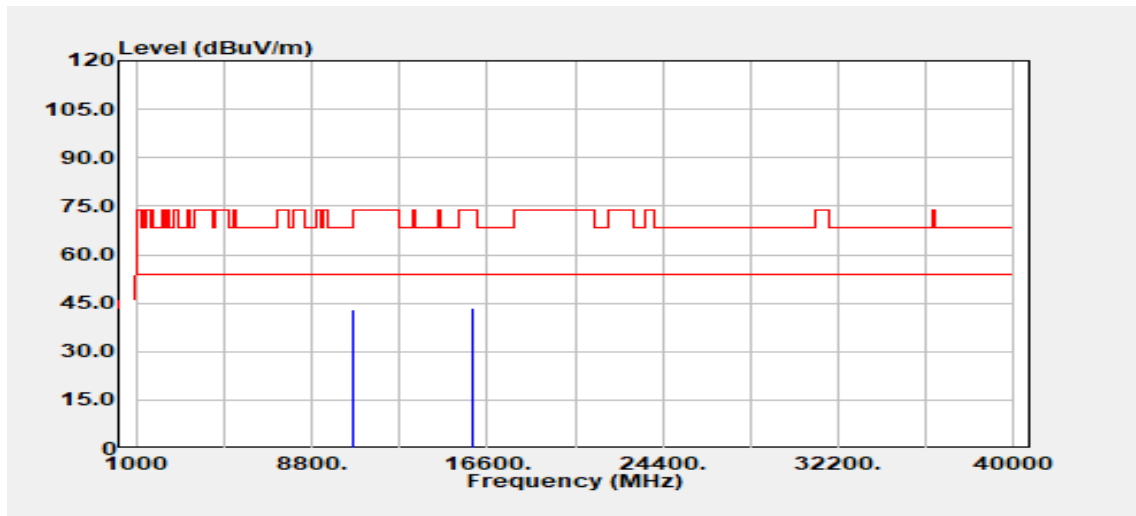


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 31.35 | 11.50 | 42.85 | 74.00 | -31.15 |
| 10640.00 | Average | 25.40 | 11.50 | 36.90 | 54.00 | -17.10 |
| 15960.00 | Peak | 28.23 | 15.09 | 43.32 | 74.00 | -30.68 |
| 15960.00 | Average | 23.04 | 15.09 | 38.13 | 54.00 | -15.87 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5270 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

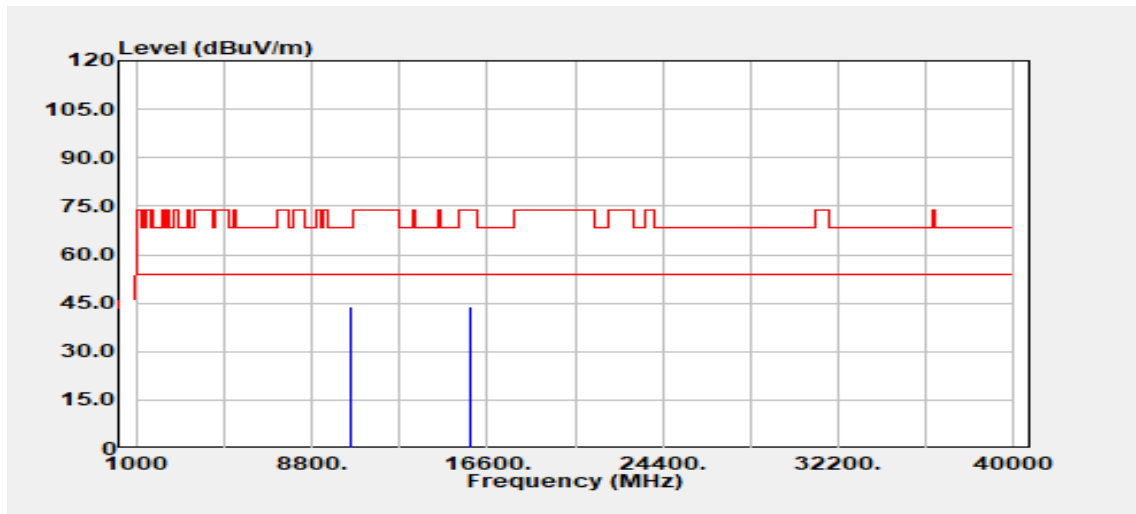


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 32.31 | 11.41 | 43.72 | 68.20 | -24.48 |
| 15810.00 | Peak | 29.68 | 14.04 | 43.72 | 74.00 | -30.28 |
| 15810.00 | Average | 22.61 | 14.04 | 36.65 | 54.00 | -17.35 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5270 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

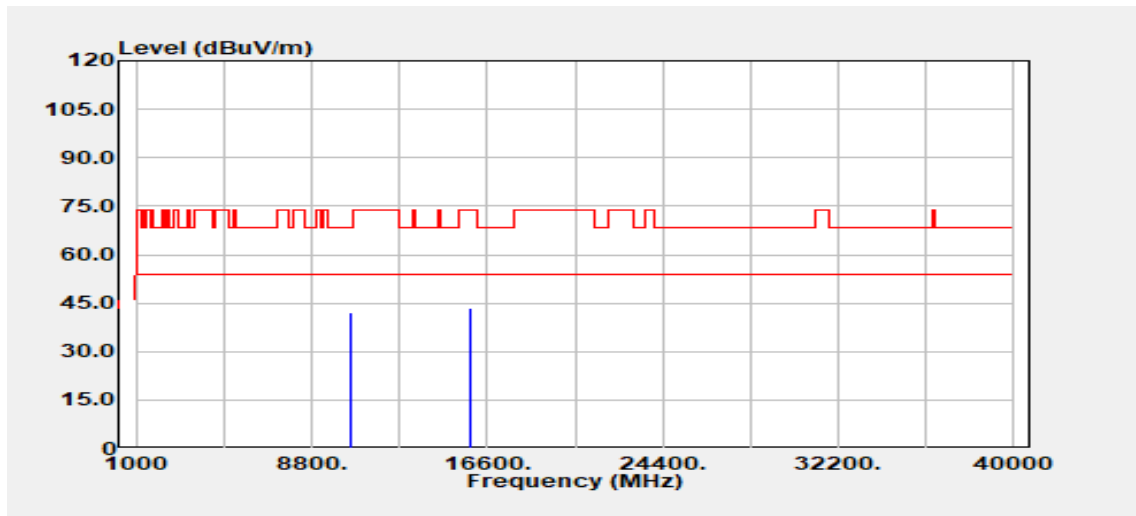


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 30.80 | 11.41 | 42.21 | 68.20 | -25.99 |
| 15810.00 | Peak | 29.60 | 14.04 | 43.64 | 74.00 | -30.36 |
| 15810.00 | Average | 22.11 | 14.04 | 36.15 | 54.00 | -17.85 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11n HT40 / 5310 MHz | Temp/Hum | 24.1(°C) / 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

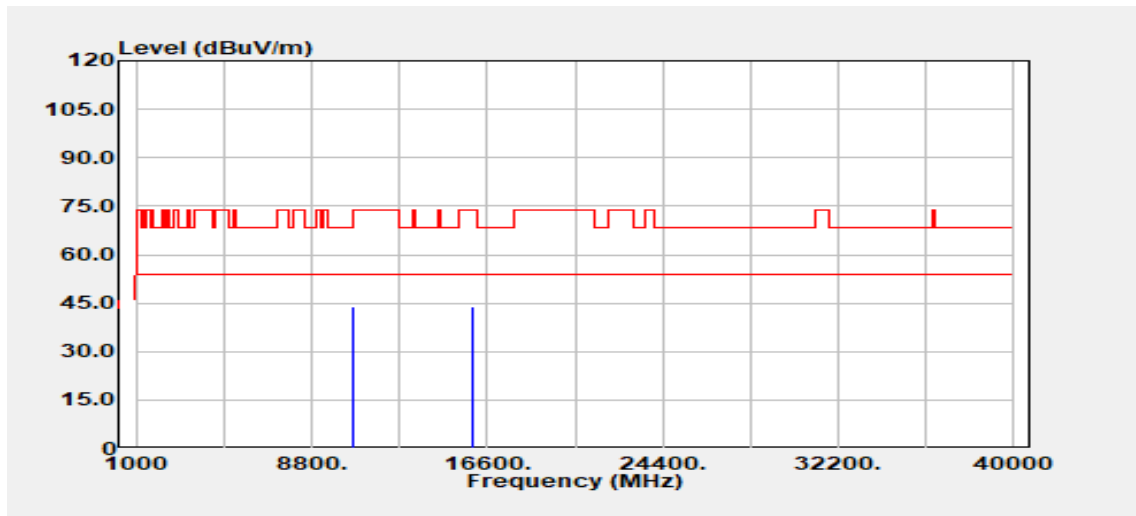


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 32.51 | 11.52 | 44.02 | 74.00 | -29.98 |
| 10620.00 | Average | 24.66 | 11.52 | 36.18 | 54.00 | -17.82 |
| 15930.00 | Peak | 29.14 | 14.81 | 43.96 | 74.00 | -30.04 |
| 15930.00 | Average | 22.79 | 14.81 | 37.61 | 54.00 | -16.39 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11n HT40 / 5310 MHz | Temp/Hum | 24.1(°C) / 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

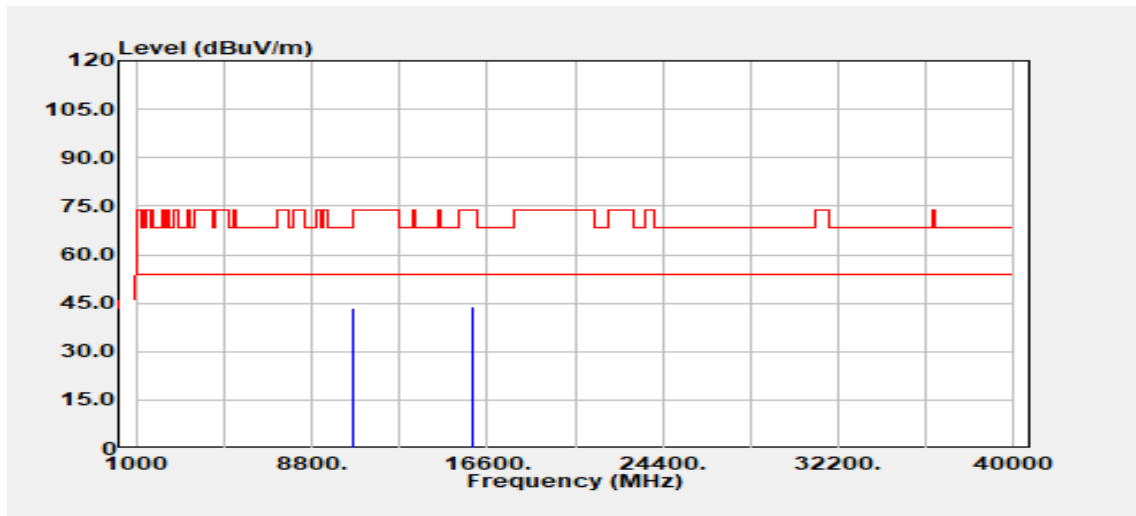


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 31.87 | 11.52 | 43.39 | 74.00 | -30.61 |
| 10620.00 | Average | 23.74 | 11.52 | 35.26 | 54.00 | -18.74 |
| 15930.00 | Peak | 29.01 | 14.81 | 43.82 | 74.00 | -30.18 |
| 15930.00 | Average | 22.63 | 14.81 | 37.44 | 54.00 | -16.56 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5290 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

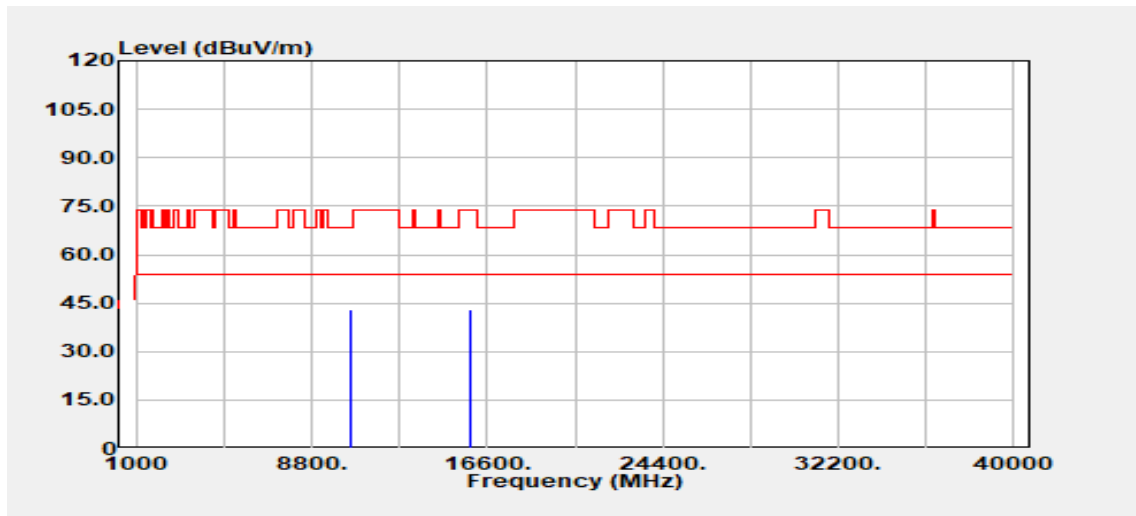


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 31.66 | 11.48 | 43.14 | 68.20 | -25.06 |
| 15870.00 | Peak | 28.84 | 14.34 | 43.18 | 74.00 | -30.82 |
| 15870.00 | Average | 23.38 | 14.34 | 37.72 | 54.00 | -16.28 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5290 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

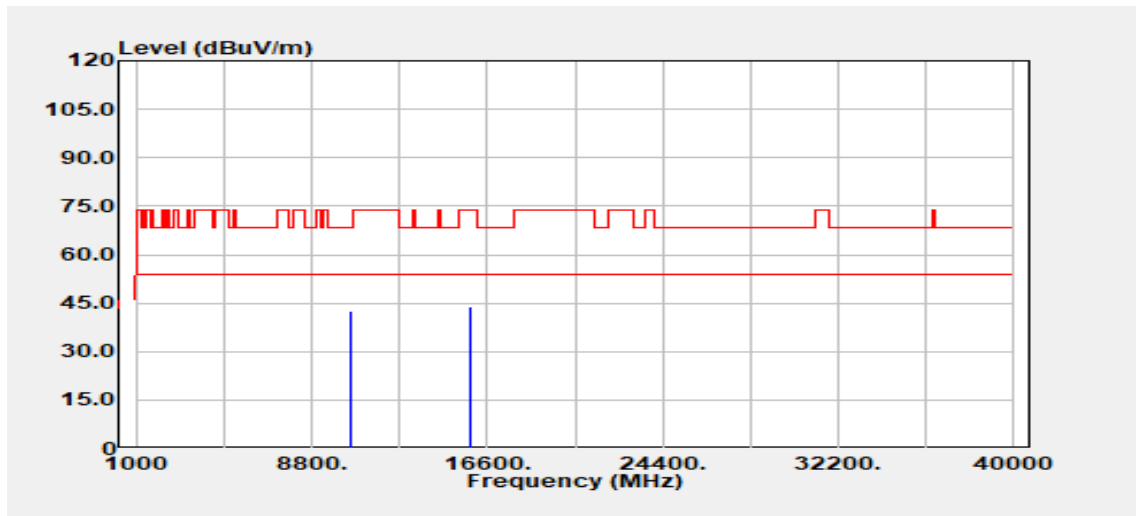


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 31.23 | 11.48 | 42.71 | 68.20 | -25.49 |
| 15870.00 | Peak | 29.46 | 14.34 | 43.80 | 74.00 | -30.20 |
| 15870.00 | Average | 23.26 | 14.34 | 37.60 | 54.00 | -16.40 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5250 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

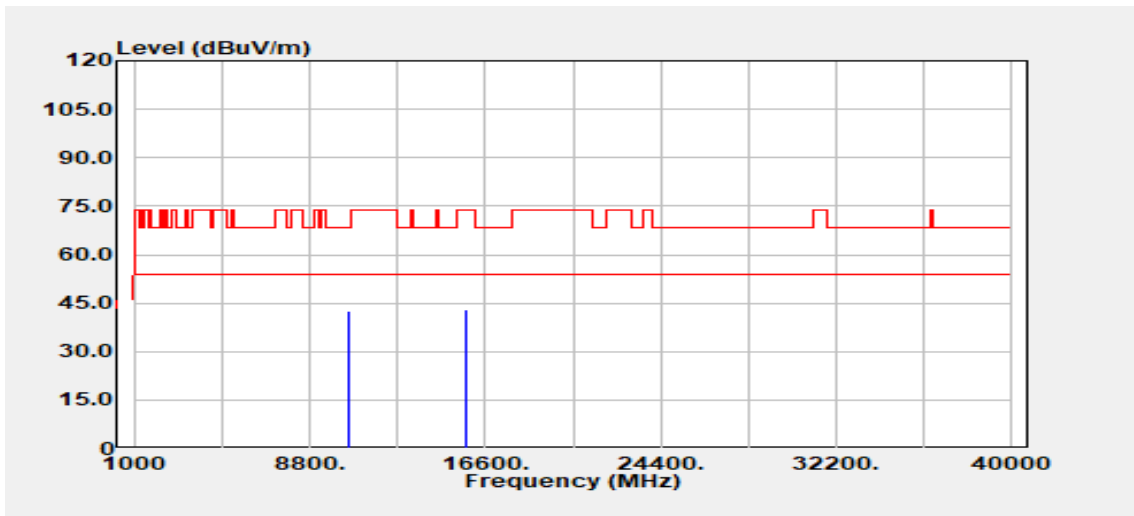


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.06 | 11.41 | 42.47 | 68.20 | -25.73 |
| 15750.00 | Peak | 28.60 | 14.22 | 42.82 | 74.00 | -31.18 |
| 15750.00 | Average | 22.98 | 14.22 | 37.20 | 54.00 | -16.80 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5250 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

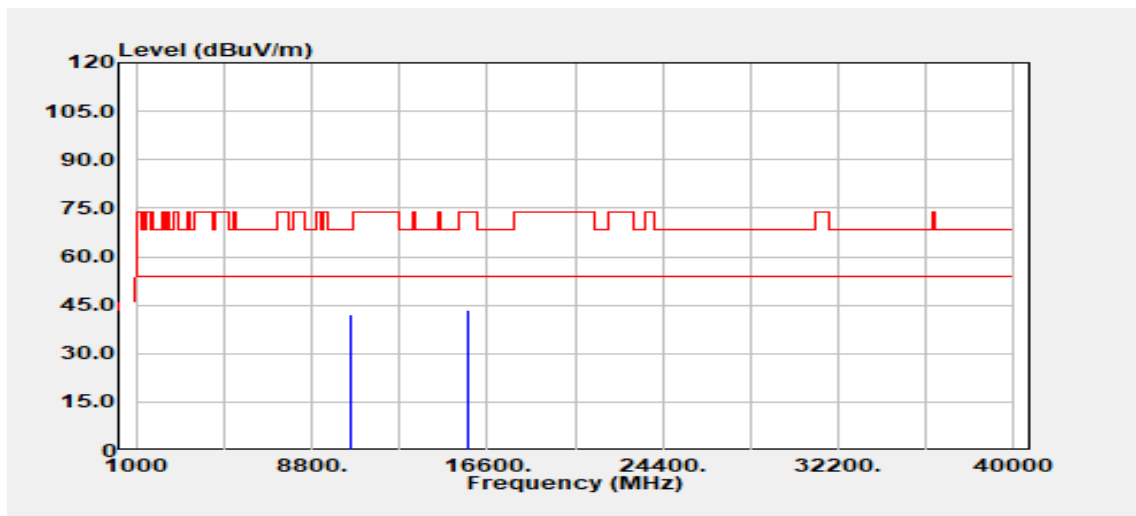


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 30.69 | 11.41 | 42.10 | 68.20 | -26.10 |
| 15750.00 | Peak | 29.37 | 14.22 | 43.59 | 74.00 | -30.41 |
| 15750.00 | Average | 22.68 | 14.22 | 36.90 | 54.00 | -17.10 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

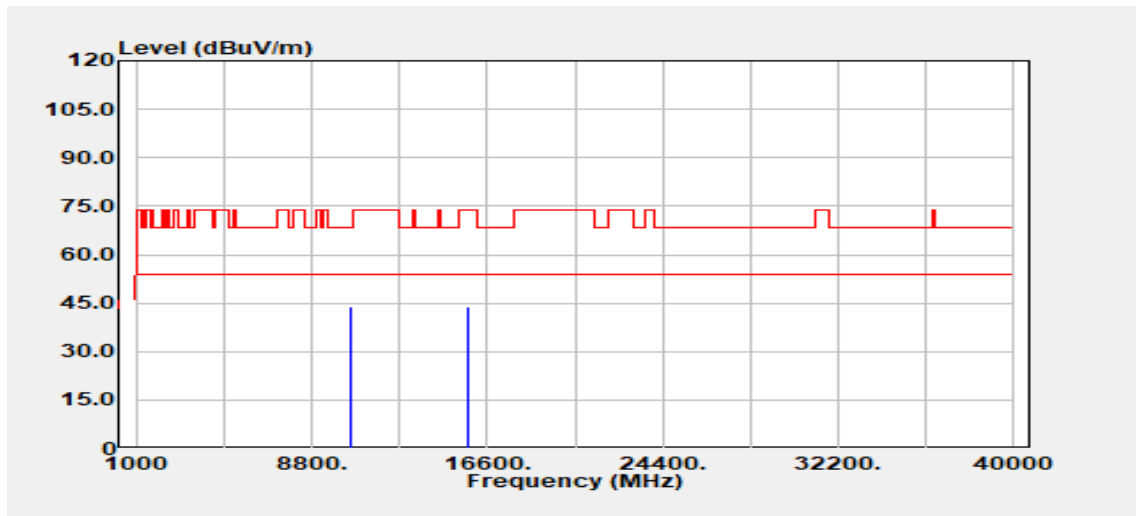


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 32.57 | 11.41 | 43.98 | 68.20 | -24.22 |
| 15780.00 | Peak | 29.83 | 14.08 | 43.90 | 74.00 | -30.10 |
| 15780.00 | Average | 23.60 | 14.08 | 37.68 | 54.00 | -16.32 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5260 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

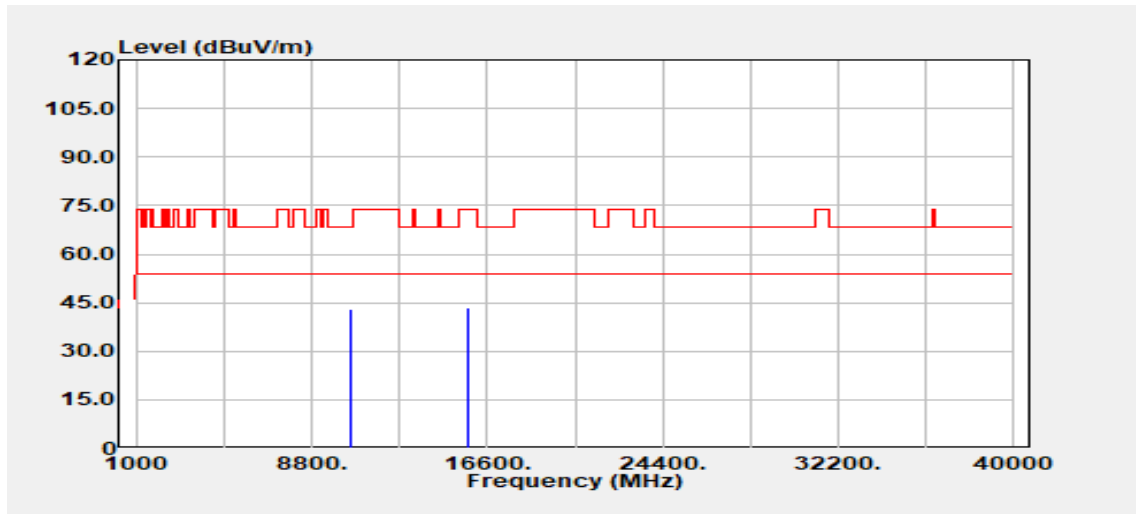


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10520.00 | Peak | 31.77 | 11.41 | 43.18 | 68.20 | -25.02 |
| 15780.00 | Peak | 29.55 | 14.08 | 43.63 | 74.00 | -30.37 |
| 15780.00 | Average | 23.57 | 14.08 | 37.64 | 54.00 | -16.36 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5300 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

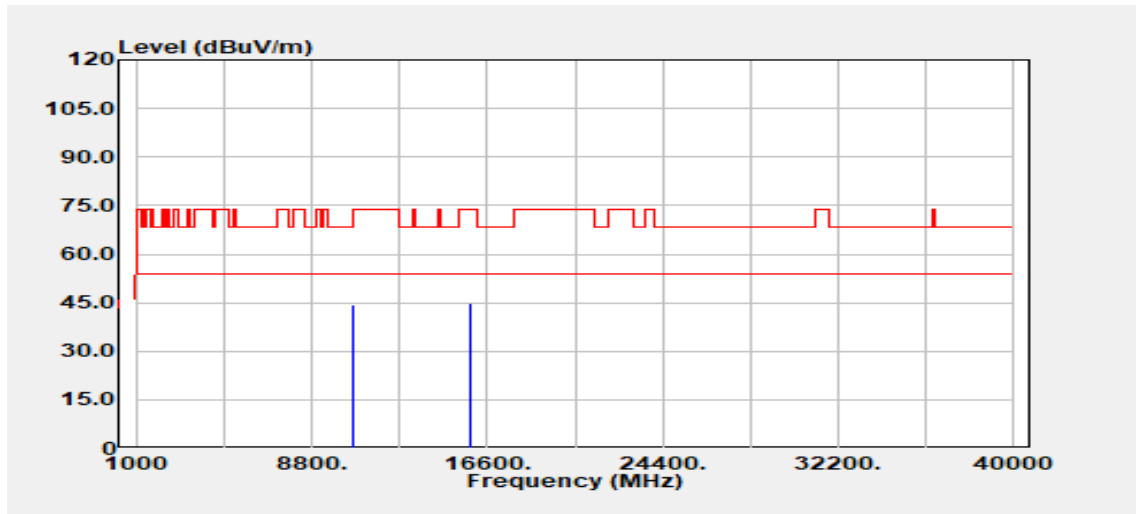


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 32.76 | 11.53 | 44.29 | 68.20 | -23.91 |
| 15900.00 | Peak | 30.16 | 14.45 | 44.61 | 74.00 | -29.39 |
| 15900.00 | Average | 24.03 | 14.45 | 38.48 | 54.00 | -15.52 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5300 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

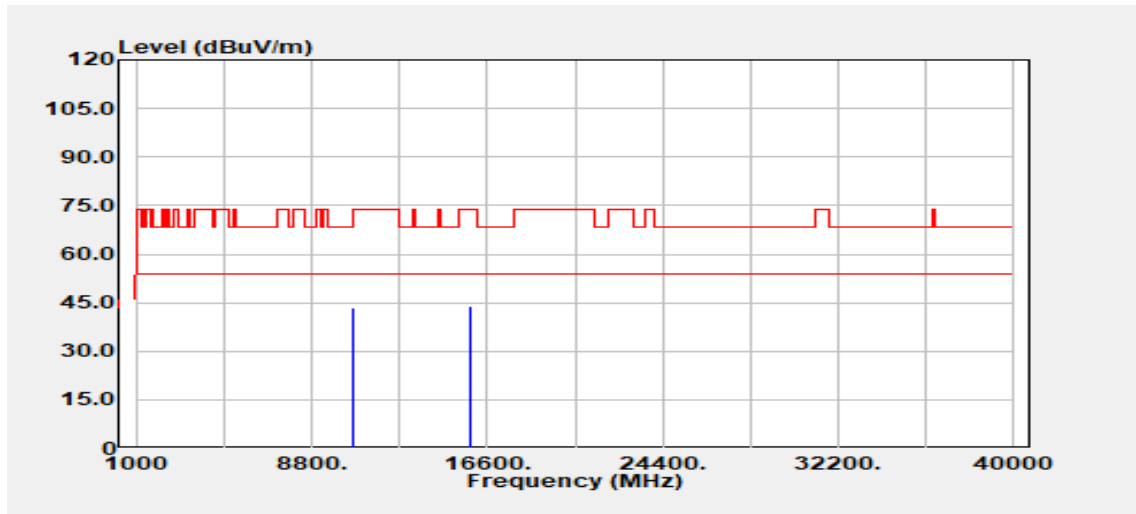


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10600.00 | Peak | 31.96 | 11.53 | 43.49 | 68.20 | -24.71 |
| 15900.00 | Peak | 29.68 | 14.45 | 44.13 | 74.00 | -29.87 |
| 15900.00 | Average | 24.09 | 14.45 | 38.54 | 54.00 | -15.46 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

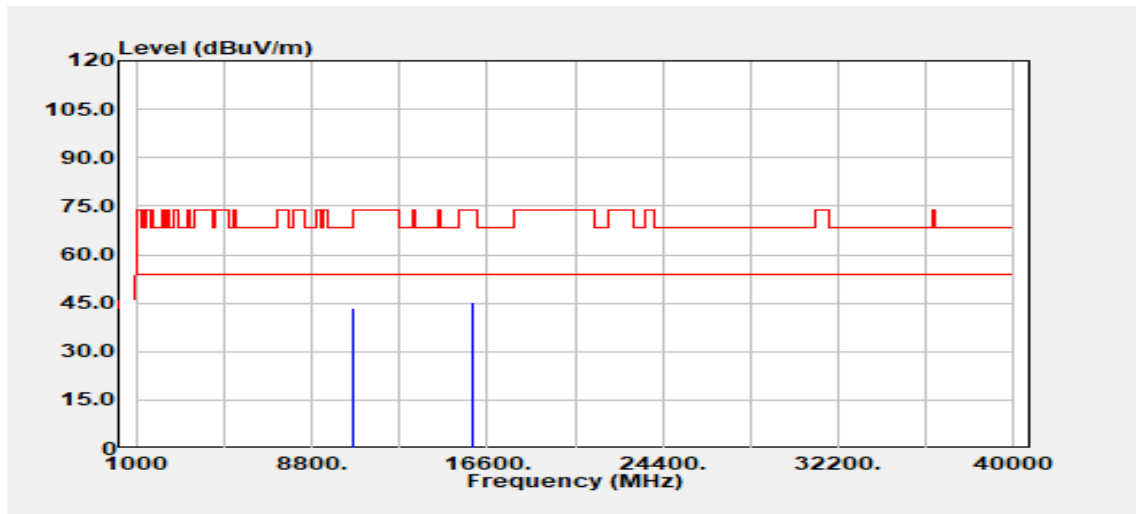


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 31.96 | 11.50 | 43.46 | 74.00 | -30.54 |
| 10640.00 | Average | 26.60 | 11.50 | 38.10 | 54.00 | -15.90 |
| 15960.00 | Peak | 30.28 | 15.09 | 45.37 | 74.00 | -28.63 |
| 15960.00 | Average | 23.59 | 15.09 | 38.68 | 54.00 | -15.32 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

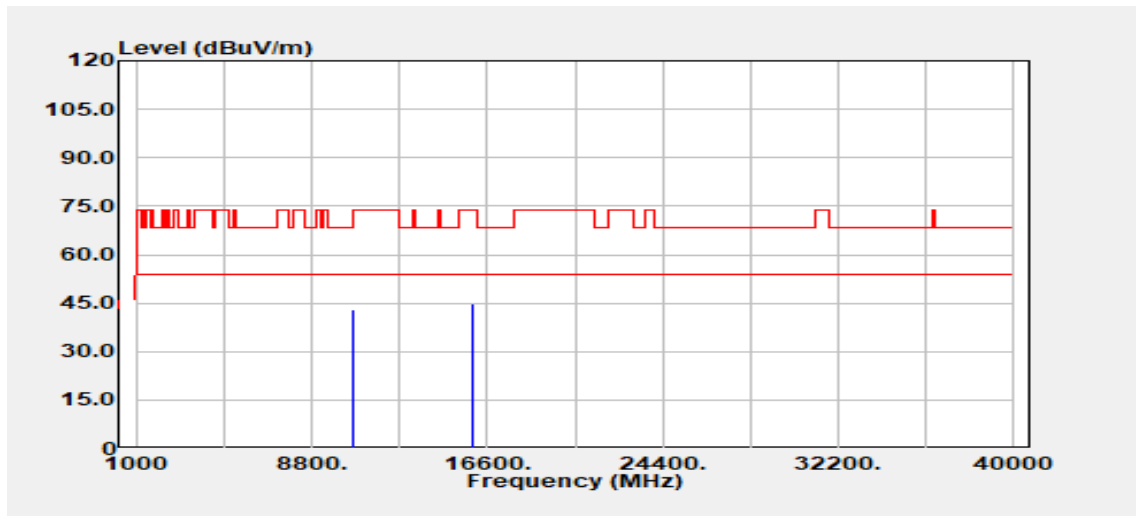


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10640.00 | Peak | 31.50 | 11.50 | 43.00 | 74.00 | -31.00 |
| 10640.00 | Average | 25.50 | 11.50 | 37.01 | 54.00 | -16.99 |
| 15960.00 | Peak | 29.64 | 15.09 | 44.73 | 74.00 | -29.27 |
| 15960.00 | Average | 23.51 | 15.09 | 38.60 | 54.00 | -15.40 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5270 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

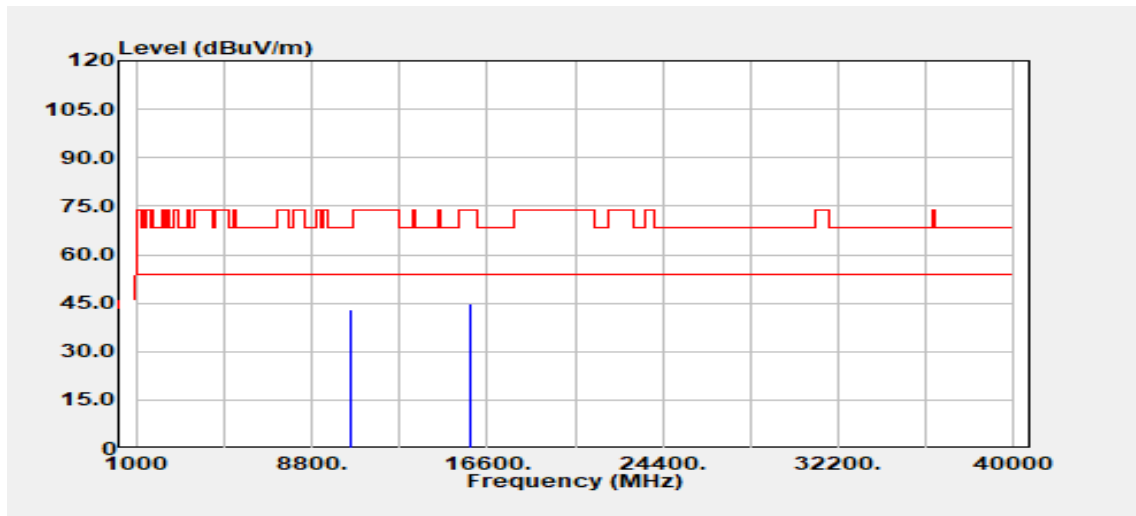


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 31.71 | 11.41 | 43.12 | 68.20 | -25.08 |
| 15810.00 | Peak | 30.67 | 14.04 | 44.71 | 74.00 | -29.29 |
| 15810.00 | Average | 23.54 | 14.04 | 37.58 | 54.00 | -16.42 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5270 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

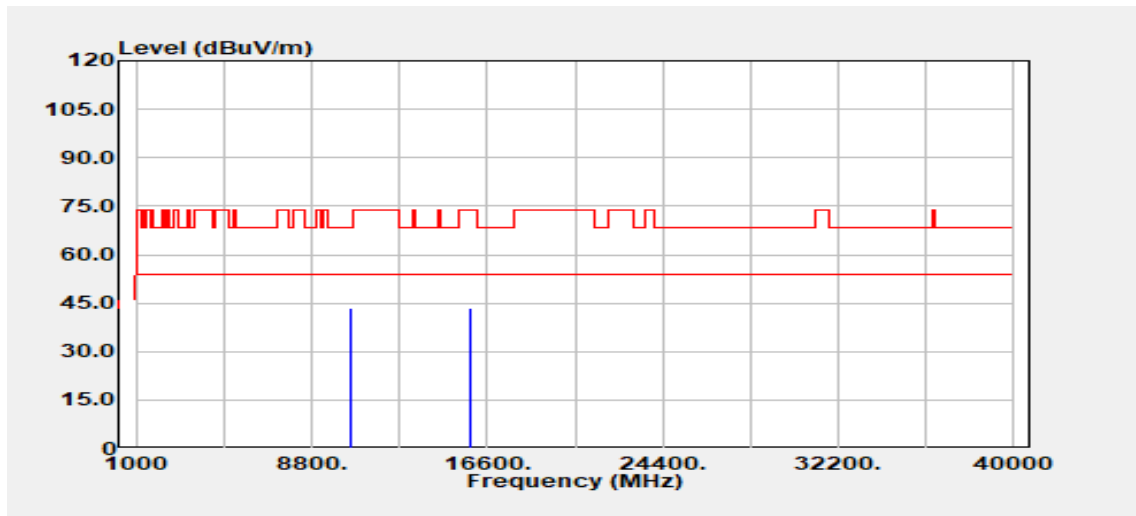


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10540.00 | Peak | 32.14 | 11.41 | 43.55 | 68.20 | -24.65 |
| 15810.00 | Peak | 29.63 | 14.04 | 43.67 | 74.00 | -30.33 |
| 15810.00 | Average | 23.43 | 14.04 | 37.47 | 54.00 | -16.53 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

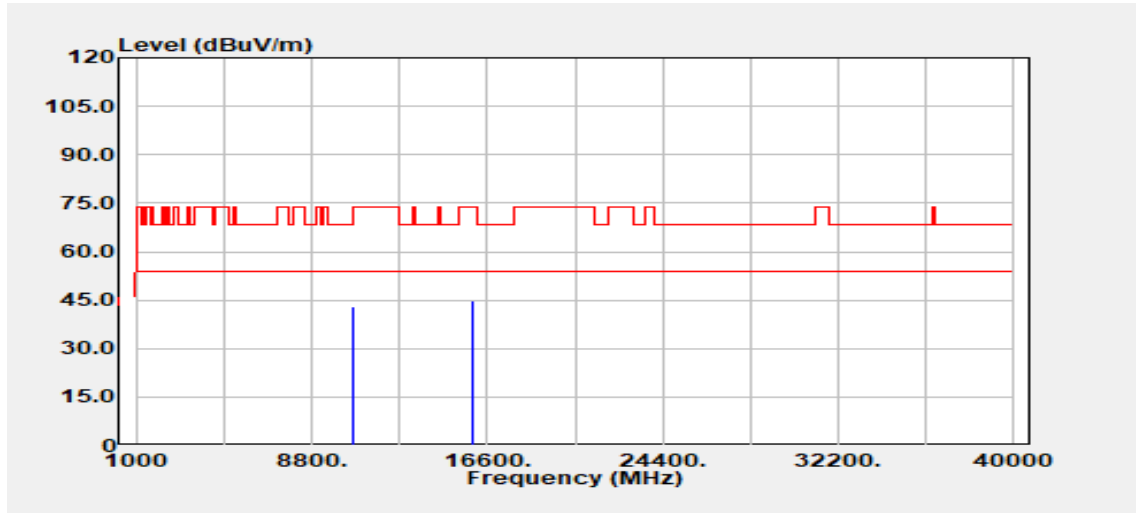


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 31.60 | 11.52 | 43.12 | 74.00 | -30.88 |
| 10620.00 | Average | 24.48 | 11.52 | 35.99 | 54.00 | -18.01 |
| 15930.00 | Peak | 30.23 | 14.81 | 45.04 | 74.00 | -28.96 |
| 15930.00 | Average | 23.64 | 14.81 | 38.46 | 54.00 | -15.54 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

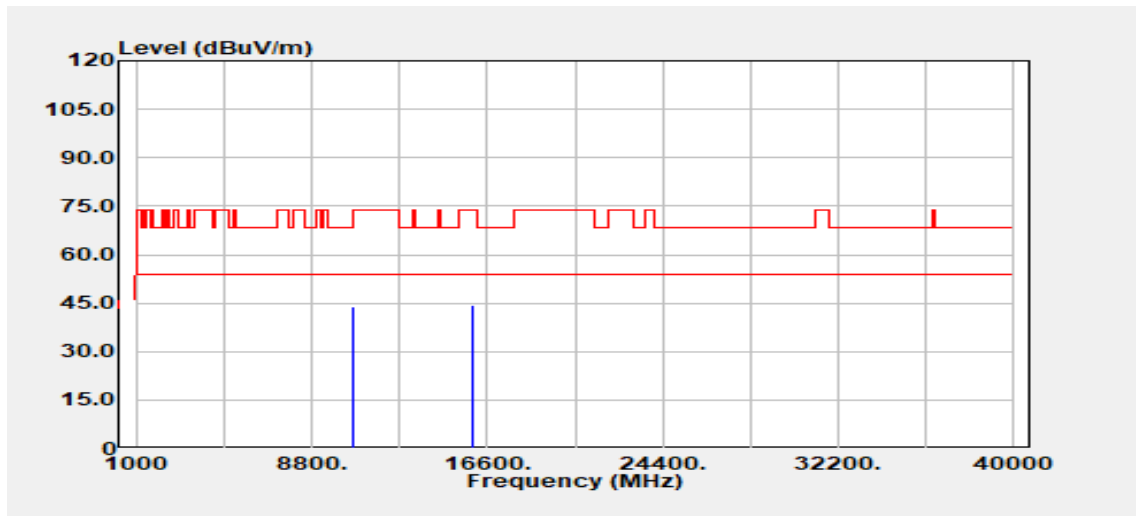


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10620.00 | Peak | 32.21 | 11.52 | 43.72 | 74.00 | -30.28 |
| 10620.00 | Average | 24.18 | 11.52 | 35.70 | 54.00 | -18.30 |
| 15930.00 | Peak | 29.63 | 14.81 | 44.44 | 74.00 | -29.56 |
| 15930.00 | Average | 23.69 | 14.81 | 38.50 | 54.00 | -15.50 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

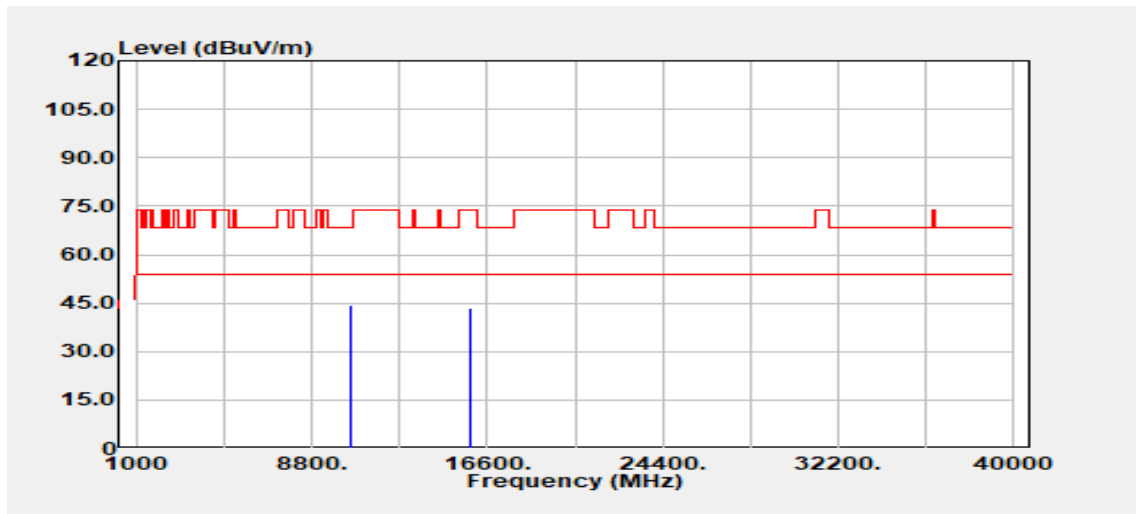


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 32.96 | 11.48 | 44.44 | 68.20 | -23.76 |
| 15870.00 | Peak | 29.25 | 14.34 | 43.59 | 74.00 | -30.41 |
| 15870.00 | Average | 23.90 | 14.34 | 38.25 | 54.00 | -15.75 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

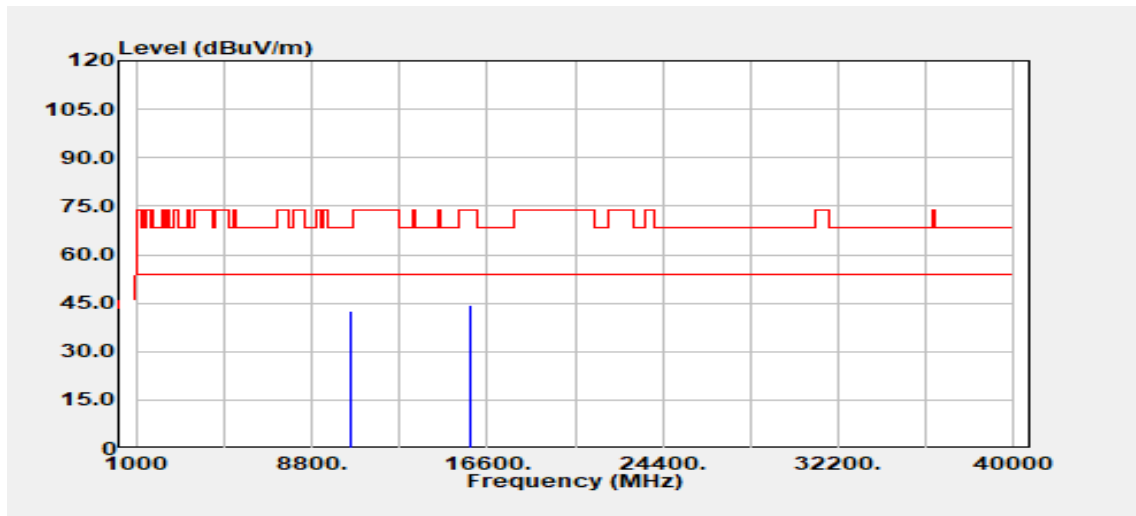


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10580.00 | Peak | 31.23 | 11.48 | 42.71 | 68.20 | -25.49 |
| 15870.00 | Peak | 29.82 | 14.34 | 44.16 | 74.00 | -29.84 |
| 15870.00 | Average | 24.00 | 14.34 | 38.34 | 54.00 | -15.66 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5250 MHz | Temp/Hum | 24.3(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

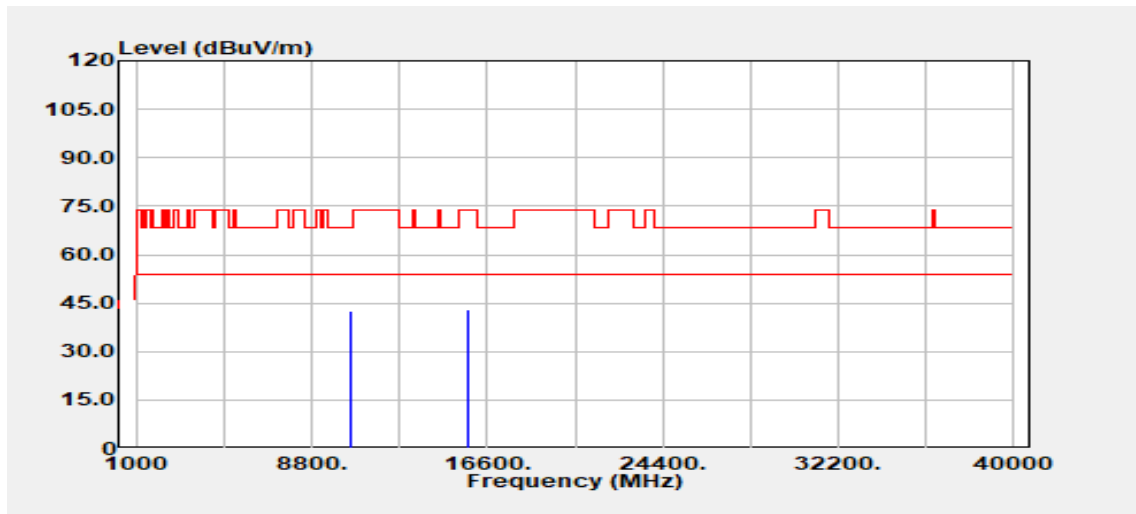


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 30.95 | 11.41 | 42.36 | 68.20 | -25.84 |
| 15750.00 | Peak | 29.02 | 14.22 | 43.24 | 74.00 | -30.76 |
| 15750.00 | Average | 20.96 | 14.22 | 35.18 | 54.00 | -18.82 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5250 MHz | Temp/Hum | 24.3(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

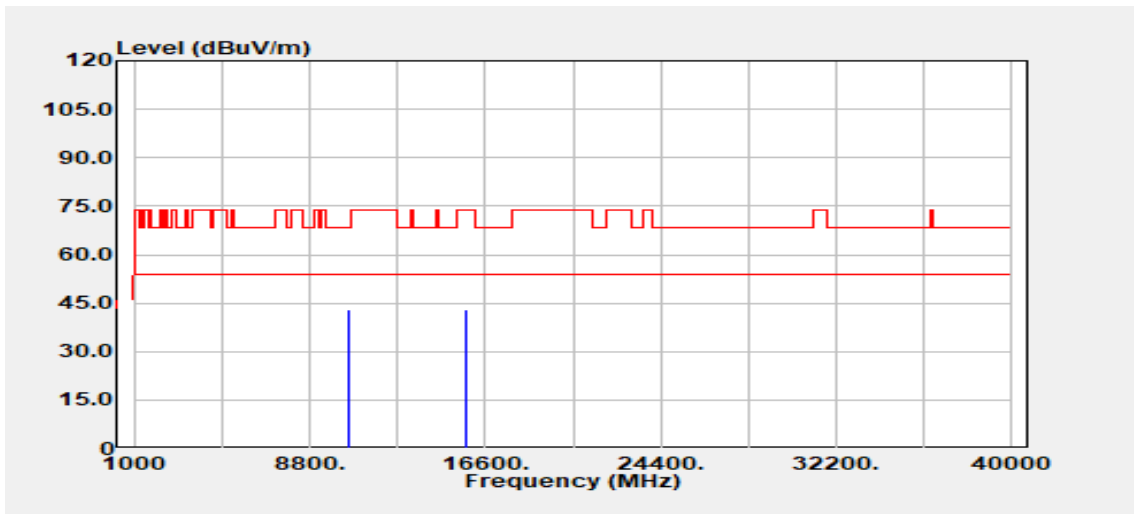


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 10500.00 | Peak | 31.39 | 11.41 | 42.80 | 68.20 | -25.40 |
| 15750.00 | Peak | 28.66 | 14.22 | 42.88 | 74.00 | -31.12 |
| 15750.00 | Average | 20.99 | 14.22 | 35.21 | 54.00 | -18.79 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5500 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

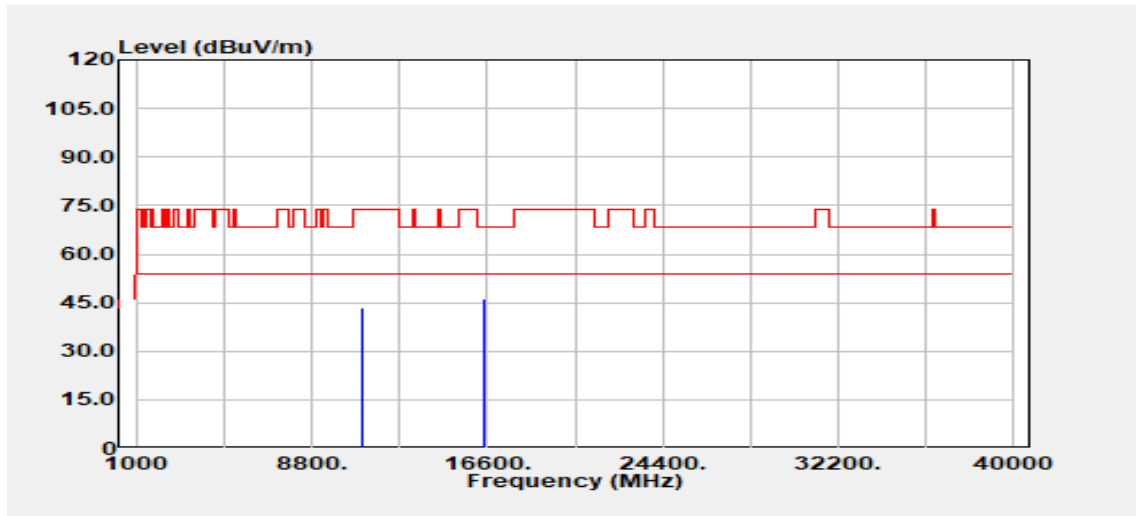


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 31.00 | 12.42 | 43.42 | 74.00 | -30.58 |
| 11000.00 | Average | 29.92 | 12.42 | 42.34 | 54.00 | -11.66 |
| 16500.00 | Peak | 27.59 | 18.70 | 46.29 | 68.20 | -21.91 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5500 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

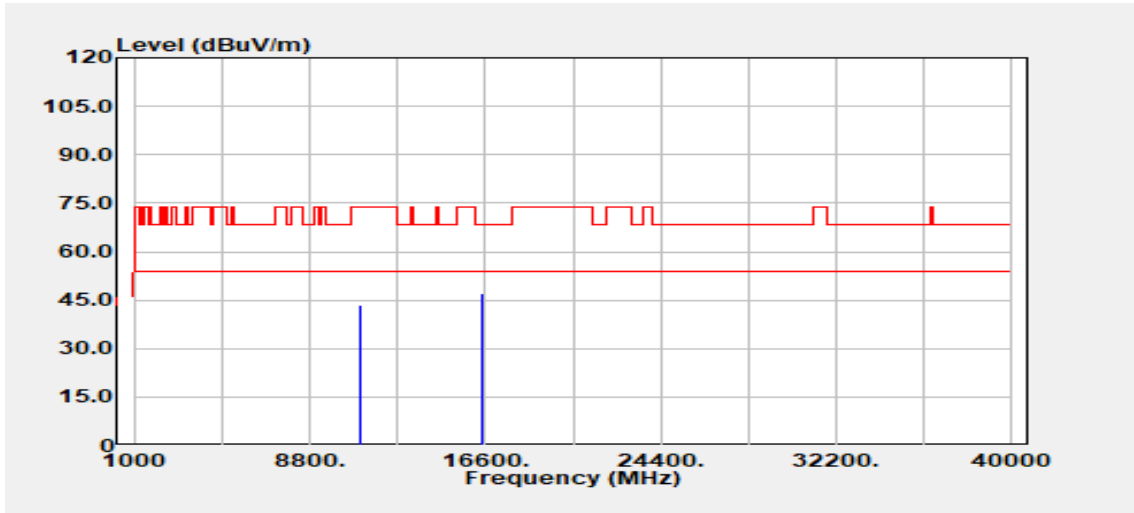


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 30.87 | 12.42 | 43.29 | 74.00 | -30.71 |
| 11000.00 | Average | 23.66 | 12.42 | 36.08 | 54.00 | -17.92 |
| 16500.00 | Peak | 28.59 | 18.70 | 47.29 | 68.20 | -20.91 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11n HT20 / 5580 MHz | Temp/Hum | 24.1(°C) / 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

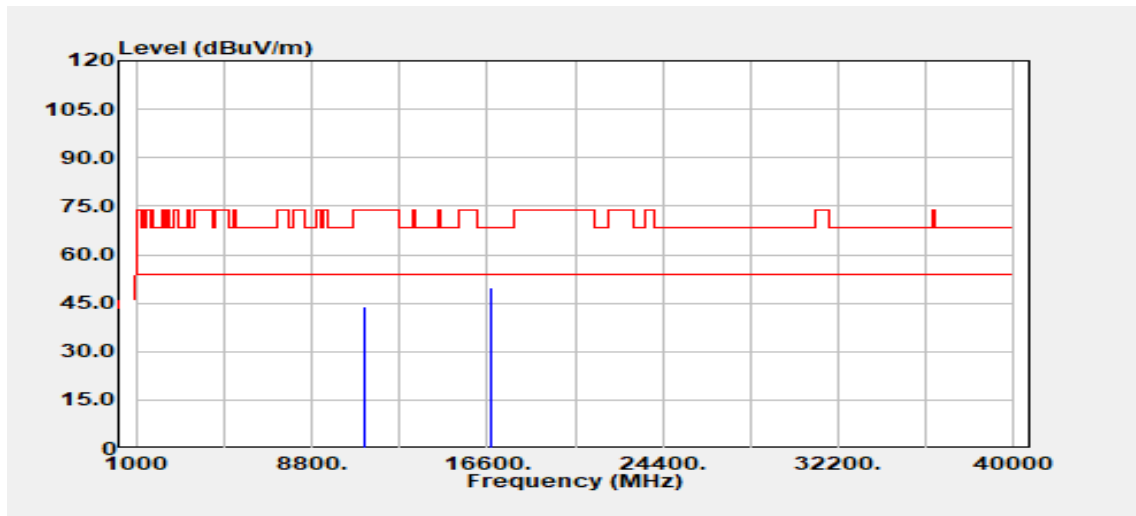


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 31.32 | 12.48 | 43.79 | 74.00 | -30.21 |
| 11160.00 | Average | 24.88 | 12.48 | 37.36 | 54.00 | -16.64 |
| 16740.00 | Peak | 29.07 | 20.88 | 49.95 | 68.20 | -18.25 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5580 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

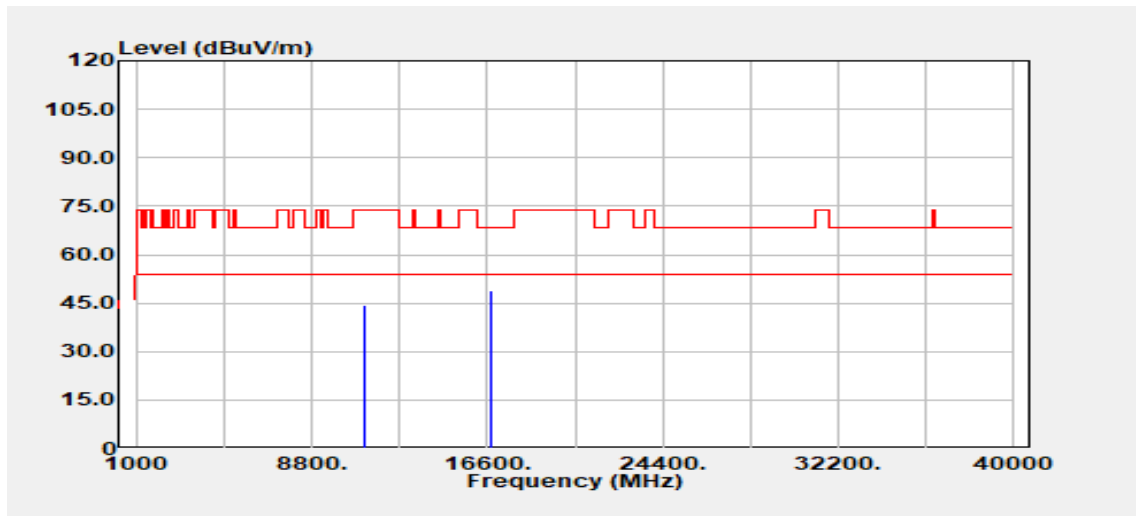


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 31.86 | 12.48 | 44.34 | 74.00 | -29.66 |
| 11160.00 | Average | 23.34 | 12.48 | 35.82 | 54.00 | -18.18 |
| 16740.00 | Peak | 28.24 | 20.88 | 49.11 | 68.20 | -19.09 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5700 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

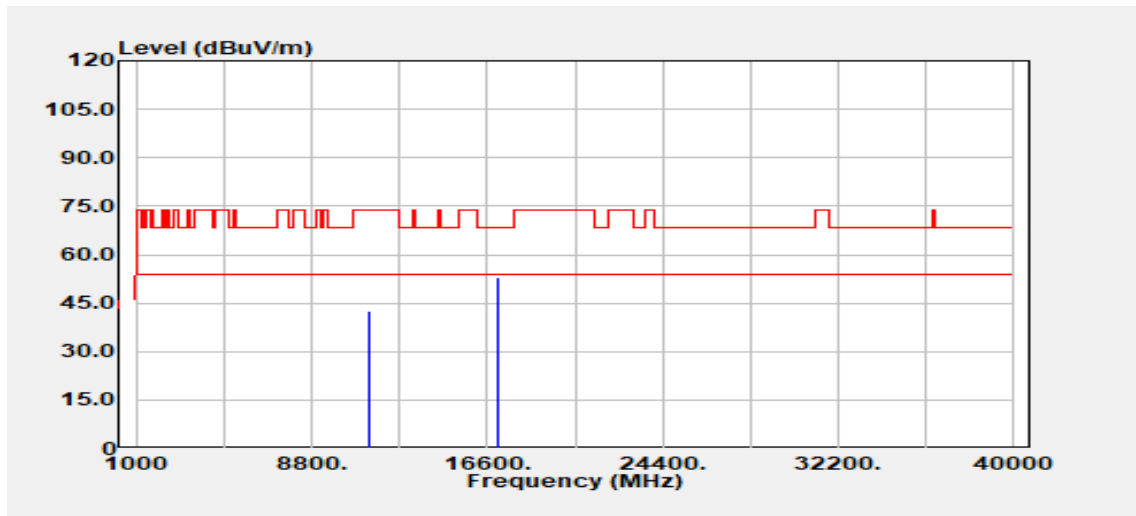


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 30.03 | 12.39 | 42.42 | 74.00 | -31.58 |
| 11400.00 | Average | 24.37 | 12.39 | 36.76 | 54.00 | -17.24 |
| 17100.00 | Peak | 27.49 | 25.62 | 53.11 | 68.20 | -15.09 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5700 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

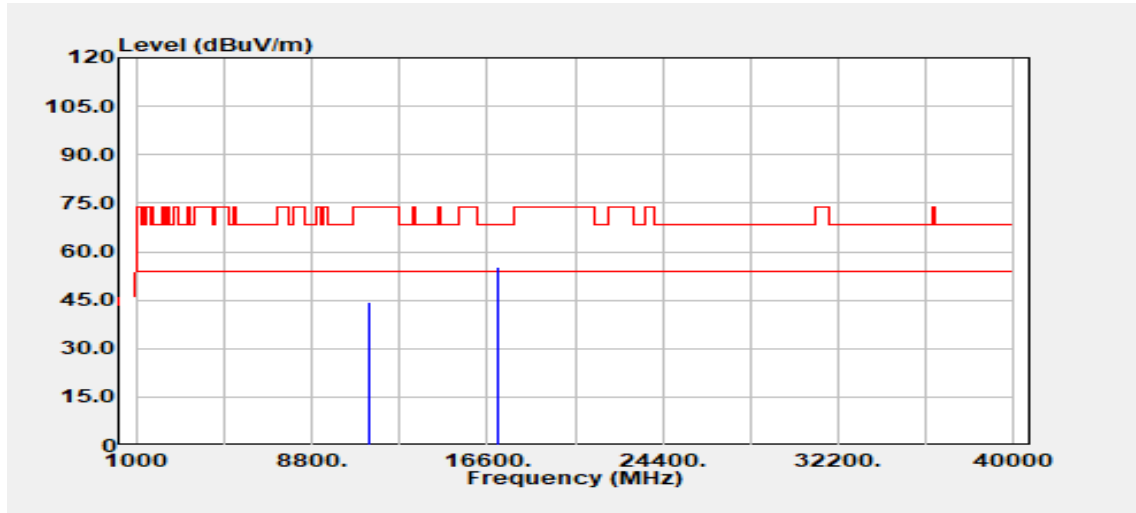


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 31.79 | 12.39 | 44.18 | 74.00 | -29.82 |
| 11400.00 | Average | 23.02 | 12.39 | 35.41 | 54.00 | -18.59 |
| 17100.00 | Peak | 29.56 | 25.62 | 55.18 | 68.20 | -13.02 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5510 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

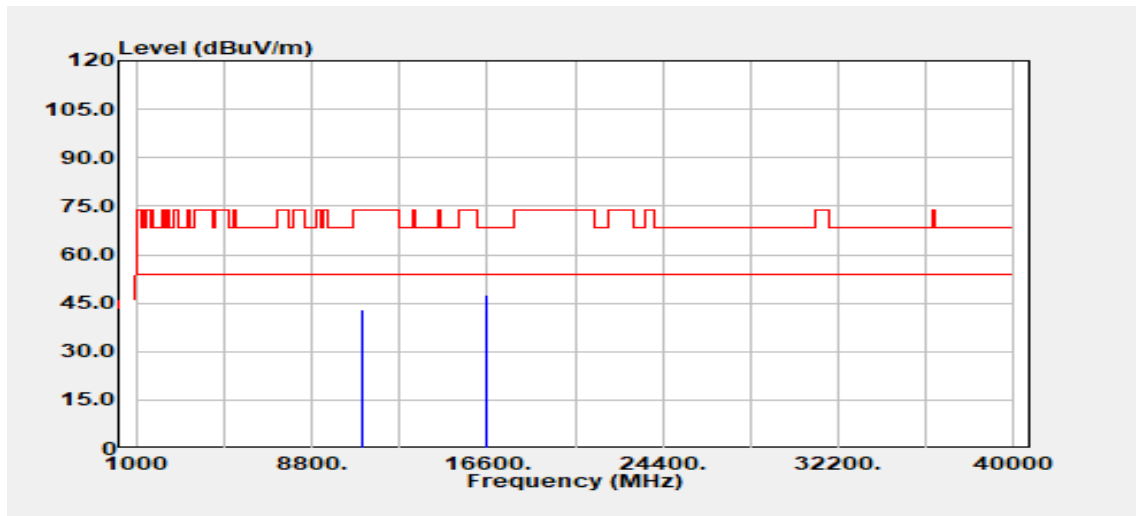


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 30.72 | 12.39 | 43.11 | 74.00 | -30.89 |
| 11020.00 | Average | 23.20 | 12.39 | 35.59 | 54.00 | -18.41 |
| 16530.00 | Peak | 28.99 | 18.66 | 47.66 | 68.20 | -20.54 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5510 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

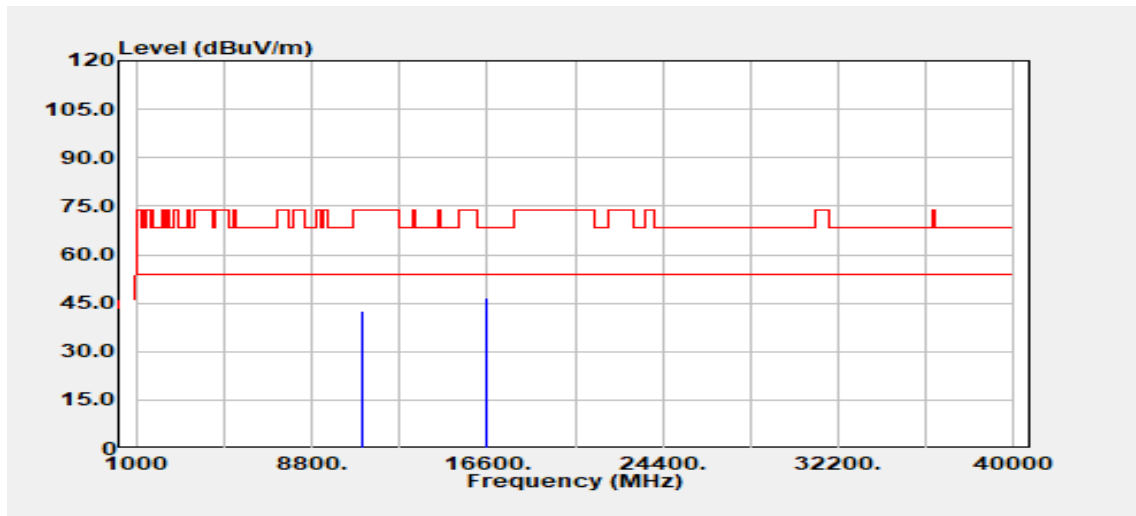


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 30.27 | 12.39 | 42.66 | 74.00 | -31.34 |
| 11020.00 | Average | 23.28 | 12.39 | 35.67 | 54.00 | -18.33 |
| 16530.00 | Peak | 28.02 | 18.66 | 46.68 | 68.20 | -21.52 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11n HT40 / 5550 MHz | Temp/Hum | 24.1(°C) / 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

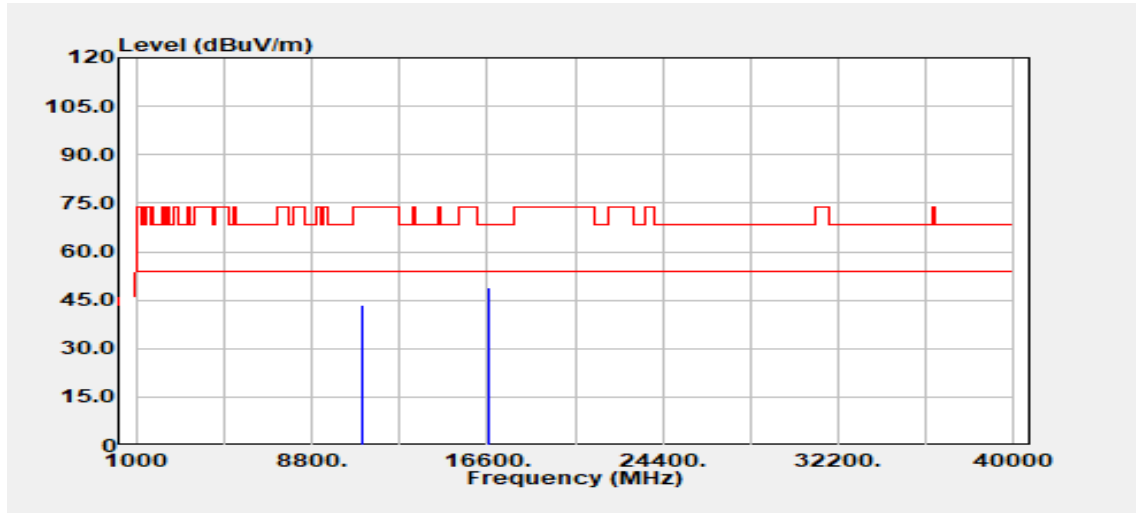


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 30.70 | 12.60 | 43.30 | 74.00 | -30.70 |
| 11100.00 | Average | 23.13 | 12.60 | 35.73 | 54.00 | -18.27 |
| 16650.00 | Peak | 29.03 | 19.99 | 49.02 | 68.20 | -19.18 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5550 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

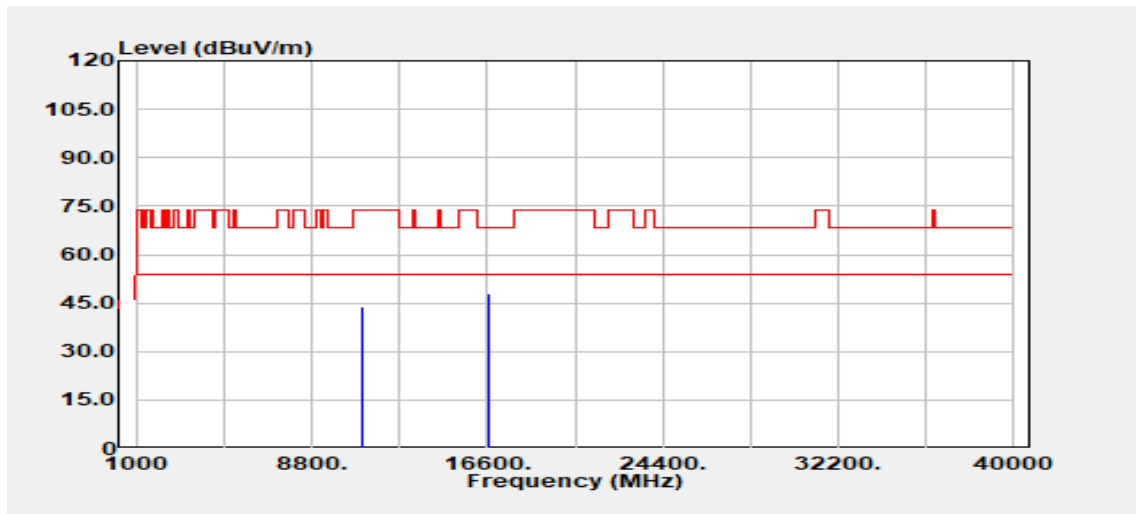


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 31.21 | 12.60 | 43.81 | 74.00 | -30.19 |
| 11100.00 | Average | 22.99 | 12.60 | 35.59 | 54.00 | -18.41 |
| 16650.00 | Peak | 28.21 | 19.99 | 48.20 | 68.20 | -20.00 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5670 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

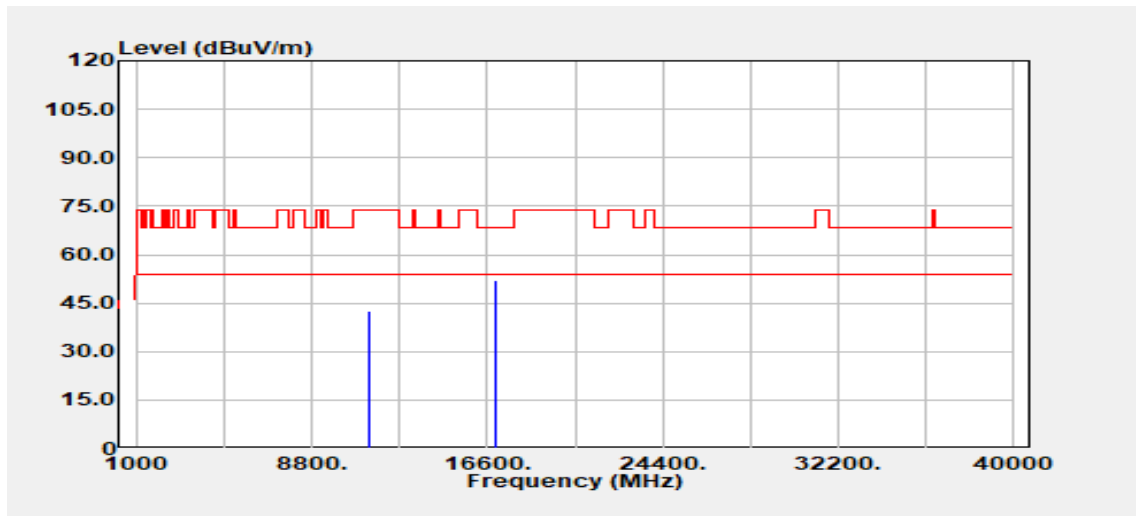


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 29.89 | 12.55 | 42.44 | 74.00 | -31.56 |
| 11340.00 | Average | 23.29 | 12.55 | 35.84 | 54.00 | -18.16 |
| 17010.00 | Peak | 26.70 | 25.32 | 52.02 | 68.20 | -16.18 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5670 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

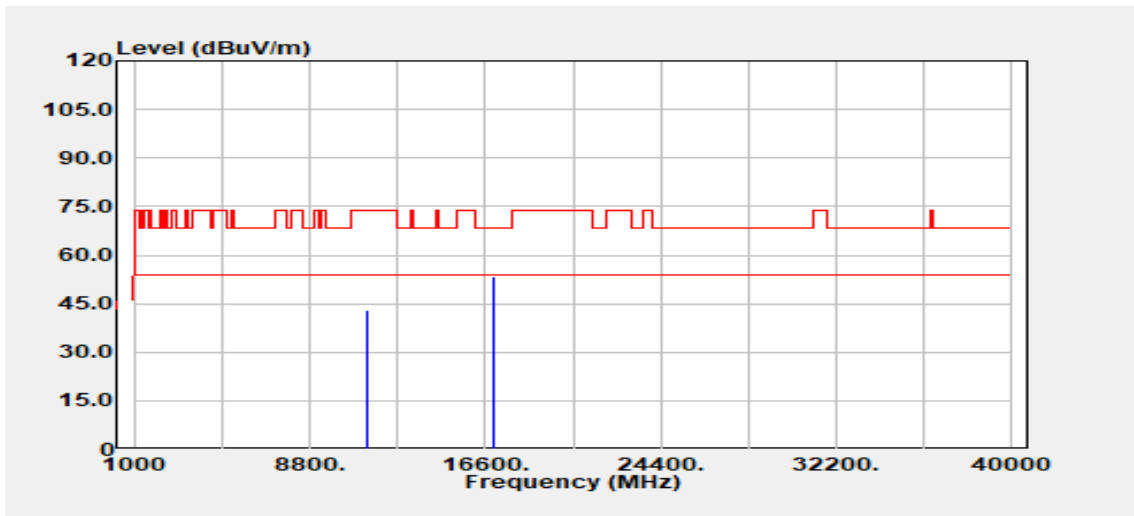


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 30.40 | 12.55 | 42.95 | 74.00 | -31.05 |
| 11340.00 | Average | 23.03 | 12.55 | 35.58 | 54.00 | -18.42 |
| 17010.00 | Peak | 28.02 | 25.32 | 53.34 | 68.20 | -14.86 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

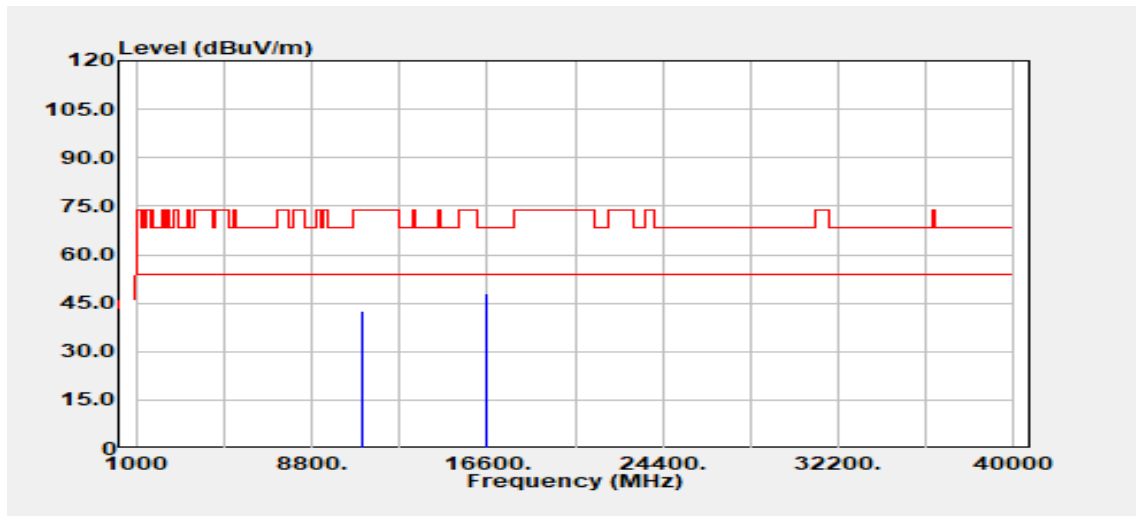


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 30.25 | 12.40 | 42.65 | 74.00 | -31.35 |
| 11060.00 | Average | 23.59 | 12.40 | 35.98 | 54.00 | -18.02 |
| 16590.00 | Peak | 28.57 | 19.22 | 47.79 | 68.20 | -20.41 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

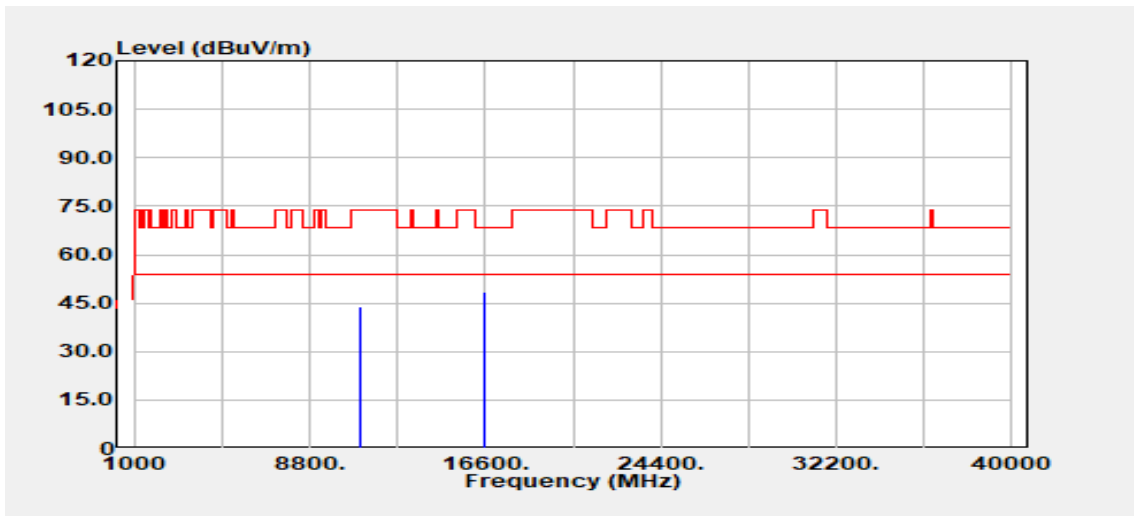


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 31.53 | 12.40 | 43.93 | 74.00 | -30.07 |
| 11060.00 | Average | 23.92 | 12.40 | 36.32 | 54.00 | -17.68 |
| 16590.00 | Peak | 29.02 | 19.22 | 48.24 | 68.20 | -19.96 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5610 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

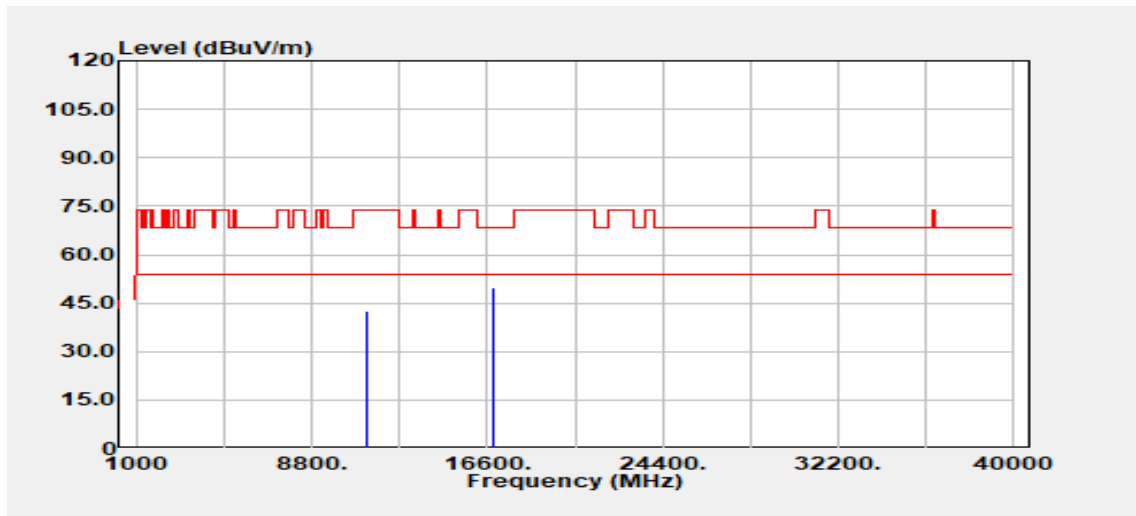


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 30.09 | 12.60 | 42.69 | 74.00 | -31.31 |
| 11220.00 | Average | 24.03 | 12.60 | 36.64 | 54.00 | -17.36 |
| 16830.00 | Peak | 27.66 | 22.01 | 49.67 | 68.20 | -18.53 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5610 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

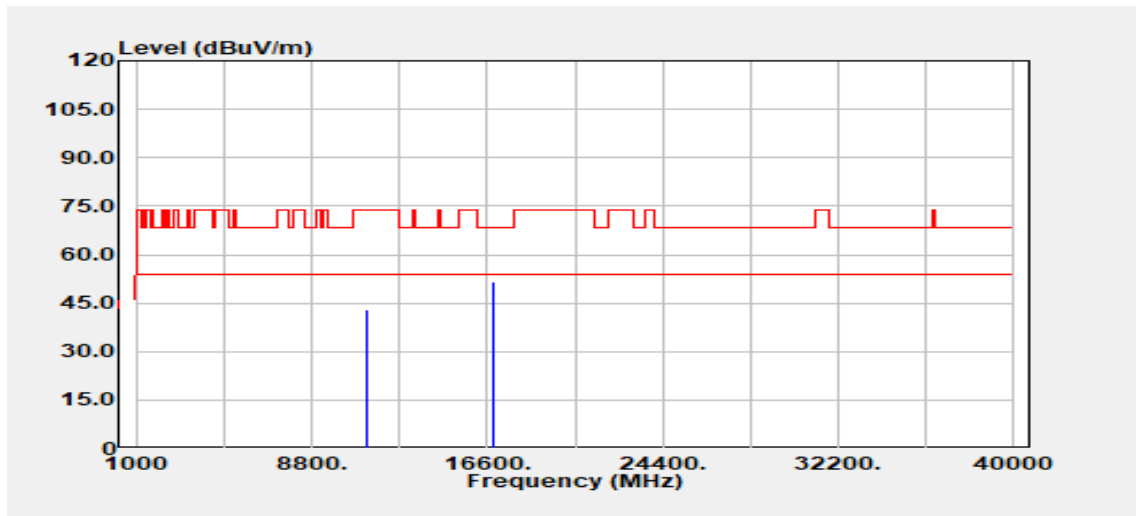


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 30.49 | 12.60 | 43.10 | 74.00 | -30.90 |
| 11220.00 | Average | 24.15 | 12.60 | 36.76 | 54.00 | -17.24 |
| 16830.00 | Peak | 29.76 | 22.01 | 51.76 | 68.20 | -16.44 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 570 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

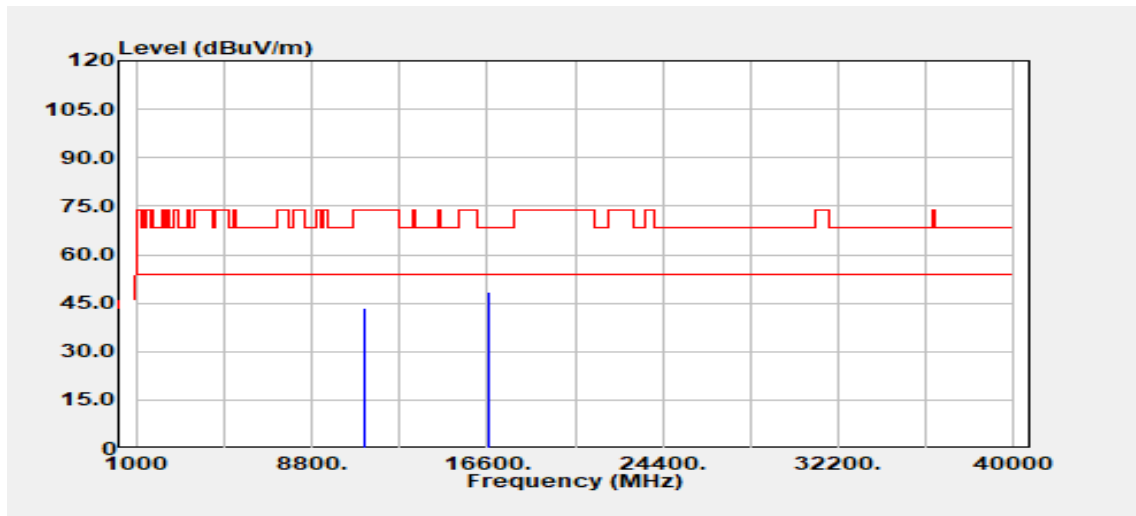


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 30.88 | 12.49 | 43.37 | 74.00 | -30.63 |
| 11140.00 | Average | 23.86 | 12.49 | 36.34 | 54.00 | -17.66 |
| 16710.00 | Peak | 27.81 | 20.67 | 48.48 | 68.20 | -19.72 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|---------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT160 / 5770 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

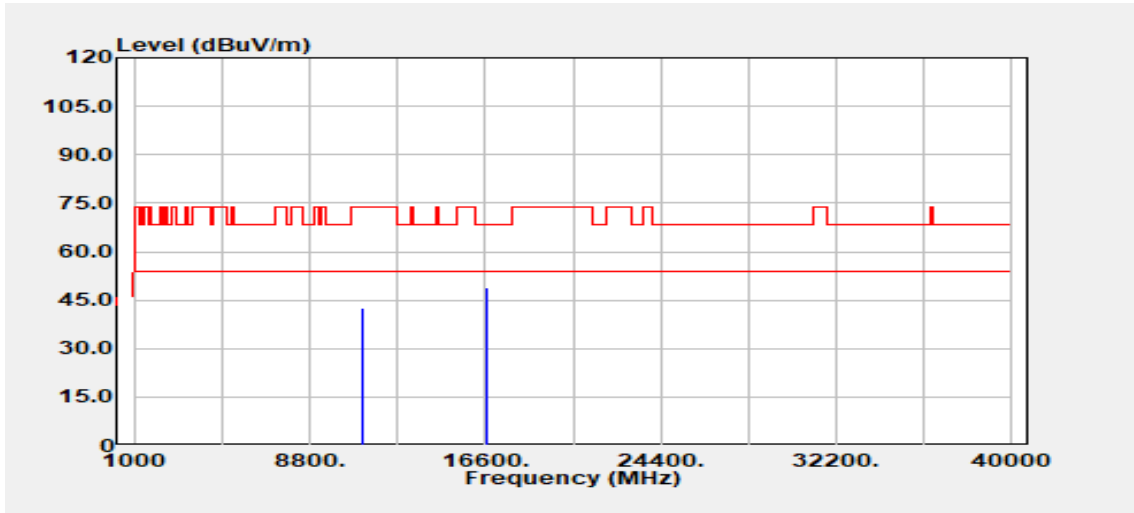


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11140.00 | Peak | 30.13 | 12.49 | 42.62 | 74.00 | -31.38 |
| 11140.00 | Average | 24.13 | 12.49 | 36.62 | 54.00 | -17.38 |
| 16710.00 | Peak | 28.12 | 20.67 | 48.79 | 68.20 | -19.41 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

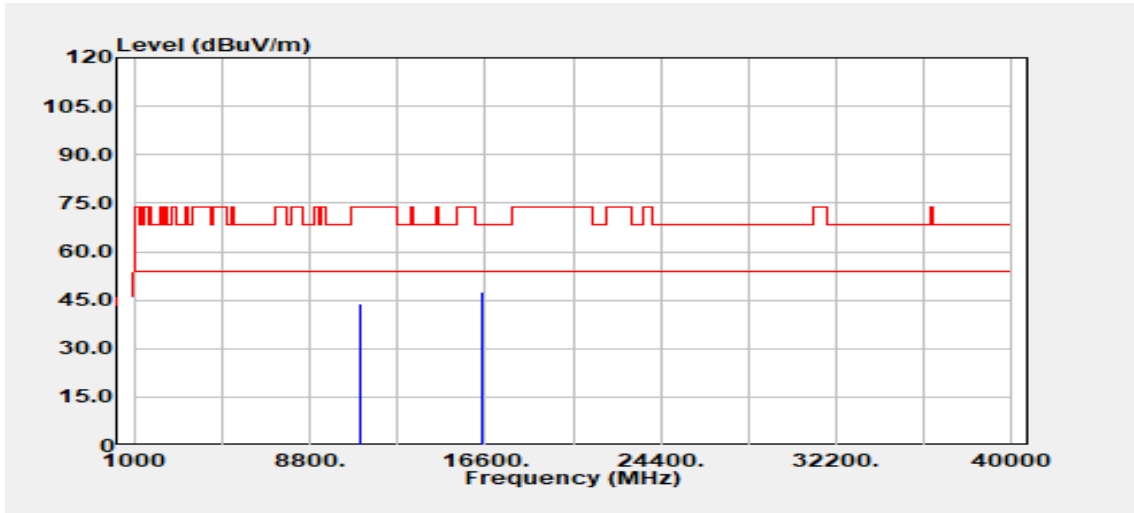


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 31.55 | 12.42 | 43.97 | 74.00 | -30.03 |
| 11000.00 | Average | 24.07 | 12.42 | 36.49 | 54.00 | -17.51 |
| 16500.00 | Peak | 28.68 | 18.70 | 47.38 | 68.20 | -20.82 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

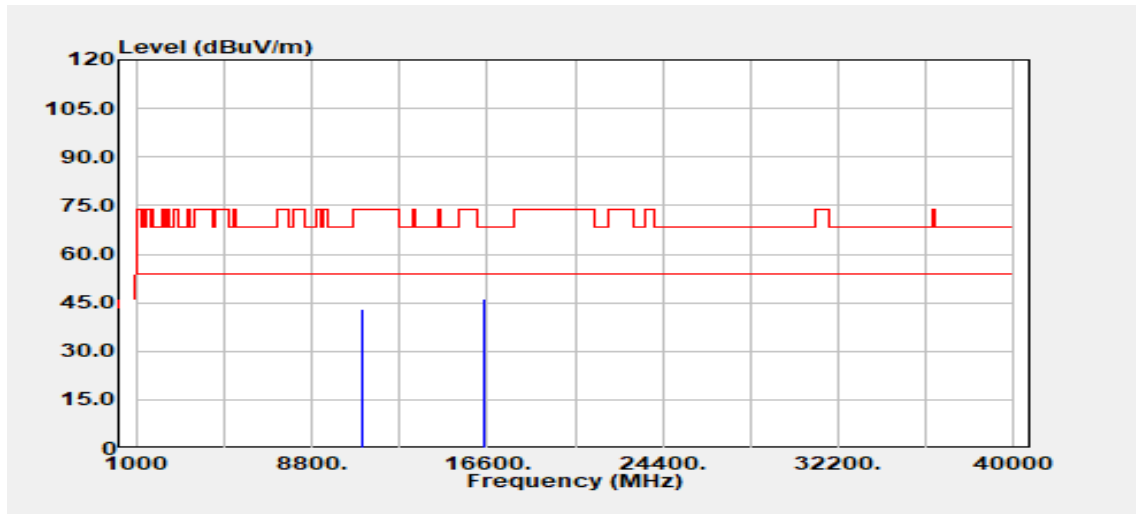


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11000.00 | Peak | 30.67 | 12.42 | 43.09 | 74.00 | -30.91 |
| 11000.00 | Average | 23.88 | 12.42 | 36.30 | 54.00 | -17.70 |
| 16500.00 | Peak | 27.64 | 18.70 | 46.34 | 68.20 | -21.86 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5580 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

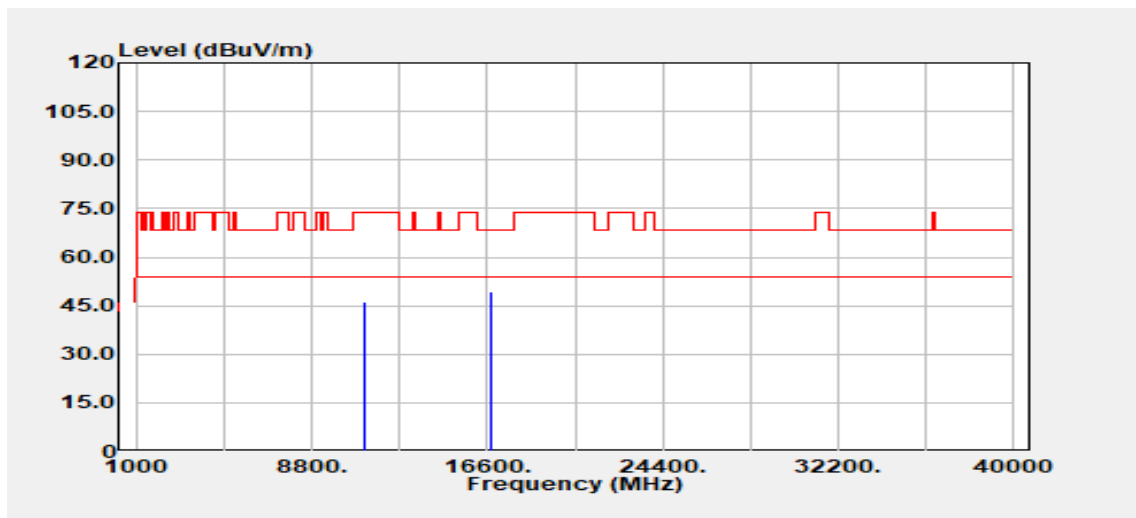


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 33.82 | 12.48 | 46.29 | 74.00 | -27.71 |
| 11160.00 | Average | 25.18 | 12.48 | 37.65 | 54.00 | -16.35 |
| 16740.00 | Peak | 28.69 | 20.88 | 49.57 | 68.20 | -18.63 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5580 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

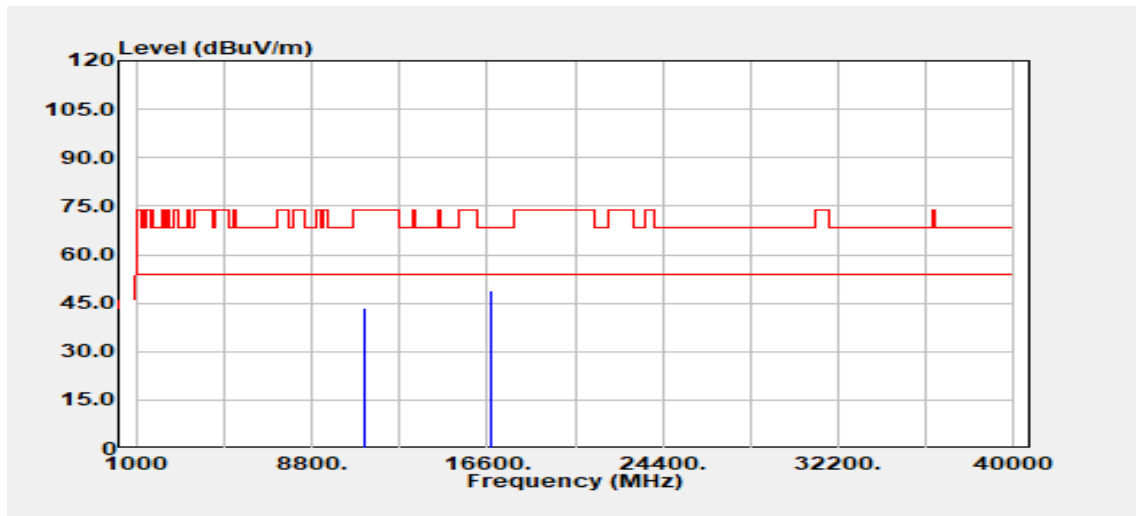


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11160.00 | Peak | 30.94 | 12.48 | 43.42 | 74.00 | -30.58 |
| 11160.00 | Average | 24.41 | 12.48 | 36.88 | 54.00 | -17.12 |
| 16740.00 | Peak | 28.11 | 20.88 | 48.98 | 68.20 | -19.22 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

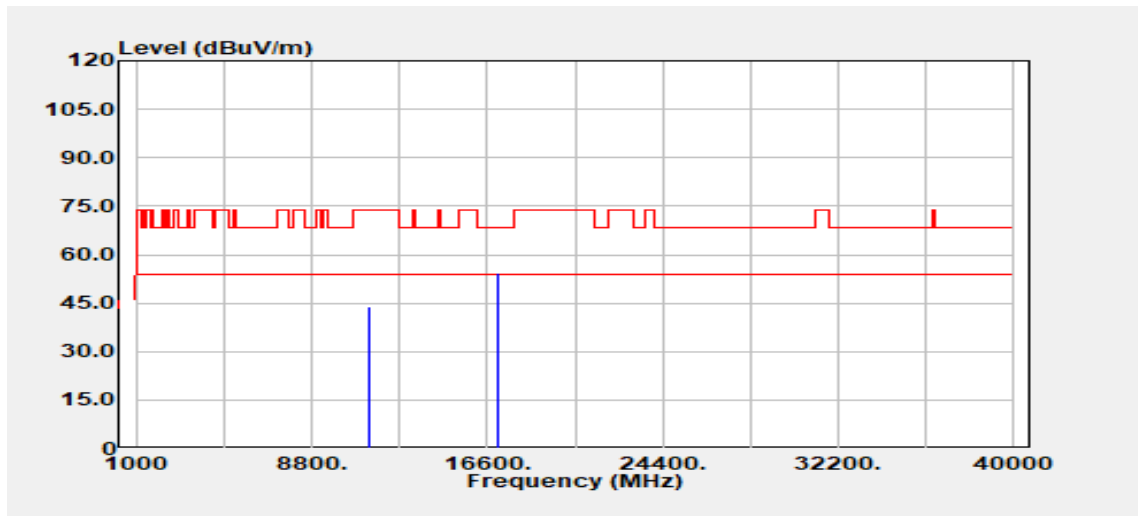


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 31.41 | 12.39 | 43.80 | 74.00 | -30.20 |
| 11400.00 | Average | 24.07 | 12.39 | 36.46 | 54.00 | -17.54 |
| 17100.00 | Peak | 28.65 | 25.62 | 54.27 | 68.20 | -13.93 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

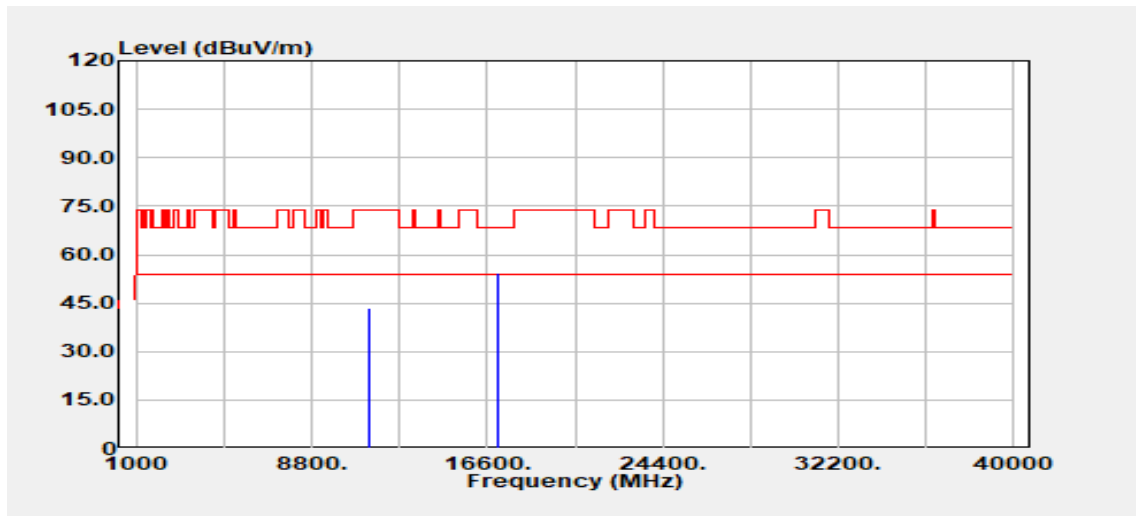


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 31.26 | 12.39 | 43.65 | 74.00 | -30.35 |
| 11400.00 | Average | 23.74 | 12.39 | 36.13 | 54.00 | -17.87 |
| 17100.00 | Peak | 28.92 | 25.62 | 54.54 | 68.20 | -13.66 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz_ | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

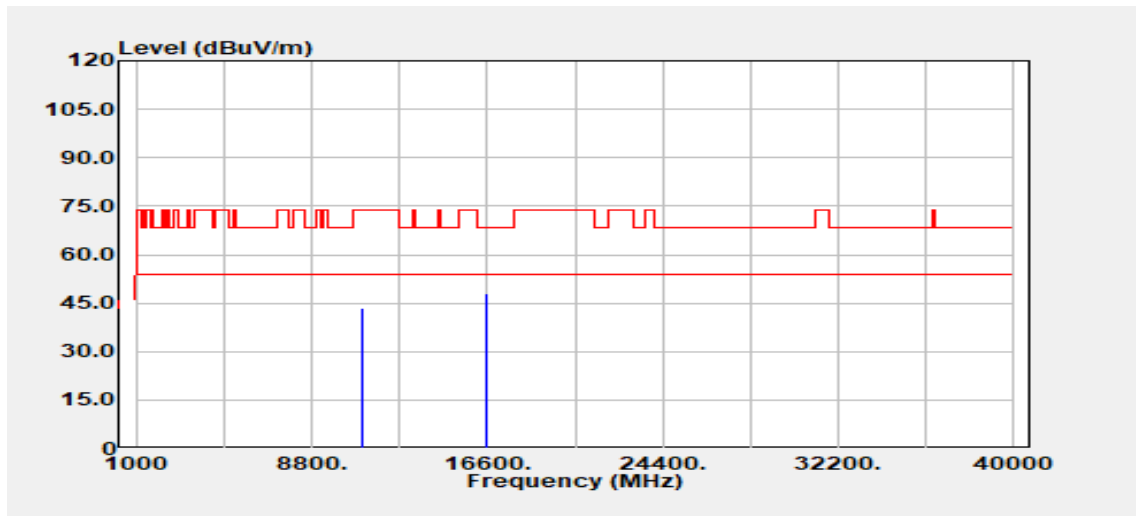


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 31.28 | 12.39 | 43.67 | 74.00 | -30.33 |
| 11020.00 | Average | 23.73 | 12.39 | 36.12 | 54.00 | -17.88 |
| 16530.00 | Peak | 29.17 | 18.66 | 47.83 | 68.20 | -20.37 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz_ | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

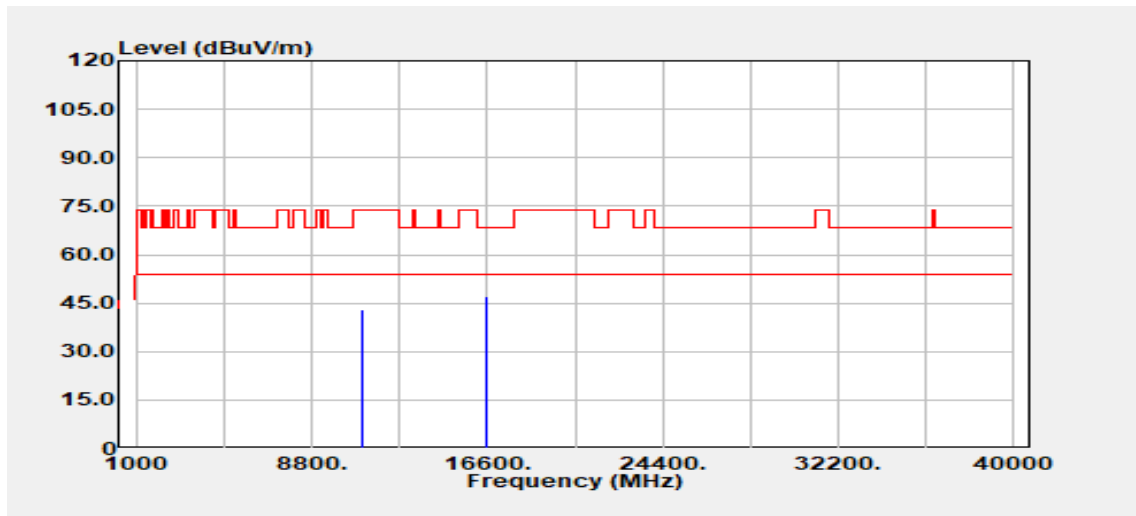


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11020.00 | Peak | 30.65 | 12.39 | 43.04 | 74.00 | -30.96 |
| 11020.00 | Average | 23.74 | 12.39 | 36.13 | 54.00 | -17.87 |
| 16530.00 | Peak | 28.60 | 18.66 | 47.26 | 68.20 | -20.94 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5550 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

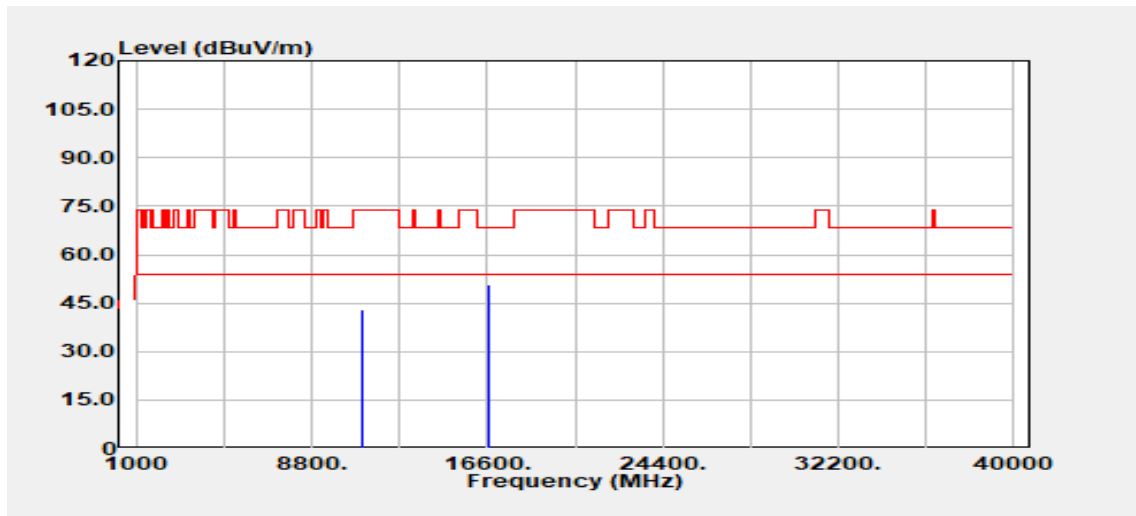


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 30.28 | 12.60 | 42.88 | 74.00 | -31.12 |
| 11100.00 | Average | 23.74 | 12.60 | 36.34 | 54.00 | -17.66 |
| 16650.00 | Peak | 30.71 | 19.99 | 50.69 | 68.20 | -17.51 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5550 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

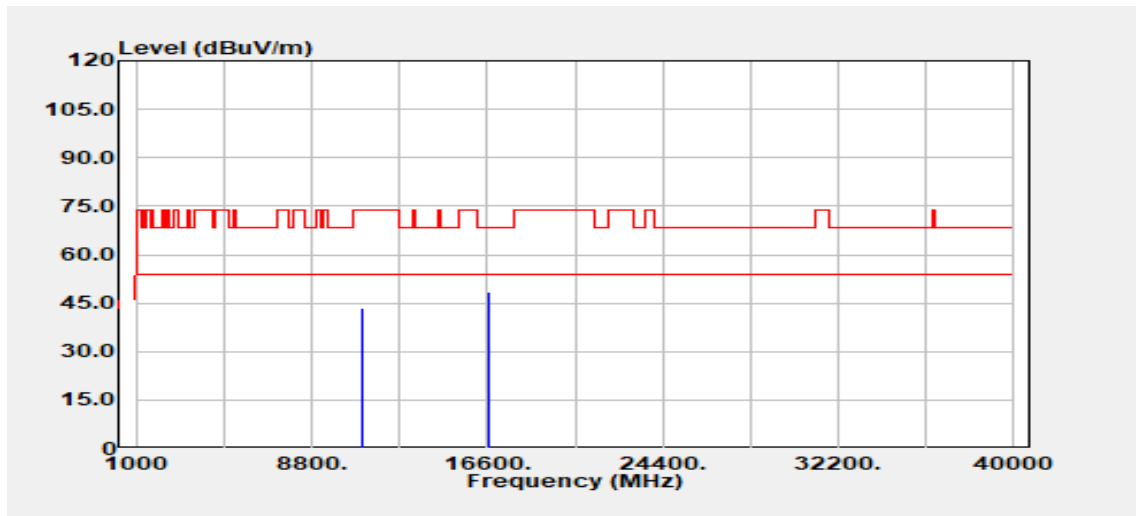


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11100.00 | Peak | 30.91 | 12.60 | 43.51 | 74.00 | -30.49 |
| 11100.00 | Average | 23.75 | 12.60 | 36.35 | 54.00 | -17.65 |
| 16650.00 | Peak | 28.64 | 19.99 | 48.63 | 68.20 | -19.57 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz_ | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

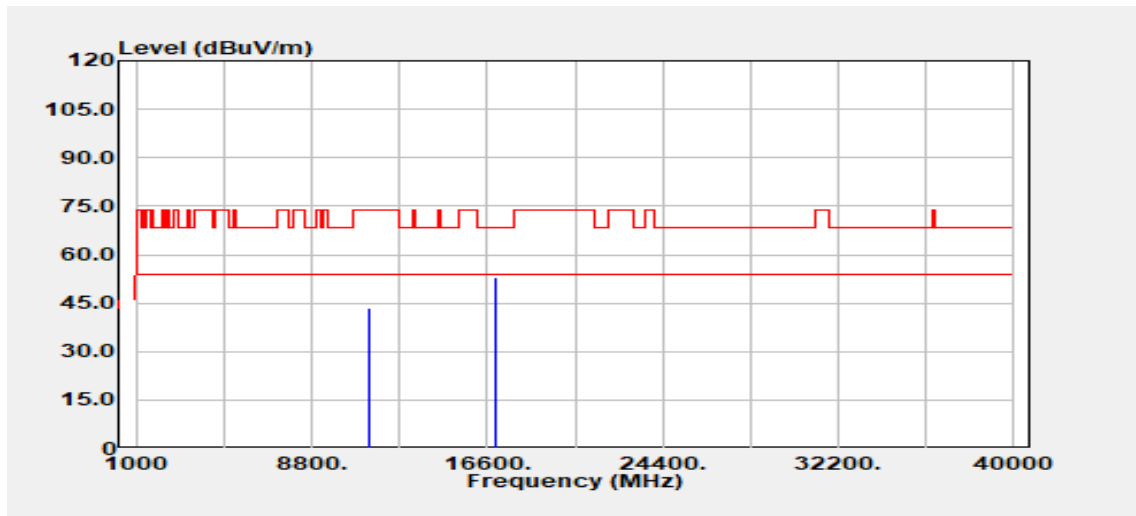


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11340.00 | Peak | 30.84 | 12.55 | 43.39 | 74.00 | -30.61 |
| 11340.00 | Average | 23.61 | 12.55 | 36.16 | 54.00 | -17.84 |
| 17010.00 | Peak | 27.58 | 25.32 | 52.90 | 68.20 | -15.30 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

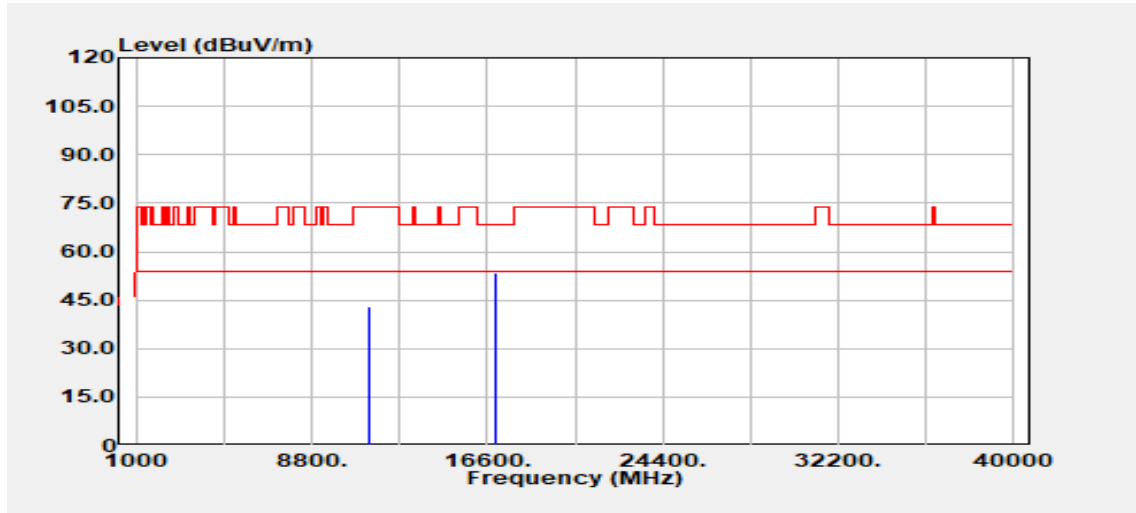


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11340.00 | Peak | 30.58 | 12.55 | 43.14 | 74.00 | -30.86 |
| 11340.00 | Average | 23.59 | 12.55 | 36.15 | 54.00 | -17.85 |
| 17010.00 | Peak | 28.04 | 25.32 | 53.36 | 68.20 | -14.84 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

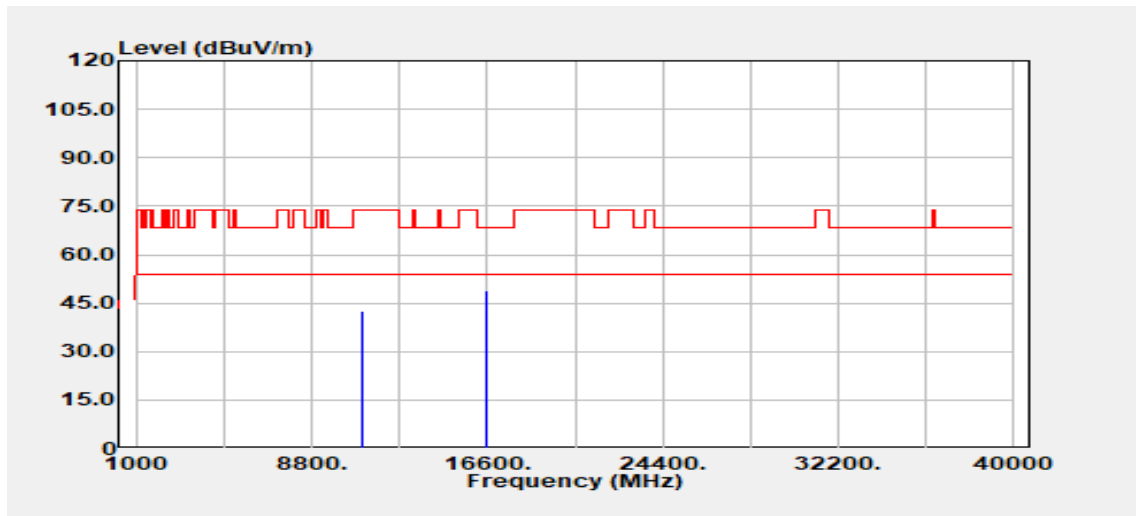


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 30.24 | 12.40 | 42.64 | 74.00 | -31.36 |
| 11060.00 | Average | 23.80 | 12.40 | 36.19 | 54.00 | -17.81 |
| 16590.00 | Peak | 29.53 | 19.22 | 48.76 | 68.20 | -19.44 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

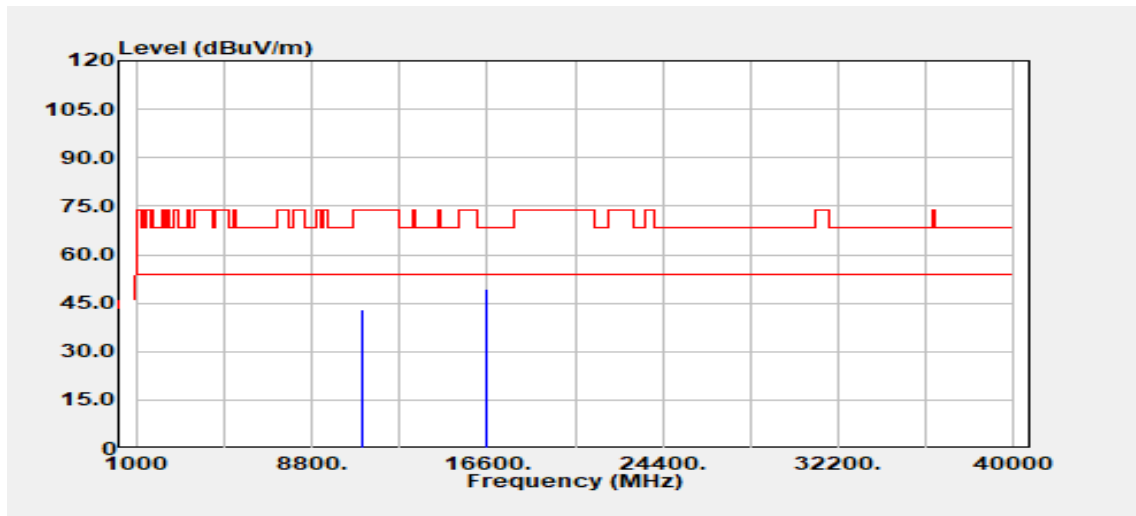


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11060.00 | Peak | 30.79 | 12.40 | 43.19 | 74.00 | -30.81 |
| 11060.00 | Average | 23.78 | 12.40 | 36.17 | 54.00 | -17.83 |
| 16590.00 | Peak | 30.17 | 19.22 | 49.39 | 68.20 | -18.81 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5610 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

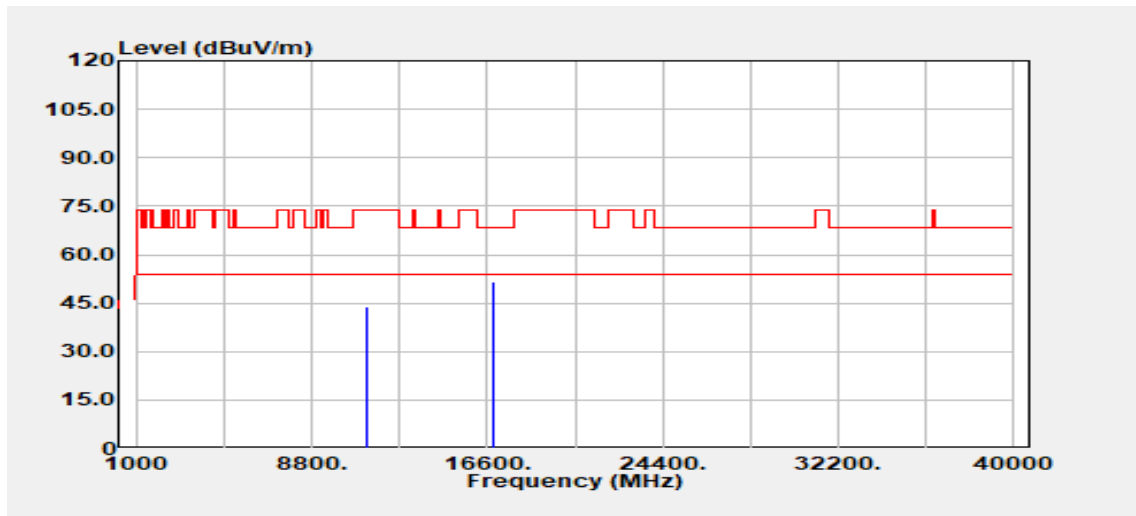


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 31.38 | 12.60 | 43.99 | 74.00 | -30.01 |
| 11220.00 | Average | 23.75 | 12.60 | 36.35 | 54.00 | -17.65 |
| 16830.00 | Peak | 29.42 | 22.01 | 51.42 | 68.20 | -16.78 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5610 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

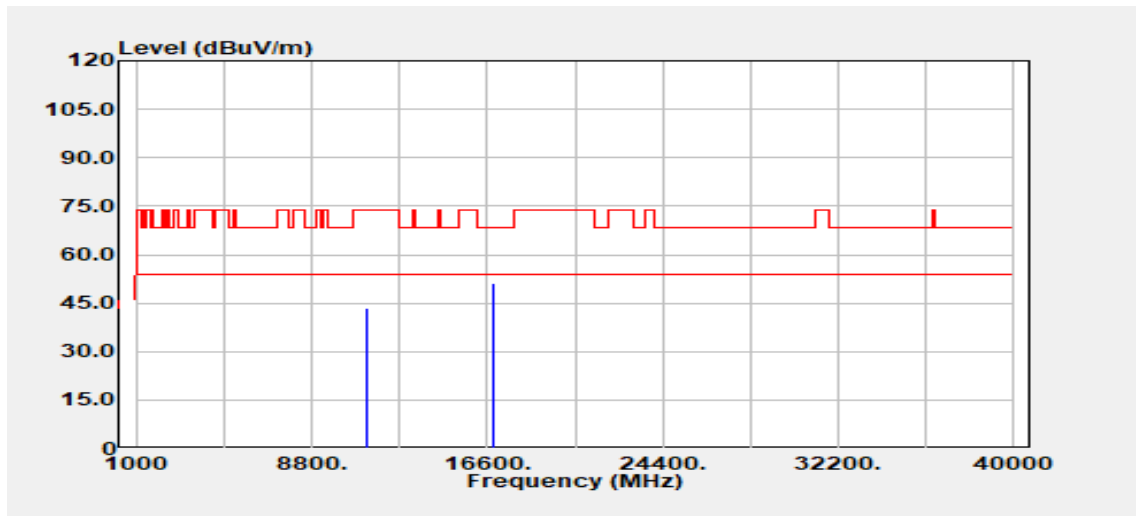


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11220.00 | Peak | 30.98 | 12.60 | 43.58 | 74.00 | -30.42 |
| 11220.00 | Average | 23.85 | 12.60 | 36.45 | 54.00 | -17.55 |
| 16830.00 | Peak | 28.96 | 22.01 | 50.97 | 68.20 | -17.23 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5570 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

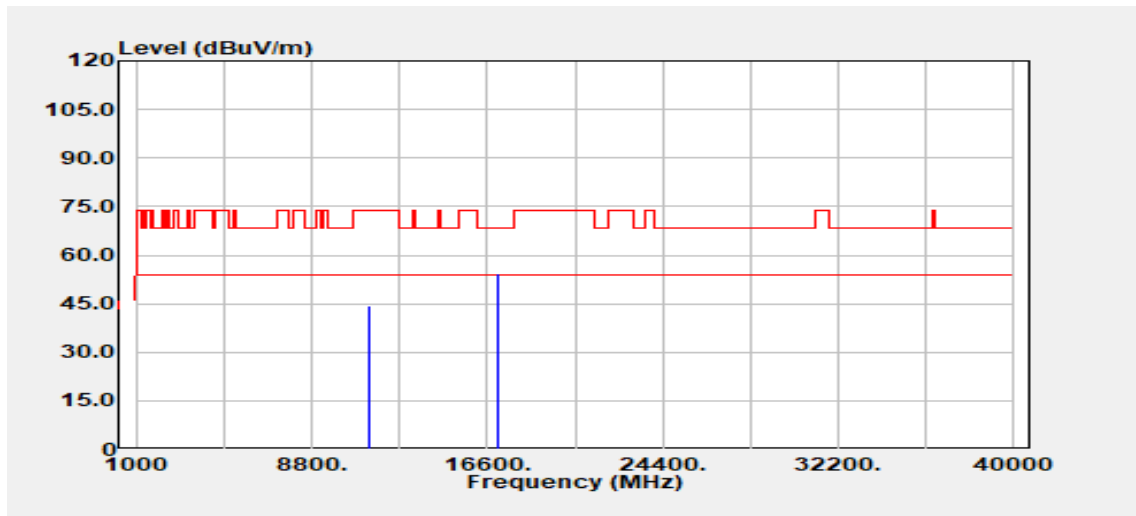


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 32.19 | 12.39 | 44.58 | 74.00 | -29.42 |
| 11400.00 | Average | 23.02 | 12.39 | 35.41 | 54.00 | -18.59 |
| 17100.00 | Peak | 28.83 | 25.62 | 54.45 | 68.20 | -13.75 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE160 / 5570 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 18, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

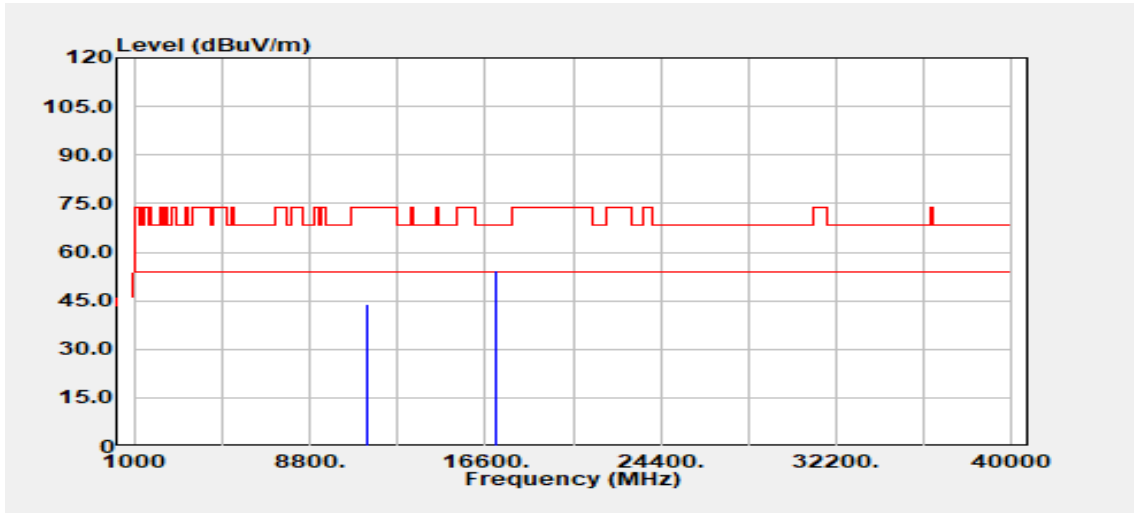


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11400.00 | Peak | 31.56 | 12.39 | 43.95 | 74.00 | -30.05 |
| 11400.00 | Average | 22.92 | 12.39 | 35.31 | 54.00 | -18.69 |
| 17100.00 | Peak | 28.71 | 25.62 | 54.33 | 68.20 | -13.87 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5745 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

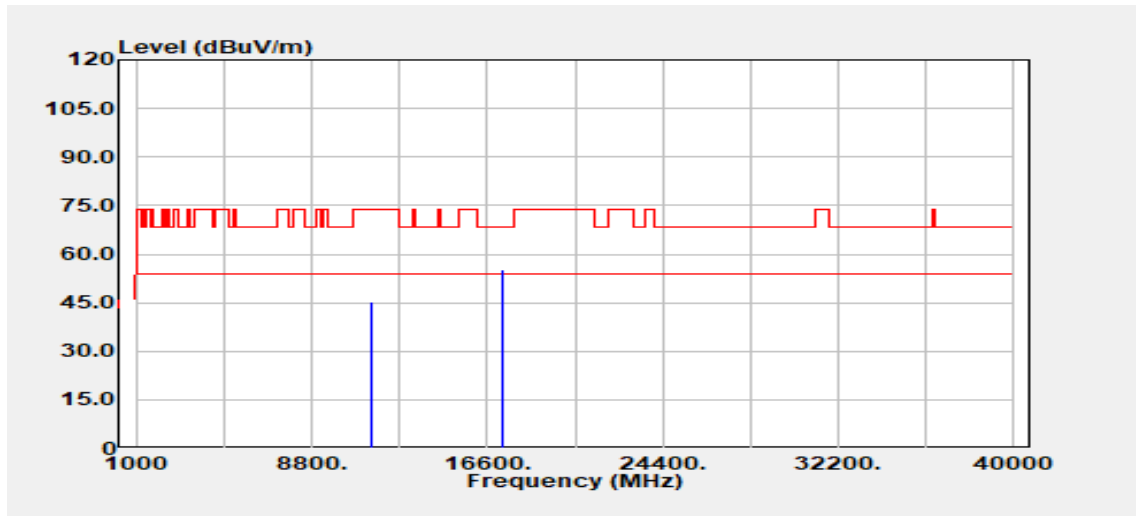


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 32.91 | 12.39 | 45.30 | 74.00 | -28.70 |
| 11490.00 | Average | 25.32 | 12.39 | 37.71 | 54.00 | -16.29 |
| 17235.00 | Peak | 29.23 | 26.10 | 55.33 | 68.20 | -12.87 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5745 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

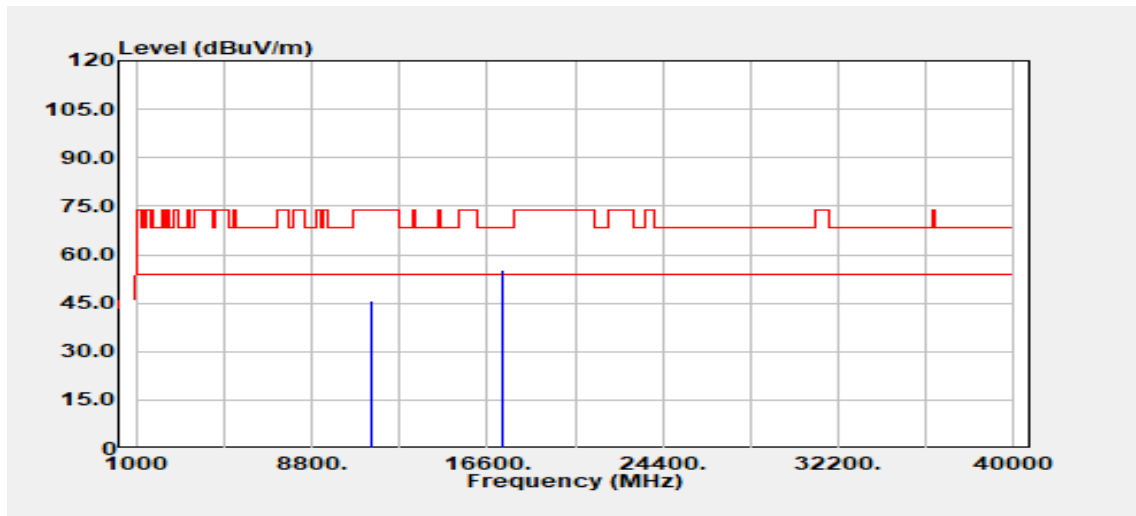


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 33.31 | 12.39 | 45.70 | 74.00 | -28.30 |
| 11490.00 | Average | 24.12 | 12.39 | 36.51 | 54.00 | -17.49 |
| 17235.00 | Peak | 28.93 | 26.10 | 55.03 | 68.20 | -13.17 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5785 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

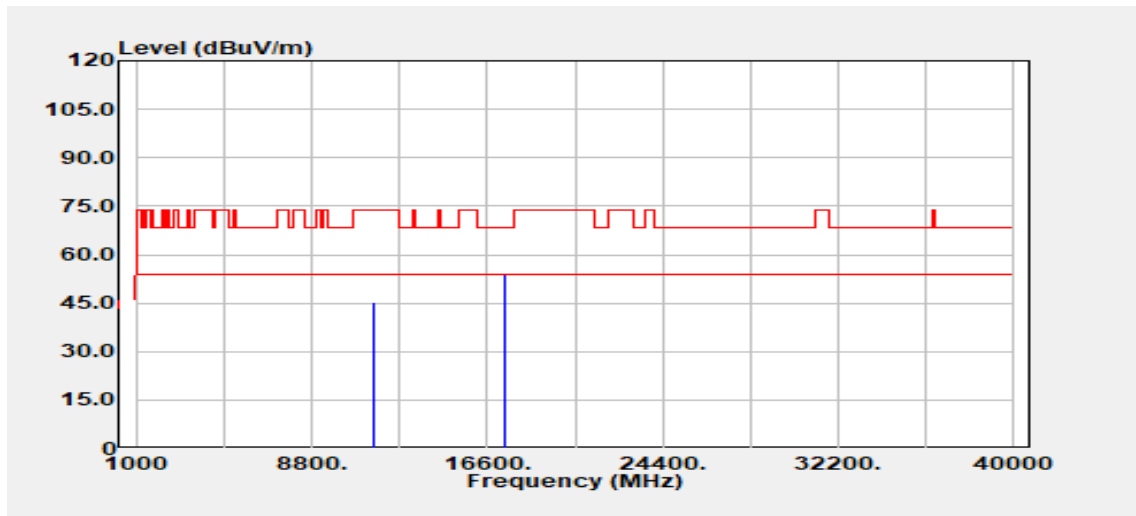


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 32.82 | 12.49 | 45.31 | 74.00 | -28.69 |
| 11570.00 | Average | 25.11 | 12.49 | 37.60 | 54.00 | -16.40 |
| 17355.00 | Peak | 28.44 | 25.47 | 53.91 | 68.20 | -14.29 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5785 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

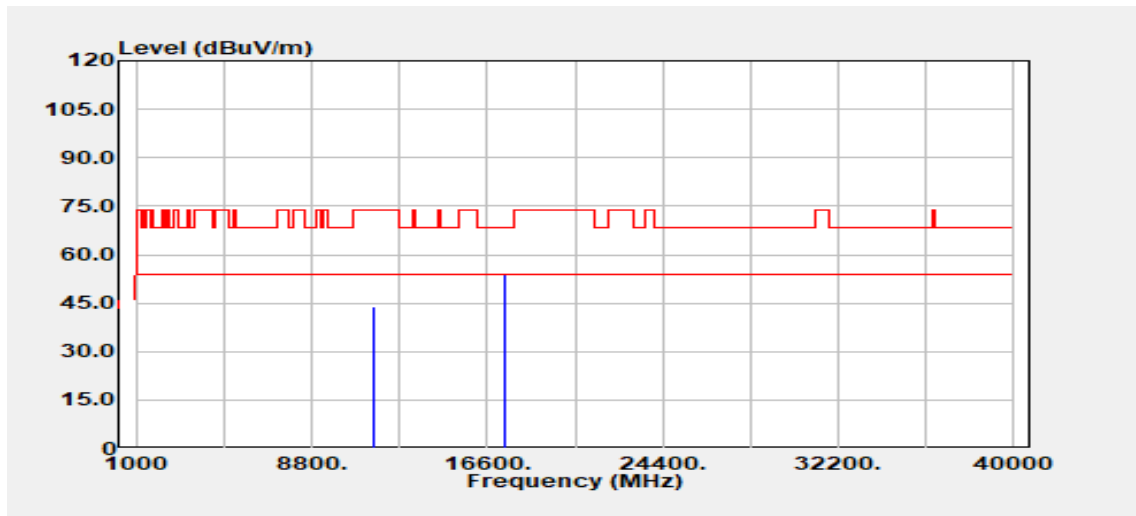


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 31.39 | 12.49 | 43.88 | 74.00 | -30.12 |
| 11570.00 | Average | 23.67 | 12.49 | 36.16 | 54.00 | -17.84 |
| 17355.00 | Peak | 28.35 | 25.47 | 53.82 | 68.20 | -14.38 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5825 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

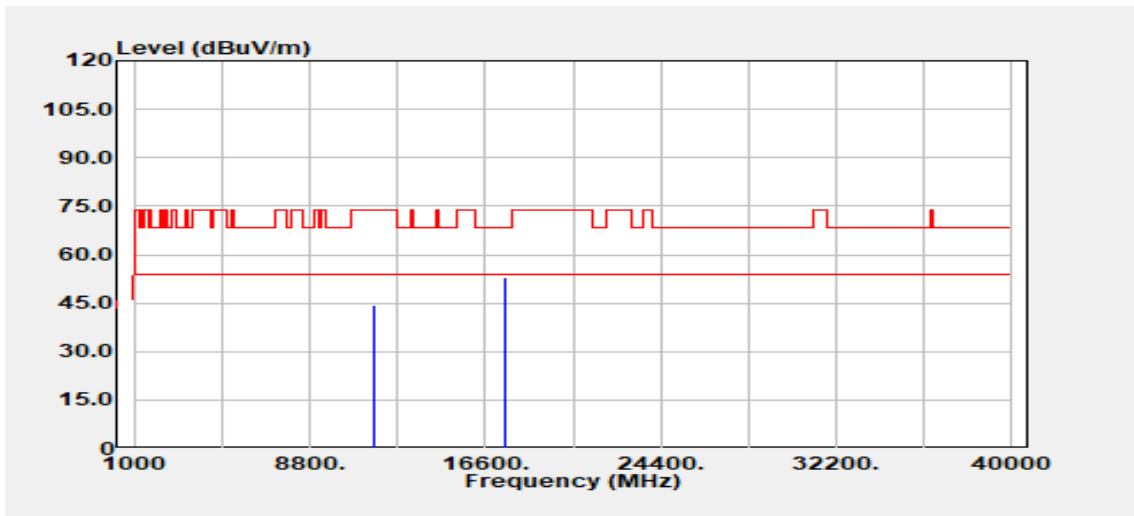


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 31.80 | 12.43 | 44.23 | 74.00 | -29.77 |
| 11650.00 | Average | 25.51 | 12.43 | 37.94 | 54.00 | -16.07 |
| 17475.00 | Peak | 27.71 | 25.06 | 52.77 | 68.20 | -15.43 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT20 / 5825 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Tony Chao |
| Detector | Peak & Average | | |

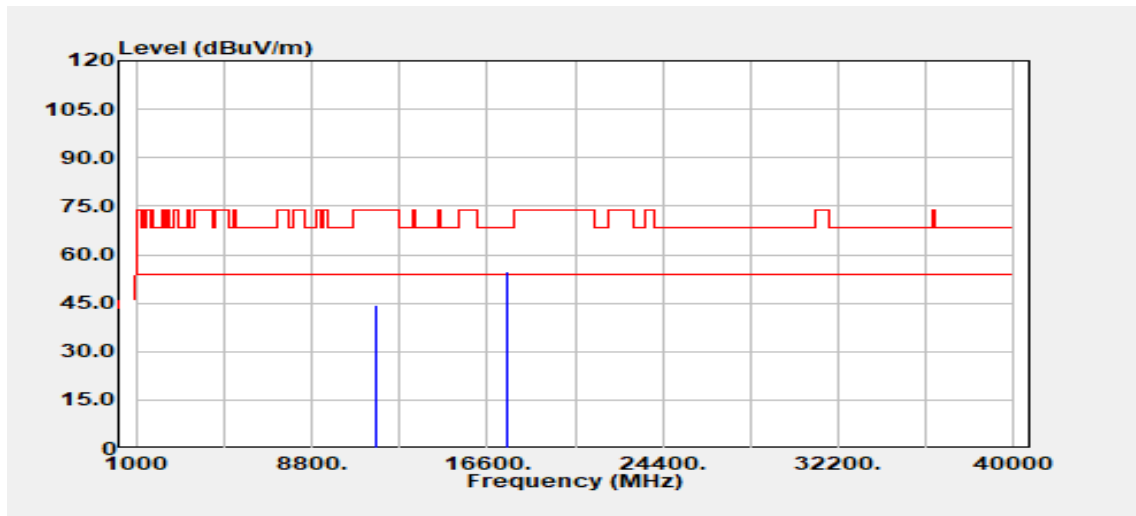


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 31.90 | 12.43 | 44.33 | 74.00 | -29.67 |
| 11650.00 | Average | 24.41 | 12.43 | 36.84 | 54.00 | -17.17 |
| 17475.00 | Peak | 29.84 | 25.06 | 54.90 | 68.20 | -13.30 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5755 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

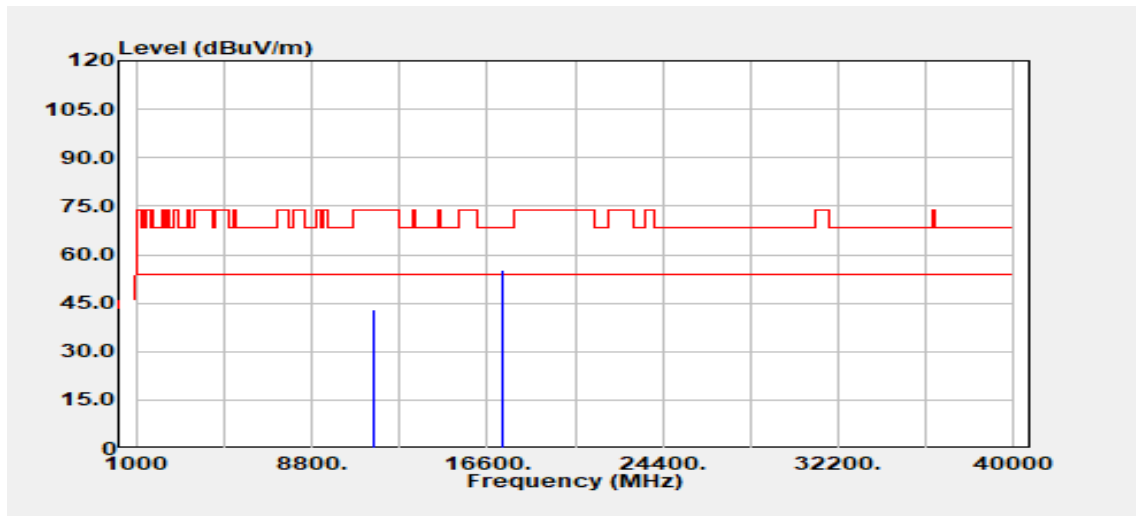


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 30.61 | 12.43 | 43.04 | 74.00 | -30.96 |
| 11510.00 | Average | 23.46 | 12.43 | 35.89 | 54.00 | -18.11 |
| 17265.00 | Peak | 28.91 | 26.14 | 55.05 | 68.20 | -13.15 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5755 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

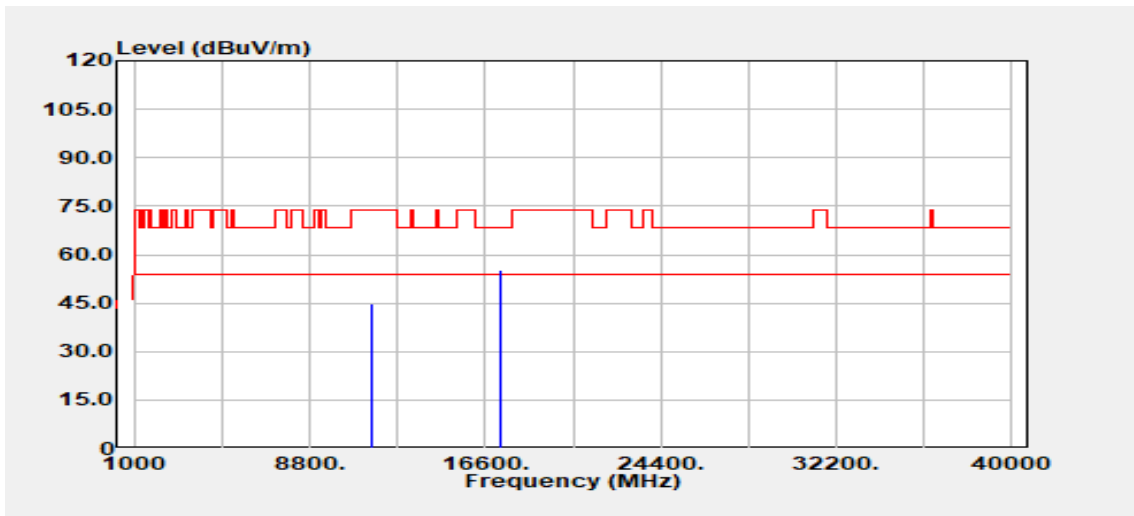


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 32.42 | 12.43 | 44.85 | 74.00 | -29.15 |
| 11510.00 | Average | 23.57 | 12.43 | 35.99 | 54.00 | -18.01 |
| 17265.00 | Peak | 29.30 | 26.14 | 55.44 | 68.20 | -12.76 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5795 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

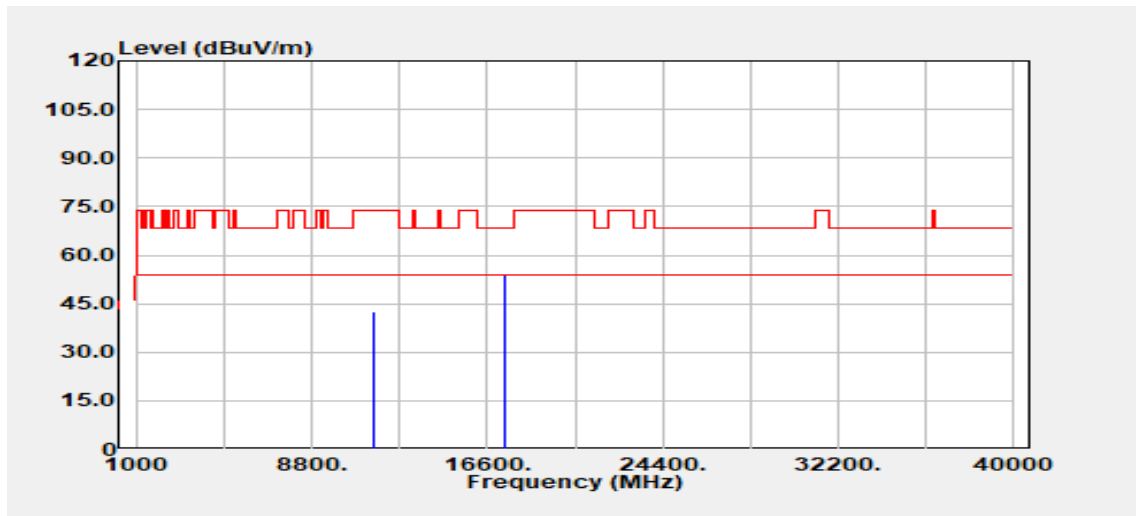


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 30.09 | 12.48 | 42.56 | 74.00 | -31.44 |
| 11590.00 | Average | 23.47 | 12.48 | 35.95 | 54.00 | -18.05 |
| 17385.00 | Peak | 28.81 | 25.27 | 54.08 | 68.20 | -14.12 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11n HT40 / 5795 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

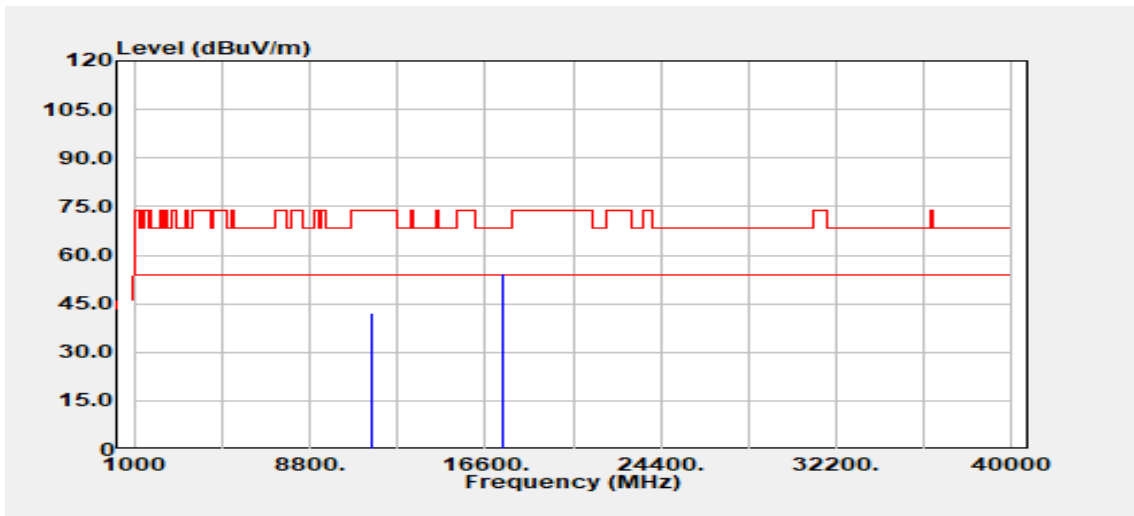


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 29.78 | 12.48 | 42.26 | 74.00 | -31.74 |
| 11590.00 | Average | 23.39 | 12.48 | 35.87 | 54.00 | -18.13 |
| 17385.00 | Peak | 28.90 | 25.27 | 54.17 | 68.20 | -14.03 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

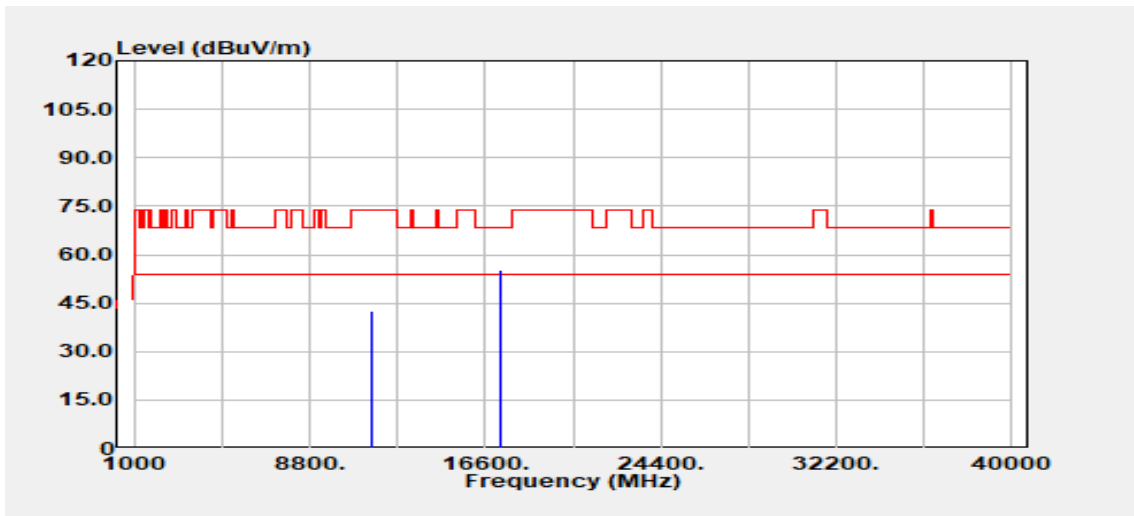


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 30.07 | 12.51 | 42.58 | 74.00 | -31.42 |
| 11550.00 | Average | 23.59 | 12.51 | 36.09 | 54.00 | -17.91 |
| 17325.00 | Peak | 29.47 | 25.79 | 55.26 | 68.20 | -12.94 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum | 24.1(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 16, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

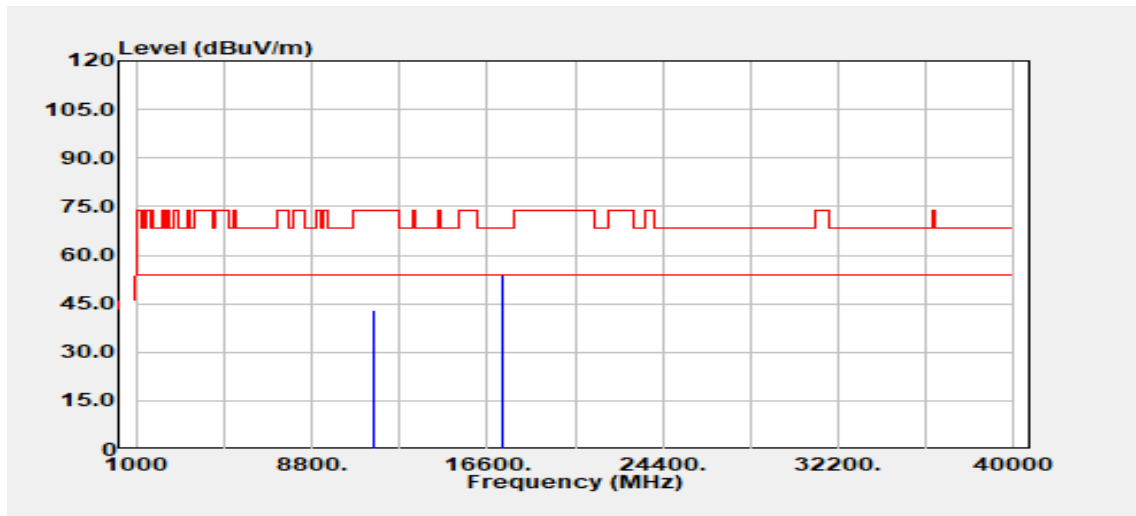


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 30.44 | 12.51 | 42.95 | 74.00 | -31.05 |
| 11550.00 | Average | 23.72 | 12.51 | 36.23 | 54.00 | -17.77 |
| 17325.00 | Peak | 27.99 | 25.79 | 53.78 | 68.20 | -14.42 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

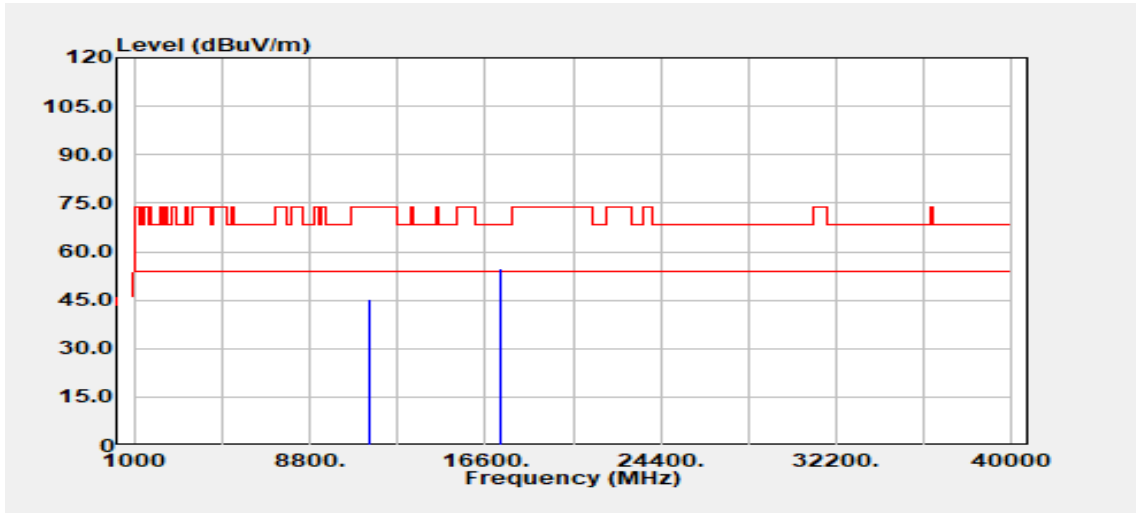


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 32.74 | 12.39 | 45.13 | 74.00 | -28.87 |
| 11490.00 | Average | 27.22 | 12.39 | 39.61 | 54.00 | -14.39 |
| 17235.00 | Peak | 28.60 | 26.10 | 54.70 | 68.20 | -13.50 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

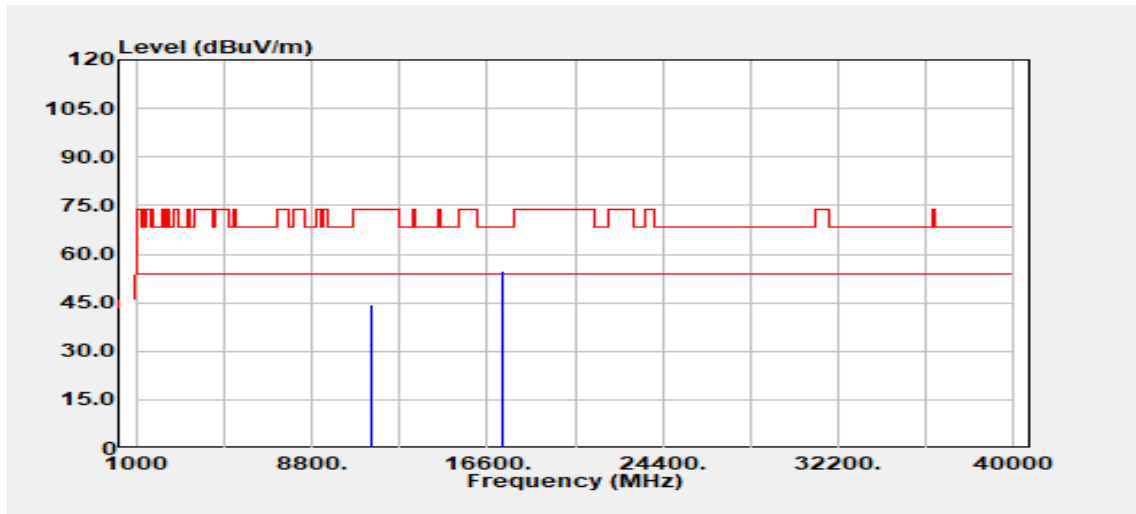


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11490.00 | Peak | 32.18 | 12.39 | 44.57 | 74.00 | -29.43 |
| 11490.00 | Average | 25.58 | 12.39 | 37.97 | 54.00 | -16.03 |
| 17235.00 | Peak | 28.61 | 26.10 | 54.72 | 68.20 | -13.48 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5785 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

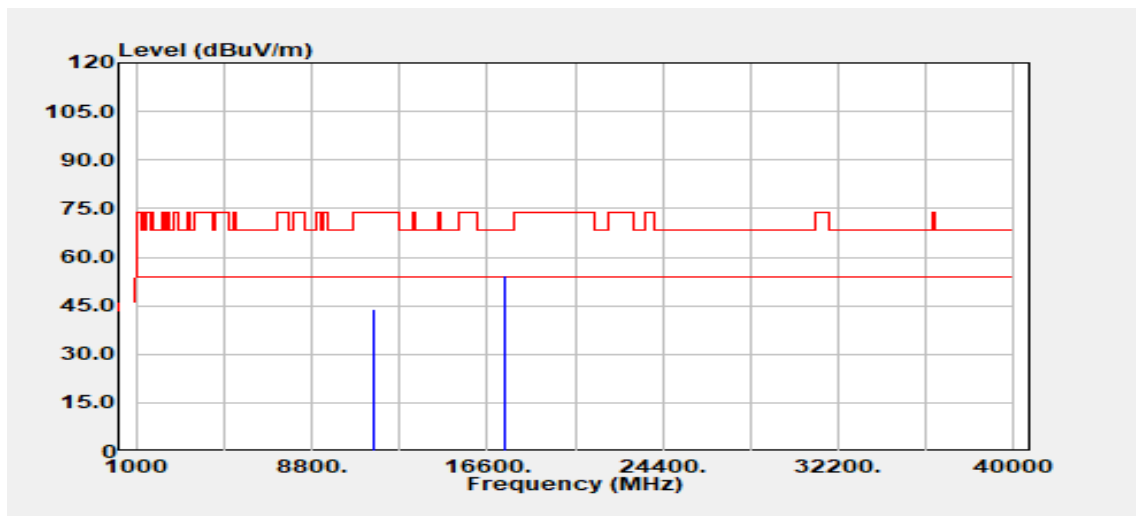


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 31.41 | 12.49 | 43.90 | 74.00 | -30.10 |
| 11570.00 | Average | 25.93 | 12.49 | 38.42 | 54.00 | -15.58 |
| 17355.00 | Peak | 28.85 | 25.47 | 54.31 | 68.20 | -13.89 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5785 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

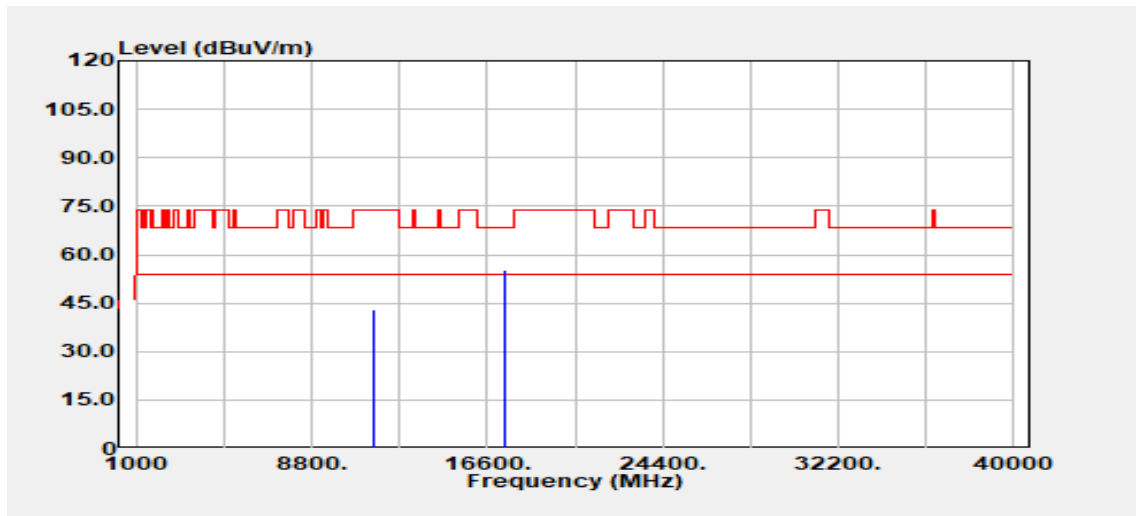


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11570.00 | Peak | 30.64 | 12.49 | 43.13 | 74.00 | -30.87 |
| 11570.00 | Average | 25.06 | 12.49 | 37.55 | 54.00 | -16.45 |
| 17355.00 | Peak | 29.77 | 25.47 | 55.24 | 68.20 | -12.96 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5825 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

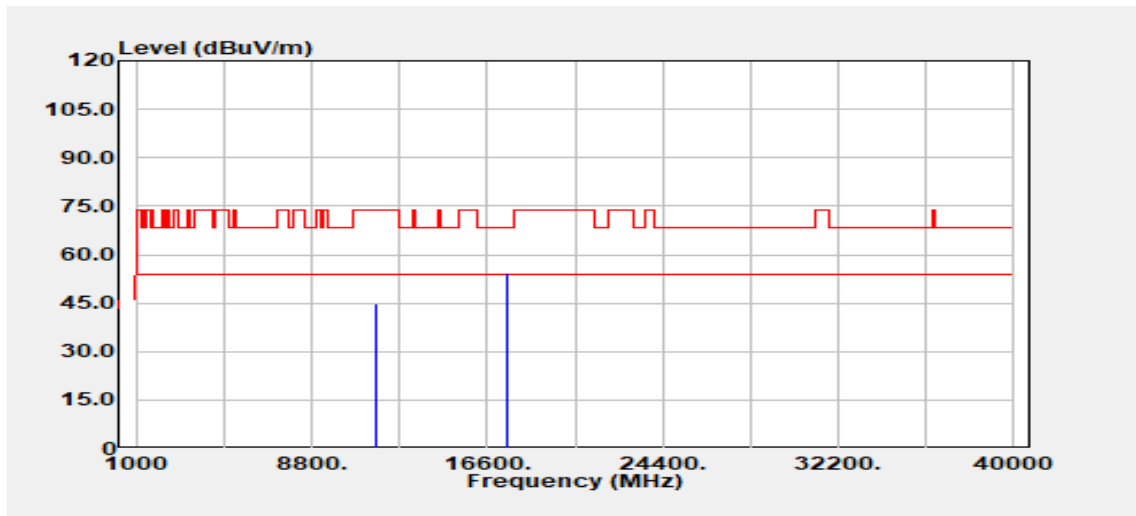


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11650.00 | Peak | 32.20 | 12.43 | 44.63 | 74.00 | -29.37 |
| 11650.00 | Average | 26.80 | 12.43 | 39.23 | 54.00 | -14.77 |
| 17475.00 | Peak | 29.43 | 25.06 | 54.49 | 68.20 | -13.71 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5825 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

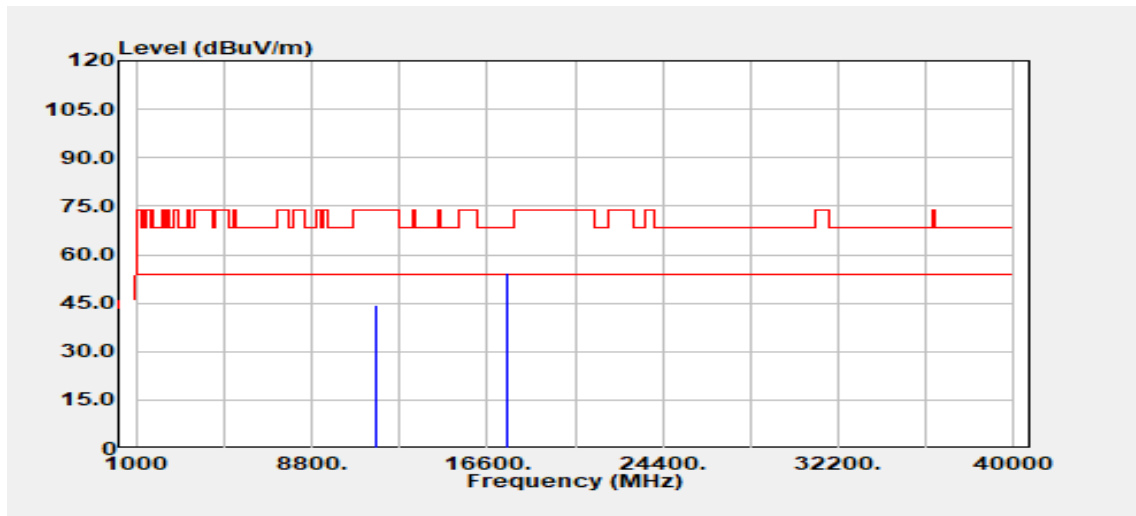


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11650.00 | Peak | 31.90 | 12.43 | 44.33 | 74.00 | -29.67 |
| 11650.00 | Average | 26.93 | 12.43 | 39.36 | 54.00 | -14.64 |
| 17475.00 | Peak | 29.10 | 25.06 | 54.16 | 68.20 | -14.04 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5755 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

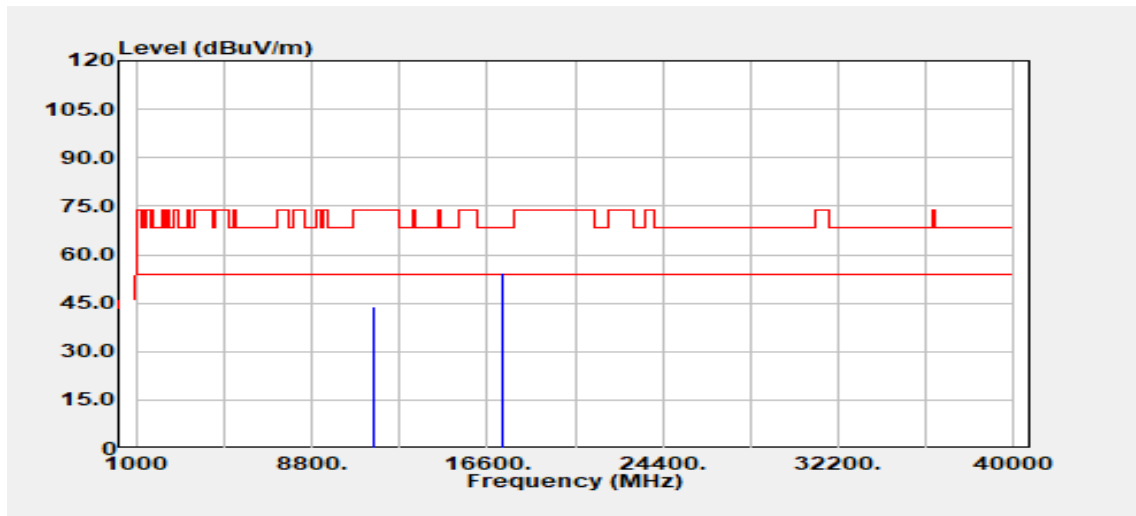


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 31.60 | 12.43 | 44.03 | 74.00 | -29.97 |
| 11510.00 | Average | 24.82 | 12.43 | 37.25 | 54.00 | -16.75 |
| 17265.00 | Peak | 28.40 | 26.14 | 54.54 | 68.20 | -13.66 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5755 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

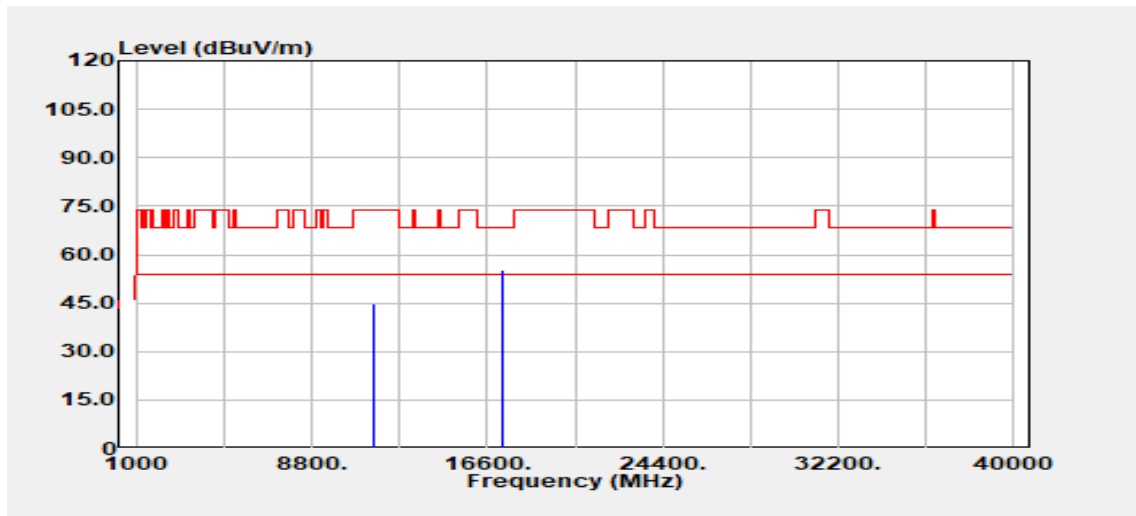


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11510.00 | Peak | 32.18 | 12.43 | 44.61 | 74.00 | -29.39 |
| 11510.00 | Average | 24.95 | 12.43 | 37.38 | 54.00 | -16.62 |
| 17265.00 | Peak | 29.23 | 26.14 | 55.37 | 68.20 | -12.83 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5795 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

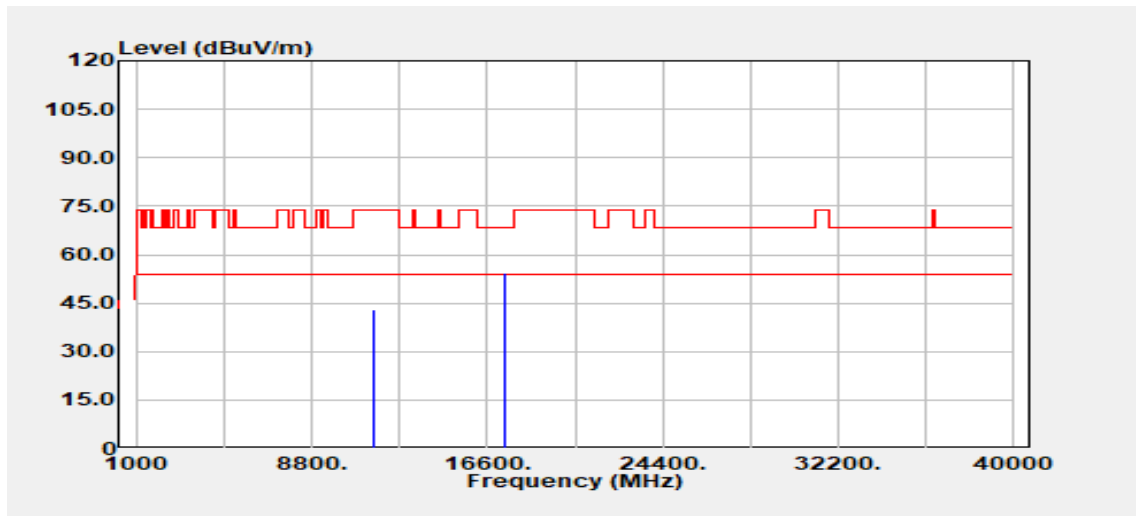


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dB μ V) | Factor (dB) | Actual FS (dB μ V/m) | Limit @3m (dB μ V/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------------|-------------|--------------------------|--------------------------|-------------|
| 11590.00 | Peak | 30.58 | 12.48 | 43.05 | 74.00 | -30.95 |
| 11590.00 | Average | 24.44 | 12.48 | 36.92 | 54.00 | -17.08 |
| 17385.00 | Peak | 29.14 | 25.27 | 54.41 | 68.20 | -13.79 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5795 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

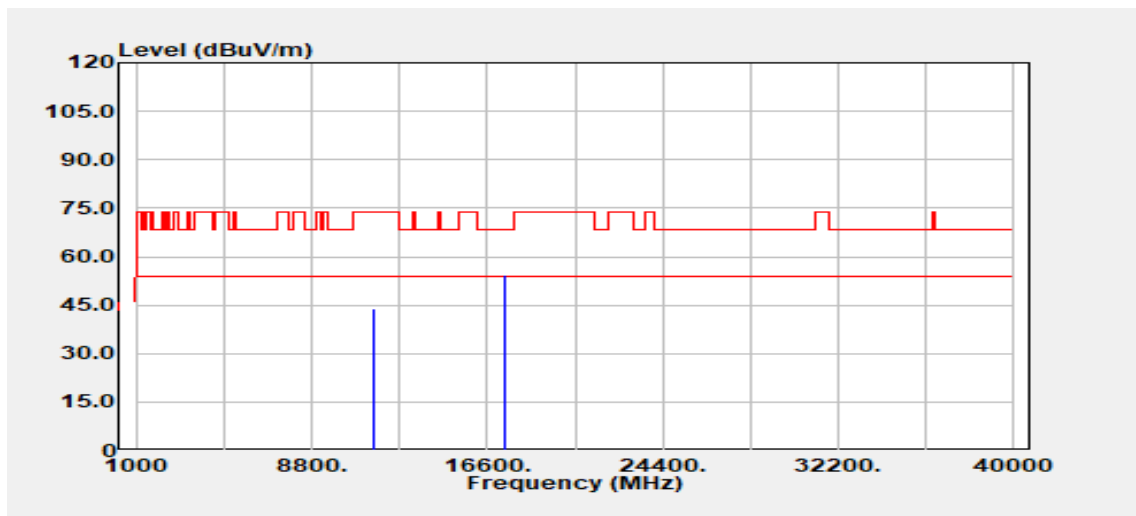


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11590.00 | Peak | 31.60 | 12.48 | 44.08 | 74.00 | -29.92 |
| 11590.00 | Average | 23.80 | 12.48 | 36.28 | 54.00 | -17.72 |
| 17385.00 | Peak | 29.15 | 25.27 | 54.42 | 68.20 | -13.78 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5775 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Vertical | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

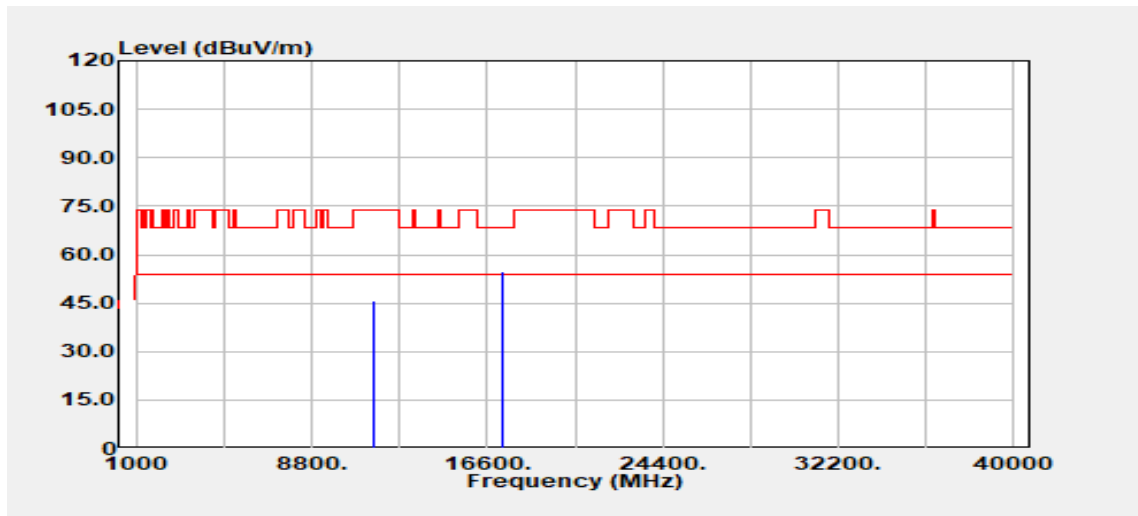


| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBµV) | Factor (dB) | Actual FS (dBµV/m) | Limit @3m (dBµV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 33.01 | 12.51 | 45.51 | 74.00 | -28.49 |
| 11550.00 | Average | 23.32 | 12.51 | 35.83 | 54.00 | -18.18 |
| 17325.00 | Peak | 29.15 | 25.79 | 54.94 | 68.20 | -13.26 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

| | | | |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5775 MHz | Temp/Hum | 24.5(°C)/ 57%RH |
| Test Item | Harmonic | Test Date | May 17, 2023 |
| Polarize | Horizontal | Test Engineer | Ray Li |
| Detector | Peak & Average | | |

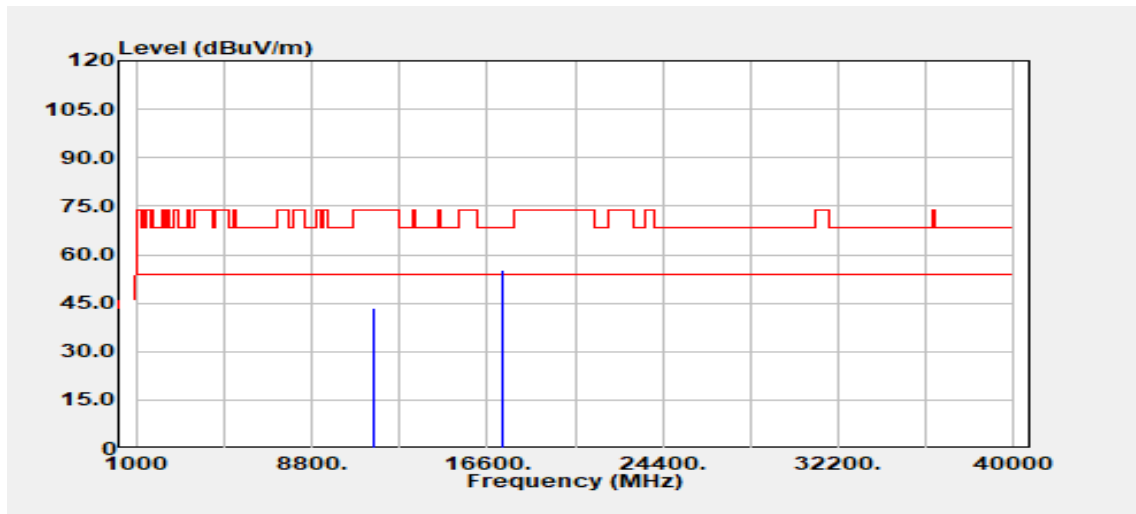

| Freq. (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBμV) | Factor (dB) | Actual FS (dBμV/m) | Limit @3m (dBμV/m) | Margin (dB) |
|-------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 11550.00 | Peak | 31.17 | 12.51 | 43.68 | 74.00 | -30.32 |
| 11550.00 | Average | 23.18 | 12.51 | 35.69 | 54.00 | -18.32 |
| 17325.00 | Peak | 29.63 | 25.79 | 55.42 | 68.20 | -12.78 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.