


Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2457 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

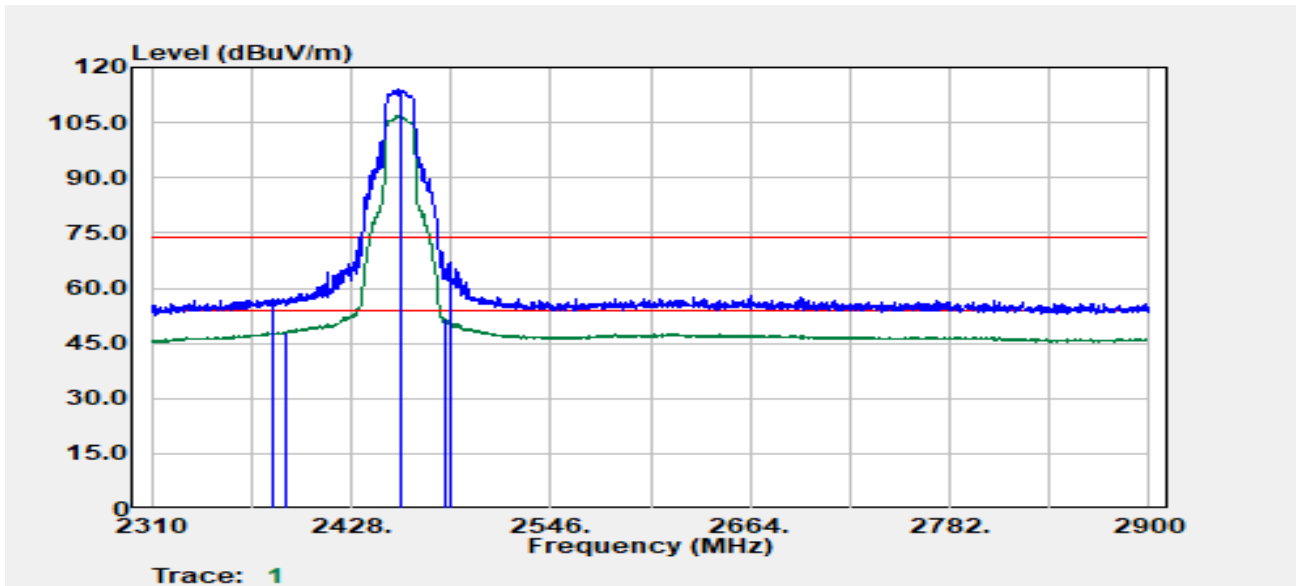


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2381.16	Peak	51.10	6.09	57.20	74.00	-16.80
2389.65	Average	41.86	6.27	48.13	54.00	-5.87
2457.00	Peak	107.75	6.31	114.06	--	--
2457.00	Average	100.52	6.31	106.83	--	--
2483.78	Average	44.84	6.72	51.56	54.00	-2.44
2486.28	Peak	60.15	6.75	66.90	74.00	-7.10

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_Ch1
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-04-17
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

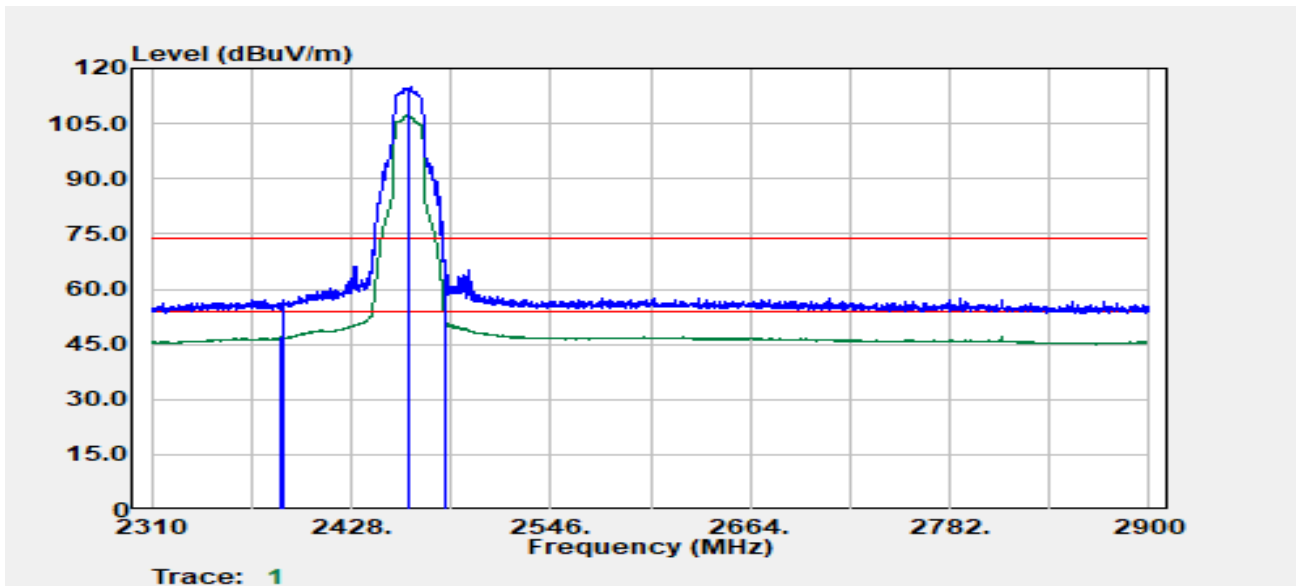


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2386.78	Average	40.66	6.21	46.87	54.00	-7.13
2387.78	Peak	51.04	6.23	57.28	74.00	-16.72
2462.00	Peak	108.70	6.32	115.02	--	--
2462.00	Average	100.90	6.32	107.22	--	--
2483.57	Peak	58.60	6.72	65.31	74.00	-8.69
2483.57	Average	45.37	6.72	52.09	54.00	-1.91

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_Ch1
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-04-17
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

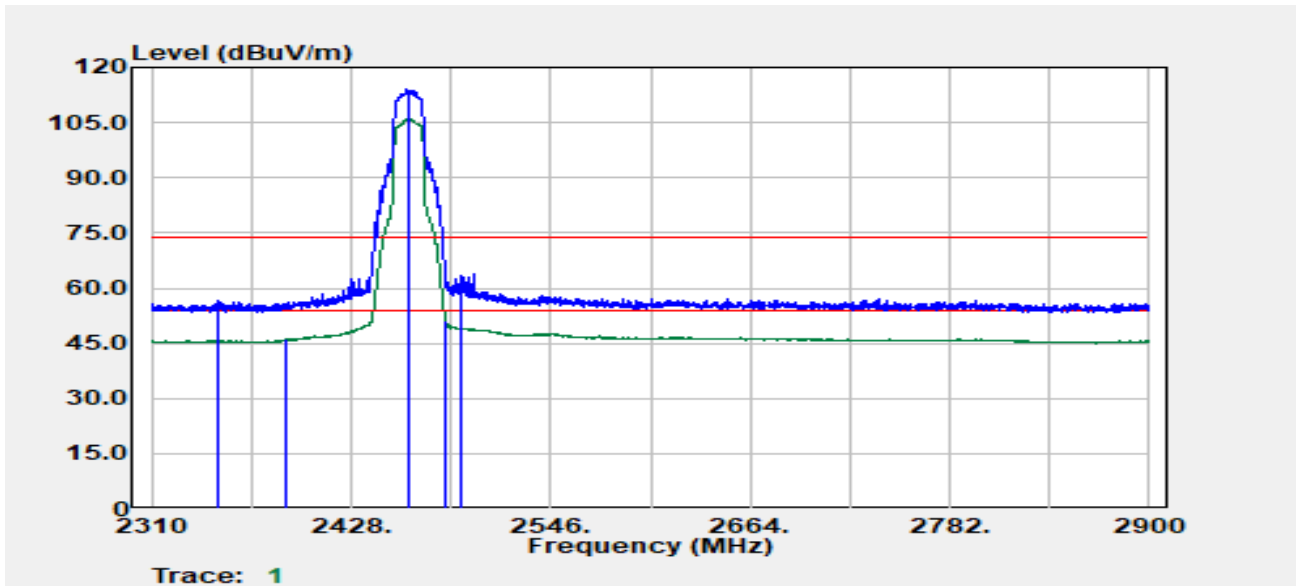


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2349.02	Peak	50.30	6.23	56.53	74.00	-17.47
2390.00	Average	39.79	6.28	46.07	54.00	-7.93
2462.00	Peak	107.86	6.32	114.18	--	--
2462.00	Average	99.72	6.32	106.04	--	--
2483.57	Average	44.33	6.72	51.04	54.00	-2.96
2492.33	Peak	56.79	6.81	63.60	74.00	-10.40

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2412 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

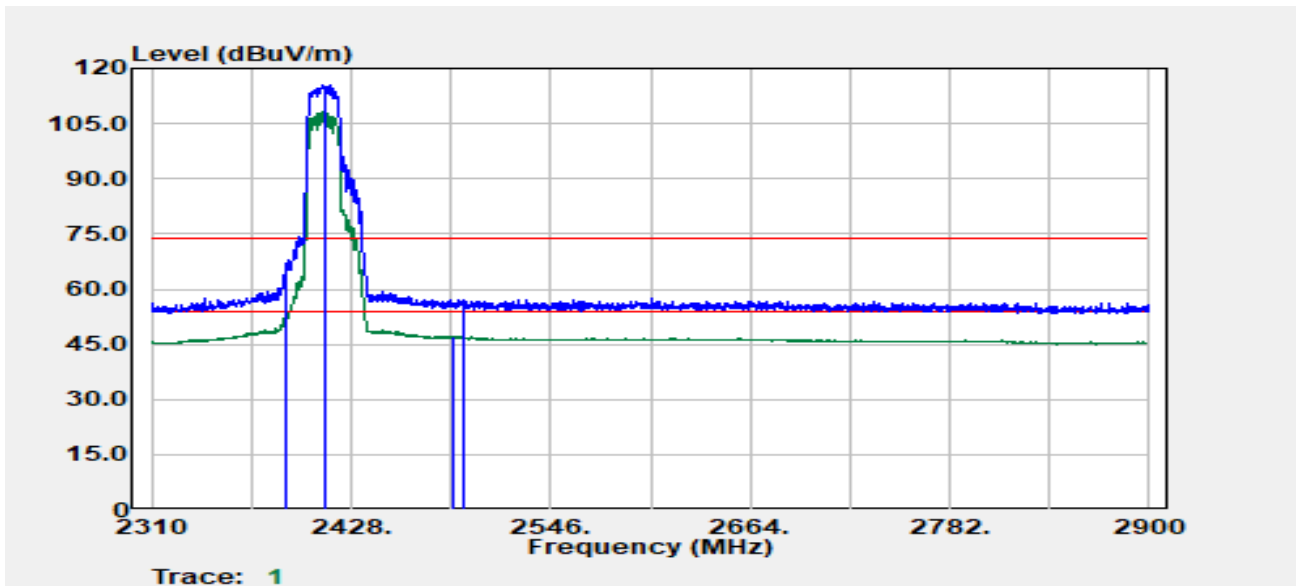


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2388.90	Average	47.05	6.26	53.31	54.00	-0.69
2389.40	Peak	60.64	6.27	66.91	74.00	-7.09
2412.00	Peak	108.99	6.31	115.29	--	--
2412.00	Average	101.83	6.31	108.14	--	--
2489.02	Average	40.30	6.79	47.09	54.00	-6.91
2494.27	Peak	50.23	6.82	57.05	74.00	-16.95

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2412 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-04-16
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

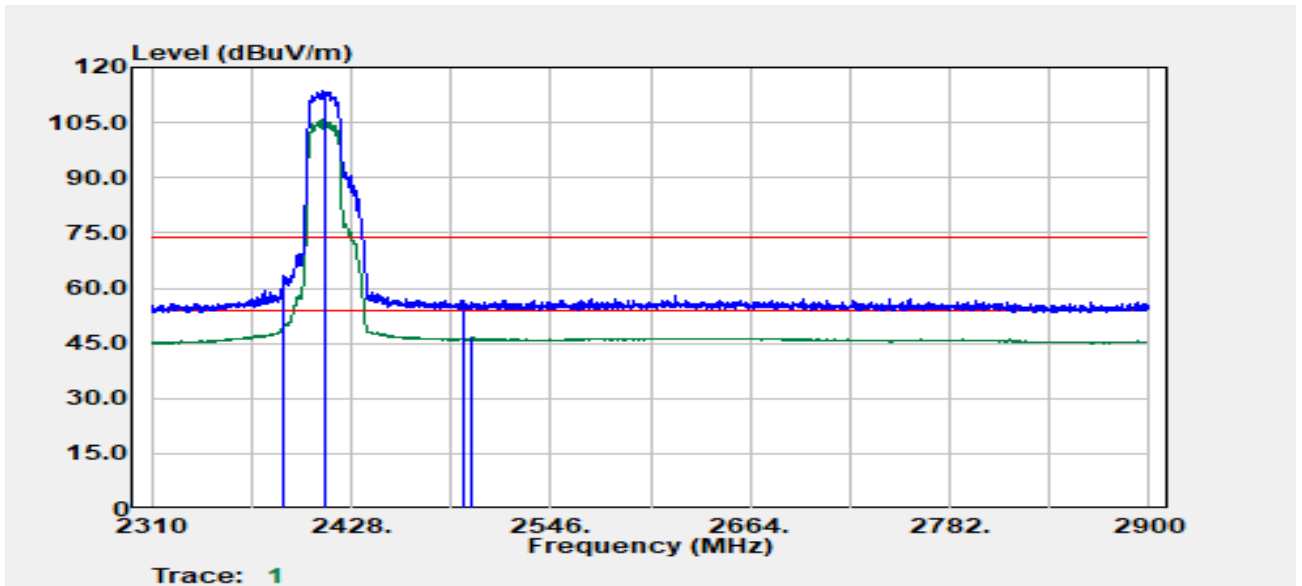


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2388.53	Peak	57.11	6.25	63.36	74.00	-10.64
2388.53	Average	43.88	6.25	50.13	54.00	-3.87
2412.00	Peak	107.26	6.31	113.57	--	--
2412.00	Average	99.63	6.31	105.94	--	--
2494.08	Peak	49.92	6.82	56.74	74.00	-17.26
2499.83	Average	39.77	6.84	46.61	54.00	-7.39

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2417 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

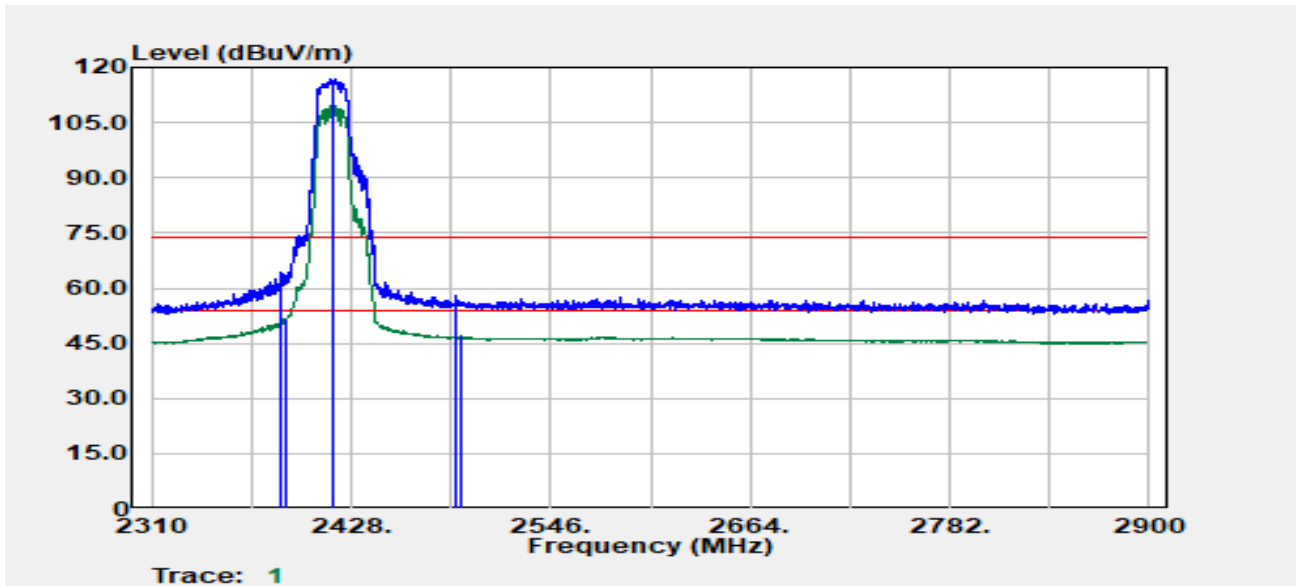


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2386.03	Peak	58.12	6.20	64.31	74.00	-9.69
2390.00	Average	45.35	6.28	51.63	54.00	-2.37
2417.00	Peak	110.70	6.31	117.02	--	--
2417.00	Average	103.25	6.31	109.56	--	--
2490.33	Peak	51.13	6.80	57.93	74.00	-16.07
2493.33	Average	40.10	6.82	46.92	54.00	-7.08

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2417 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

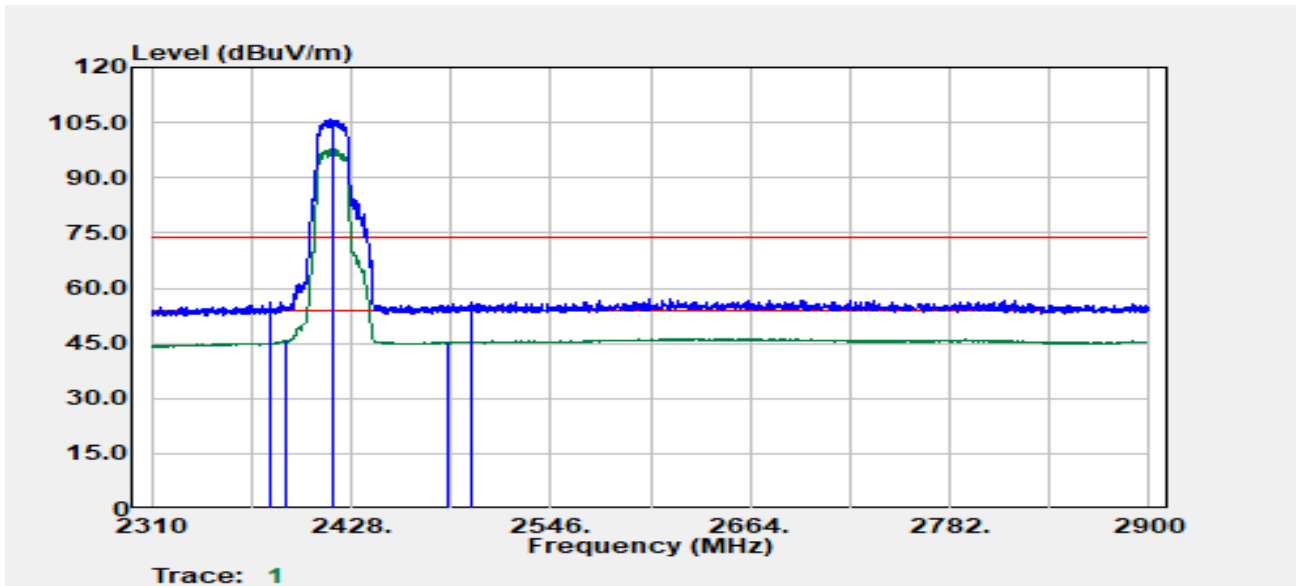


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2380.28	Peak	50.07	6.08	56.14	74.00	-17.86
2390.00	Average	39.39	6.28	45.67	54.00	-8.33
2417.00	Peak	99.69	6.31	106.00	--	--
2417.00	Average	91.56	6.31	97.87	--	--
2484.82	Average	38.68	6.73	45.41	54.00	-8.59
2498.58	Peak	49.27	6.83	56.11	74.00	-17.89

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

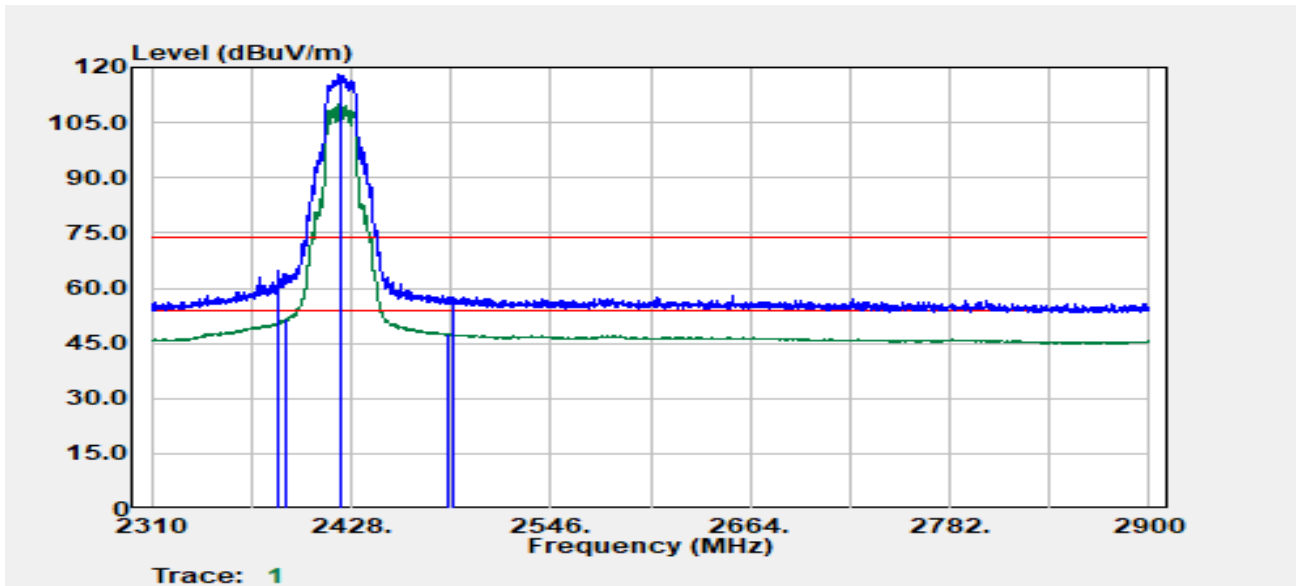


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2384.53	Peak	58.48	6.17	64.65	74.00	-9.35
2389.28	Average	45.51	6.26	51.77	54.00	-2.23
2422.00	Peak	111.65	6.34	117.99	--	--
2422.00	Average	103.58	6.34	109.92	--	--
2484.82	Average	40.73	6.73	47.47	54.00	-6.53
2488.08	Peak	50.72	6.78	57.49	74.00	-16.51

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

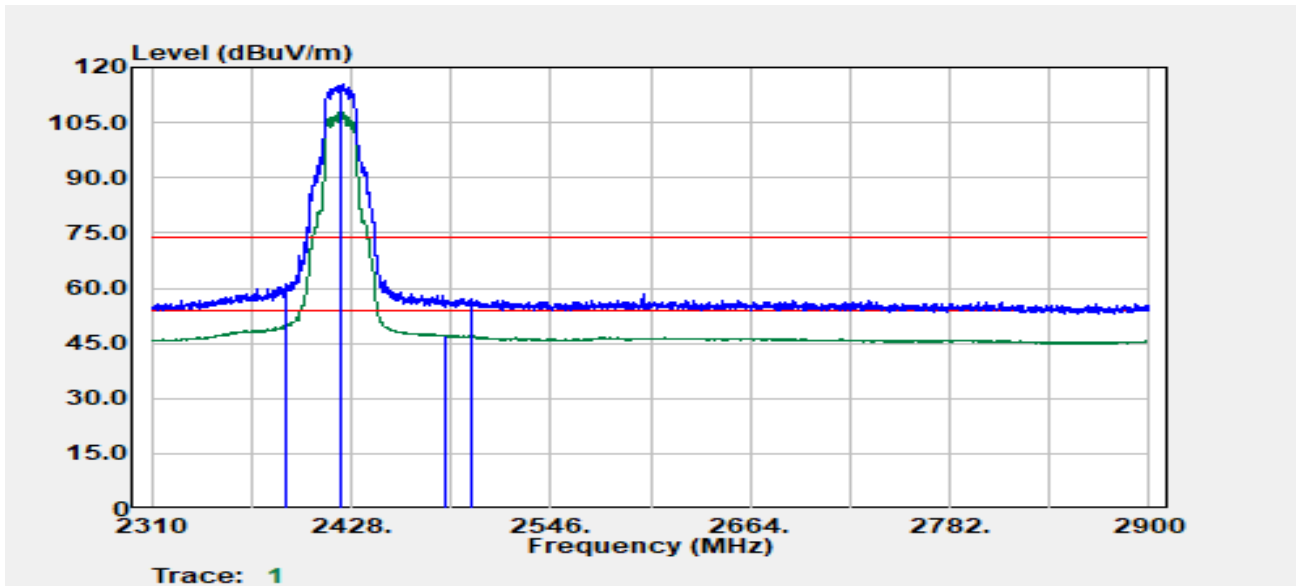


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2389.03	Peak	54.73	6.26	60.99	74.00	-13.01
2390.00	Average	43.52	6.28	49.80	54.00	-4.20
2422.00	Peak	109.09	6.34	115.43	--	--
2422.00	Average	101.51	6.34	107.84	--	--
2483.57	Average	40.39	6.72	47.11	54.00	-6.89
2499.08	Peak	50.19	6.84	57.02	74.00	-16.98

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

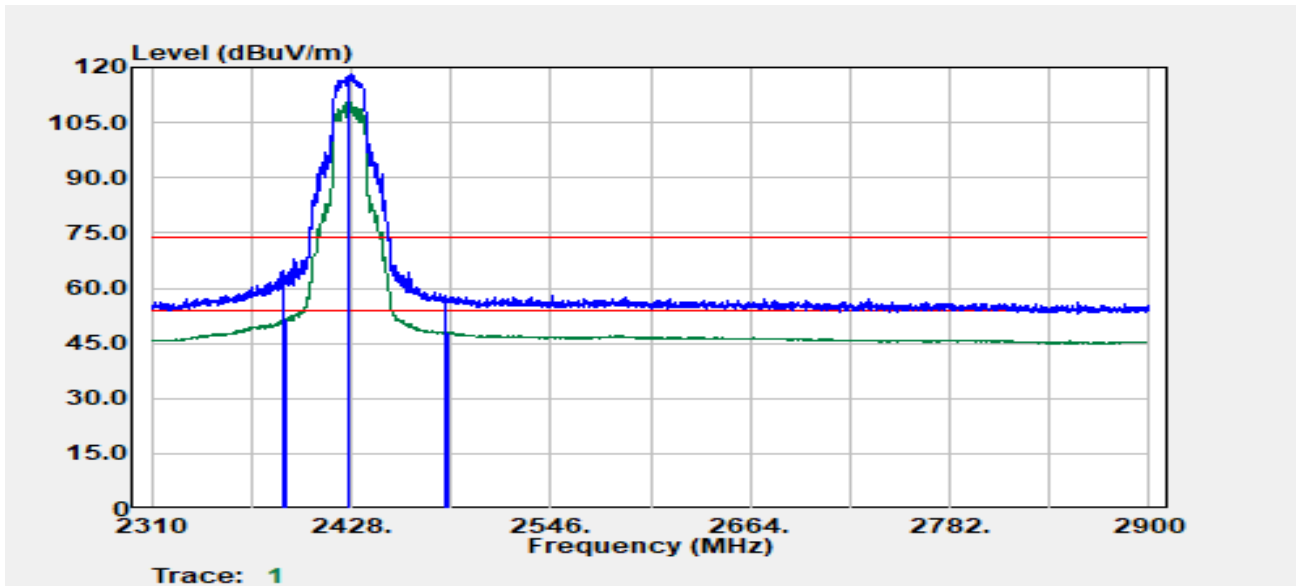


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2388.03	Peak	58.73	6.24	64.97	74.00	-9.03
2390.00	Average	45.32	6.28	51.60	54.00	-2.40
2427.00	Peak	111.82	6.40	118.21	--	--
2427.00	Average	104.29	6.40	110.69	--	--
2483.57	Peak	50.99	6.72	57.70	74.00	-16.30
2485.82	Average	41.23	6.75	47.98	54.00	-6.02

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

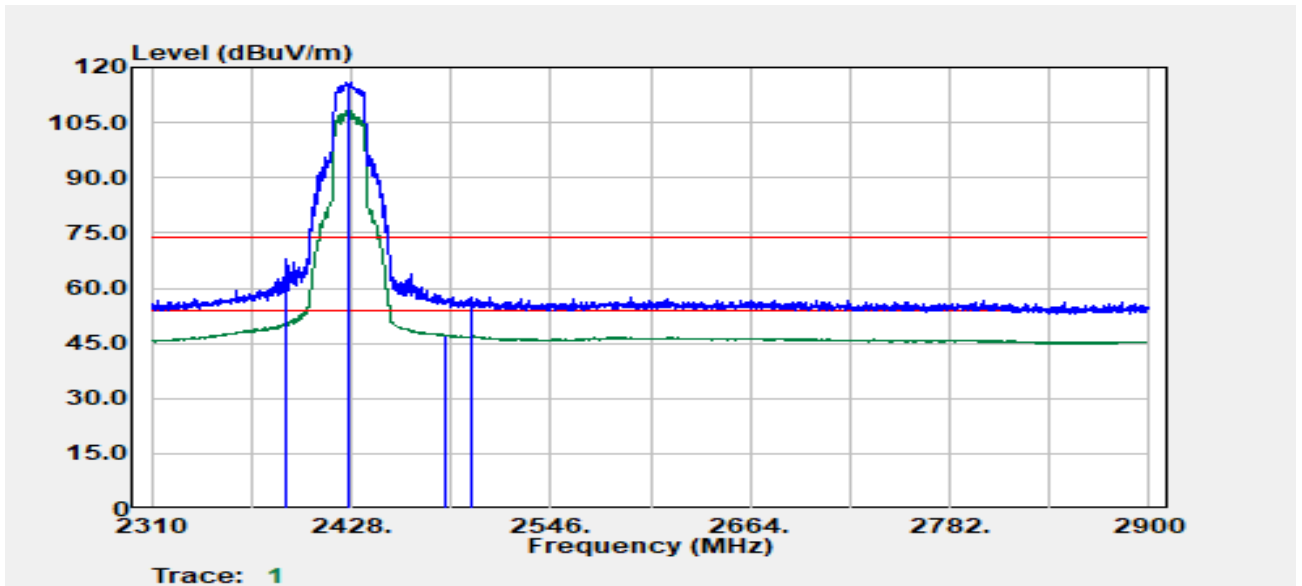


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2390.00	Peak	61.71	6.28	67.99	74.00	-6.01
2390.00	Average	44.42	6.28	50.70	54.00	-3.30
2427.00	Peak	109.58	6.40	115.97	--	--
2427.00	Average	101.72	6.40	108.12	--	--
2484.32	Average	40.44	6.73	47.17	54.00	-6.83
2499.58	Peak	50.67	6.84	57.51	74.00	-16.49

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

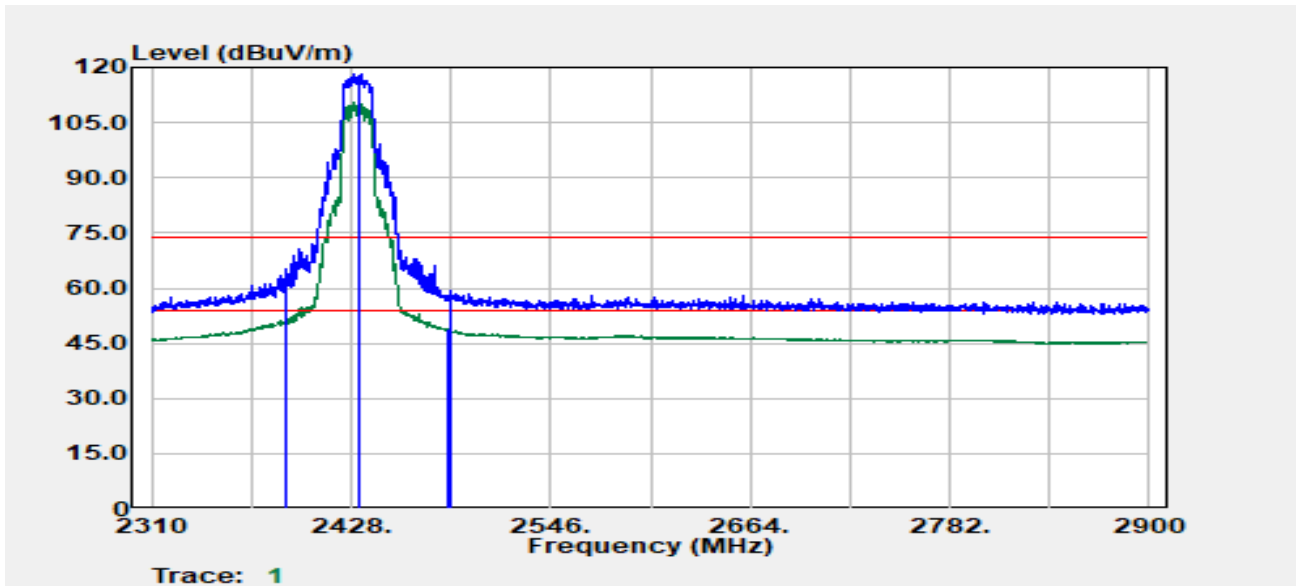


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2389.40	Peak	58.76	6.27	65.02	74.00	-8.98
2389.40	Average	45.05	6.27	51.32	54.00	-2.68
2432.00	Peak	111.70	6.41	118.11	--	--
2432.00	Average	104.25	6.41	110.66	--	--
2484.78	Average	41.97	6.73	48.71	54.00	-5.29
2486.78	Peak	52.38	6.76	59.14	74.00	-14.86

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

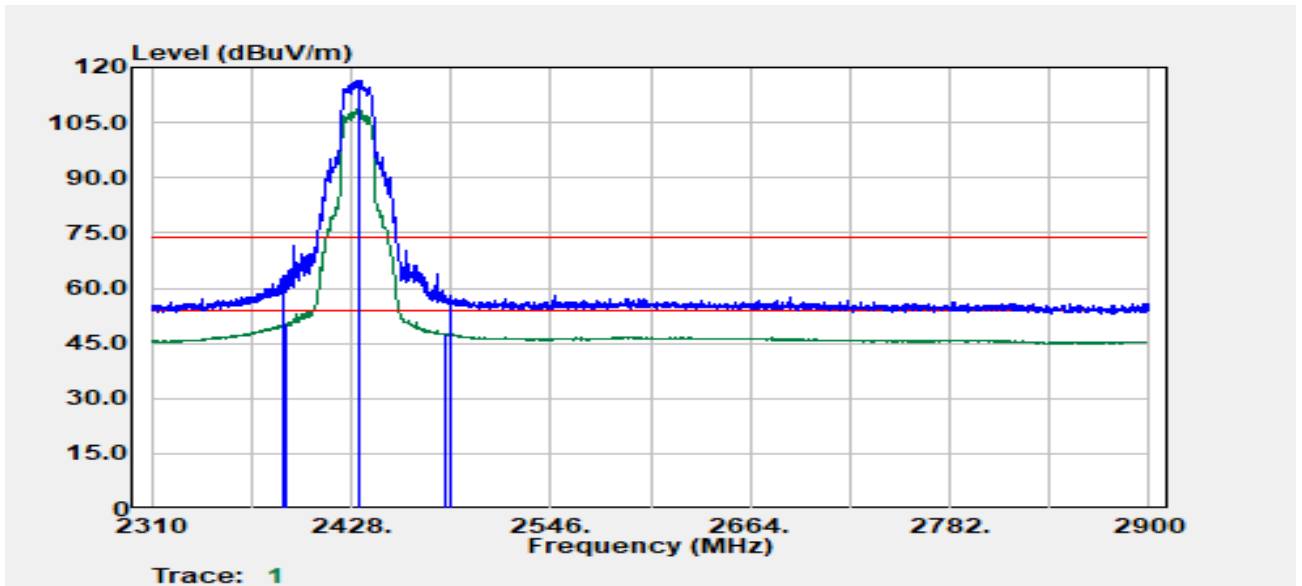


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2387.28	Peak	57.19	6.22	63.42	74.00	-10.58
2388.78	Average	44.01	6.25	50.27	54.00	-3.73
2432.00	Peak	110.12	6.41	116.53	--	--
2432.00	Average	102.16	6.41	108.57	--	--
2483.57	Average	40.77	6.72	47.48	54.00	-6.52
2486.58	Peak	51.39	6.76	58.14	74.00	-15.86

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

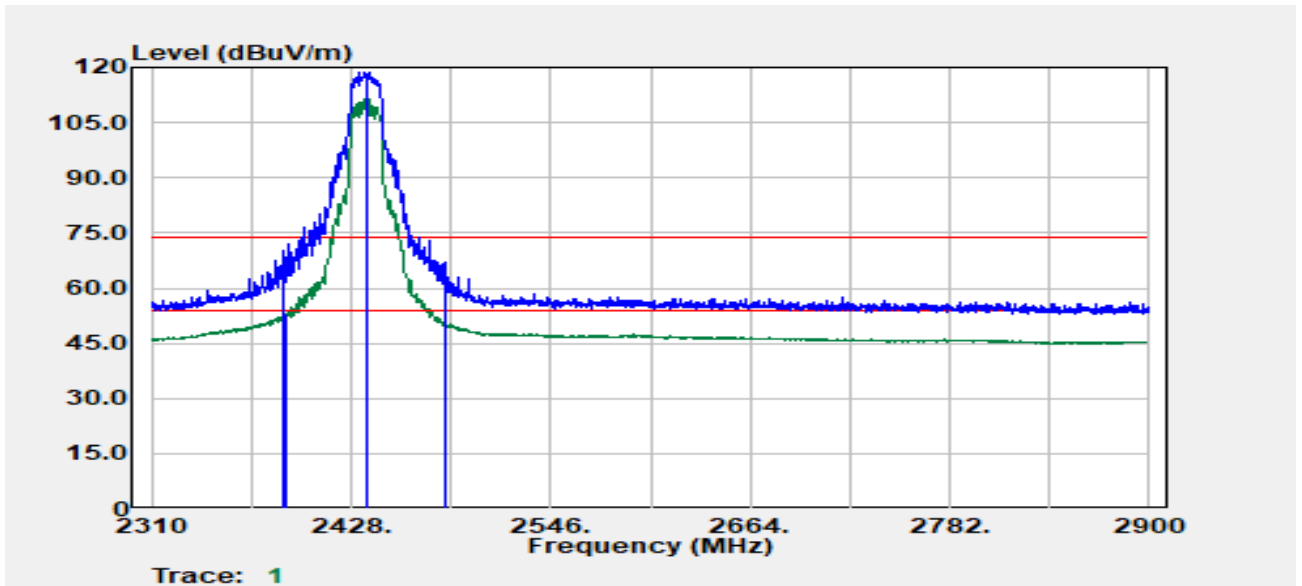


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2388.15	Peak	64.17	6.24	70.41	74.00	-3.59
2388.90	Average	46.51	6.26	52.76	54.00	-1.24
2437.00	Peak	112.32	6.37	118.69	--	--
2437.00	Average	105.11	6.37	111.48	--	--
2483.53	Average	43.67	6.71	50.39	54.00	-3.61
2484.28	Peak	60.28	6.72	67.01	74.00	-6.99

Report No.: TMWK2309003308KR

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

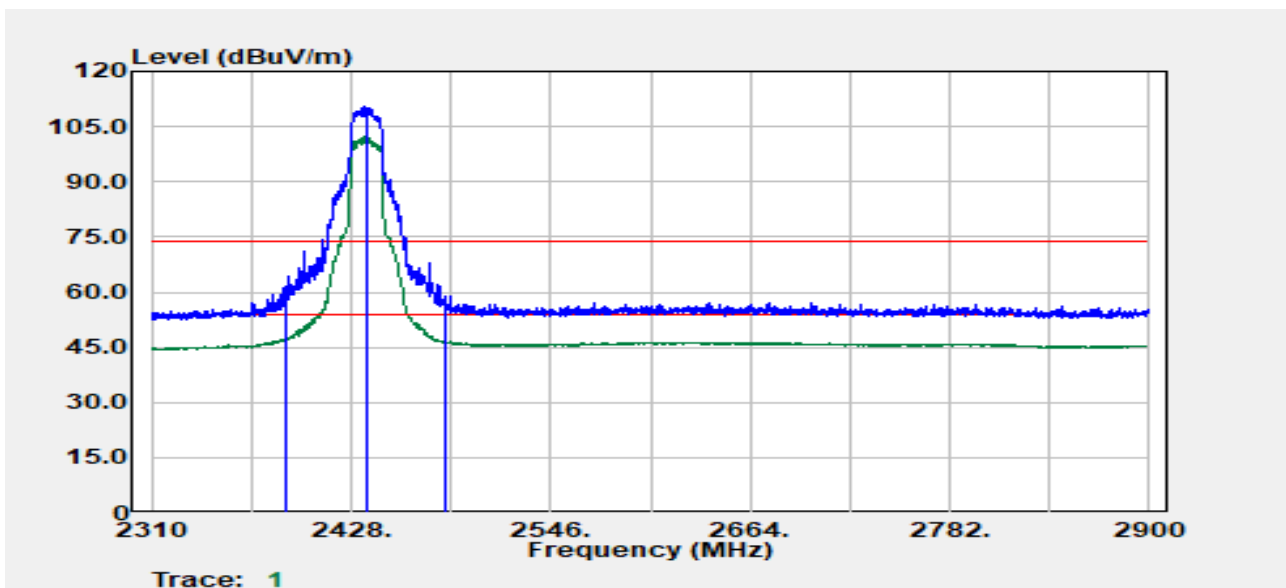


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2388.65	Peak	55.04	6.25	61.29	74.00	-12.71
2389.90	Average	41.10	6.28	47.37	54.00	-6.63
2437.00	Peak	104.07	6.37	110.43	--	--
2437.00	Average	95.91	6.37	102.28	--	--
2483.53	Peak	52.36	6.71	59.08	74.00	-14.92
2484.03	Average	39.80	6.72	46.53	54.00	-7.47

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

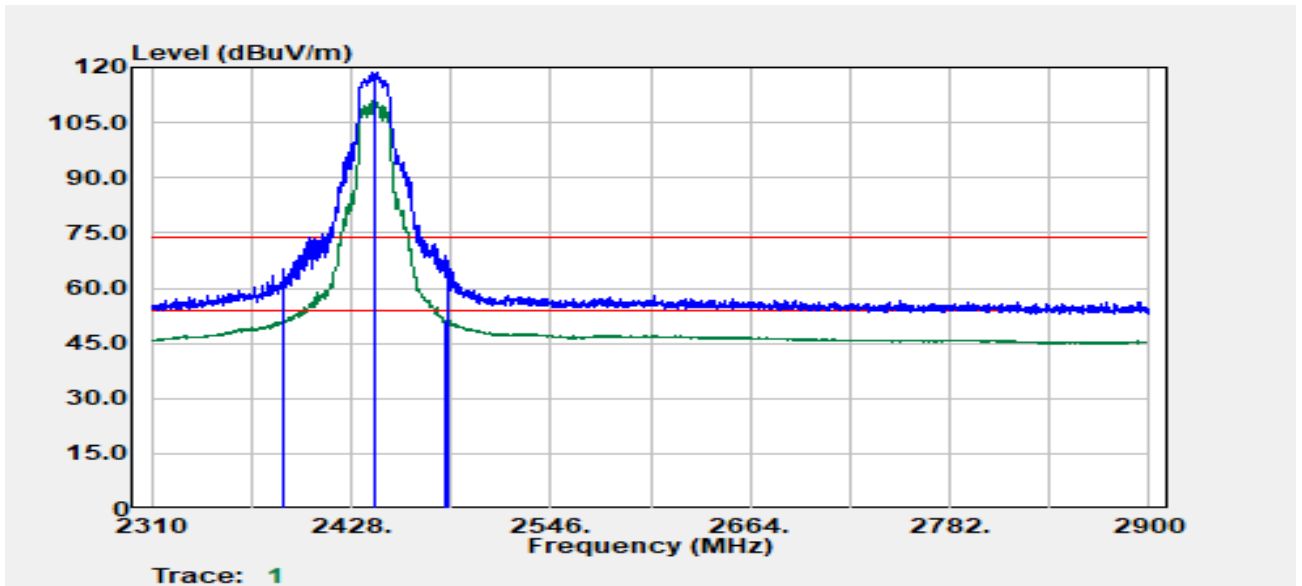


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2388.15	Peak	59.16	6.24	65.40	74.00	-8.60
2388.40	Average	44.96	6.25	51.21	54.00	-2.79
2442.00	Peak	112.17	6.34	118.52	--	--
2442.00	Average	104.57	6.34	110.92	--	--
2483.53	Average	44.50	6.71	51.21	54.00	-2.79
2485.28	Peak	60.93	6.74	67.67	74.00	-6.33

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

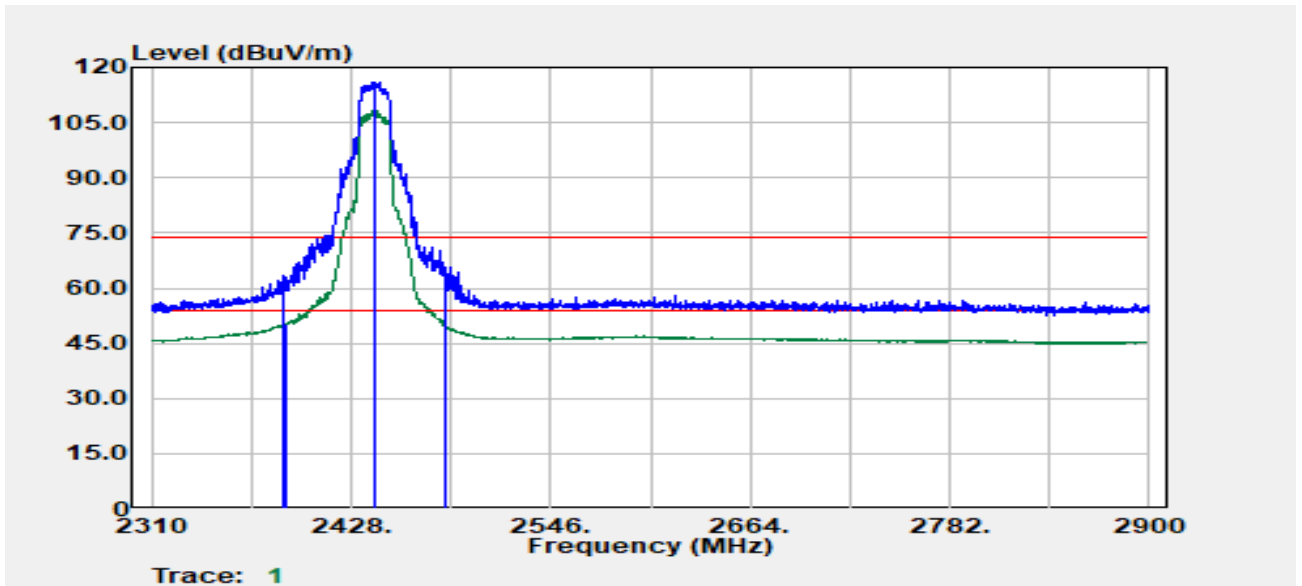


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d $B\mu$ V/m	Limit d $B\mu$ V/m	Margin dB
2388.15	Peak	56.94	6.24	63.18	74.00	-10.82
2389.90	Average	44.16	6.28	50.44	54.00	-3.56
2442.00	Peak	109.71	6.34	116.05	--	--
2442.00	Average	101.77	6.34	108.12	--	--
2483.78	Average	43.03	6.72	49.75	54.00	-4.25
2484.03	Peak	58.90	6.72	65.62	74.00	-8.38

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

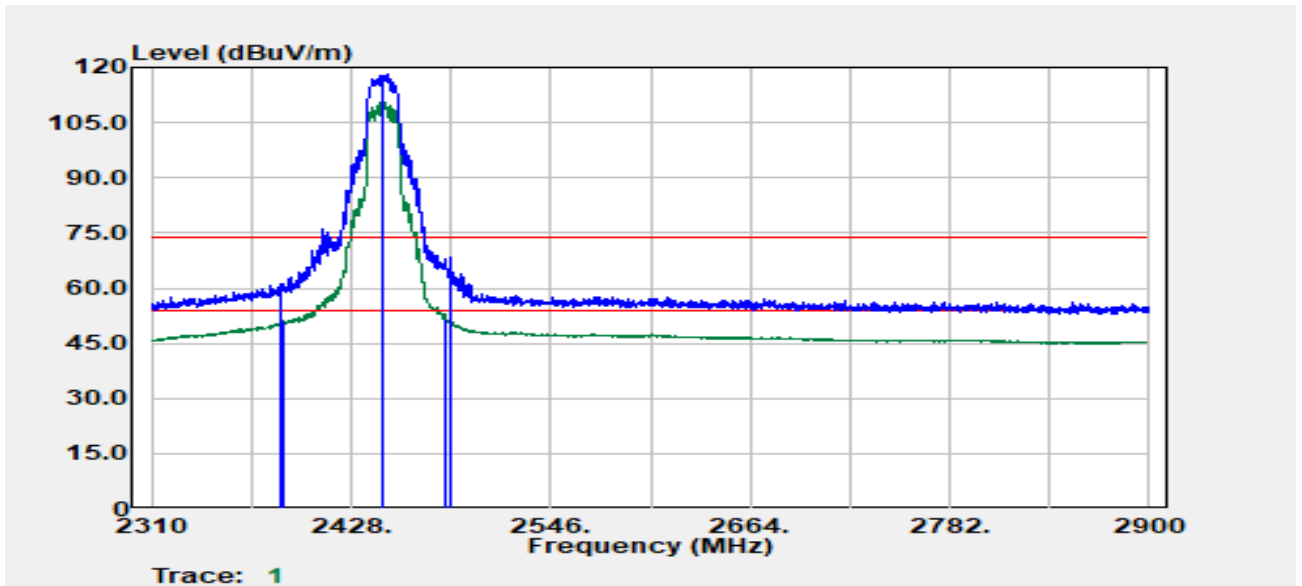


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2385.90	Peak	54.80	6.19	60.99	74.00	-13.01
2388.15	Average	44.76	6.24	51.01	54.00	-2.99
2447.00	Peak	111.72	6.35	118.07	--	--
2447.00	Average	104.38	6.35	110.73	--	--
2483.53	Average	45.03	6.71	51.74	54.00	-2.26
2486.28	Peak	61.76	6.75	68.52	74.00	-5.48

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

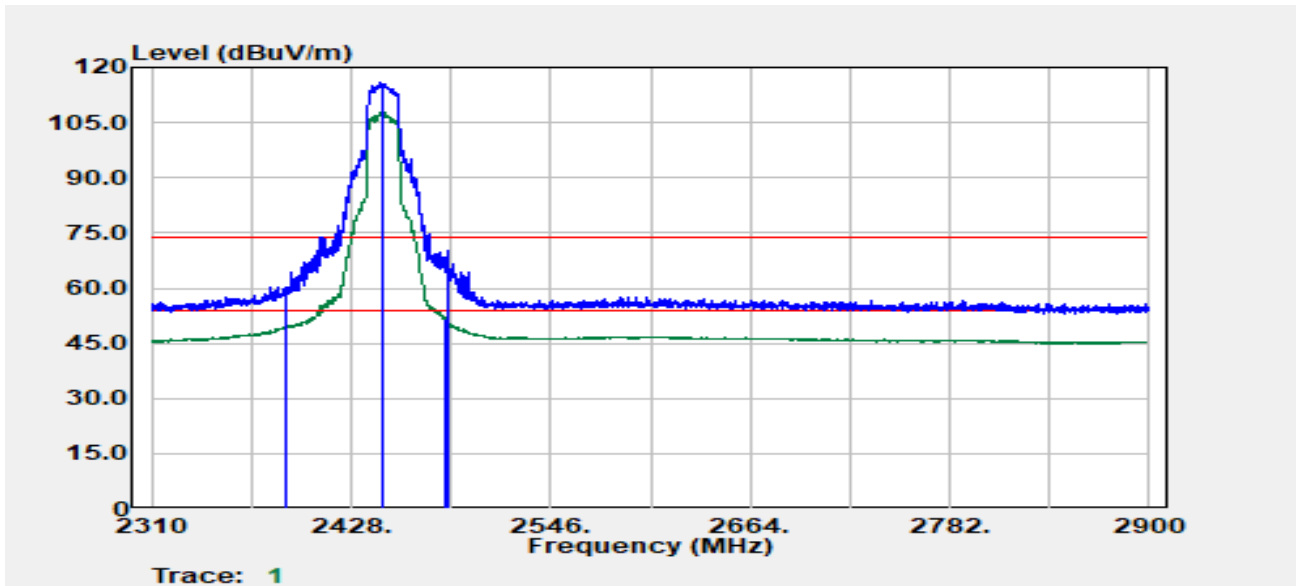


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2388.78	Peak	53.88	6.25	60.13	74.00	-13.87
2390.00	Average	43.05	6.28	49.33	54.00	-4.67
2447.00	Peak	109.63	6.35	115.98	--	--
2447.00	Average	101.44	6.35	107.79	--	--
2484.32	Average	44.74	6.73	51.47	54.00	-2.53
2484.57	Peak	63.52	6.73	70.25	74.00	-3.75

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

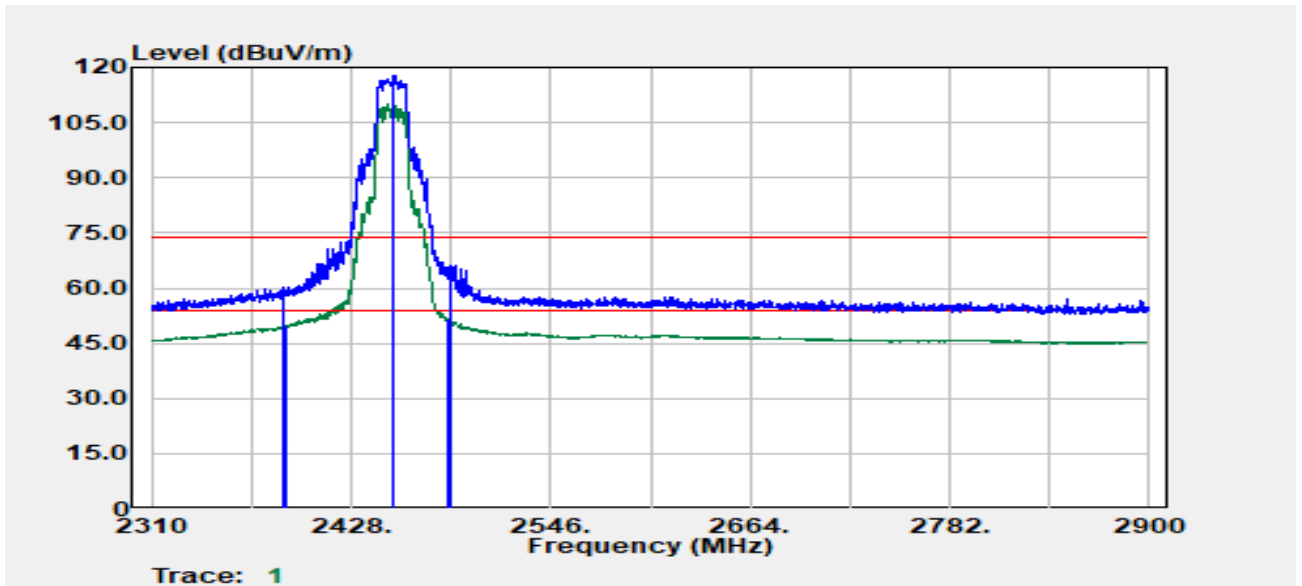


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2387.40	Peak	54.18	6.23	60.41	74.00	-13.59
2389.90	Average	43.63	6.28	49.91	54.00	-4.09
2452.00	Peak	111.40	6.34	117.74	--	--
2452.00	Average	103.57	6.34	109.91	--	--
2484.53	Average	44.93	6.73	51.66	54.00	-2.34
2486.28	Peak	59.24	6.75	65.99	74.00	-8.01

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20.5

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

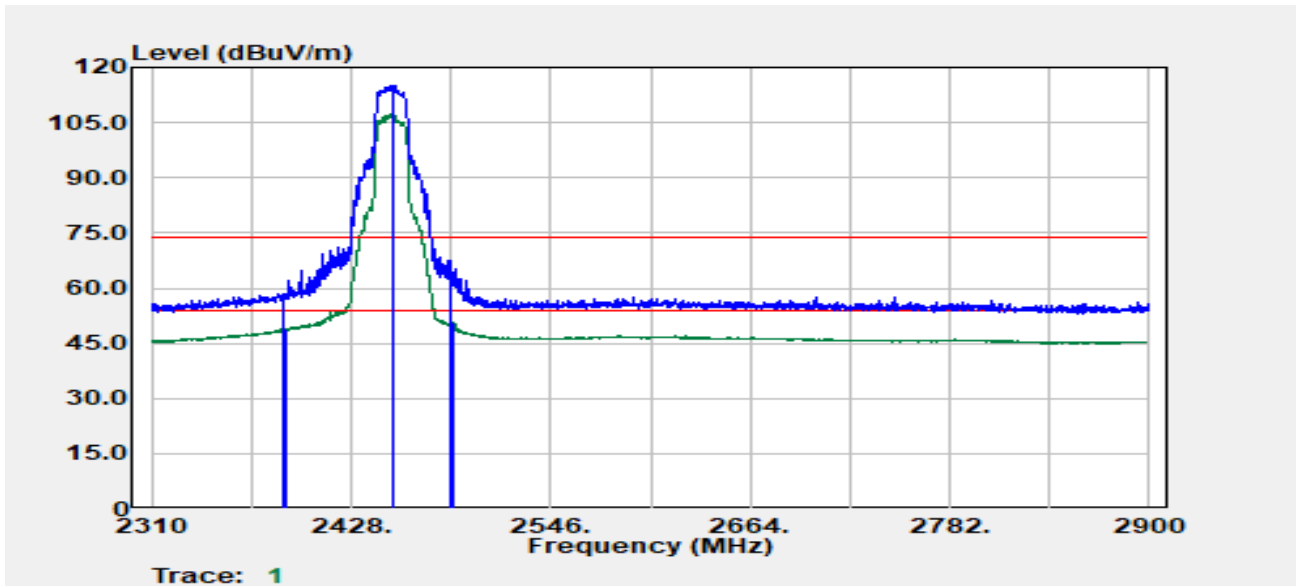


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d $B\mu$ V/m	Limit d $B\mu$ V/m	Margin dB
2387.78	Peak	52.33	6.23	58.56	74.00	-15.44
2389.03	Average	42.85	6.26	49.11	54.00	-4.89
2452.00	Peak	108.69	6.34	115.04	--	--
2452.00	Average	100.99	6.34	107.33	--	--
2486.58	Peak	60.69	6.76	67.45	74.00	-6.55
2488.83	Average	44.06	6.79	50.85	54.00	-3.15

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2457 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

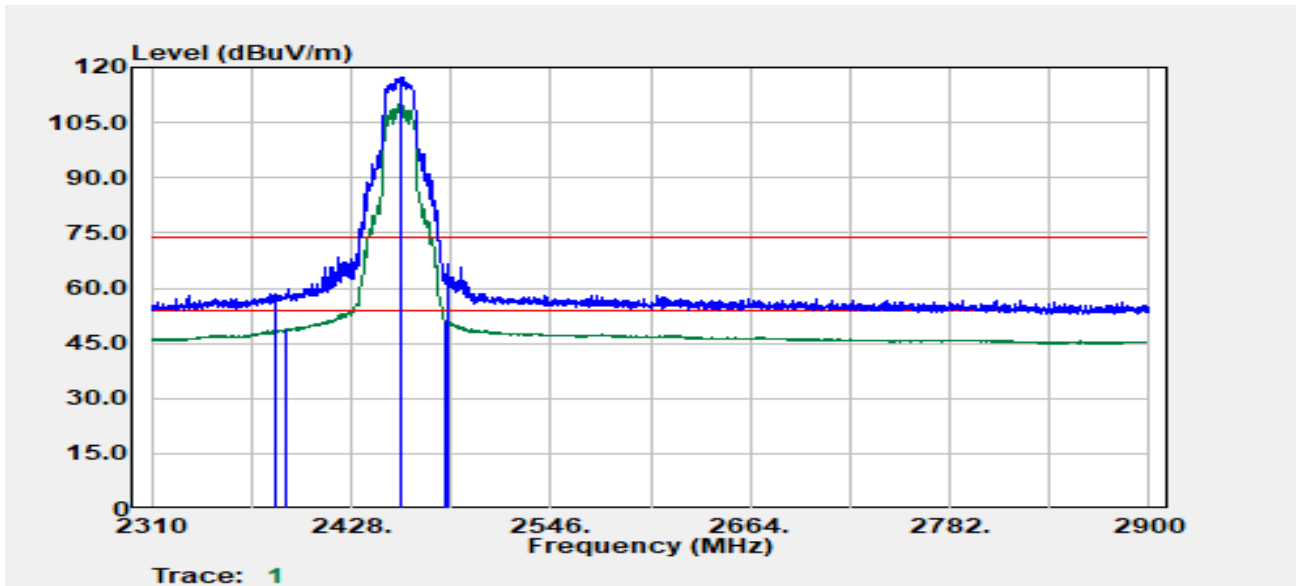


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2383.16	Peak	52.35	6.14	58.48	74.00	-15.52
2388.90	Average	42.64	6.26	48.89	54.00	-5.11
2457.00	Peak	111.00	6.31	117.31	--	--
2457.00	Average	103.60	6.31	109.91	--	--
2483.53	Average	44.54	6.71	51.25	54.00	-2.75
2485.28	Peak	59.63	6.74	66.37	74.00	-7.63

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2457 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20


Test Date :2024-05-28
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

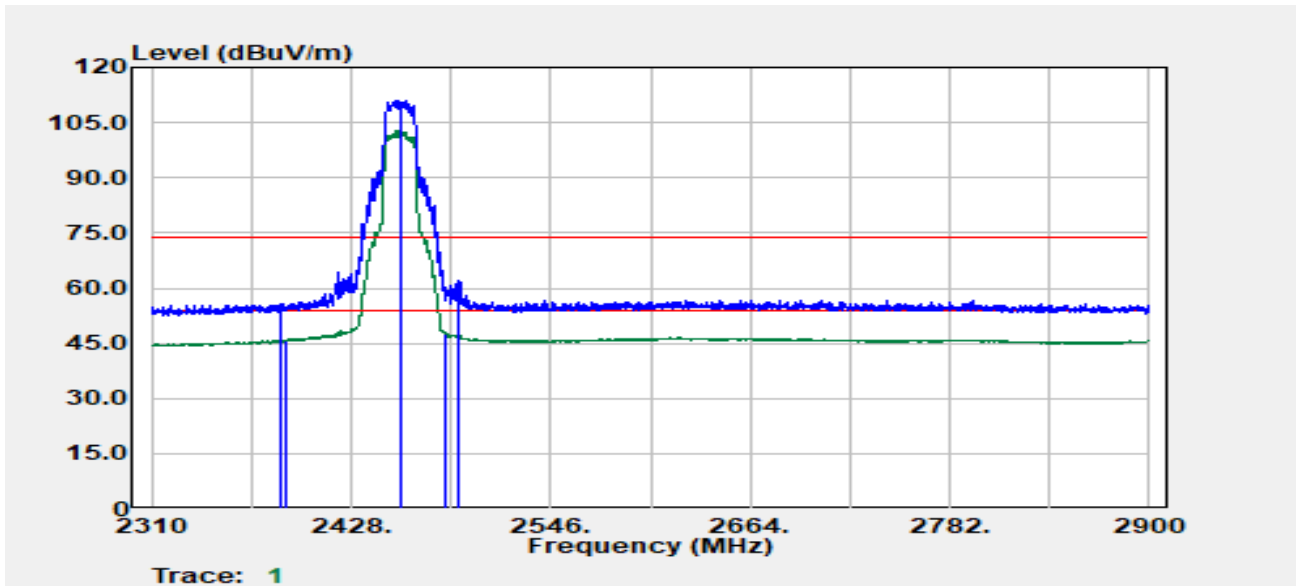

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2386.53	Peak	49.40	6.21	55.61	74.00	-18.39
2389.28	Average	39.67	6.26	45.94	54.00	-8.06
2457.00	Peak	104.81	6.31	111.12	--	--
2457.00	Average	96.69	6.31	103.00	--	--
2483.57	Average	40.74	6.72	47.46	54.00	-6.54
2491.08	Peak	55.23	6.81	62.03	74.00	-11.97

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-04-16
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber :966A

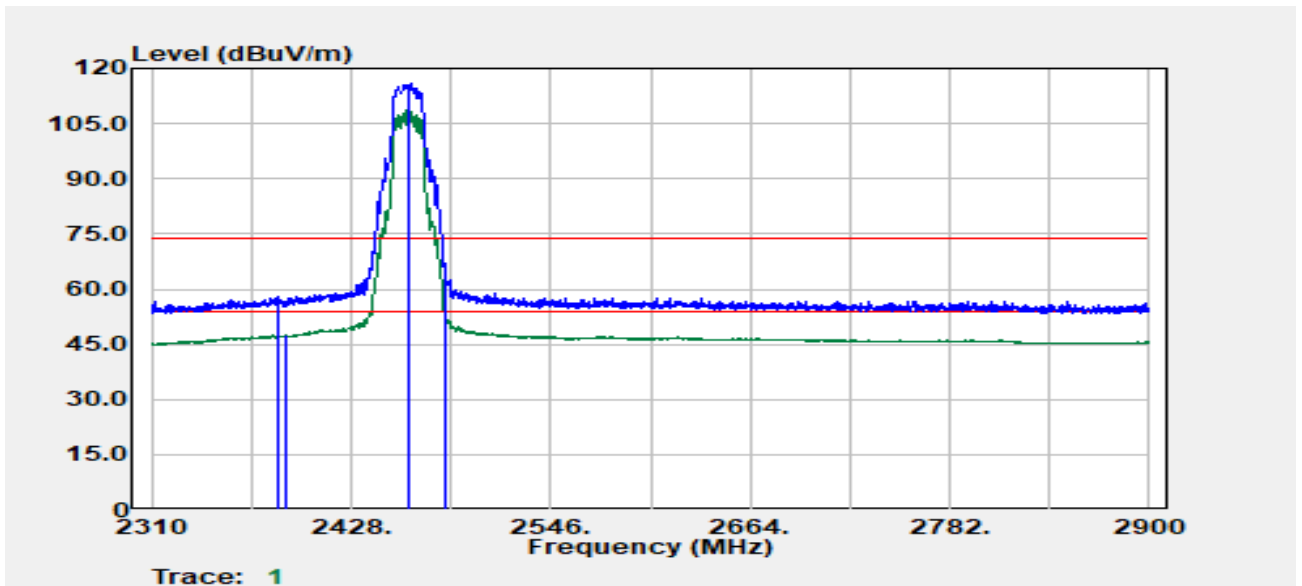


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2385.03	Peak	51.61	6.18	57.79	74.00	-16.21
2389.53	Average	41.38	6.27	47.65	54.00	-6.35
2462.00	Peak	109.78	6.32	116.10	--	--
2462.00	Average	102.40	6.32	108.72	--	--
2483.57	Peak	60.50	6.72	67.21	74.00	-6.79
2483.57	Average	46.82	6.72	53.53	54.00	-0.47

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-04-16
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

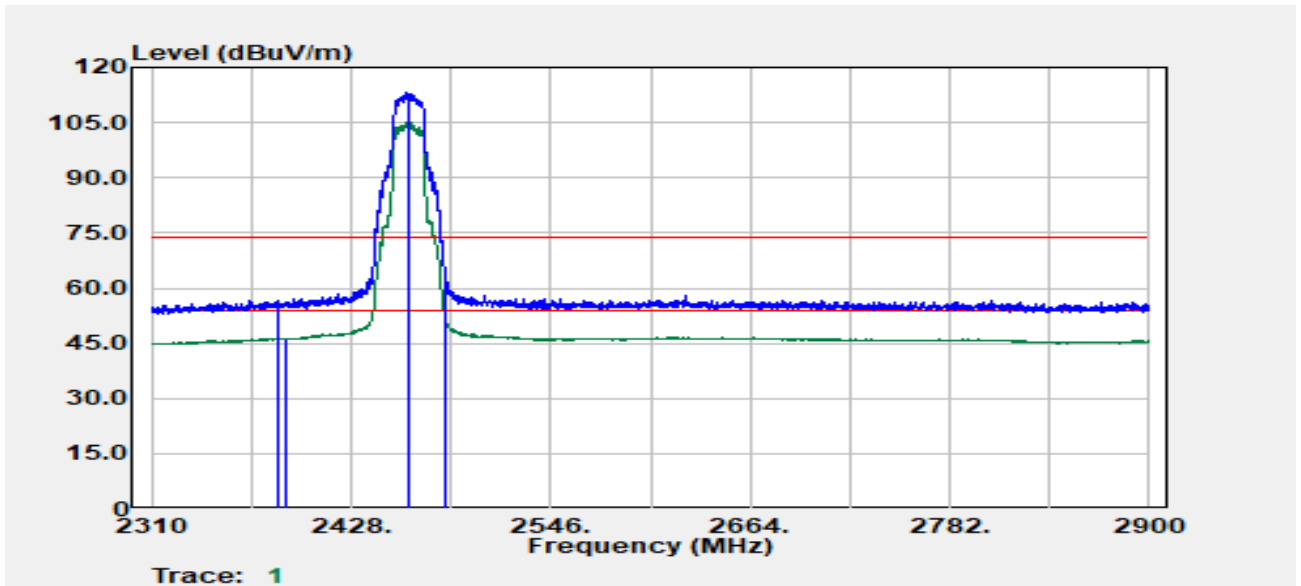


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2384.53	Peak	50.24	6.17	56.40	74.00	-17.60
2389.78	Average	40.05	6.28	46.33	54.00	-7.67
2462.00	Peak	106.66	6.32	112.98	--	--
2462.00	Average	98.75	6.32	105.07	--	--
2483.57	Peak	55.49	6.72	62.20	74.00	-11.80
2483.57	Average	44.67	6.72	51.39	54.00	-2.61

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16

Test Date :2024-04-17
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

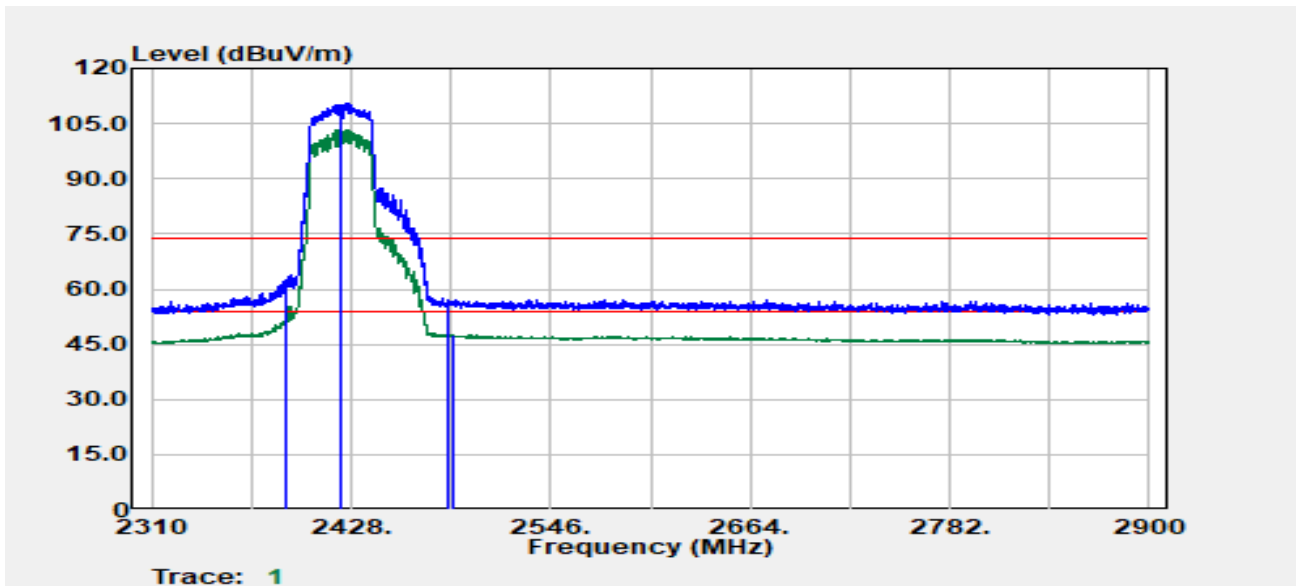


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2389.90	Peak	56.22	6.28	62.50	74.00	-11.50
2389.90	Average	47.19	6.28	53.47	54.00	-0.53
2422.00	Peak	104.14	6.34	110.48	--	--
2422.00	Average	97.12	6.34	103.46	--	--
2484.78	Peak	50.44	6.73	57.18	74.00	-16.82
2488.02	Average	40.72	6.78	47.49	54.00	-6.51

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16

Test Date :2024-04-17
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

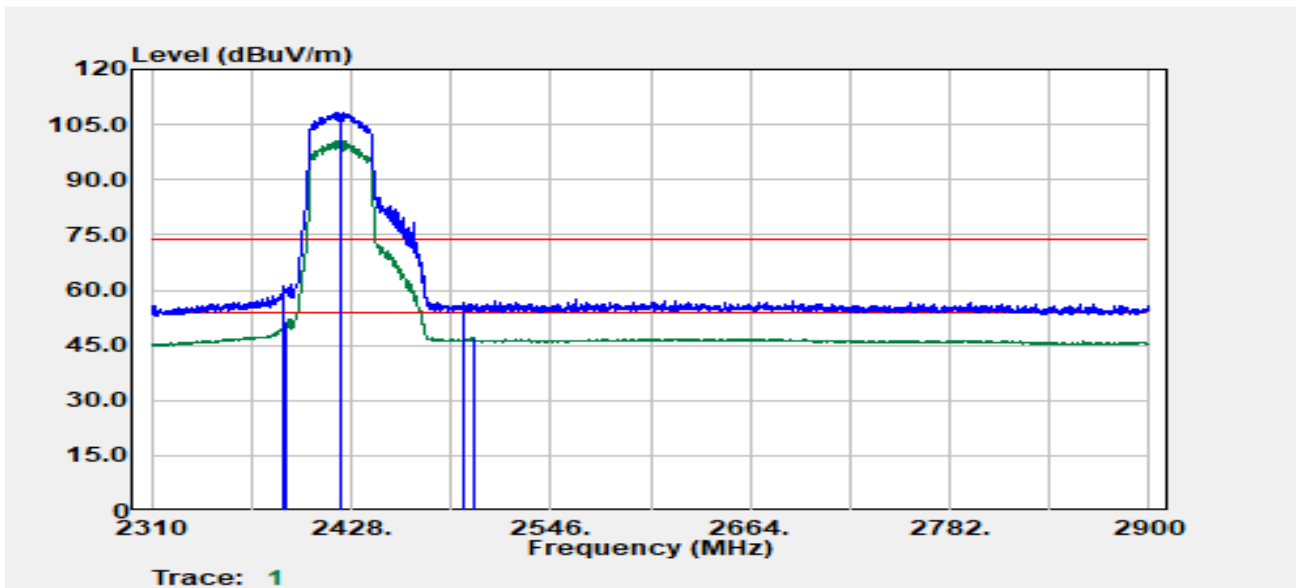


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2387.78	Peak	54.76	6.23	61.00	74.00	-13.00
2389.53	Average	44.76	6.27	51.03	54.00	-2.97
2422.00	Peak	102.09	6.34	108.43	--	--
2422.00	Average	94.40	6.34	100.74	--	--
2494.83	Peak	49.62	6.82	56.44	74.00	-17.56
2500.00	Average	40.19	6.84	47.03	54.00	-6.97

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

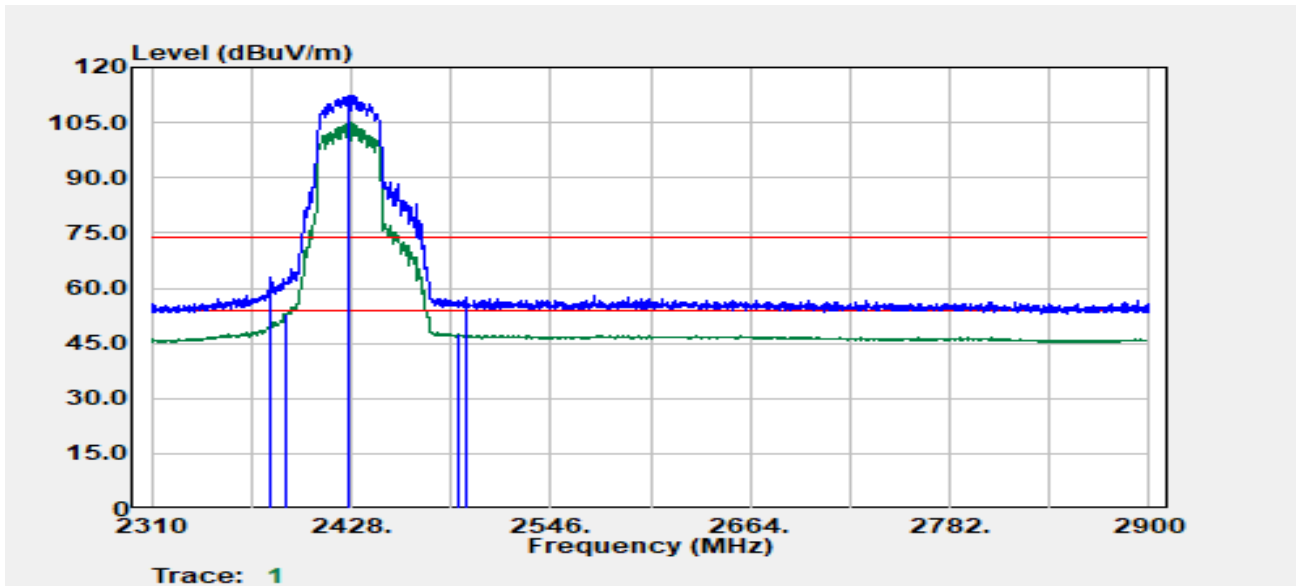


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2380.66	Peak	56.66	6.08	62.75	74.00	-11.25
2389.15	Average	46.58	6.26	52.84	54.00	-1.16
2427.00	Peak	106.09	6.40	112.49	--	--
2427.00	Average	98.51	6.40	104.91	--	--
2490.77	Average	40.65	6.81	47.45	54.00	-6.55
2496.26	Peak	50.65	6.83	57.47	74.00	-16.53

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

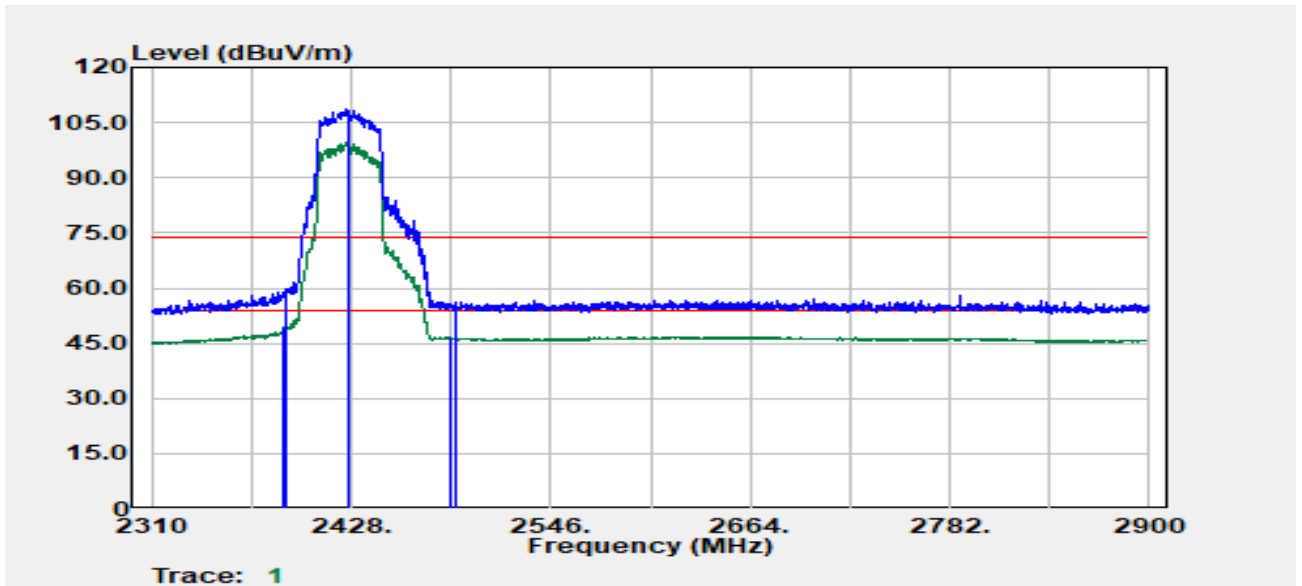


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2388.40	Average	43.12	6.25	49.37	54.00	-4.63
2388.65	Peak	53.47	6.25	59.73	74.00	-14.27
2427.00	Peak	102.24	6.40	108.64	--	--
2427.00	Average	93.41	6.40	99.80	--	--
2486.28	Average	39.75	6.75	46.50	54.00	-7.50
2490.02	Peak	49.29	6.80	56.10	74.00	-17.90

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

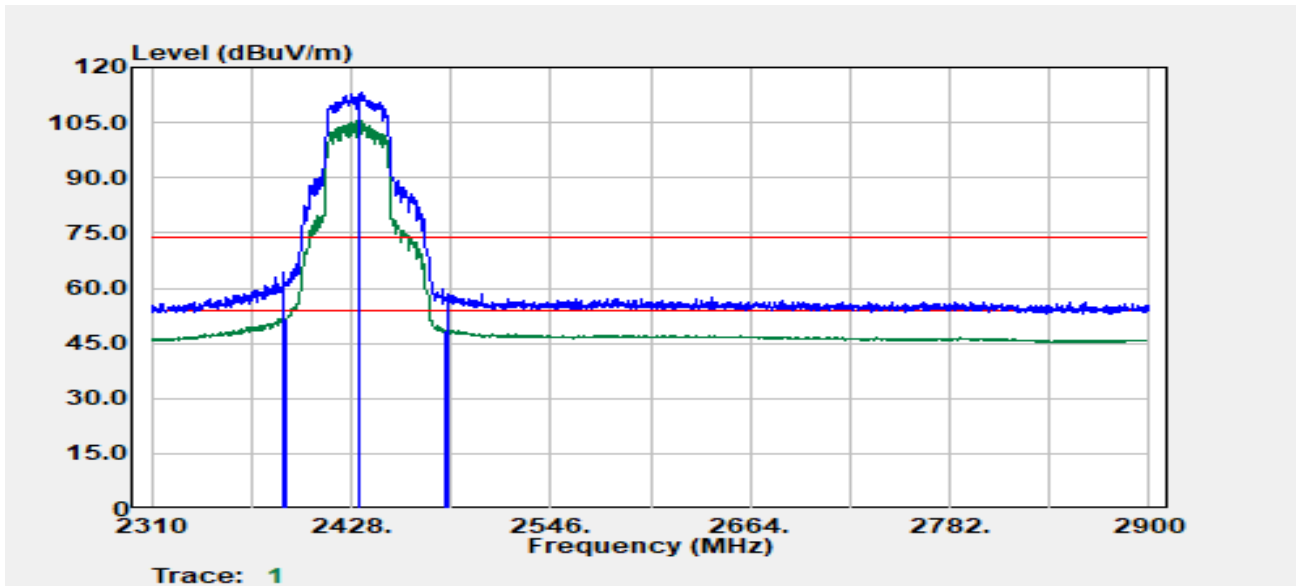


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2387.40	Peak	57.87	6.23	64.10	74.00	-9.90
2389.90	Average	45.56	6.28	51.84	54.00	-2.16
2432.00	Peak	106.66	6.41	113.07	--	--
2432.00	Average	99.05	6.41	105.46	--	--
2483.78	Average	41.80	6.72	48.52	54.00	-5.48
2484.78	Peak	51.48	6.73	58.21	74.00	-15.79

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

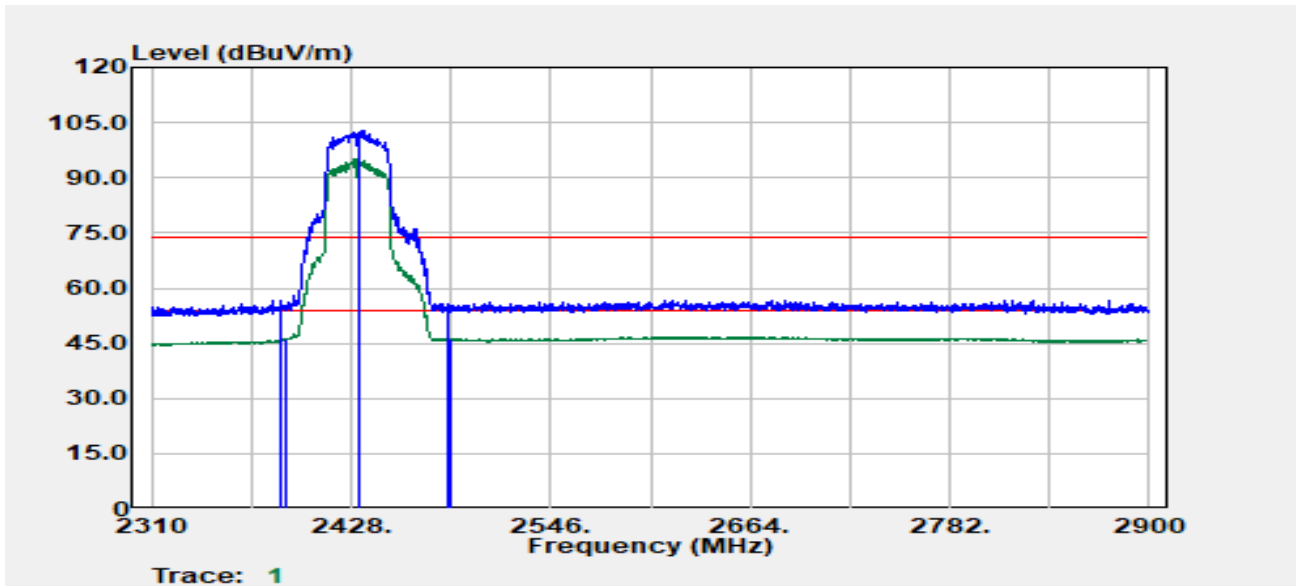


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2386.40	Peak	50.59	6.20	56.79	74.00	-17.21
2388.65	Average	39.84	6.25	46.09	54.00	-7.91
2432.00	Peak	96.21	6.41	102.62	--	--
2432.00	Average	88.71	6.41	95.12	--	--
2485.28	Peak	48.97	6.74	55.71	74.00	-18.29
2486.03	Average	39.66	6.75	46.40	54.00	-7.60

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-29
 Temp./Humi. :24.3/60
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

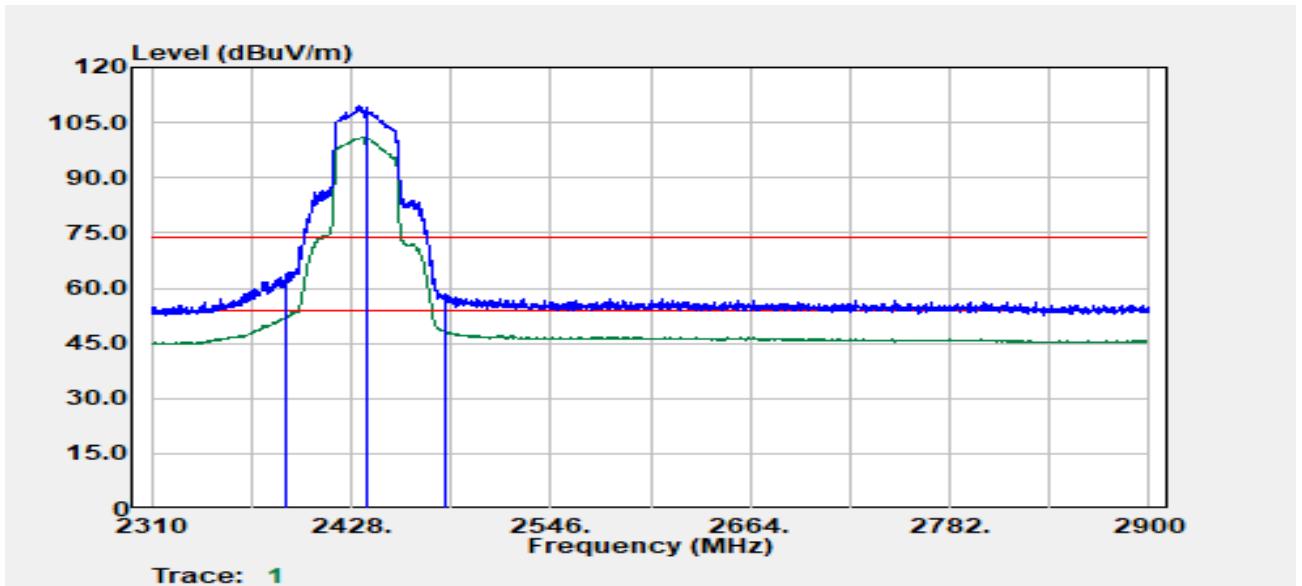


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2389.65	Peak	57.38	6.27	63.65	74.00	-10.35
2389.90	Average	46.03	6.28	52.30	54.00	-1.70
2437.00	Peak	103.30	6.37	109.67	--	--
2437.00	Average	94.75	6.37	101.11	--	--
2483.53	Average	41.40	6.71	48.11	54.00	-5.89
2483.78	Peak	51.30	6.72	58.02	74.00	-15.98

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-29
 Temp./Humi. :24.3/60
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

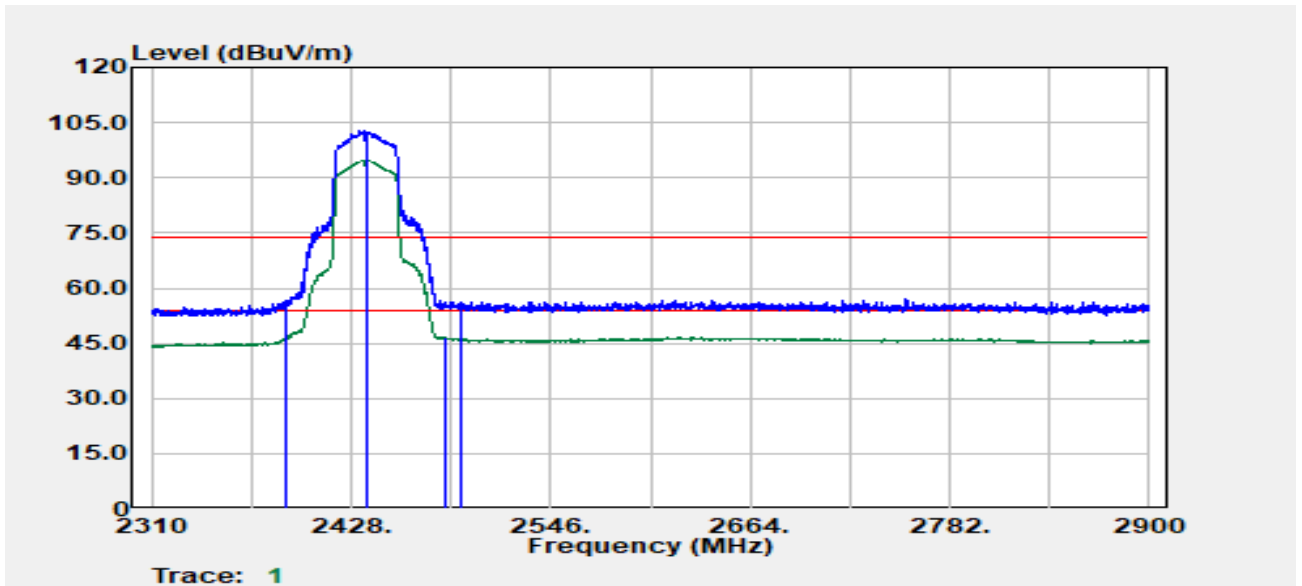


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d $B\mu$ V/m	Limit d $B\mu$ V/m	Margin dB
2389.53	Peak	50.28	6.27	56.55	74.00	-17.45
2390.00	Average	40.25	6.28	46.53	54.00	-7.47
2437.00	Peak	96.49	6.37	102.86	--	--
2437.00	Average	88.47	6.37	94.84	--	--
2483.57	Average	39.85	6.72	46.57	54.00	-7.43
2492.58	Peak	49.46	6.81	56.28	74.00	-17.72

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

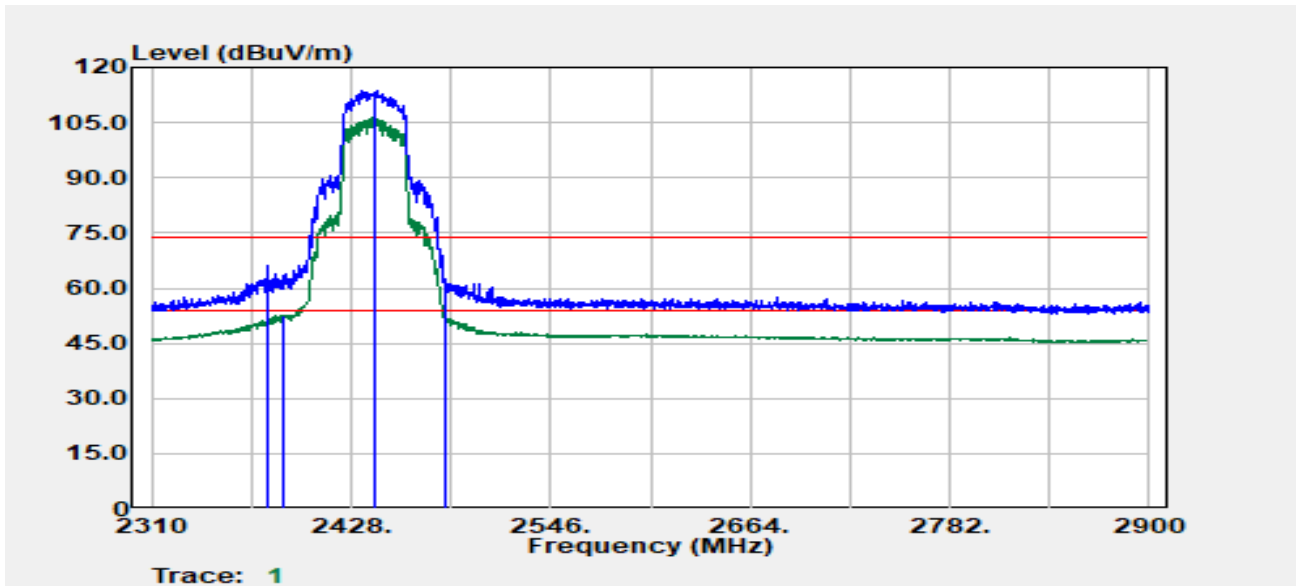


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2378.16	Peak	59.91	6.09	66.00	74.00	-8.00
2388.40	Average	46.37	6.25	52.61	54.00	-1.39
2442.00	Peak	107.25	6.34	113.59	--	--
2442.00	Average	99.98	6.34	106.33	--	--
2483.53	Average	45.37	6.71	52.08	54.00	-1.92
2483.78	Peak	55.63	6.72	62.35	74.00	-11.65

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

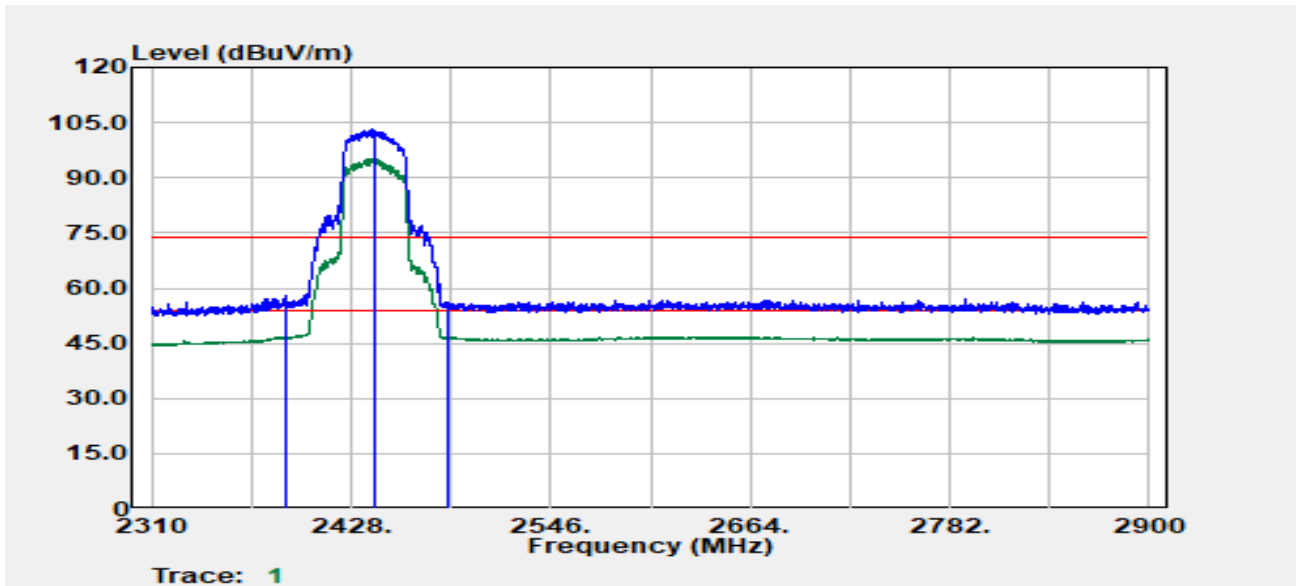


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2389.15	Average	40.65	6.26	46.91	54.00	-7.09
2389.65	Peak	51.63	6.27	57.90	74.00	-16.10
2442.00	Peak	96.87	6.34	103.22	--	--
2442.00	Average	88.94	6.34	95.29	--	--
2484.78	Peak	49.43	6.73	56.16	74.00	-17.84
2485.53	Average	40.18	6.74	46.93	54.00	-7.07

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

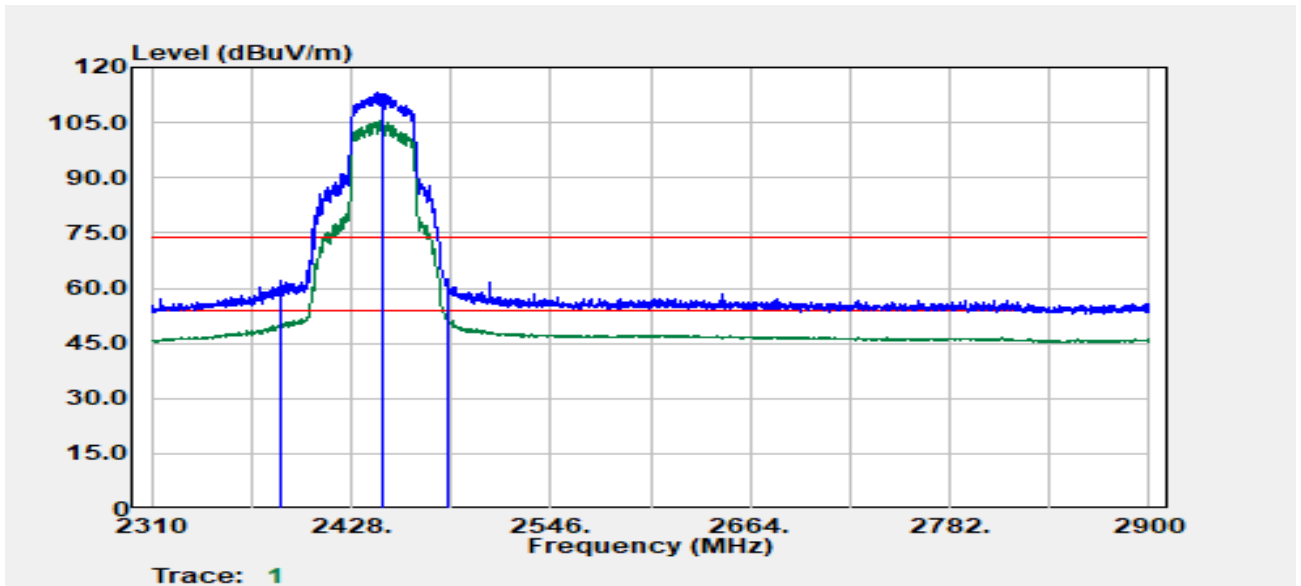


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2386.15	Peak	56.03	6.20	62.23	74.00	-11.77
2386.90	Average	44.56	6.21	50.77	54.00	-3.23
2447.00	Peak	106.75	6.35	113.11	--	--
2447.00	Average	99.01	6.35	105.36	--	--
2485.03	Average	45.95	6.73	52.69	54.00	-1.31
2485.28	Peak	55.89	6.74	62.63	74.00	-11.37

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

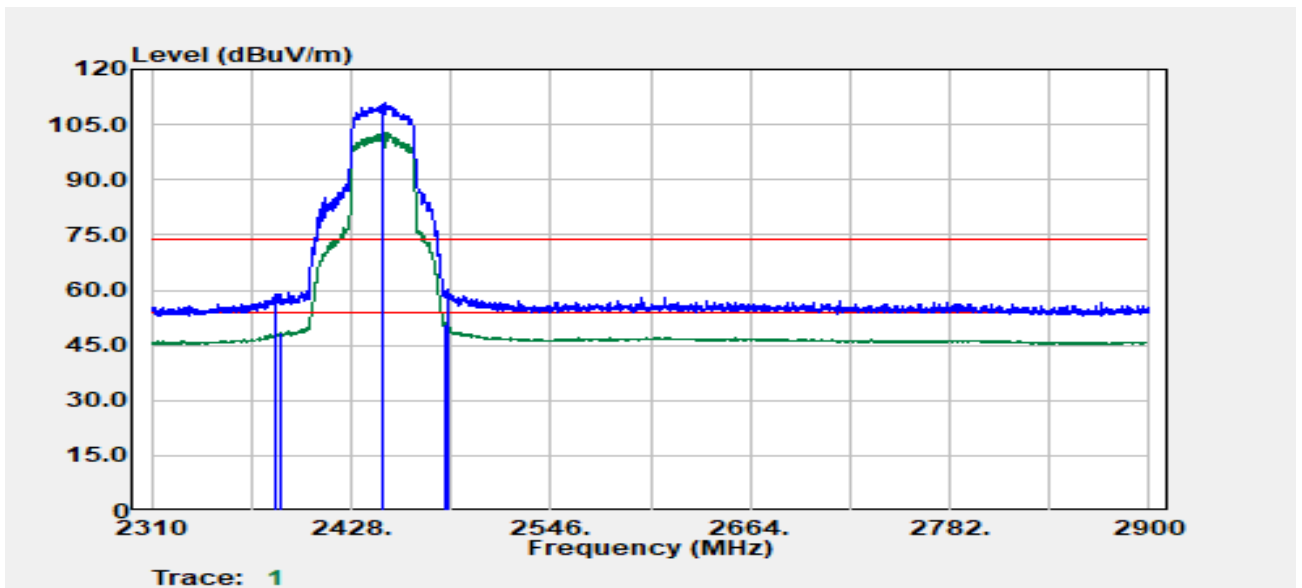


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2383.91	Peak	52.81	6.15	58.96	74.00	-15.04
2386.90	Average	42.28	6.21	48.49	54.00	-5.51
2447.00	Peak	104.41	6.35	110.76	--	--
2447.00	Average	96.49	6.35	102.84	--	--
2483.53	Average	43.95	6.71	50.67	54.00	-3.33
2485.78	Peak	53.29	6.75	60.04	74.00	-13.96

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :15

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

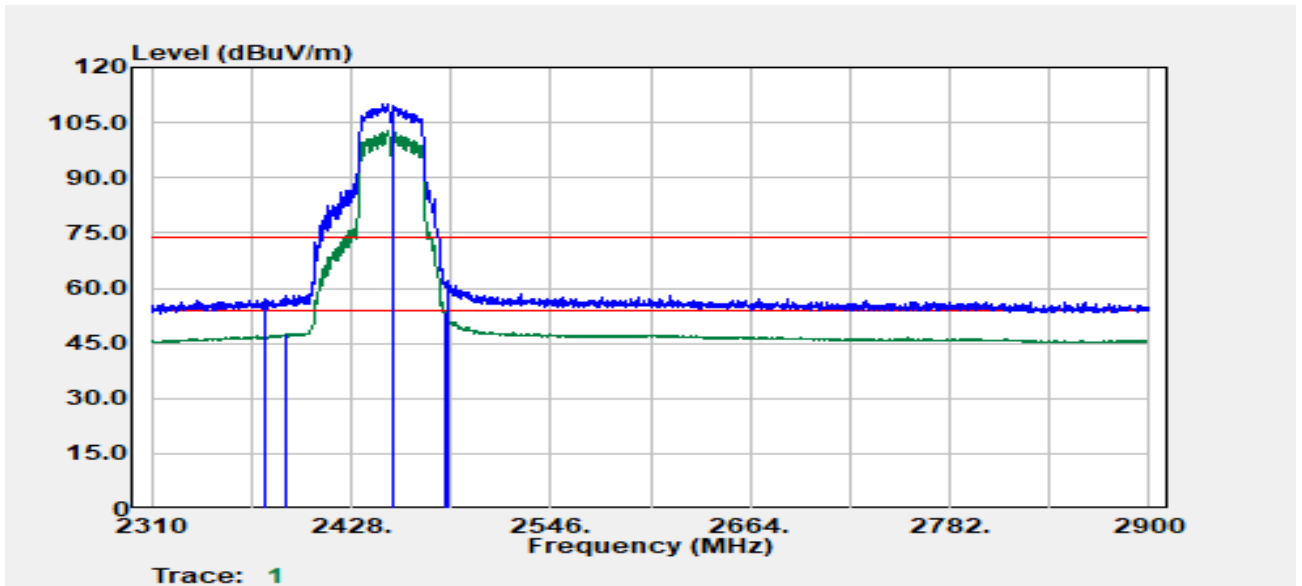


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2376.67	Peak	50.79	6.10	56.89	74.00	-17.11
2389.15	Average	41.22	6.26	47.48	54.00	-6.52
2452.00	Peak	103.68	6.34	110.03	--	--
2452.00	Average	96.56	6.34	102.91	--	--
2484.28	Average	46.51	6.72	53.24	54.00	-0.76
2484.78	Peak	55.16	6.73	61.89	74.00	-12.11

Report No.: TMWK2309003308KR

Rev.: 00


Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :15

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

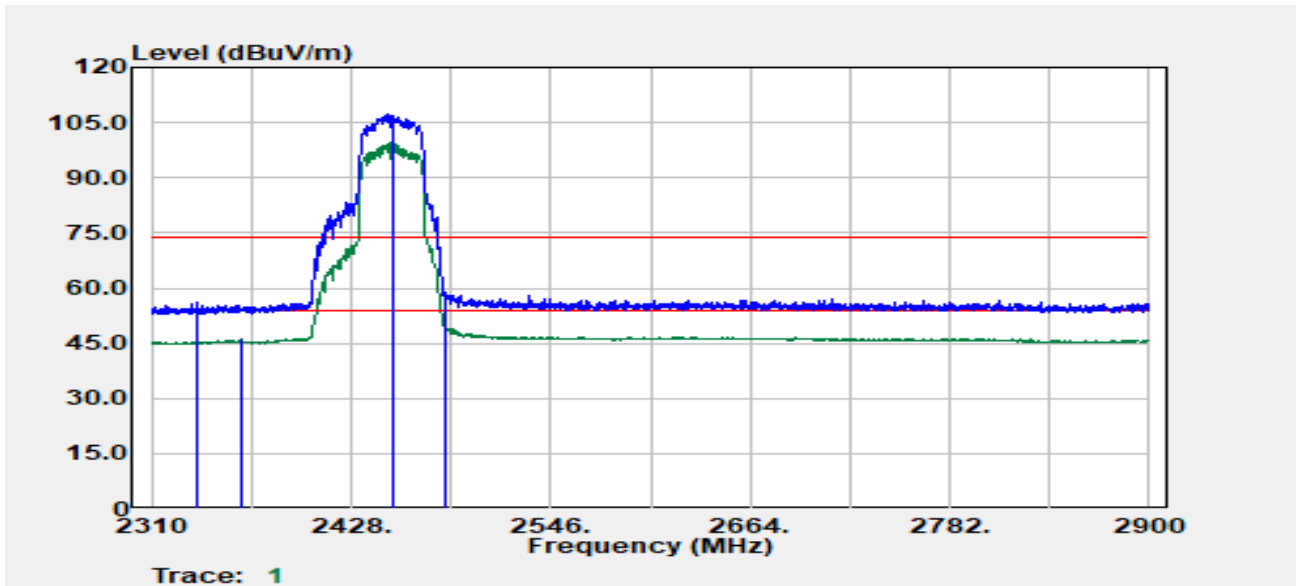

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2336.72	Peak	49.93	6.14	56.06	74.00	-17.94
2363.43	Average	39.85	6.22	46.07	54.00	-7.93
2452.00	Peak	100.79	6.34	107.13	--	--
2452.00	Average	93.16	6.34	99.51	--	--
2483.53	Peak	52.02	6.71	58.74	74.00	-15.26
2483.53	Average	42.43	6.71	49.15	54.00	-4.85

Project No	:TM-2309000207P	Test Date	:2024-04-18
Operation Band	:802.11ax20	Temp./Humi.	:24.5/57
Frequency	:2412 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:16.5		

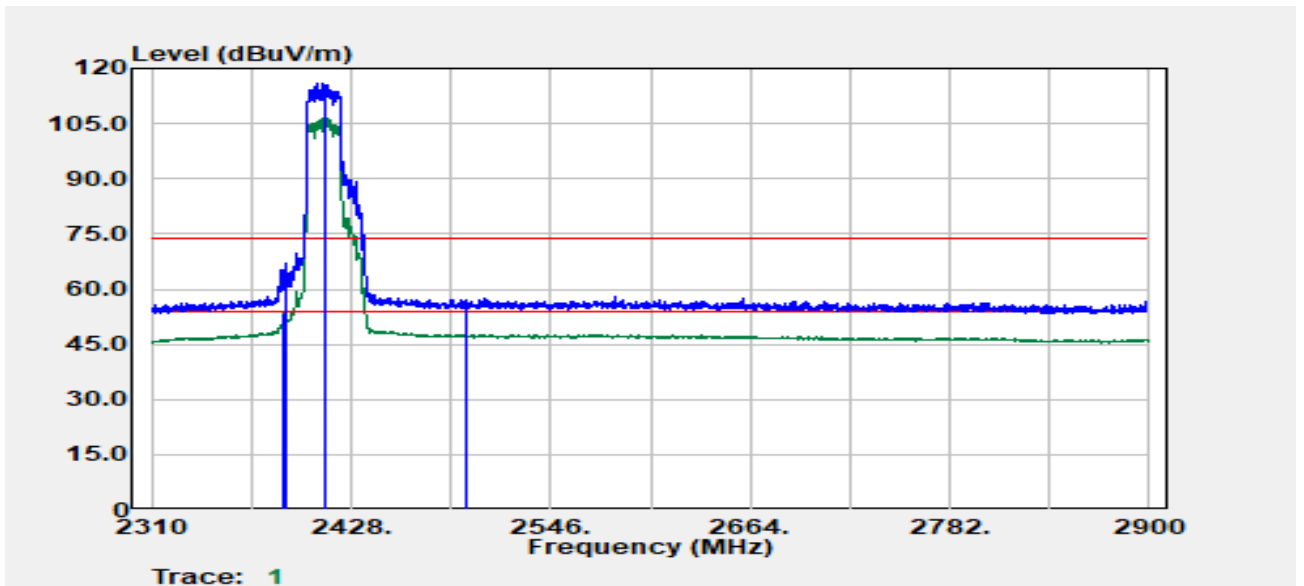


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2387.90	Average	47.15	6.24	53.39	54.00	-0.61
2389.15	Peak	60.91	6.26	67.17	74.00	-6.83
2412.00	Peak	109.59	6.31	115.89	--	--
2412.00	Average	100.30	6.31	106.60	--	--
2495.51	Peak	50.32	6.82	57.15	74.00	-16.85
2495.76	Average	40.85	6.82	47.68	54.00	-6.32

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2412 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

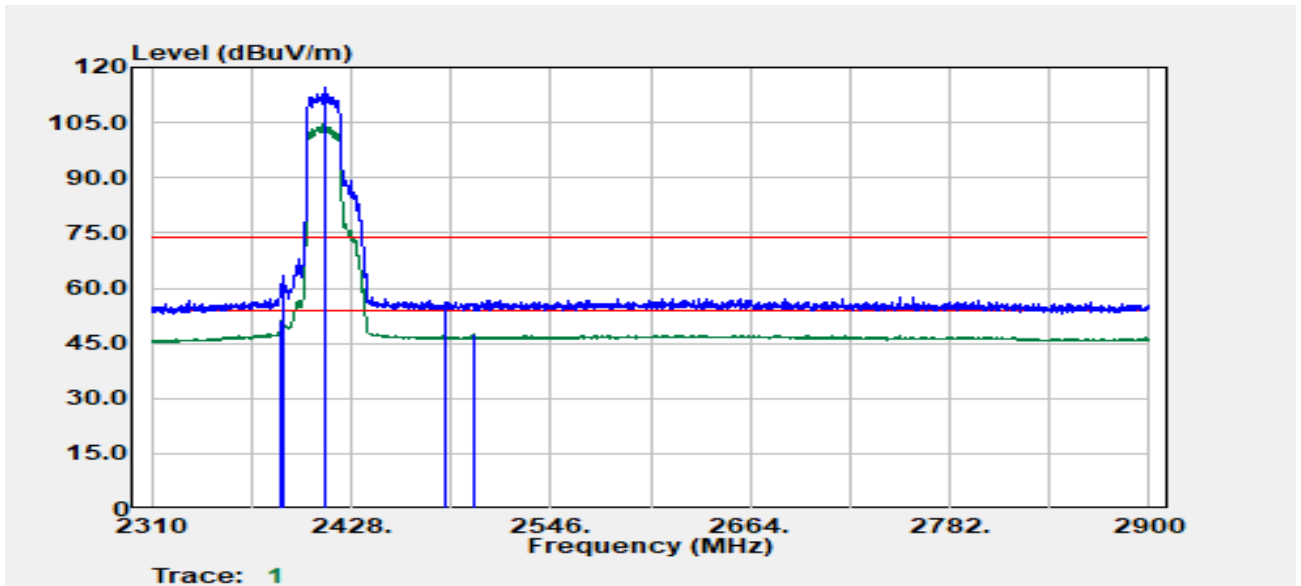


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2386.78	Average	44.78	6.21	51.00	54.00	-3.00
2388.28	Peak	57.33	6.24	63.57	74.00	-10.43
2412.00	Peak	108.43	6.31	114.74	--	--
2412.00	Average	98.22	6.31	104.53	--	--
2484.32	Peak	49.60	6.73	56.33	74.00	-17.67
2500.00	Average	40.51	6.84	47.36	54.00	-6.64

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2417 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

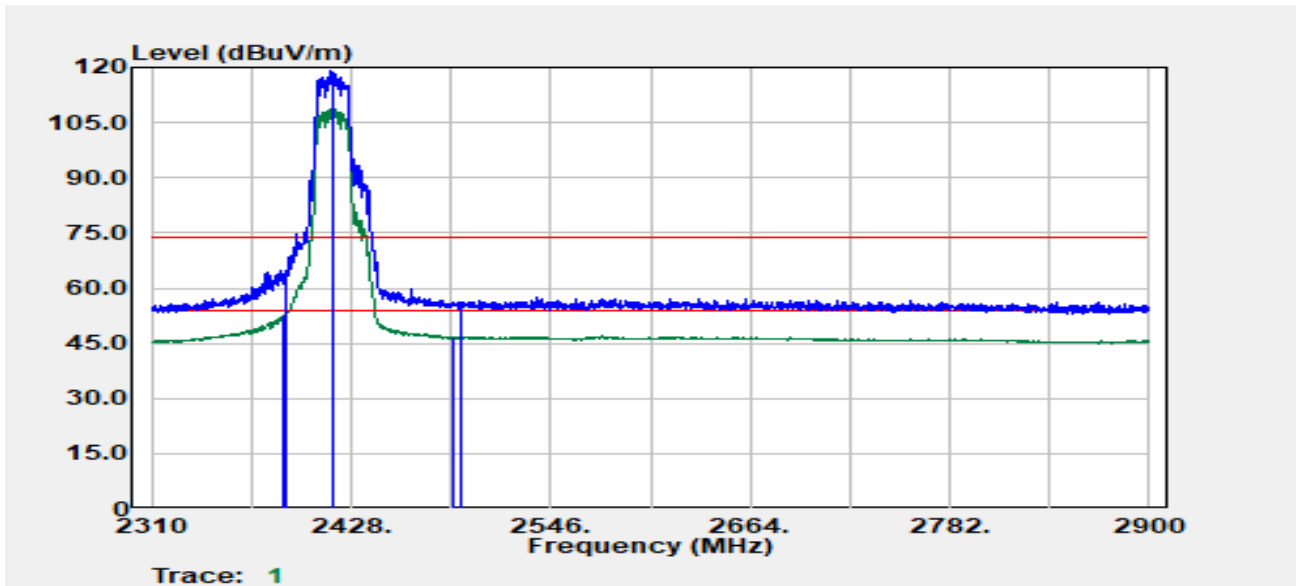


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2388.15	Average	46.27	6.24	52.51	54.00	-1.49
2389.90	Peak	58.64	6.28	64.91	74.00	-9.09
2417.00	Peak	112.71	6.31	119.02	--	--
2417.00	Average	102.54	6.31	108.85	--	--
2489.02	Average	39.96	6.79	46.75	54.00	-7.25
2492.27	Peak	49.42	6.81	56.23	74.00	-17.77

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2417 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

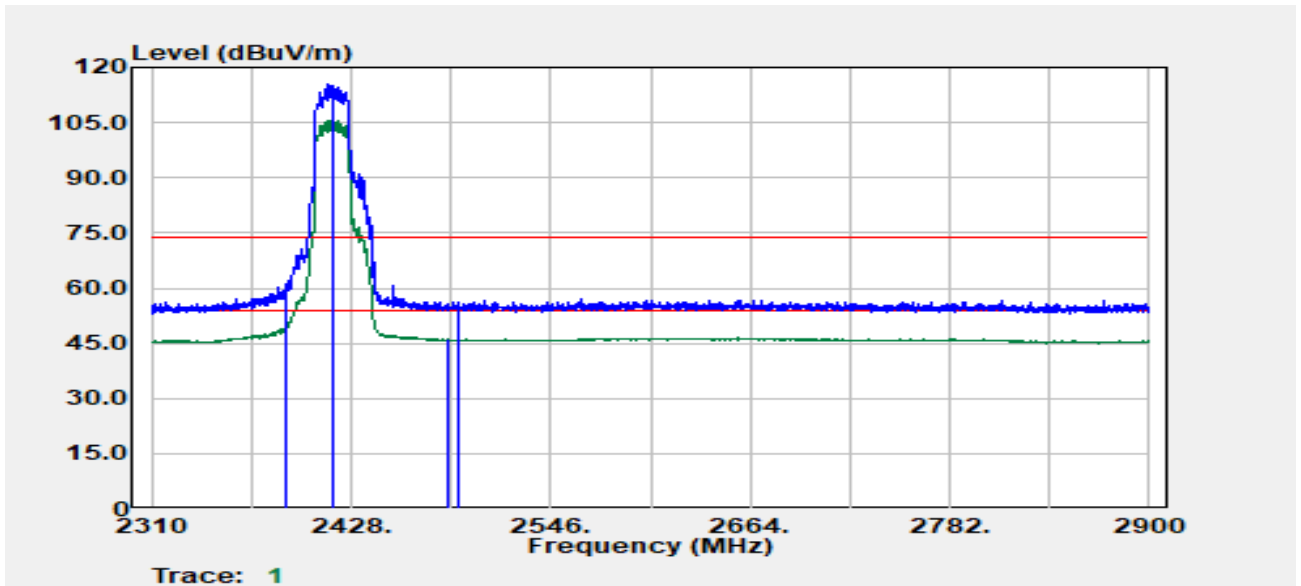


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2389.65	Peak	54.96	6.27	61.24	74.00	-12.76
2389.90	Average	43.33	6.28	49.60	54.00	-4.40
2417.00	Peak	109.05	6.31	115.36	--	--
2417.00	Average	99.30	6.31	105.61	--	--
2485.03	Average	39.33	6.73	46.07	54.00	-7.93
2491.27	Peak	49.37	6.81	56.18	74.00	-17.82

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

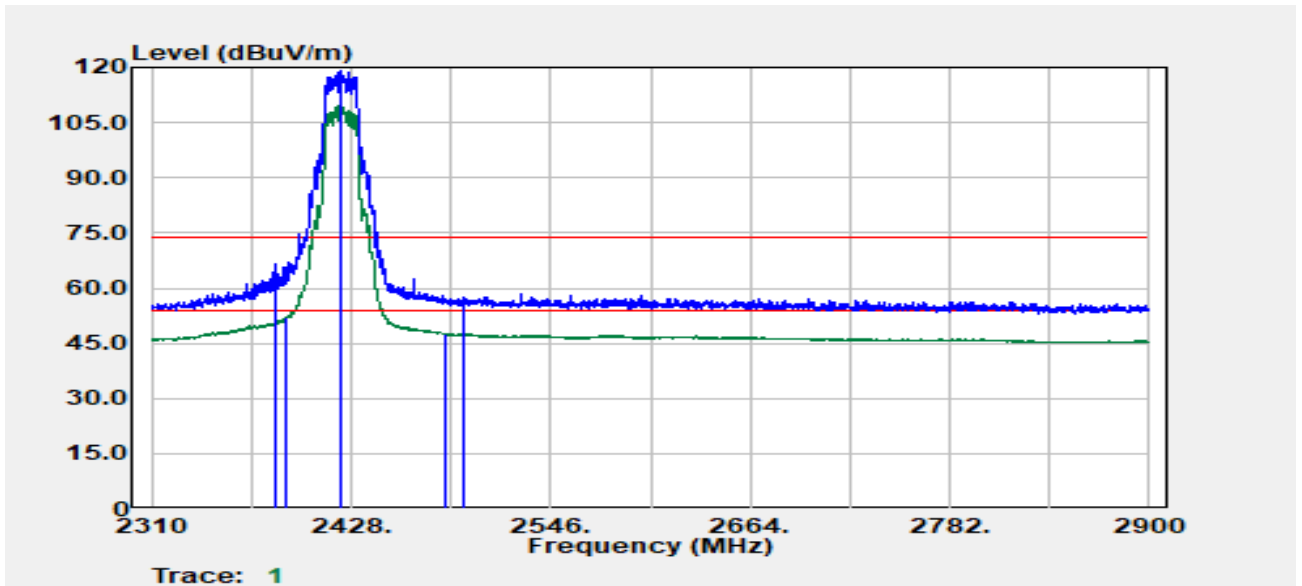


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2383.91	Peak	60.39	6.15	66.54	74.00	-7.46
2388.90	Average	45.75	6.26	52.00	54.00	-2.00
2422.00	Peak	112.72	6.34	119.05	--	--
2422.00	Average	103.14	6.34	109.48	--	--
2483.53	Average	40.91	6.71	47.63	54.00	-6.37
2493.77	Peak	50.91	6.82	57.73	74.00	-16.27

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

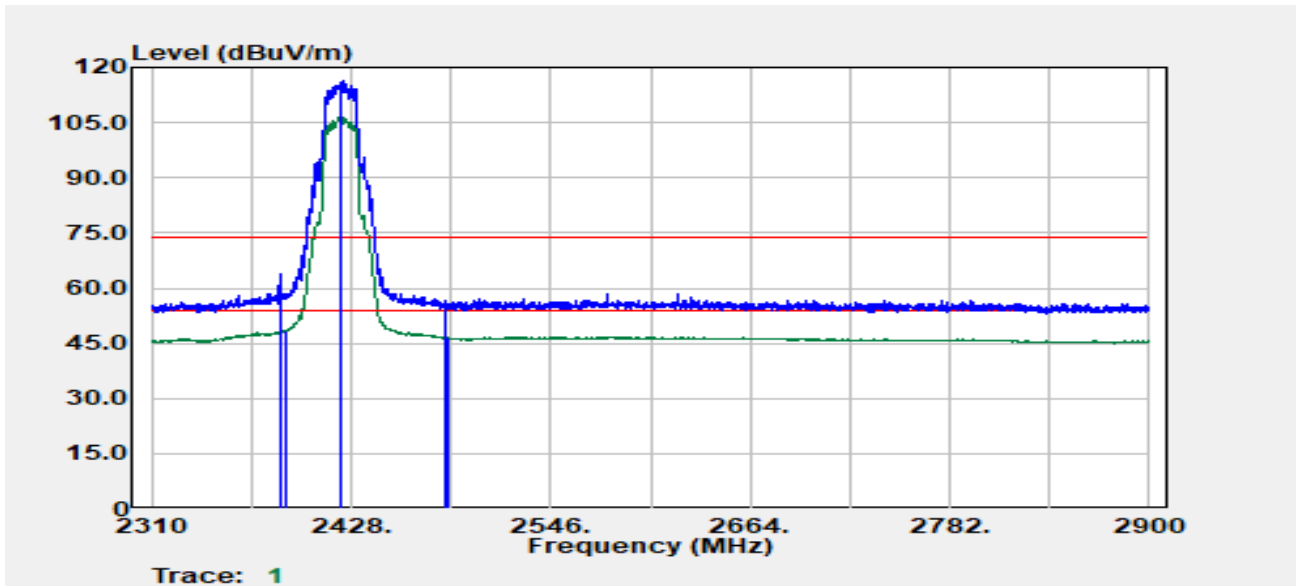


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2385.65	Peak	57.76	6.19	63.95	74.00	-10.05
2389.65	Average	42.40	6.27	48.68	54.00	-5.32
2422.00	Peak	110.05	6.34	116.39	--	--
2422.00	Average	100.25	6.34	106.59	--	--
2484.28	Peak	50.03	6.72	56.75	74.00	-17.25
2484.53	Average	39.90	6.73	46.63	54.00	-7.37

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

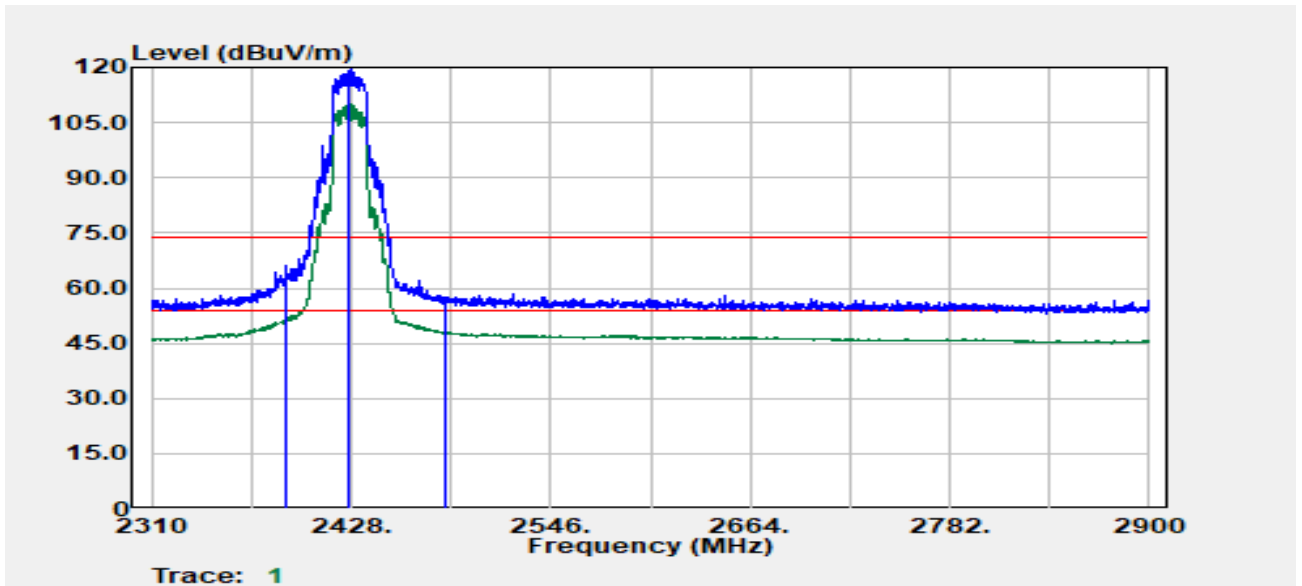


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2388.90	Average	45.11	6.26	51.37	54.00	-2.63
2389.40	Peak	60.06	6.27	66.33	74.00	-7.67
2427.00	Peak	113.12	6.40	119.51	--	--
2427.00	Average	103.67	6.40	110.07	--	--
2483.53	Peak	50.98	6.71	57.69	74.00	-16.31
2483.78	Average	41.45	6.72	48.17	54.00	-5.83

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :19.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

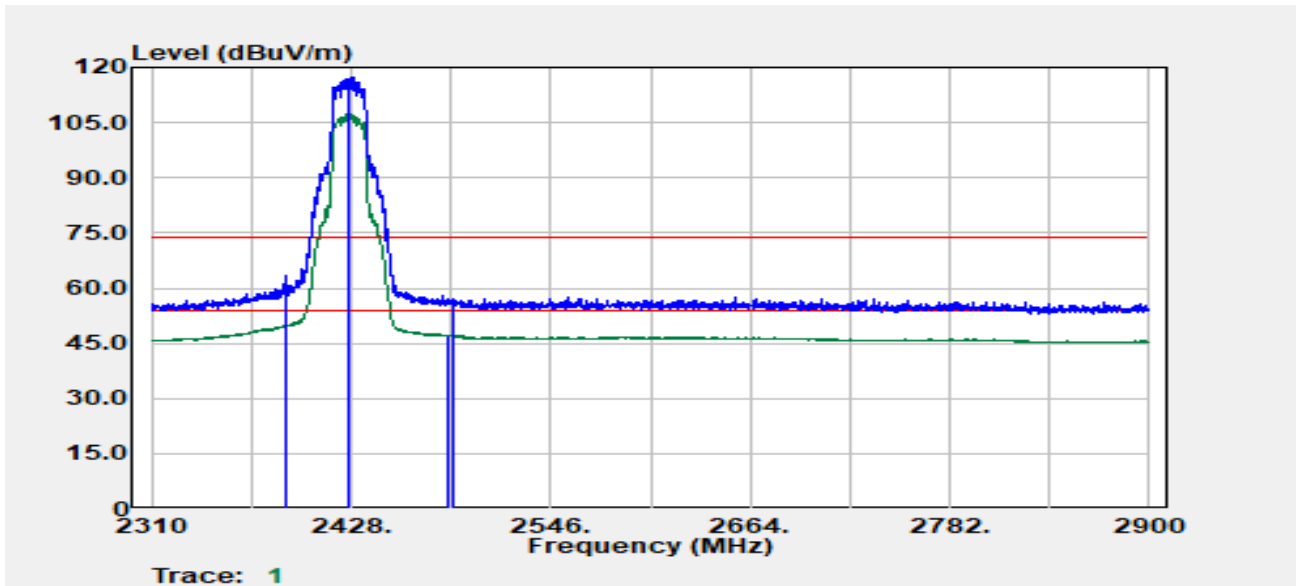


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d $B\mu$ V/m	Limit d $B\mu$ V/m	Margin dB
2388.65	Peak	57.31	6.25	63.56	74.00	-10.44
2389.90	Average	43.44	6.28	49.72	54.00	-4.28
2427.00	Peak	110.87	6.40	117.26	--	--
2427.00	Average	101.08	6.40	107.47	--	--
2484.78	Average	40.56	6.73	47.29	54.00	-6.71
2488.77	Peak	50.14	6.79	56.92	74.00	-17.08

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

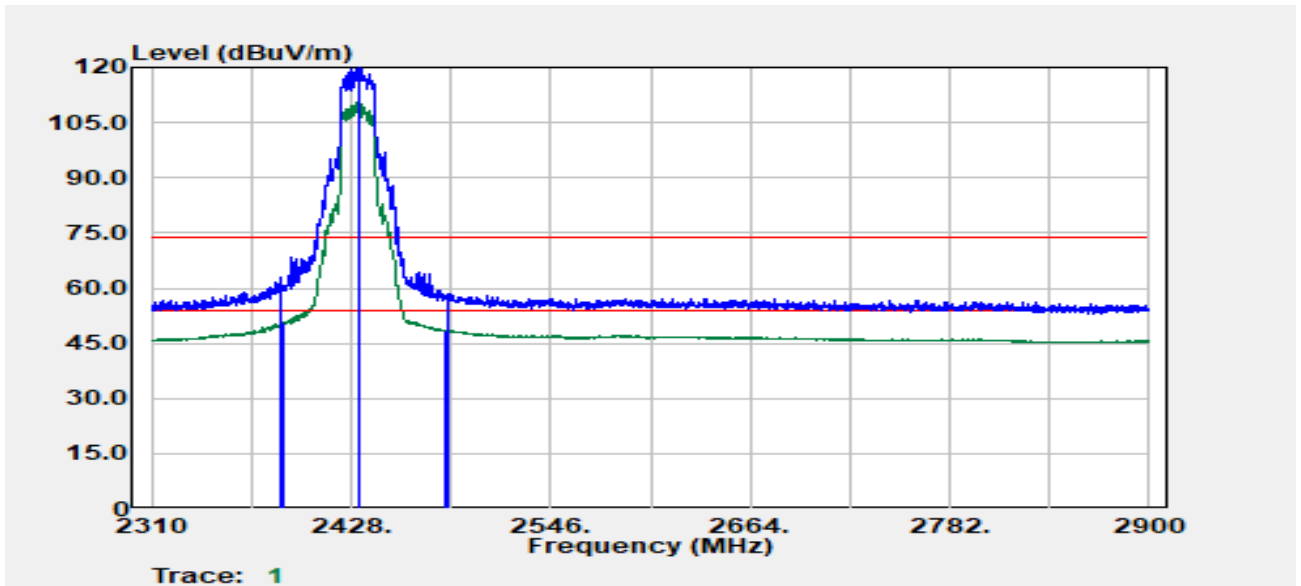


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2385.65	Peak	56.97	6.19	63.16	74.00	-10.84
2388.40	Average	44.58	6.25	50.82	54.00	-3.18
2432.00	Peak	113.64	6.41	120.06	--	--
2432.00	Average	103.98	6.41	110.40	--	--
2483.78	Average	41.91	6.72	48.63	54.00	-5.37
2484.53	Peak	51.87	6.73	58.60	74.00	-15.40

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

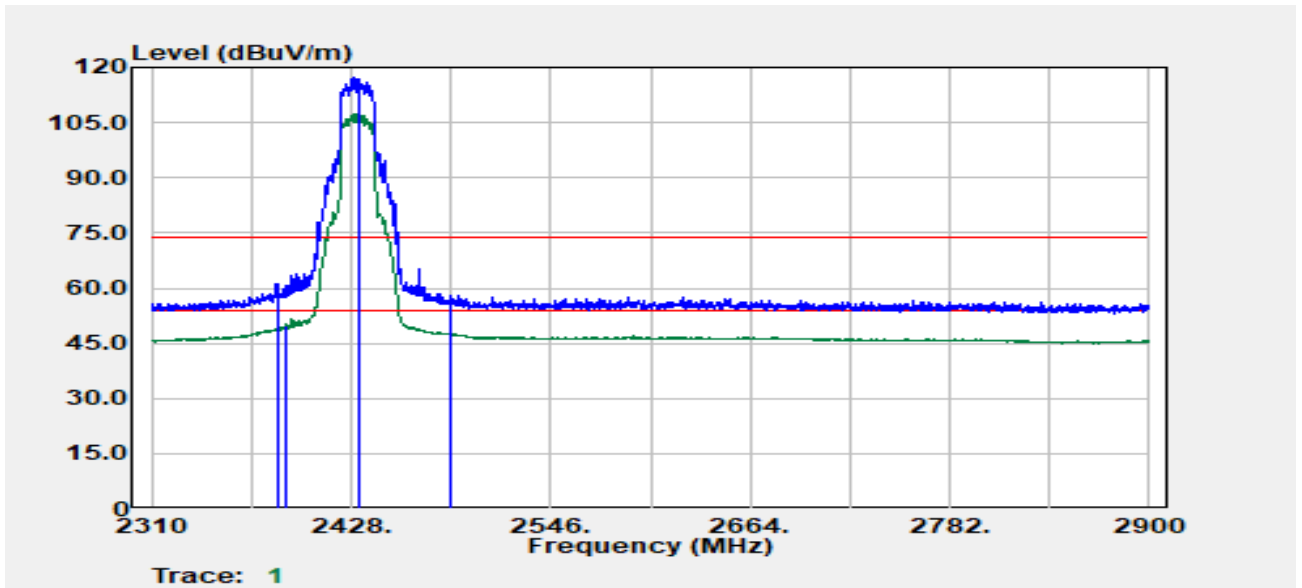


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2385.16	Peak	55.17	6.18	61.35	74.00	-12.65
2389.90	Average	43.60	6.28	49.88	54.00	-4.12
2432.00	Peak	110.67	6.41	117.08	--	--
2432.00	Average	101.03	6.41	107.44	--	--
2487.03	Peak	51.01	6.76	57.78	74.00	-16.22
2487.28	Average	40.95	6.77	47.72	54.00	-6.28

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

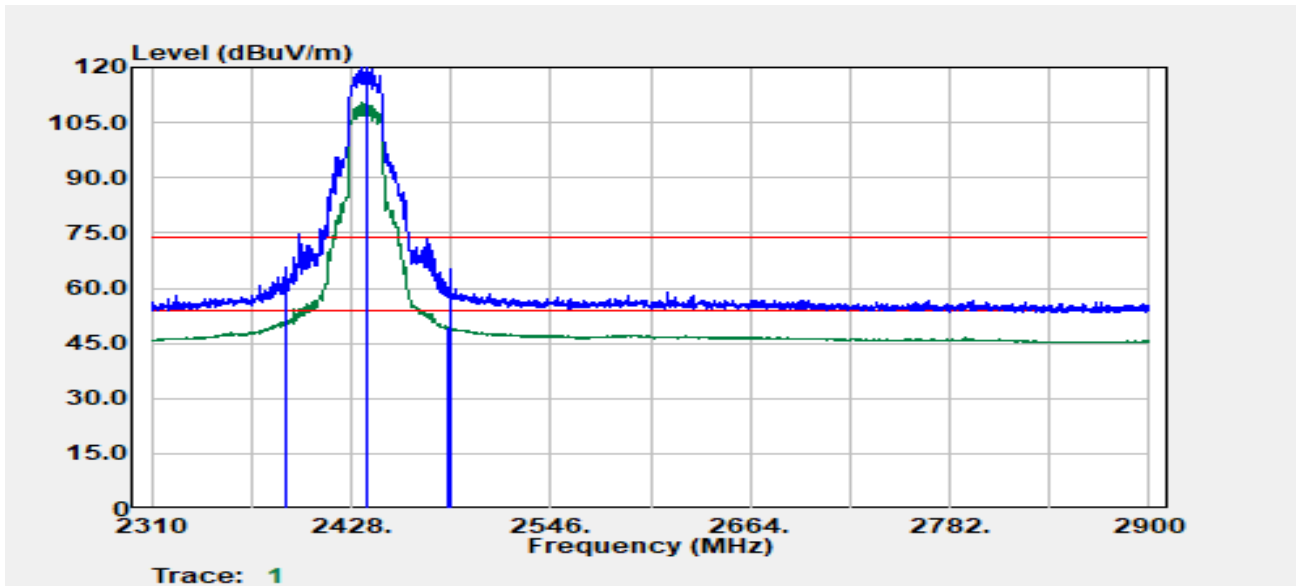


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2389.90	Peak	59.30	6.28	65.58	74.00	-8.42
2389.90	Average	45.42	6.28	51.69	54.00	-2.31
2437.00	Peak	114.38	6.37	120.74	--	--
2437.00	Average	103.96	6.37	110.33	--	--
2484.78	Average	42.61	6.73	49.34	54.00	-4.66
2486.28	Peak	58.37	6.75	65.12	74.00	-8.88

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

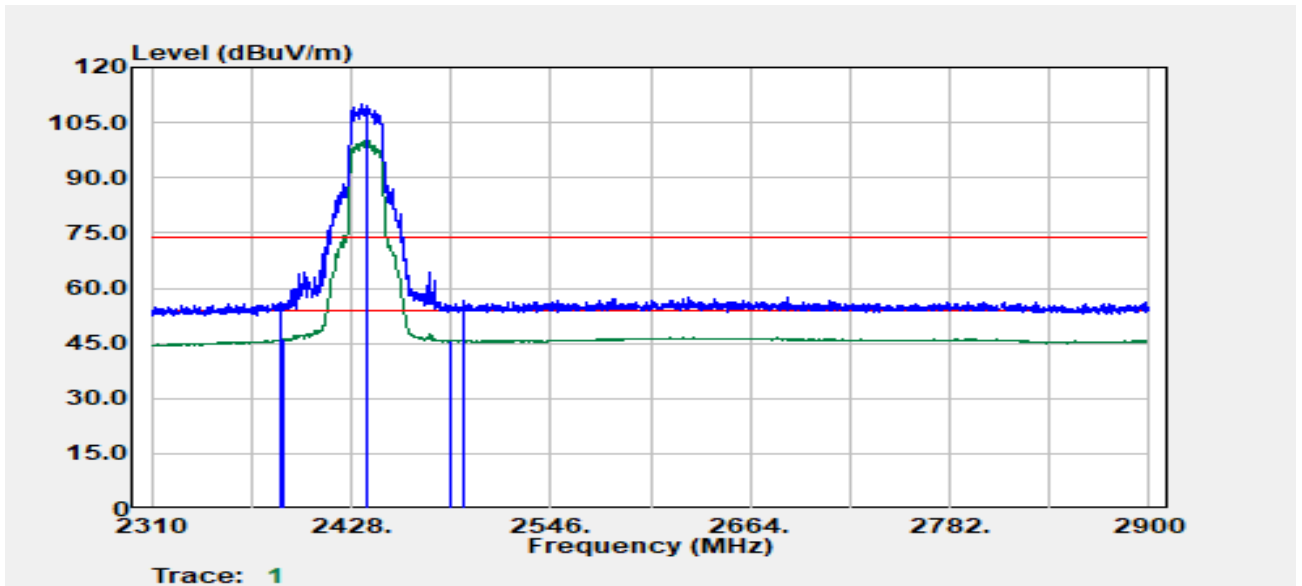


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2386.65	Peak	50.03	6.21	56.24	74.00	-17.76
2388.40	Average	39.81	6.25	46.05	54.00	-7.95
2437.00	Peak	103.60	6.37	109.97	--	--
2437.00	Average	93.85	6.37	100.22	--	--
2487.52	Average	39.08	6.77	45.84	54.00	-8.16
2495.02	Peak	49.71	6.82	56.53	74.00	-17.47

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2457 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

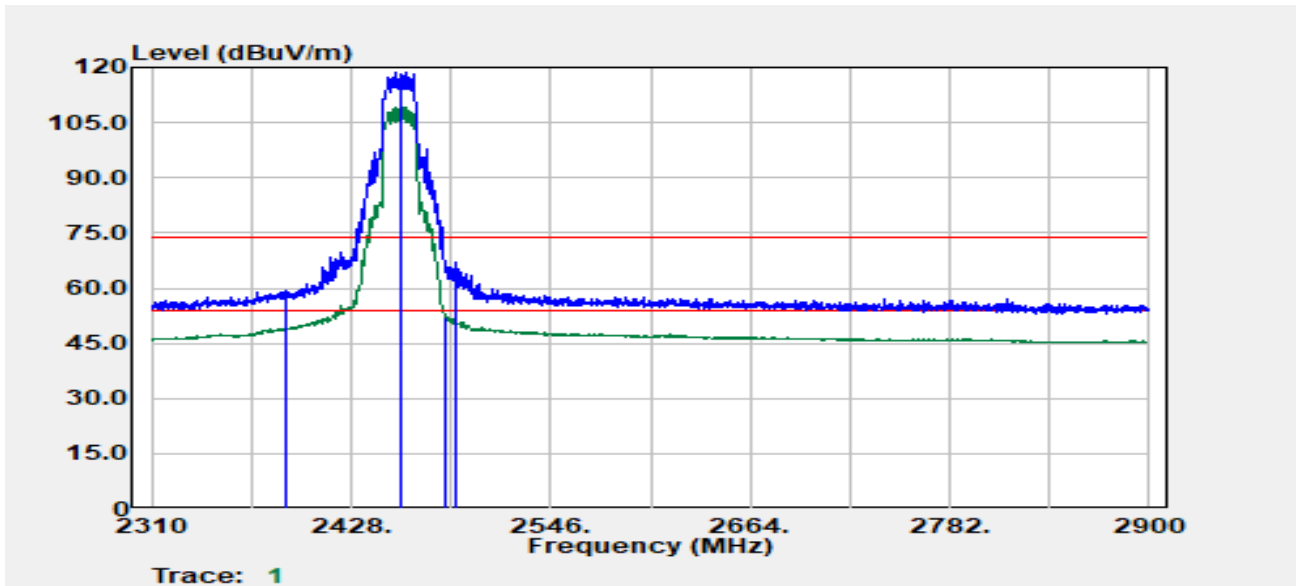


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2389.40	Peak	52.83	6.27	59.10	74.00	-14.90
2389.65	Average	42.84	6.27	49.11	54.00	-4.89
2457.00	Peak	112.54	6.31	118.85	--	--
2457.00	Average	102.94	6.31	109.25	--	--
2483.53	Average	45.49	6.71	52.21	54.00	-1.79
2490.02	Peak	60.21	6.80	67.01	74.00	-6.99

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2457 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :20


Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

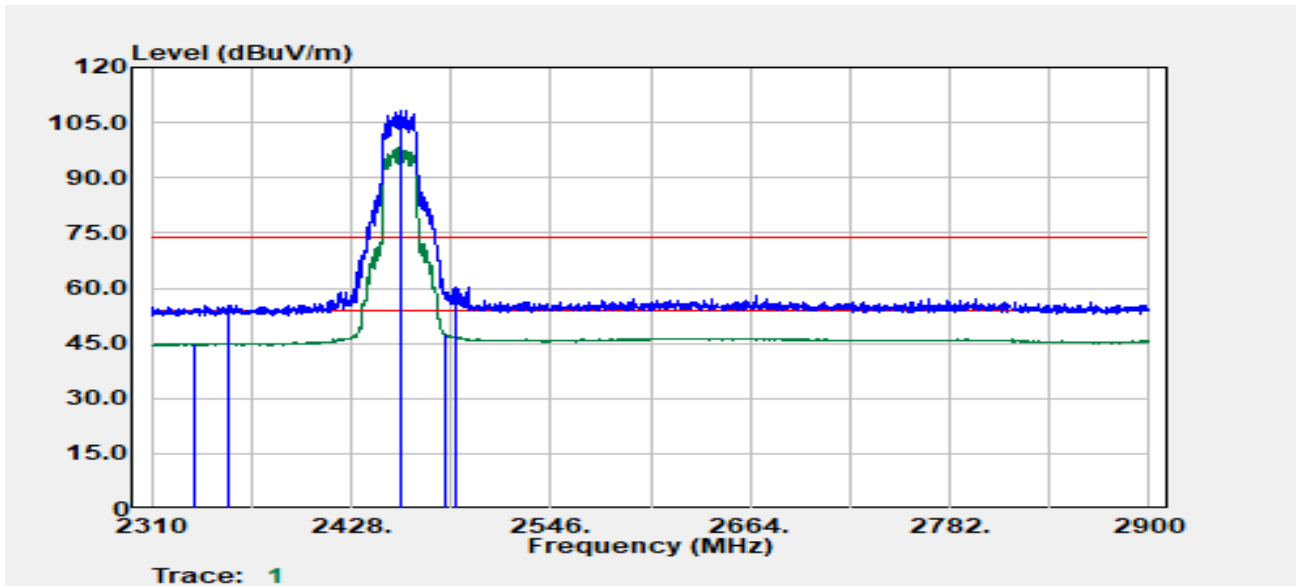

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2335.47	Average	38.86	6.14	45.00	54.00	-9.00
2355.94	Peak	49.11	6.25	55.36	74.00	-18.64
2457.00	Peak	102.06	6.31	108.37	--	--
2457.00	Average	91.83	6.31	98.14	--	--
2483.53	Average	40.65	6.71	47.36	54.00	-6.64
2490.27	Peak	53.55	6.80	60.36	74.00	-13.64

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

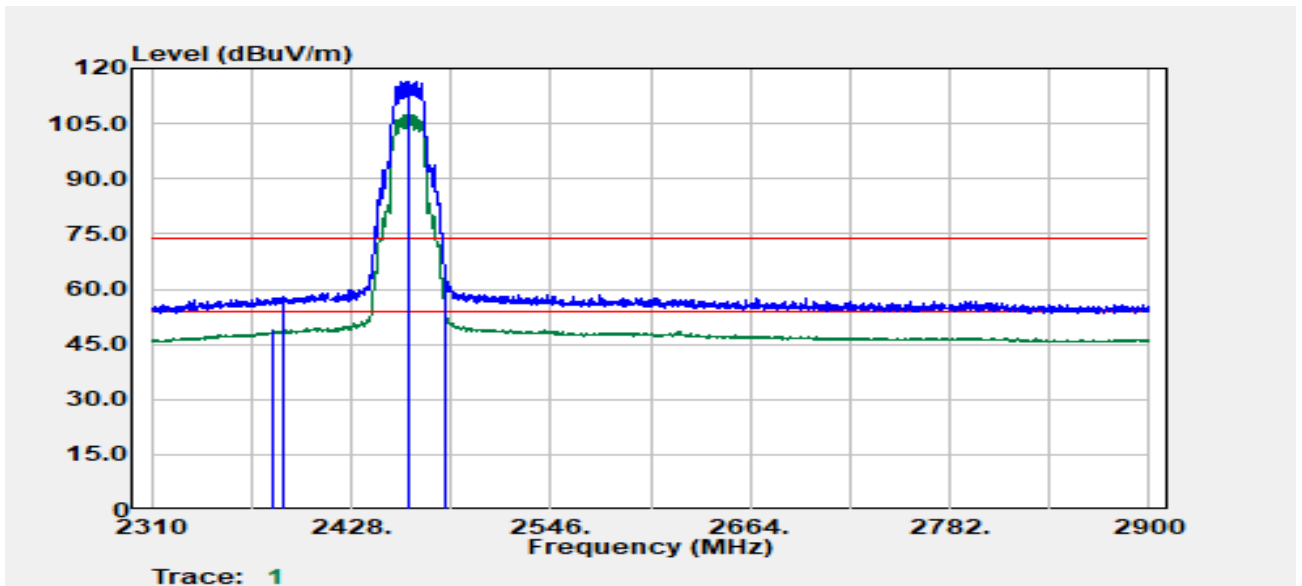


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2382.03	Average	42.79	6.11	48.90	54.00	-5.10
2387.78	Peak	51.65	6.23	57.89	74.00	-16.11
2462.00	Peak	110.13	6.32	116.45	--	--
2462.00	Average	101.21	6.32	107.53	--	--
2483.57	Average	46.80	6.72	53.52	54.00	-0.48
2483.82	Peak	59.09	6.72	65.81	74.00	-8.19

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2462 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

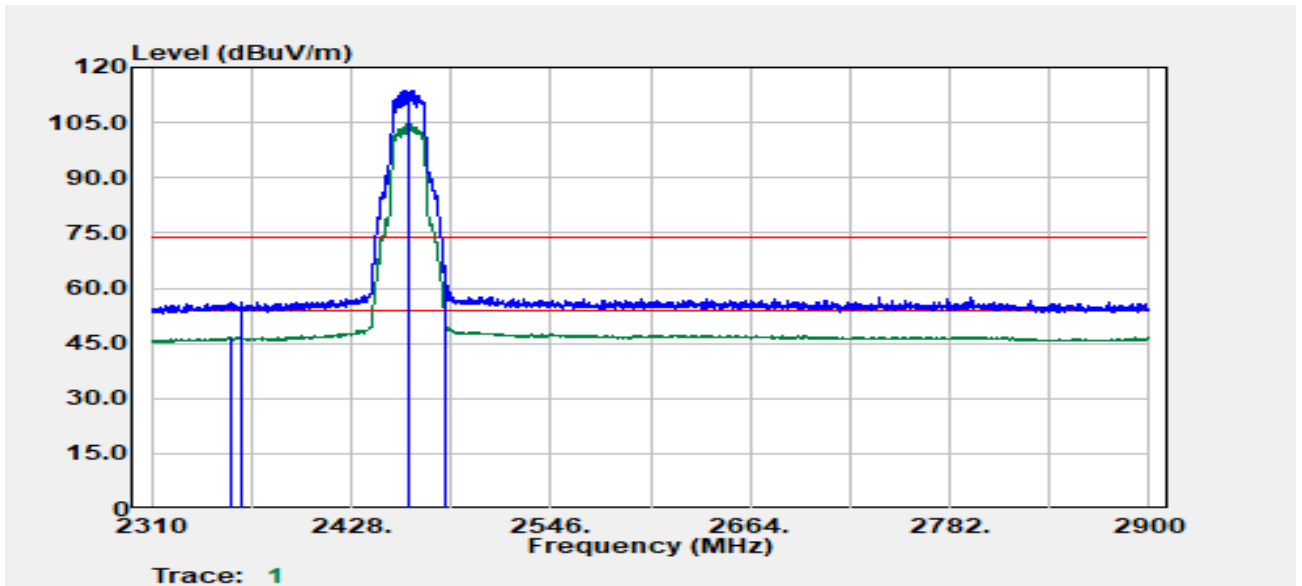


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2356.52	Average	40.52	6.25	46.76	54.00	-7.24
2362.77	Peak	50.04	6.23	56.27	74.00	-17.73
2462.00	Peak	107.43	6.32	113.75	--	--
2462.00	Average	98.29	6.32	104.61	--	--
2483.57	Peak	55.71	6.72	62.42	74.00	-11.58
2483.57	Average	45.01	6.72	51.72	54.00	-2.28

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :14.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

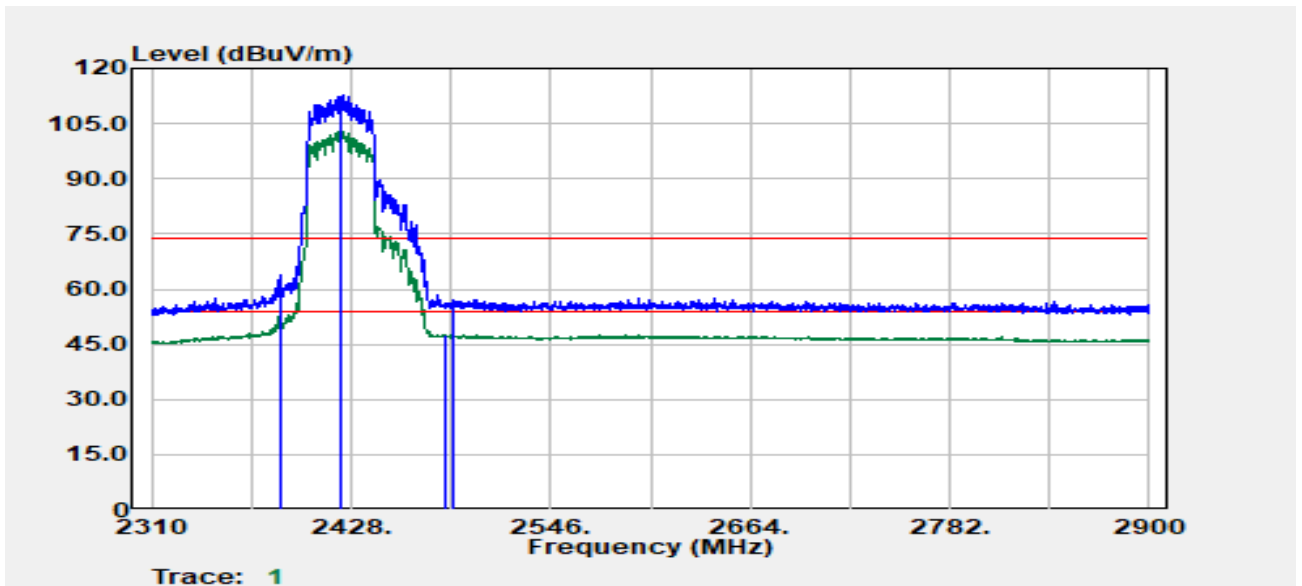


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2385.65	Average	46.64	6.19	52.83	54.00	-1.17
2385.90	Peak	57.78	6.19	63.97	74.00	-10.03
2422.00	Peak	106.22	6.34	112.56	--	--
2422.00	Average	96.64	6.34	102.97	--	--
2483.53	Average	40.80	6.71	47.52	54.00	-6.48
2488.77	Peak	50.12	6.79	56.90	74.00	-17.10

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2422 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :14.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

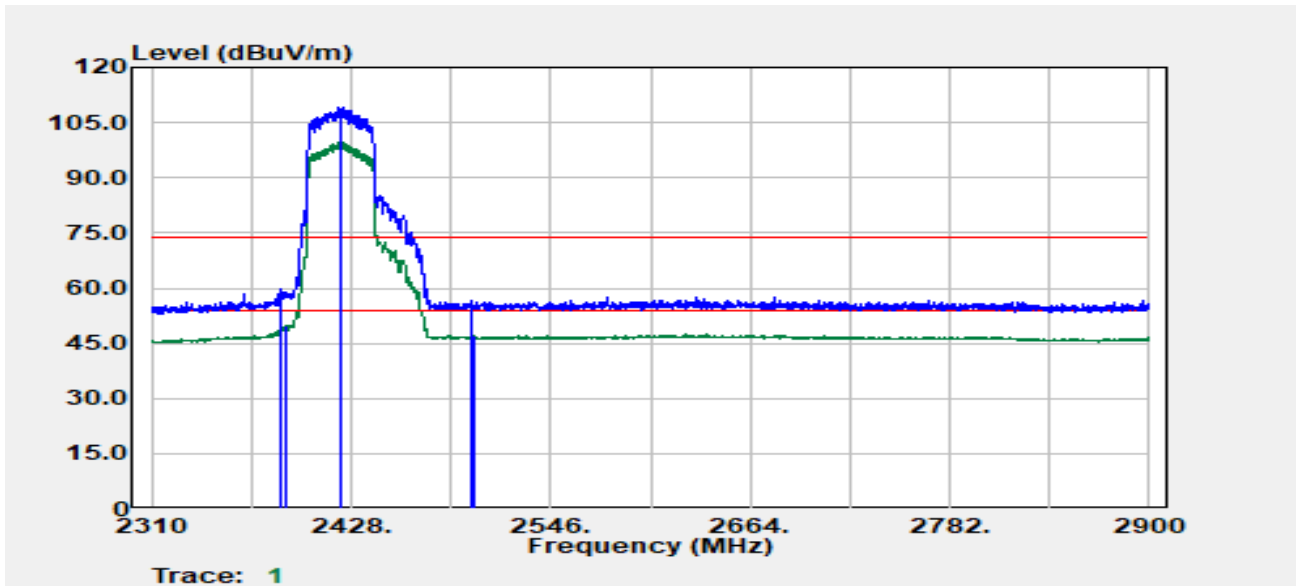


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2385.78	Peak	53.68	6.19	59.87	74.00	-14.13
2389.53	Average	43.60	6.27	49.87	54.00	-4.13
2422.00	Peak	102.86	6.34	109.20	--	--
2422.00	Average	93.30	6.34	99.64	--	--
2499.08	Peak	49.68	6.84	56.51	74.00	-17.49
2500.00	Average	40.44	6.84	47.28	54.00	-6.72

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

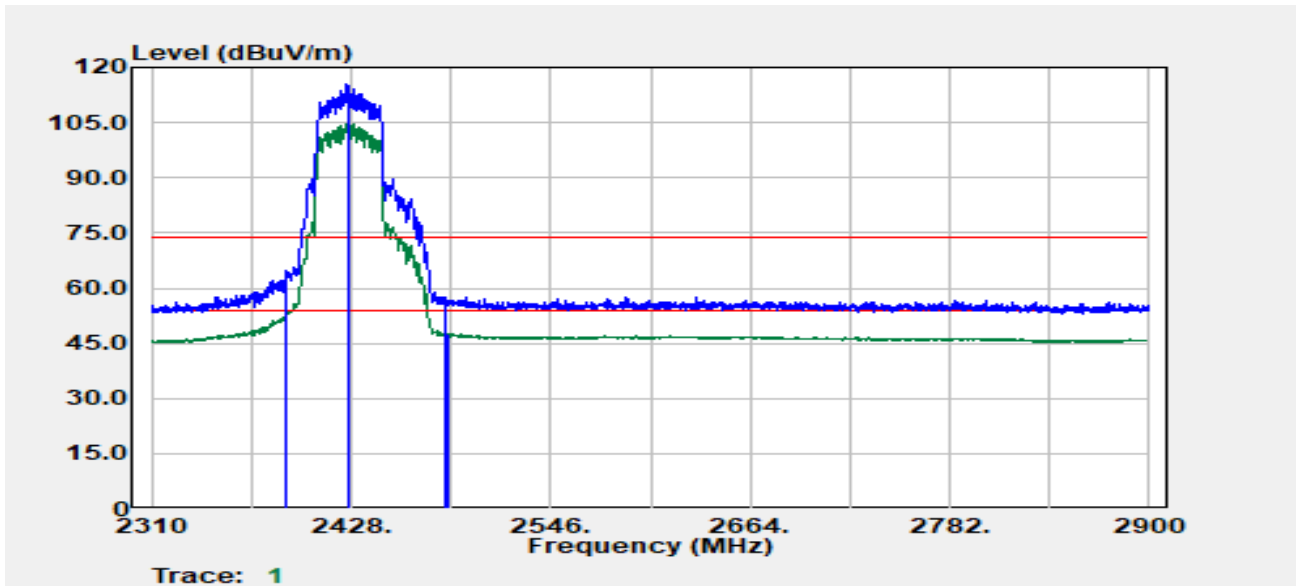


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2389.40	Average	46.64	6.27	52.91	54.00	-1.09
2389.90	Peak	58.38	6.28	64.66	74.00	-9.34
2427.00	Peak	109.00	6.40	115.39	--	--
2427.00	Average	98.29	6.40	104.69	--	--
2483.53	Peak	50.83	6.71	57.54	74.00	-16.46
2485.28	Average	40.76	6.74	47.49	54.00	-6.51

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2427 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :16.5

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

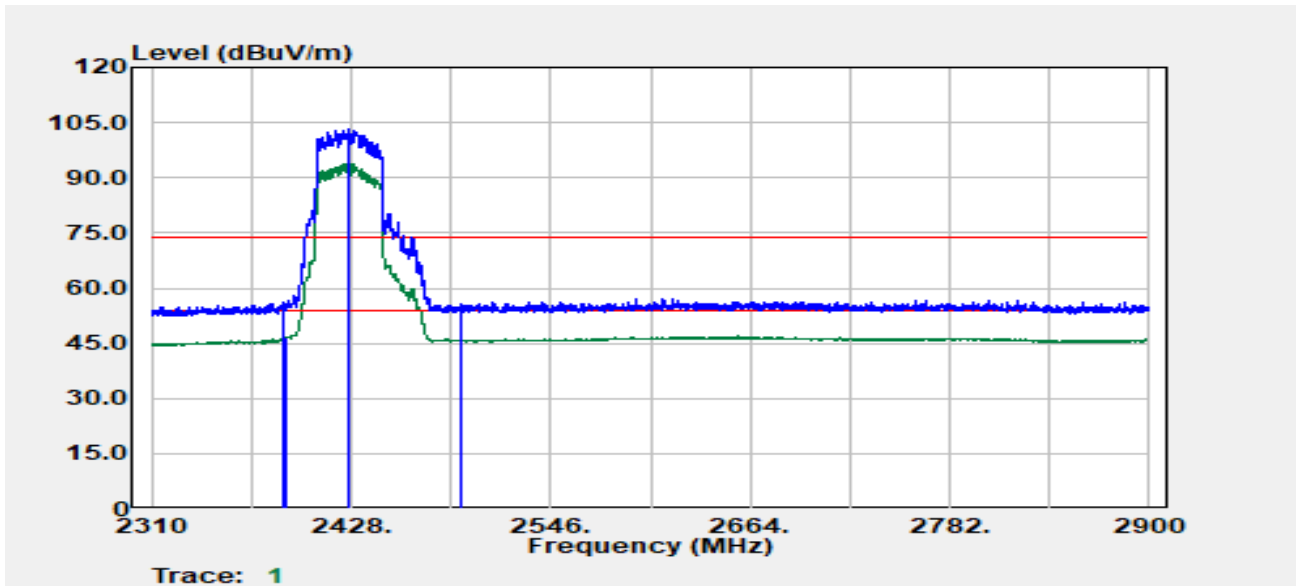


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2388.40	Peak	49.85	6.25	56.09	74.00	-17.91
2388.90	Average	40.27	6.26	46.52	54.00	-7.48
2427.00	Peak	96.76	6.40	103.16	--	--
2427.00	Average	87.52	6.40	93.92	--	--
2493.02	Peak	48.79	6.81	55.61	74.00	-18.39
2493.02	Average	39.32	6.81	46.14	54.00	-7.86

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

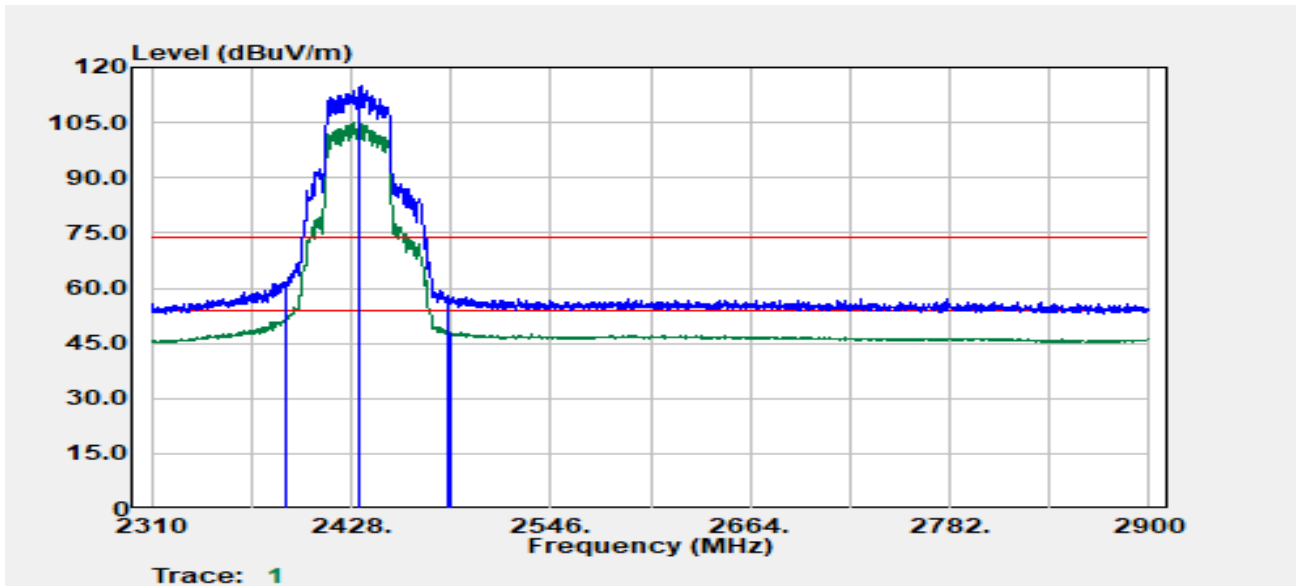


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2388.90	Peak	55.40	6.26	61.66	74.00	-12.34
2389.15	Average	45.44	6.26	51.70	54.00	-2.30
2432.00	Peak	108.71	6.41	115.12	--	--
2432.00	Average	98.54	6.41	104.95	--	--
2484.53	Peak	51.19	6.73	57.92	74.00	-16.08
2487.28	Average	41.40	6.77	48.17	54.00	-5.83

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2432 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

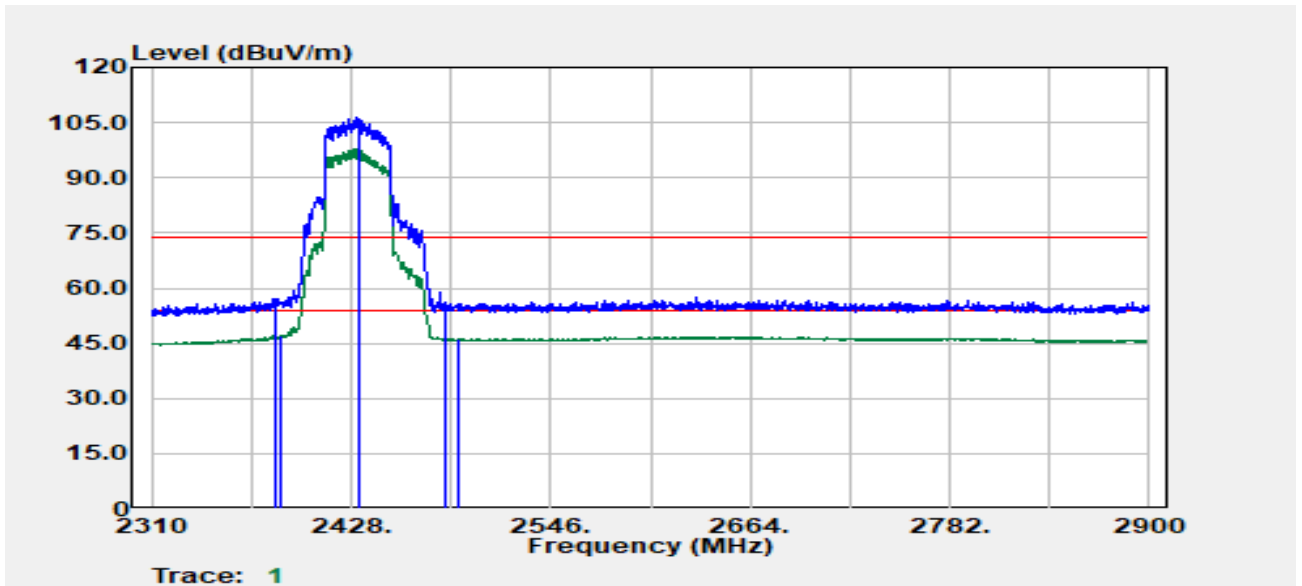


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2383.16	Peak	51.05	6.14	57.19	74.00	-16.81
2386.40	Average	40.91	6.20	47.12	54.00	-6.88
2432.00	Peak	99.82	6.41	106.23	--	--
2432.00	Average	91.34	6.41	97.75	--	--
2484.28	Peak	49.22	6.72	55.94	74.00	-18.06
2490.77	Average	39.57	6.81	46.38	54.00	-7.62

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

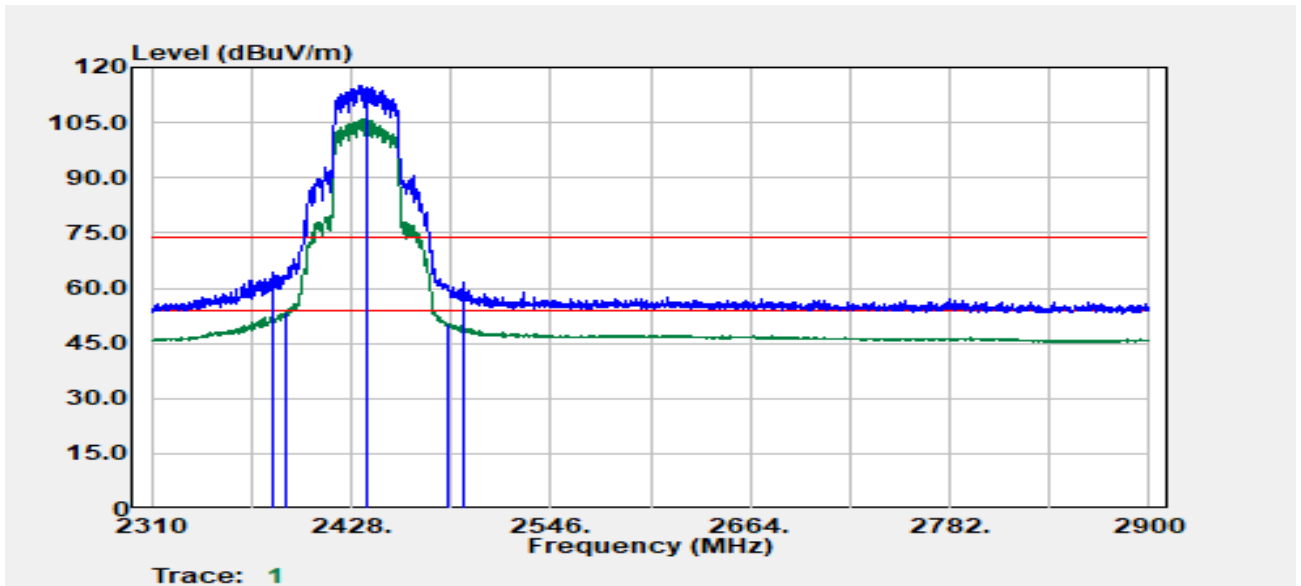


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
2382.41	Peak	58.00	6.12	64.12	74.00	-9.88
2389.65	Average	47.16	6.27	53.44	54.00	-0.56
2437.00	Peak	108.81	6.37	115.17	--	--
2437.00	Average	99.64	6.37	106.01	--	--
2484.78	Average	43.70	6.73	50.43	54.00	-3.57
2494.77	Peak	54.93	6.82	61.75	74.00	-12.25

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2437 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

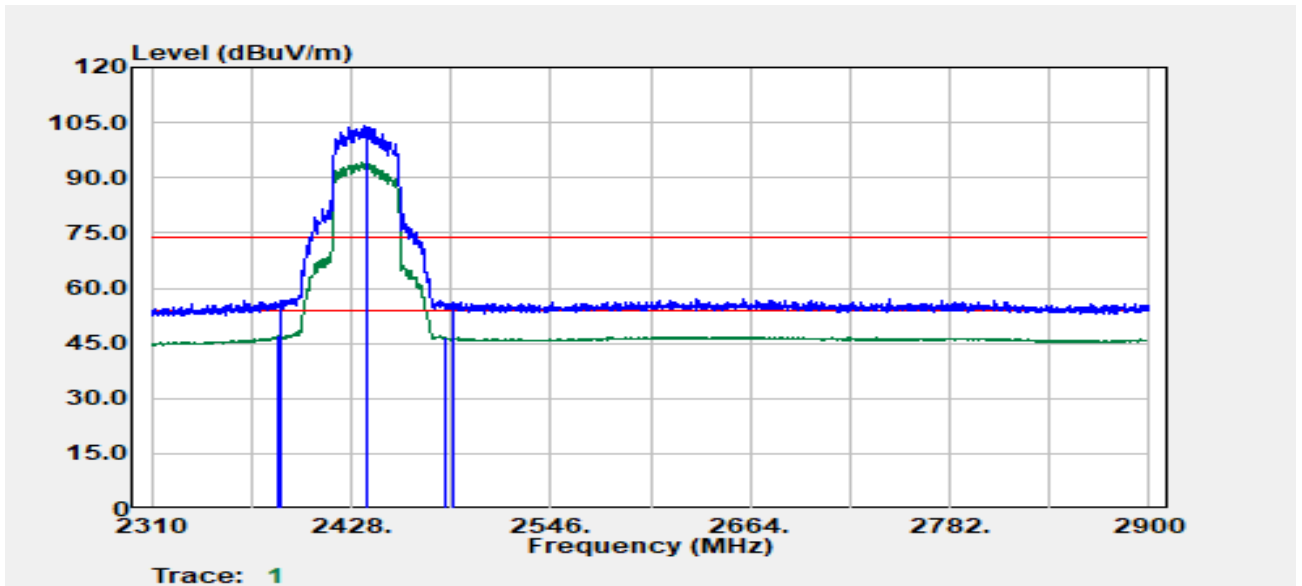


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2384.16	Average	40.79	6.16	46.95	54.00	-7.05
2386.15	Peak	50.54	6.20	56.74	74.00	-17.26
2437.00	Peak	97.66	6.37	104.03	--	--
2437.00	Average	87.78	6.37	94.15	--	--
2484.03	Average	39.77	6.72	46.49	54.00	-7.51
2487.77	Peak	49.60	6.77	56.37	74.00	-17.63

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

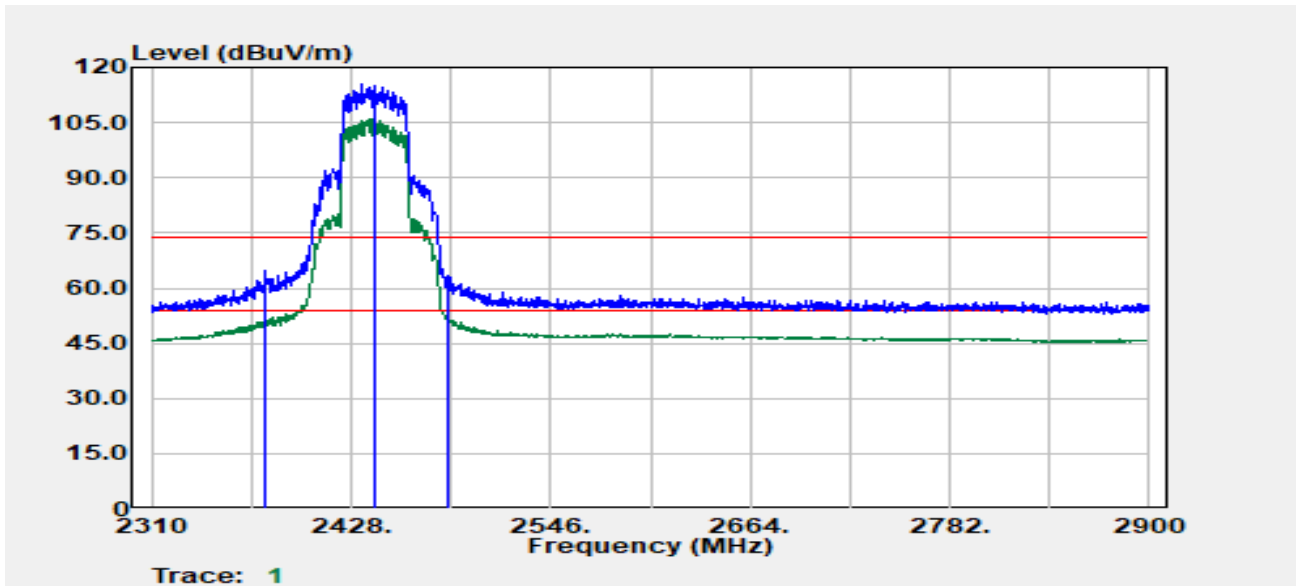


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
2377.17	Peak	58.82	6.10	64.92	74.00	-9.08
2377.41	Average	46.97	6.09	53.06	54.00	-0.94
2442.00	Peak	108.91	6.34	115.26	--	--
2442.00	Average	99.54	6.34	105.88	--	--
2485.03	Average	45.16	6.73	51.90	54.00	-2.10
2485.28	Peak	56.77	6.74	63.51	74.00	-10.49

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2442 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :18

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

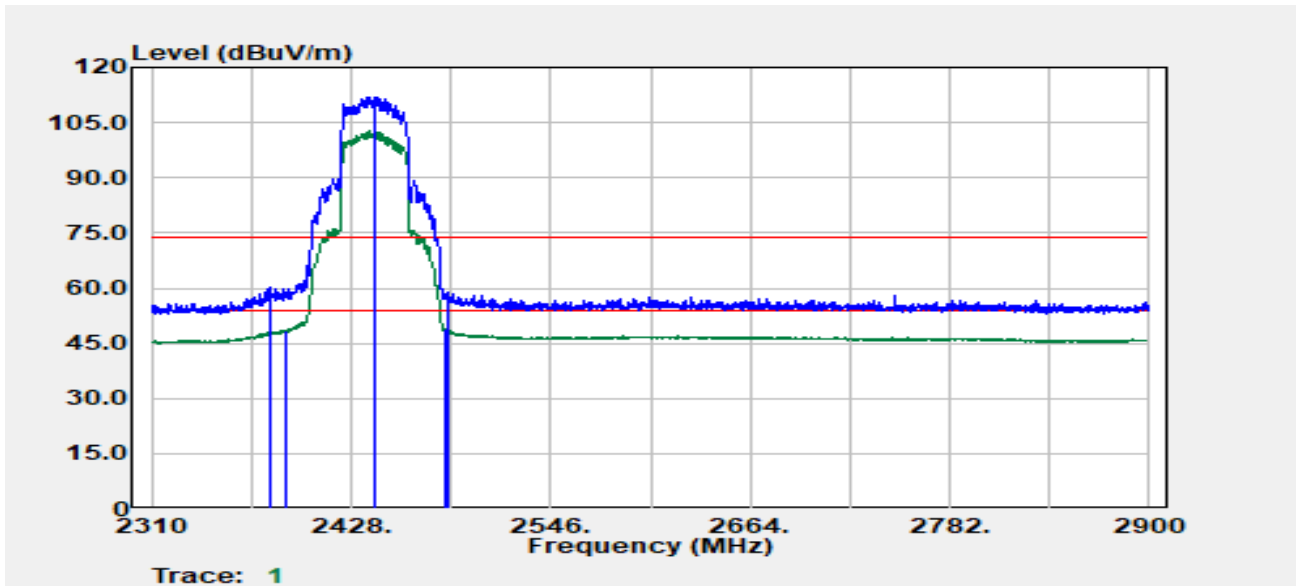


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2379.41	Peak	54.27	6.08	60.34	74.00	-13.66
2389.40	Average	42.29	6.27	48.55	54.00	-5.45
2442.00	Peak	105.60	6.34	111.95	--	--
2442.00	Average	96.60	6.34	102.94	--	--
2483.53	Average	42.14	6.71	48.86	54.00	-5.14
2485.28	Peak	52.31	6.74	59.05	74.00	-14.95

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17

Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

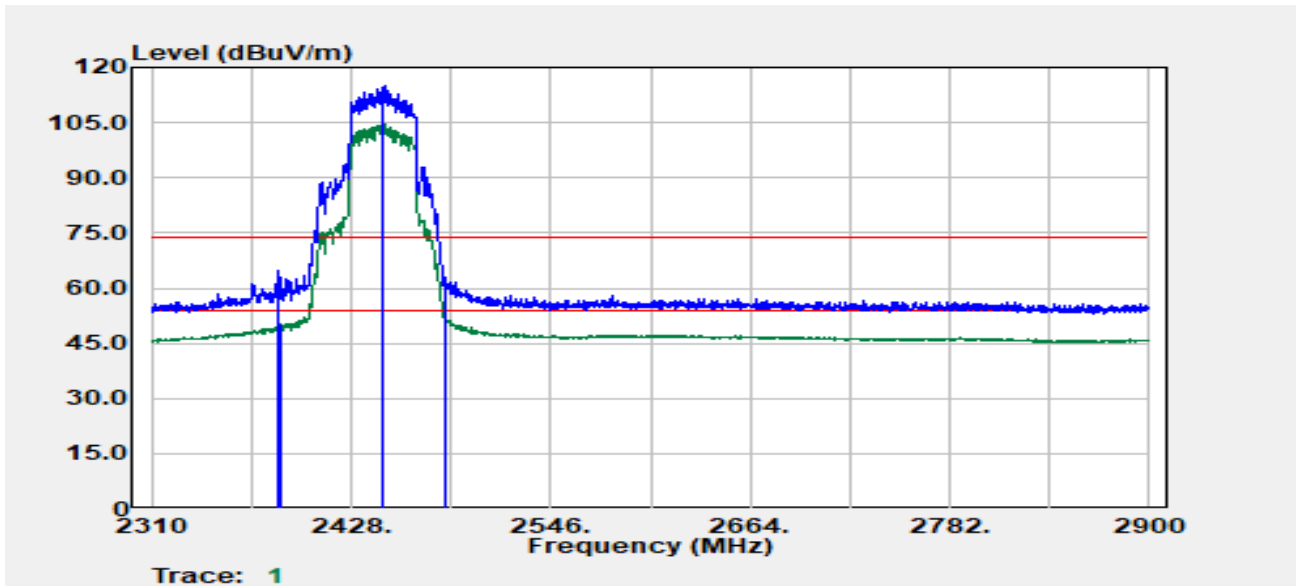


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
2384.91	Peak	58.38	6.17	64.55	74.00	-9.45
2385.65	Average	43.94	6.19	50.13	54.00	-3.87
2447.00	Peak	108.75	6.35	115.10	--	--
2447.00	Average	98.37	6.35	104.72	--	--
2483.53	Average	45.86	6.71	52.58	54.00	-1.42
2484.03	Peak	55.08	6.72	61.80	74.00	-12.20

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2447 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :17


Test Date :2024-05-29
 Temp./Humi. :24.5/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

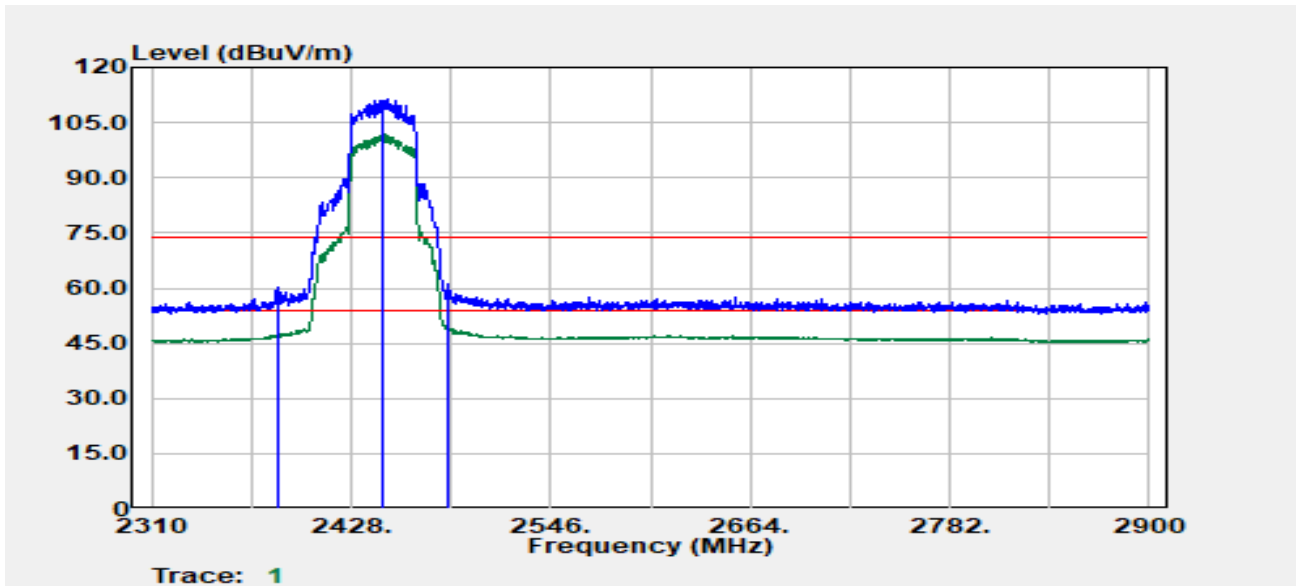

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
2384.91	Peak	54.19	6.17	60.36	74.00	-13.64
2385.40	Average	41.38	6.18	47.57	54.00	-6.43
2447.00	Peak	105.22	6.35	111.57	--	--
2447.00	Average	95.39	6.35	101.74	--	--
2484.78	Peak	54.39	6.73	61.12	74.00	-12.88
2484.78	Average	43.57	6.73	50.30	54.00	-3.70

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :15.5

Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :VERTICAL
 Engineer :Ray Li
 Test Chamber : 966A

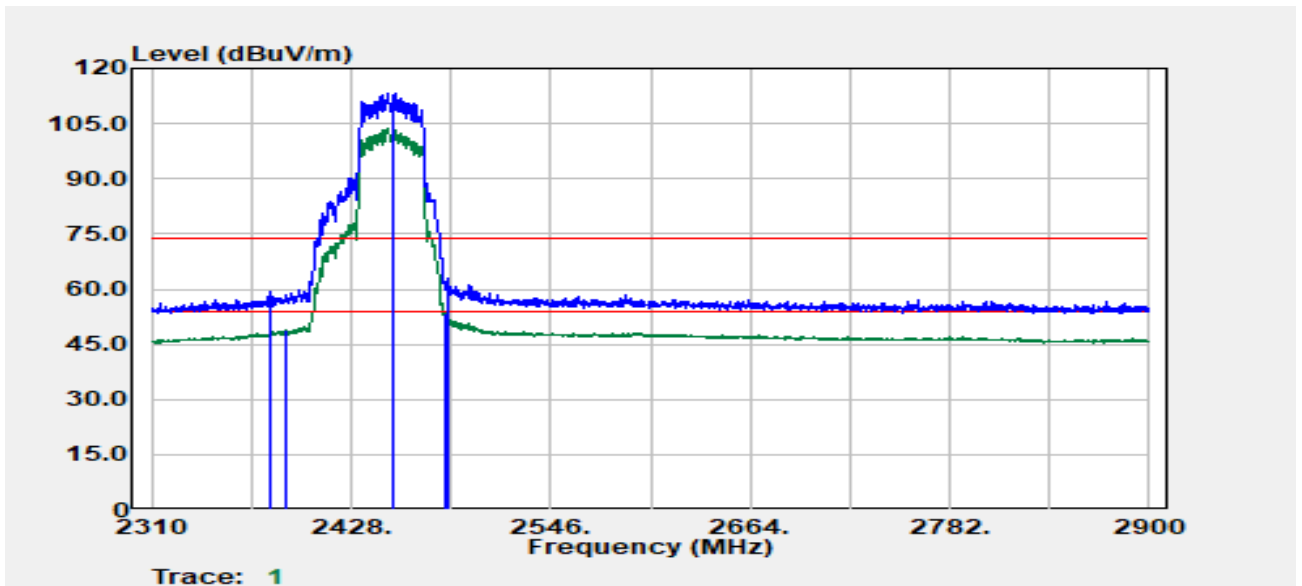


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2380.78	Peak	53.46	6.09	59.54	74.00	-14.46
2389.53	Average	42.49	6.27	48.76	54.00	-5.24
2452.00	Peak	106.77	6.34	113.11	--	--
2452.00	Average	97.55	6.34	103.89	--	--
2484.32	Average	46.73	6.73	53.46	54.00	-0.54
2484.57	Peak	56.08	6.73	62.81	74.00	-11.19

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2452 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :15.5


Test Date :2024-04-18
 Temp./Humi. :24.5/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

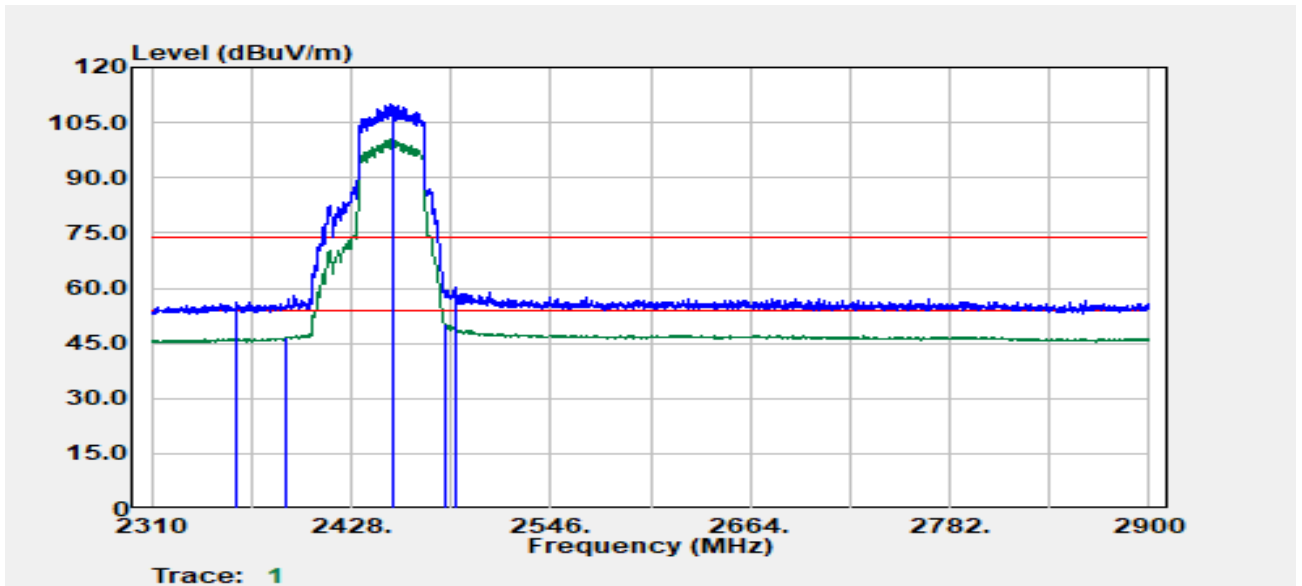

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
2360.77	Peak	49.93	6.24	56.17	74.00	-17.83
2388.78	Average	40.21	6.25	46.47	54.00	-7.53
2452.00	Peak	103.73	6.34	110.07	--	--
2452.00	Average	94.07	6.34	100.42	--	--
2483.82	Average	43.54	6.72	50.26	54.00	-3.74
2489.58	Peak	53.60	6.80	60.39	74.00	-13.61

TX Test Data

Project No	:TM-2309000207P	Test Date	:2024-06-01
Operation Band	:802.11ax20	Temp./Humi.	:24.6/57
Frequency	:2462 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

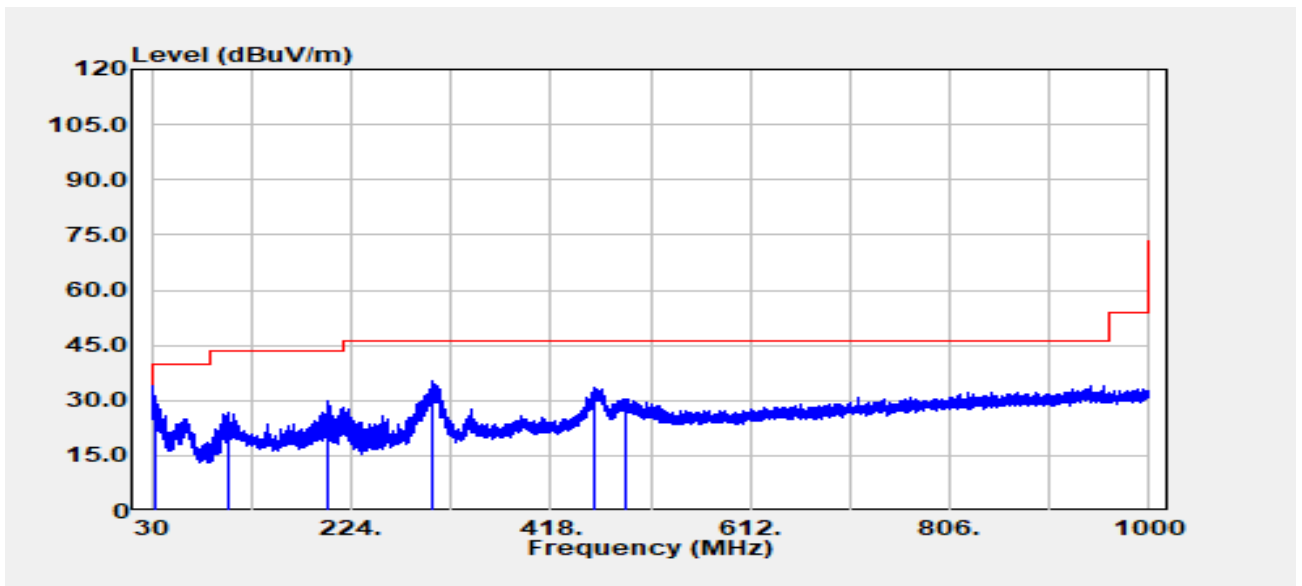


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
34.60	Peak	36.47	-5.41	31.06	40.00	-8.94
104.00	Peak	38.28	-11.40	26.88	43.50	-16.62
200.50	Peak	39.81	-9.94	29.88	43.50	-13.62
302.40	Peak	44.01	-8.51	35.50	46.00	-10.50
461.60	Peak	37.80	-4.10	33.70	46.00	-12.30
491.30	Peak	33.73	-3.41	30.32	46.00	-15.68

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2024-06-01
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

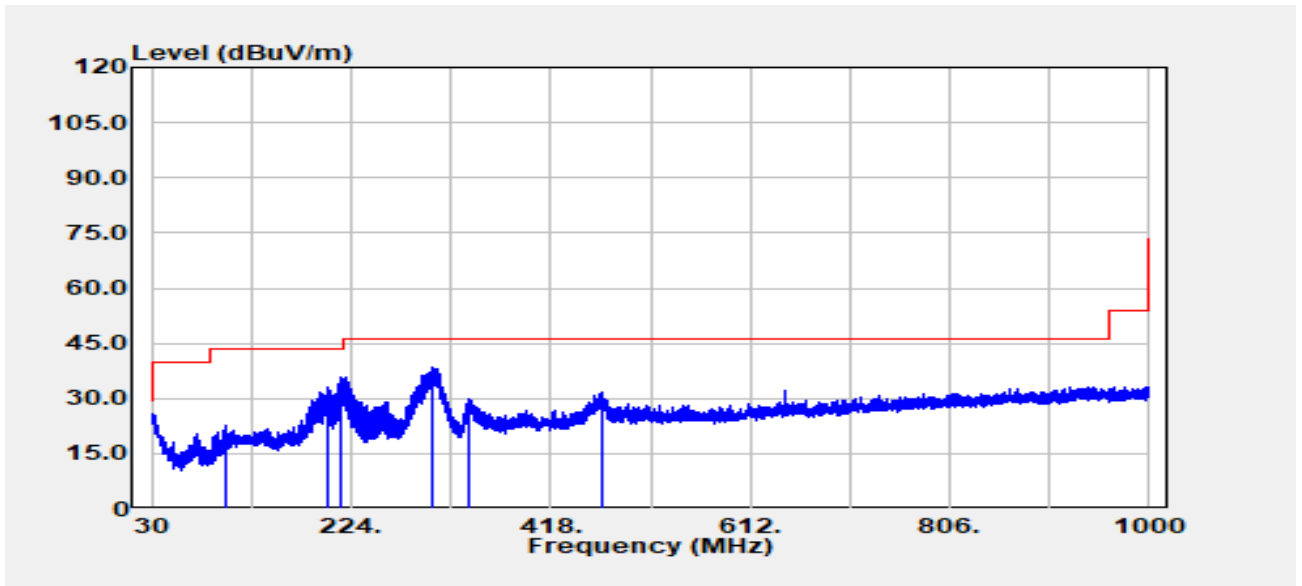


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
101.90	Peak	34.60	-12.14	22.46	43.50	-21.04
200.60	Peak	42.96	-9.98	32.98	43.50	-10.52
213.30	Peak	47.92	-11.97	35.96	43.50	-7.54
303.50	Peak	47.03	-8.49	38.54	46.00	-7.46
339.20	Peak	37.44	-7.74	29.71	46.00	-16.29
467.60	Peak	35.45	-3.88	31.57	46.00	-14.43

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :21.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Tony Chao
 Test Chamber : 966A

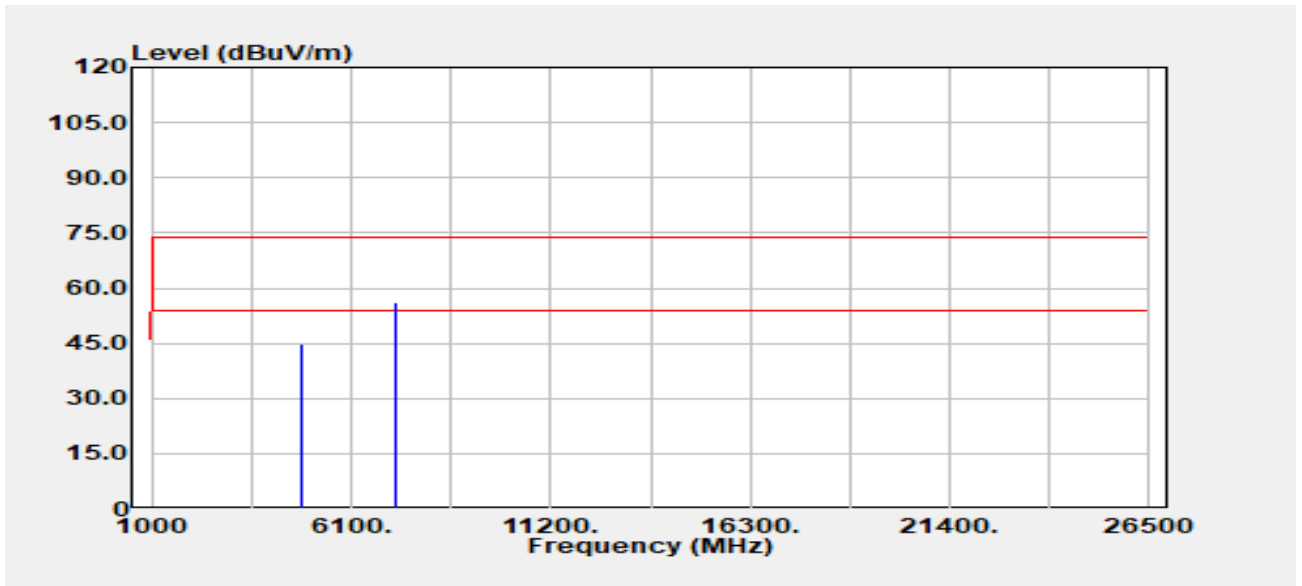


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	42.43	2.25	44.68	74.00	-29.32
4824.00	Average	39.63	2.25	41.88	54.00	-12.12
7236.00	Peak	47.21	9.17	56.37	74.00	-17.63
7236.00	Average	43.30	9.17	52.46	54.00	-1.54

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :21.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Tony Chao
 Test Chamber : 966A

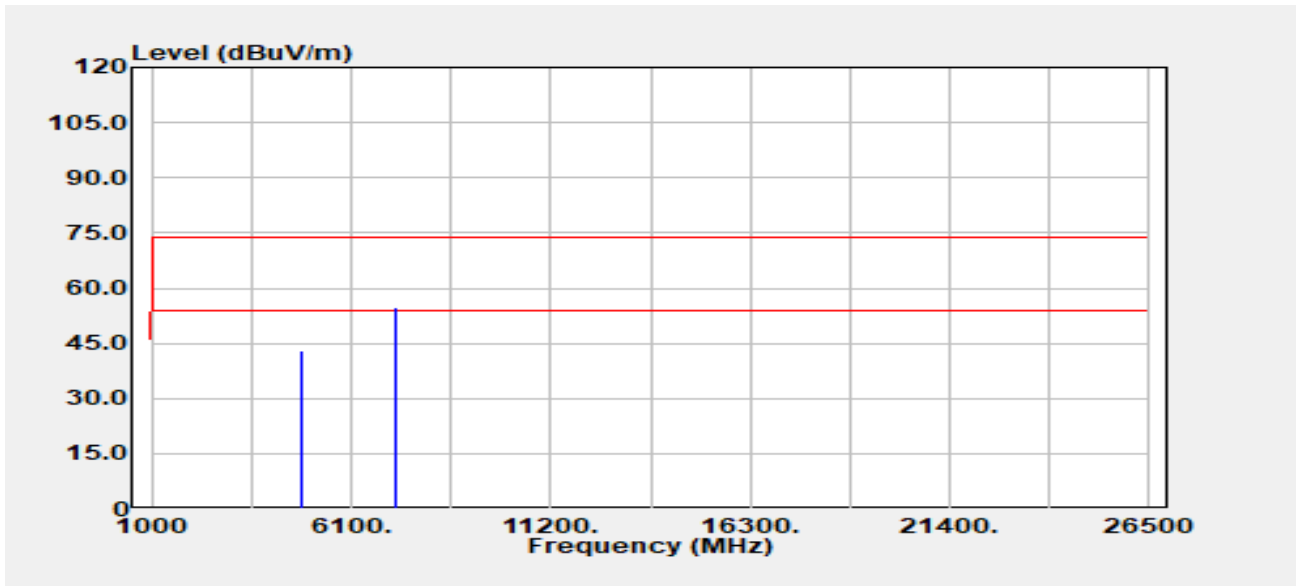


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4824.00	Peak	40.88	2.25	43.14	74.00	-30.86
4824.00	Average	38.44	2.25	40.69	54.00	-13.31
7236.00	Peak	45.75	9.17	54.92	74.00	-19.08
7236.00	Average	42.95	9.17	52.12	54.00	-1.88

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :20

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Tony Chao
 Test Chamber : 966A

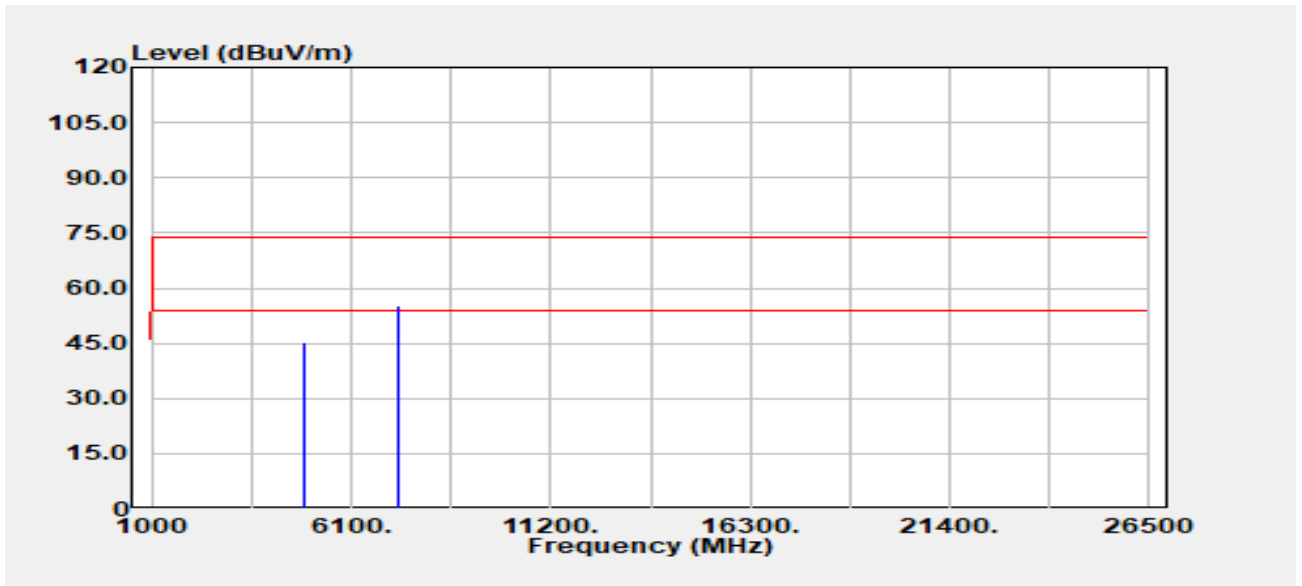


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	42.74	2.49	45.24	74.00	-28.76
4874.00	Average	40.04	2.49	42.53	54.00	-11.47
7311.00	Peak	46.40	8.96	55.37	74.00	-18.63
7311.00	Average	44.36	8.96	53.32	54.00	-0.68

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :20

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Tony Chao
 Test Chamber : 966A

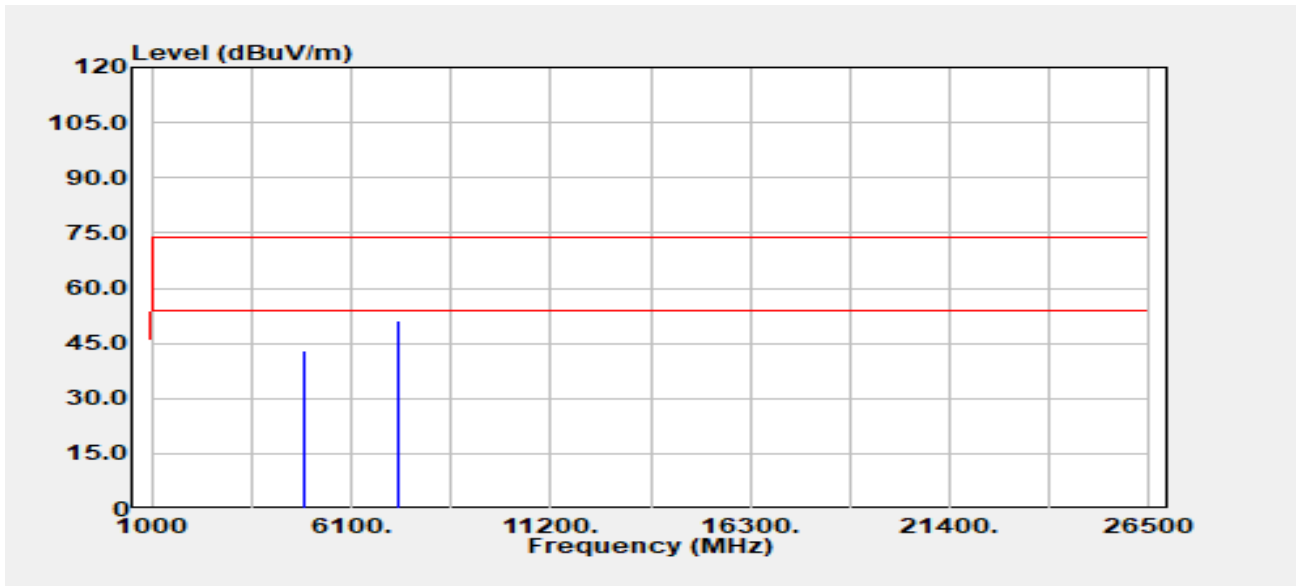


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	40.64	2.49	43.13	74.00	-30.87
4874.00	Average	38.40	2.49	40.89	54.00	-13.11
7311.00	Peak	38.73	8.96	47.70	74.00	-26.30
7311.00	Average	41.98	8.96	50.94	54.00	-3.06

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :19

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Tony Chao
 Test Chamber : 966A

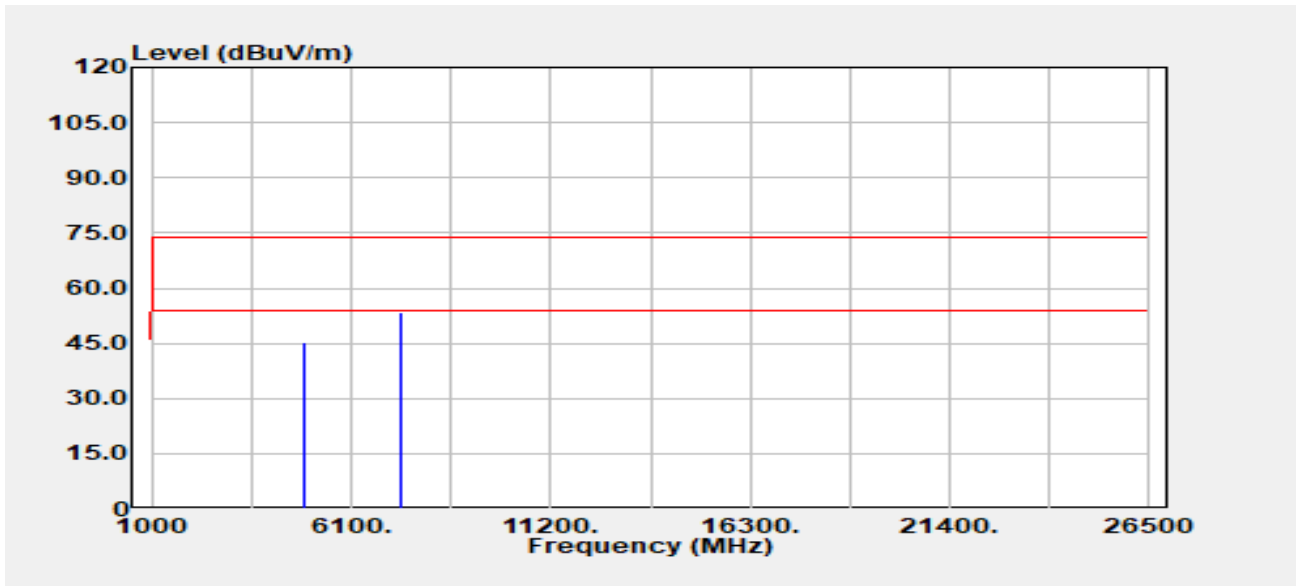


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	42.51	2.93	45.44	74.00	-28.56
4924.00	Average	39.71	2.93	42.64	54.00	-11.36
7386.00	Peak	44.44	9.01	53.45	74.00	-20.55
7386.00	Average	42.76	9.01	51.77	54.00	-2.23

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH0
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :19

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Tony Chao
 Test Chamber : 966A

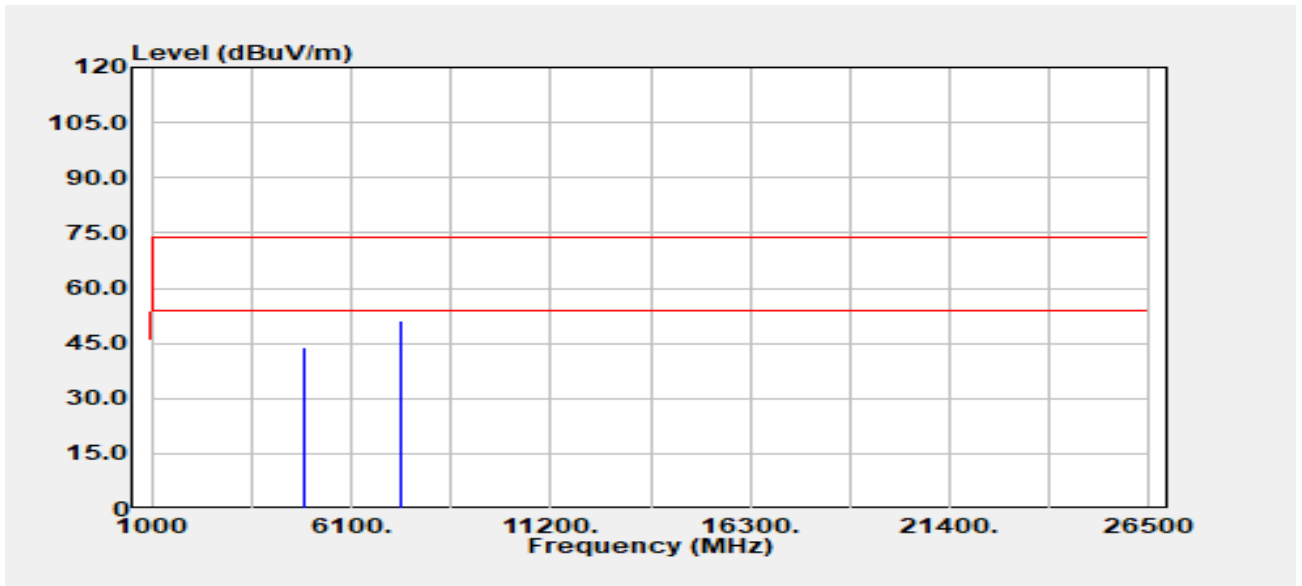


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	41.08	2.93	44.00	74.00	-30.00
4924.00	Average	38.09	2.93	41.02	54.00	-12.98
7386.00	Peak	42.26	9.01	51.27	74.00	-22.73
7386.00	Average	40.90	9.01	49.92	54.00	-4.08

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Tony Chao
 Test Chamber : 966A

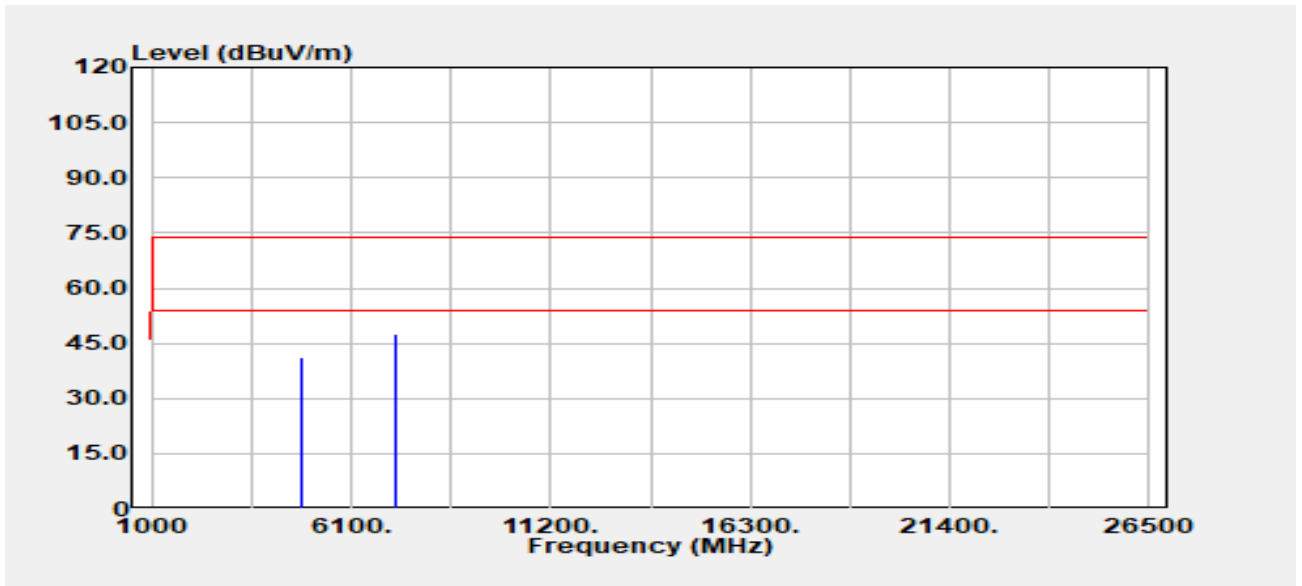


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	38.83	2.25	41.08	74.00	-32.92
4824.00	Average	29.50	2.25	31.75	54.00	-22.25
7236.00	Peak	38.52	9.17	47.68	74.00	-26.32
7236.00	Average	30.96	9.17	40.13	54.00	-13.87

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Tony Chao
 Test Chamber : 966A

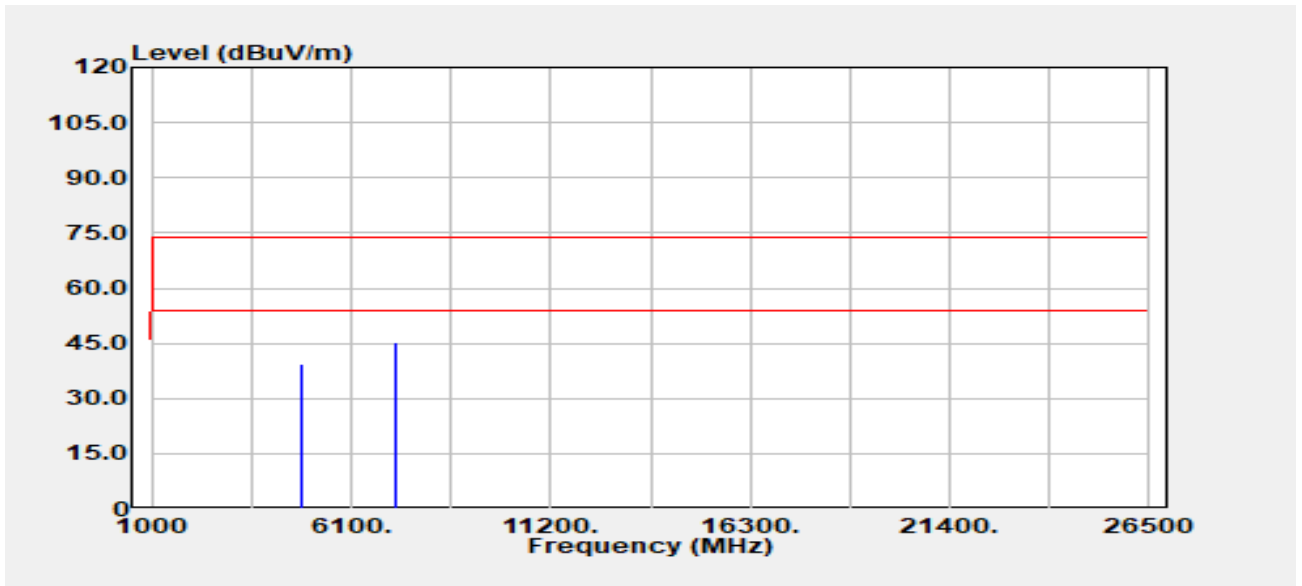


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4824.00	Peak	37.20	2.25	39.45	74.00	-34.55
4824.00	Average	28.13	2.25	30.38	54.00	-23.62
7236.00	Peak	36.04	9.17	45.21	74.00	-28.79
7236.00	Average	29.70	9.17	38.86	54.00	-15.14

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :23

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

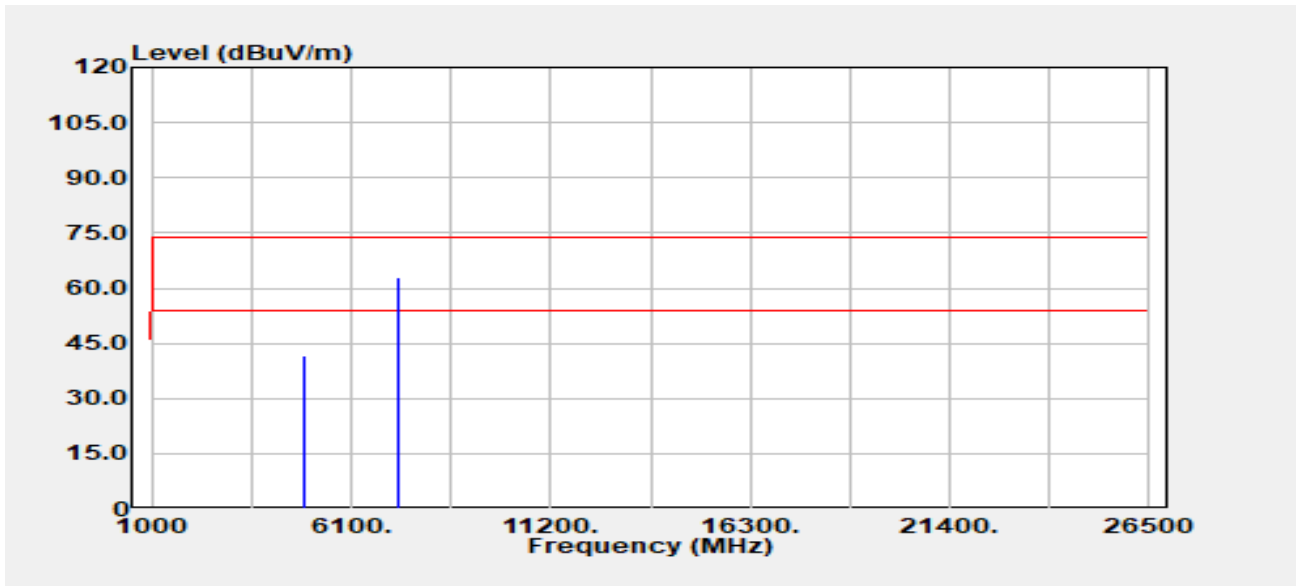


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	39.38	2.49	41.87	74.00	-32.13
4874.00	Average	30.60	2.49	33.09	54.00	-20.91
7311.00	Peak	53.76	8.96	62.72	74.00	-11.28
7311.00	Average	43.80	8.96	52.76	54.00	-1.24

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :23

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

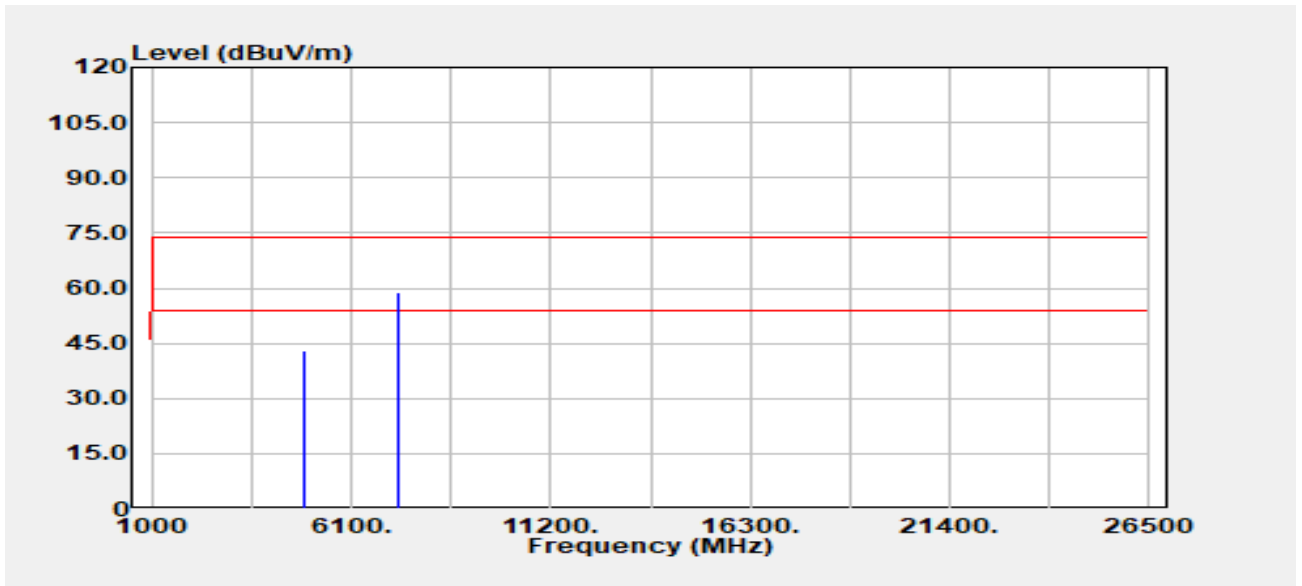


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	40.71	2.49	43.21	74.00	-30.79
4874.00	Average	30.53	2.49	33.03	54.00	-20.97
7311.00	Peak	50.04	8.96	59.00	74.00	-15.00
7311.00	Average	41.04	8.96	50.01	54.00	-3.99

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :VERTICAL
 Engineer :Tony Chao
 Test Chamber : 966A

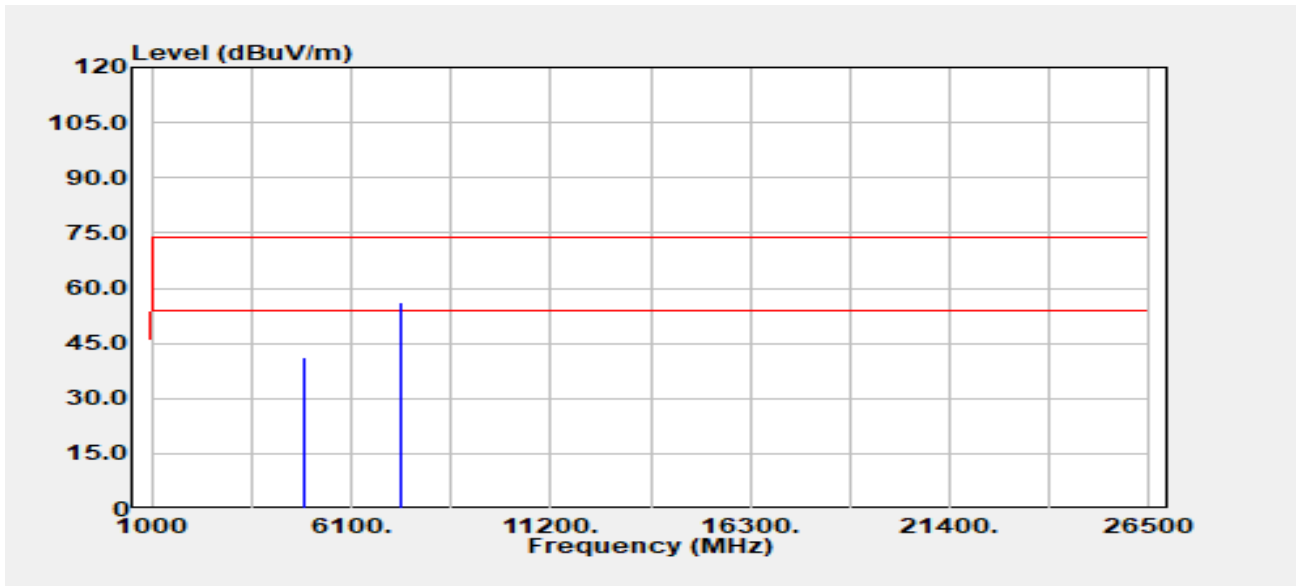


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	38.37	2.93	41.30	74.00	-32.70
4924.00	Average	30.52	2.93	33.44	54.00	-20.56
7386.00	Peak	46.98	9.01	55.99	74.00	-18.01
7386.00	Average	35.89	9.01	44.90	54.00	-9.10

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH0
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

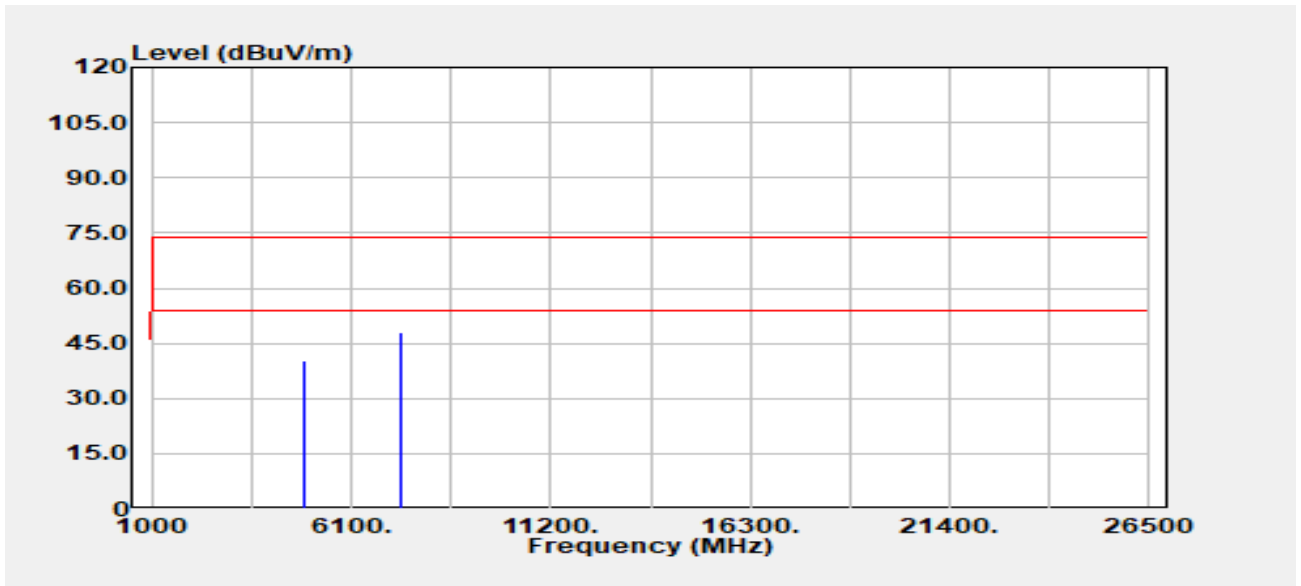


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	37.55	2.93	40.48	74.00	-33.52
4924.00	Average	28.78	2.93	31.71	54.00	-22.29
7386.00	Peak	39.19	9.01	48.21	74.00	-25.79
7386.00	Average	32.13	9.01	41.14	54.00	-12.86

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :20

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

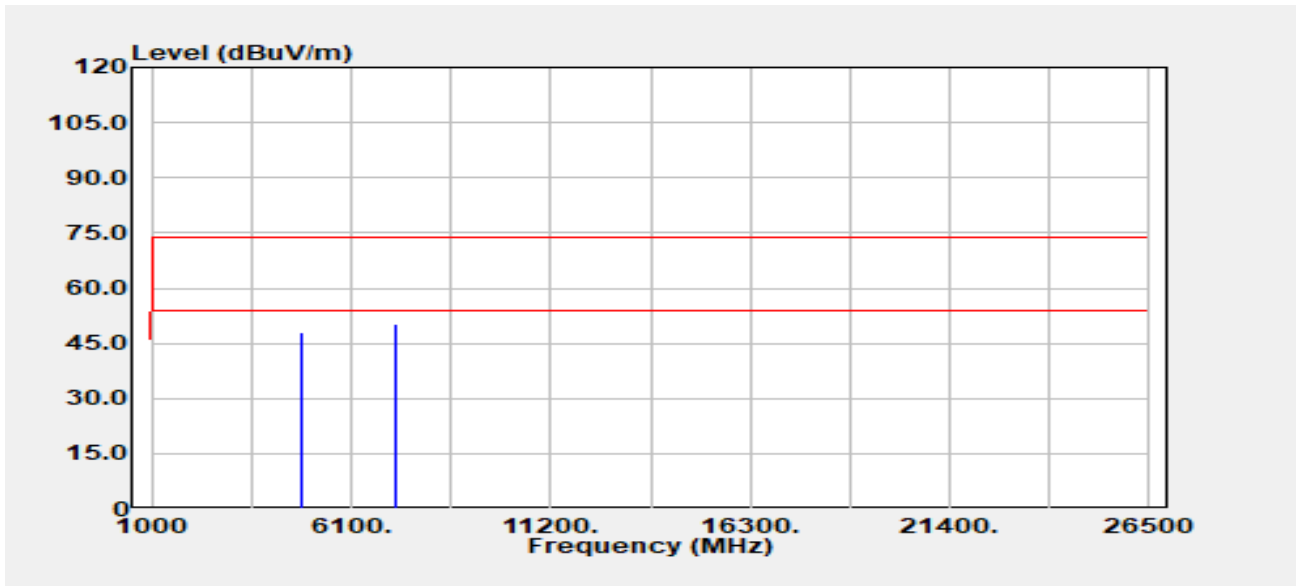


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	45.81	2.25	48.06	74.00	-25.94
4824.00	Average	44.18	2.25	46.43	54.00	-7.57
7236.00	Peak	40.97	9.17	50.14	74.00	-23.86
7236.00	Average	35.36	9.17	44.53	54.00	-9.47

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :20

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

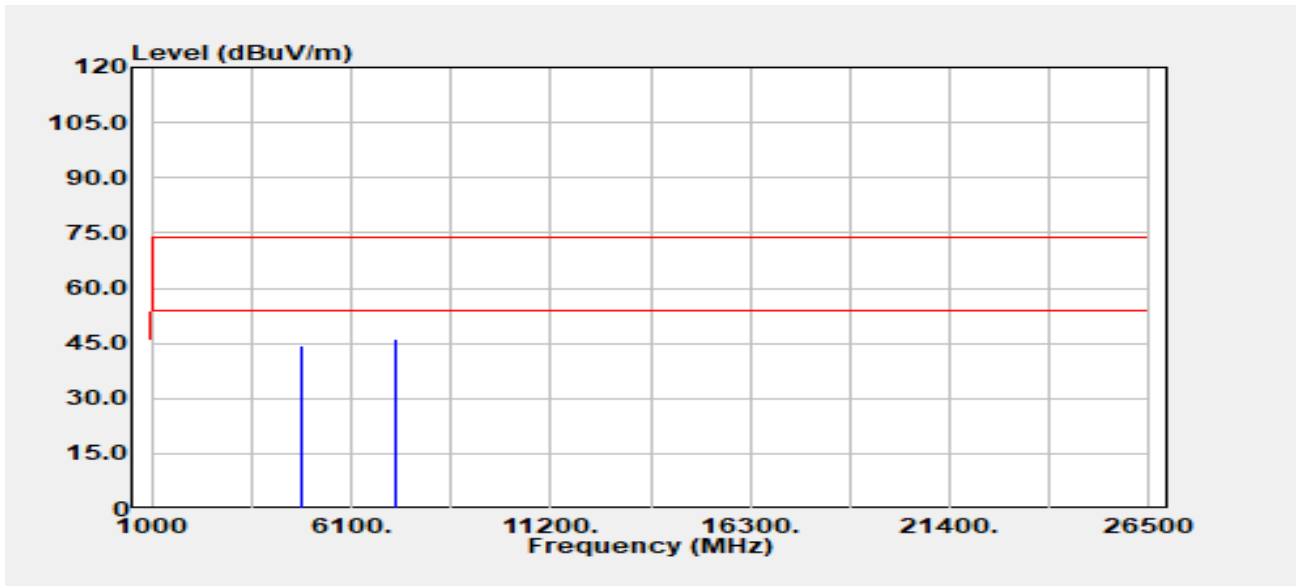


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	42.24	2.25	44.49	74.00	-29.51
4824.00	Average	40.06	2.25	42.31	54.00	-11.69
7236.00	Peak	37.02	9.17	46.18	74.00	-27.82
7236.00	Average	32.49	9.17	41.65	54.00	-12.35

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :19

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

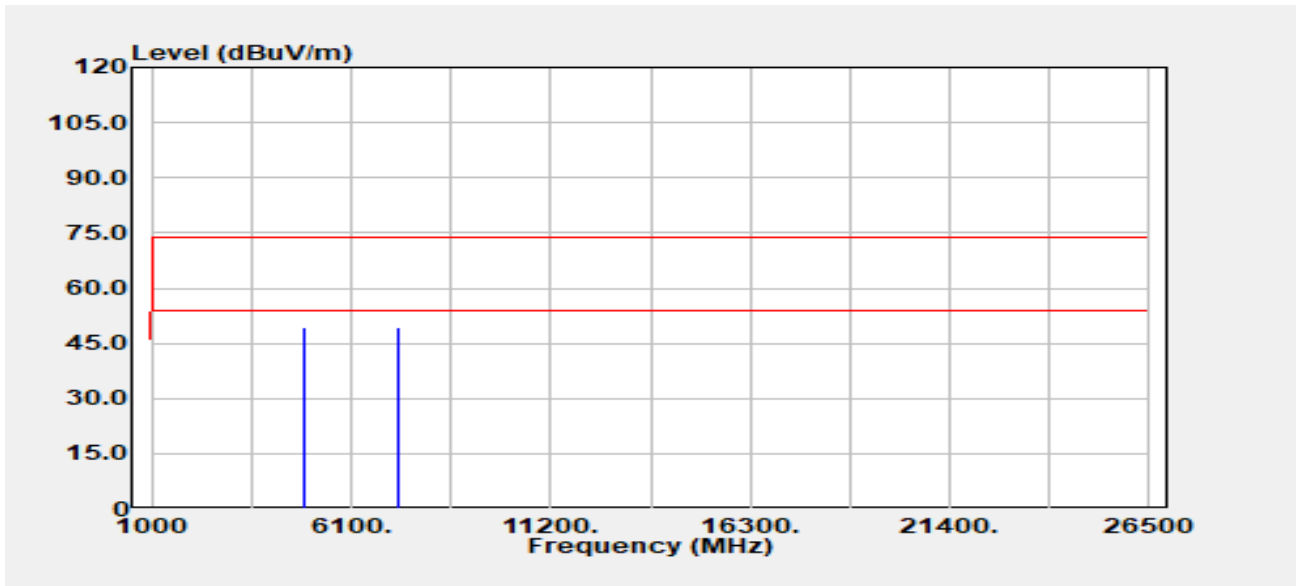


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	47.05	2.49	49.54	74.00	-24.46
4874.00	Average	44.77	2.49	47.27	54.00	-6.73
7311.00	Peak	40.55	8.96	49.51	74.00	-24.49
7311.00	Average	35.05	8.96	44.01	54.00	-9.99

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :19

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

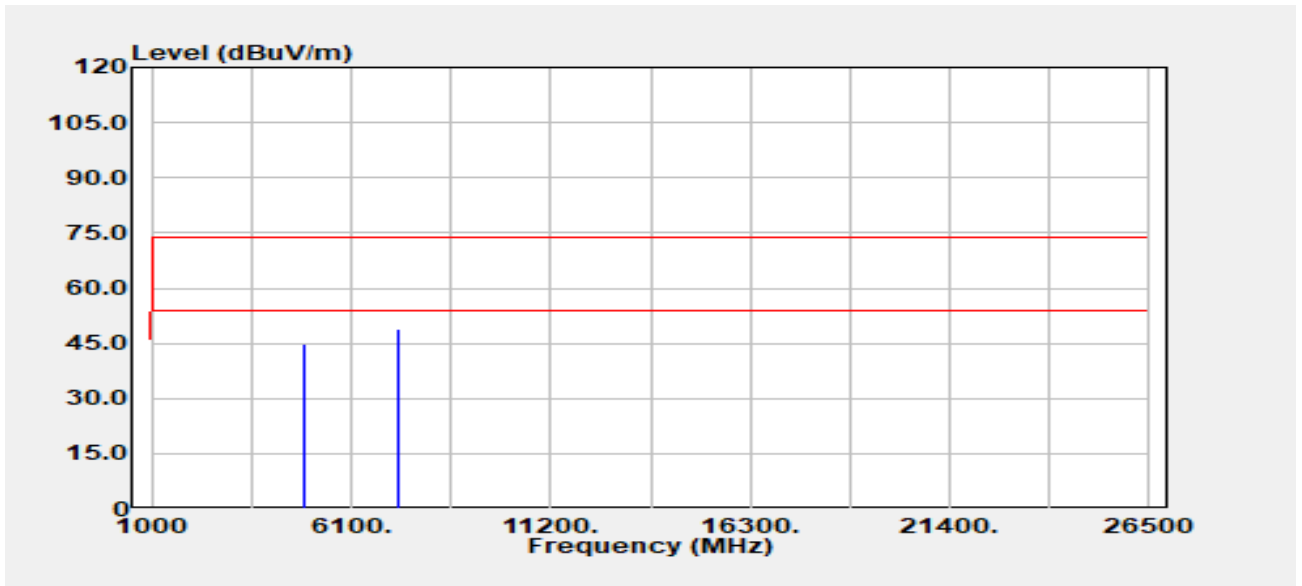


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	42.44	2.49	44.94	74.00	-29.06
4874.00	Average	40.07	2.49	42.56	54.00	-11.44
7311.00	Peak	39.78	8.96	48.74	74.00	-25.26
7311.00	Average	33.02	8.96	41.98	54.00	-12.02

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

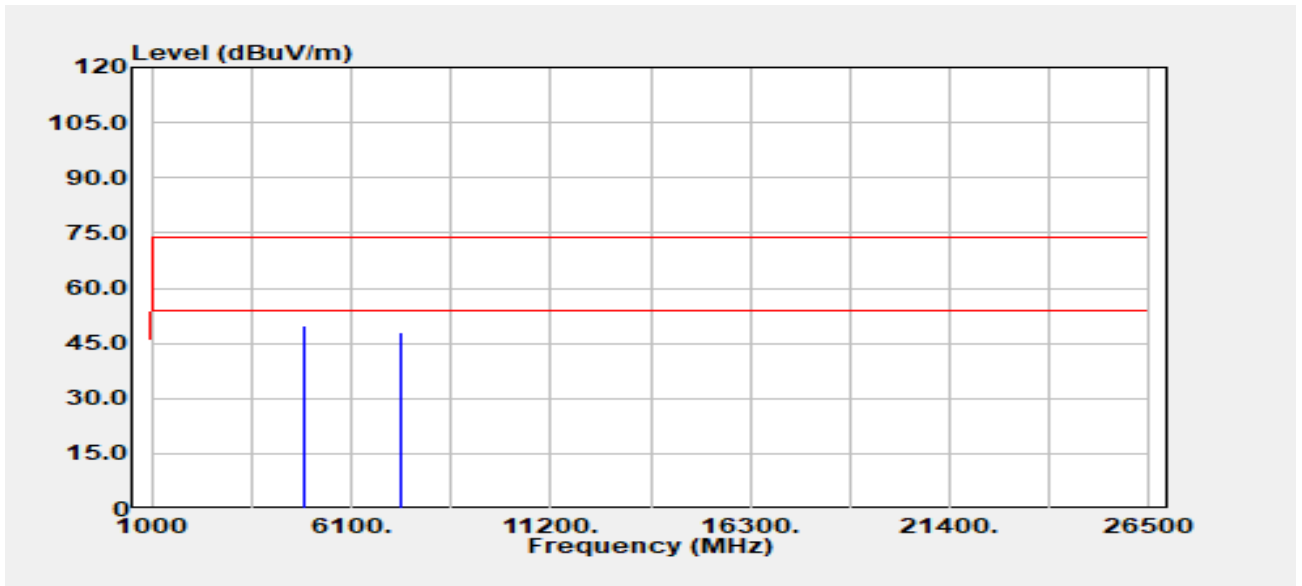


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	46.81	2.93	49.74	74.00	-24.26
4924.00	Average	44.89	2.93	47.82	54.00	-6.18
7386.00	Peak	38.96	9.01	47.97	74.00	-26.03
7386.00	Average	32.99	9.01	42.00	54.00	-12.00

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11b_CH1
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

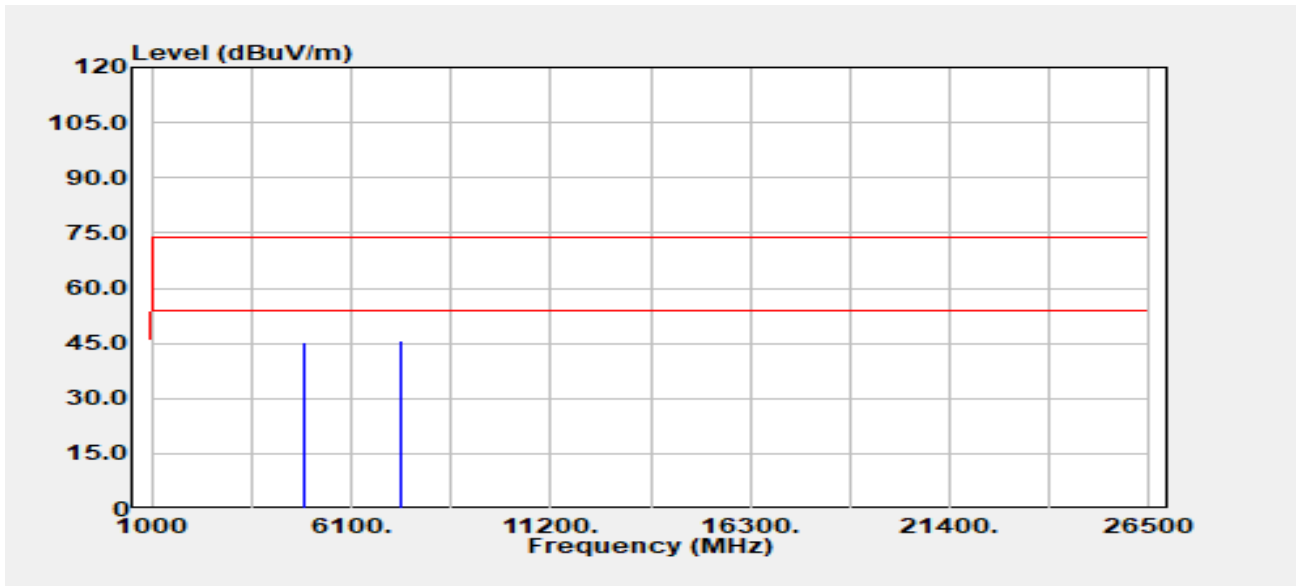


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	42.45	2.93	45.38	74.00	-28.62
4924.00	Average	40.24	2.93	43.16	54.00	-10.84
7386.00	Peak	36.62	9.01	45.64	74.00	-28.36
7386.00	Average	31.14	9.01	40.15	54.00	-13.85

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

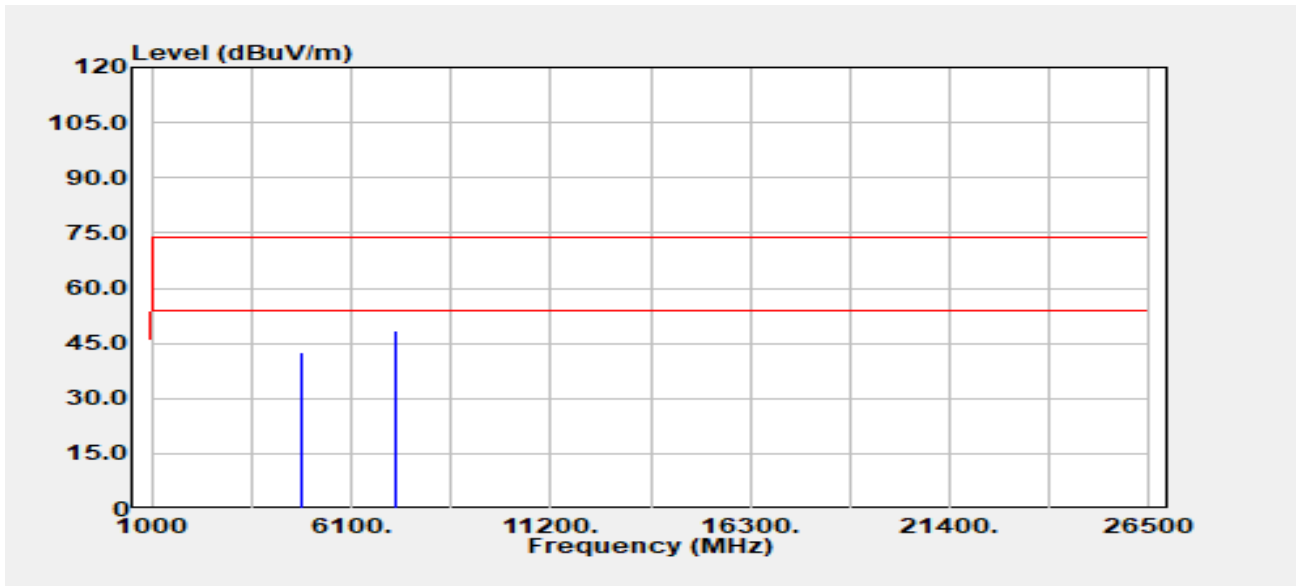


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	40.23	2.25	42.48	74.00	-31.52
4824.00	Average	32.63	2.25	34.89	54.00	-19.11
7236.00	Peak	39.43	9.17	48.60	74.00	-25.40
7236.00	Average	30.45	9.17	39.62	54.00	-14.38

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

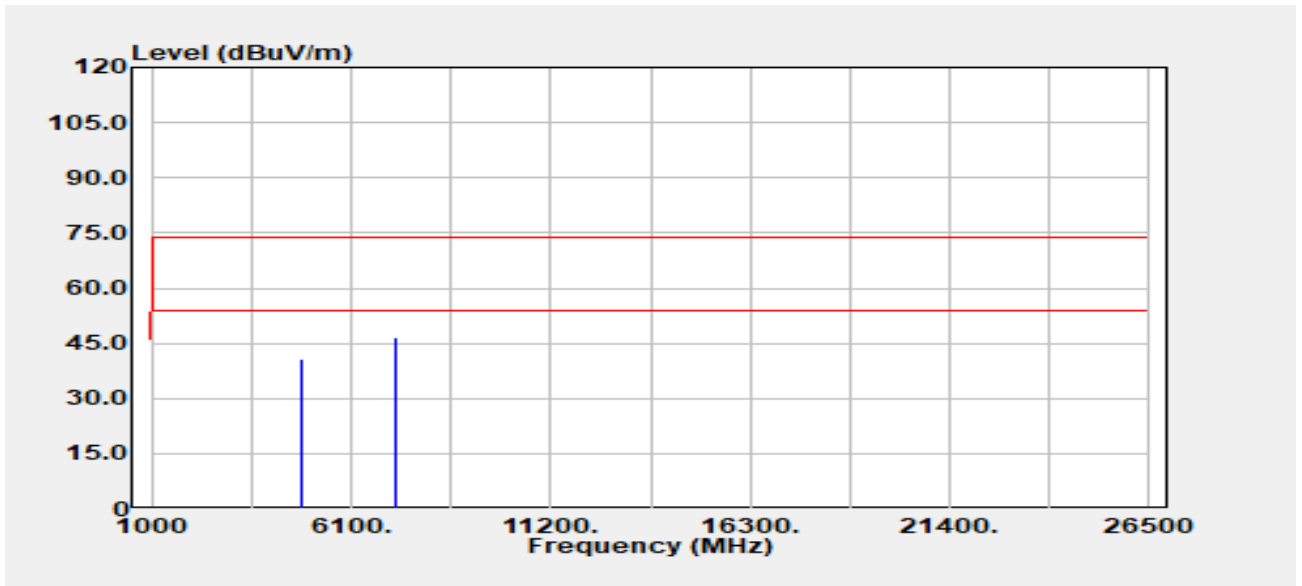


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4824.00	Peak	38.71	2.25	40.96	74.00	-33.04
4824.00	Average	30.10	2.25	32.35	54.00	-21.65
7236.00	Peak	37.63	9.17	46.80	74.00	-27.20
7236.00	Average	28.49	9.17	37.66	54.00	-16.34

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :23

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

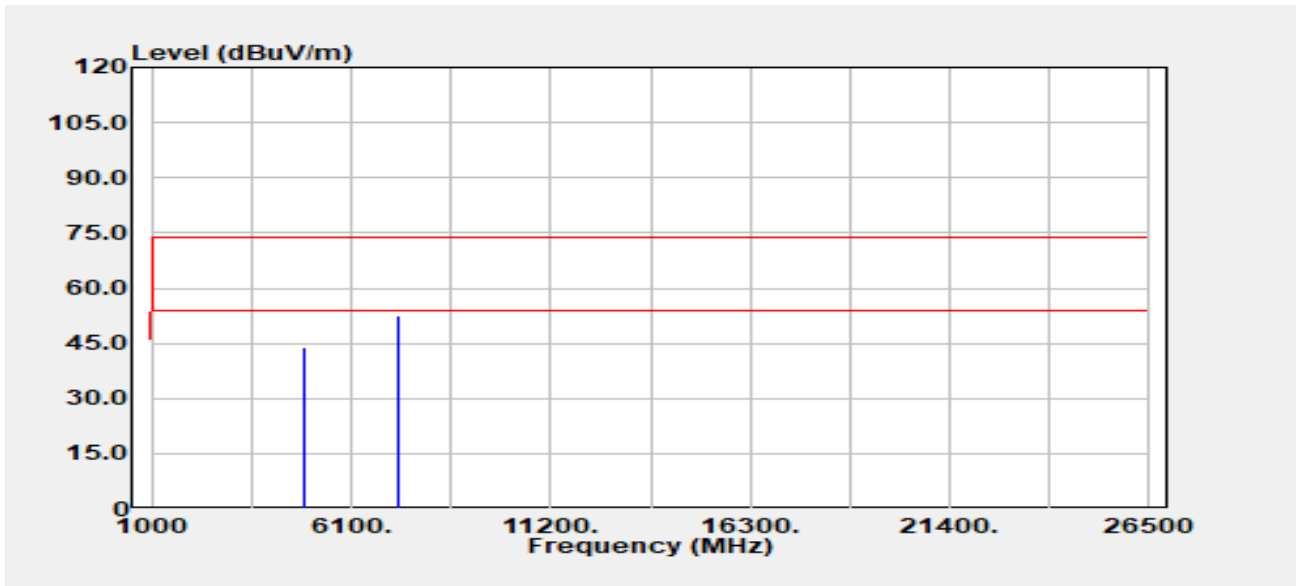


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	41.34	2.49	43.83	74.00	-30.17
4874.00	Average	33.51	2.49	36.01	54.00	-17.99
7311.00	Peak	43.66	8.96	52.62	74.00	-21.38
7311.00	Average	34.81	8.96	43.77	54.00	-10.23

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :23

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

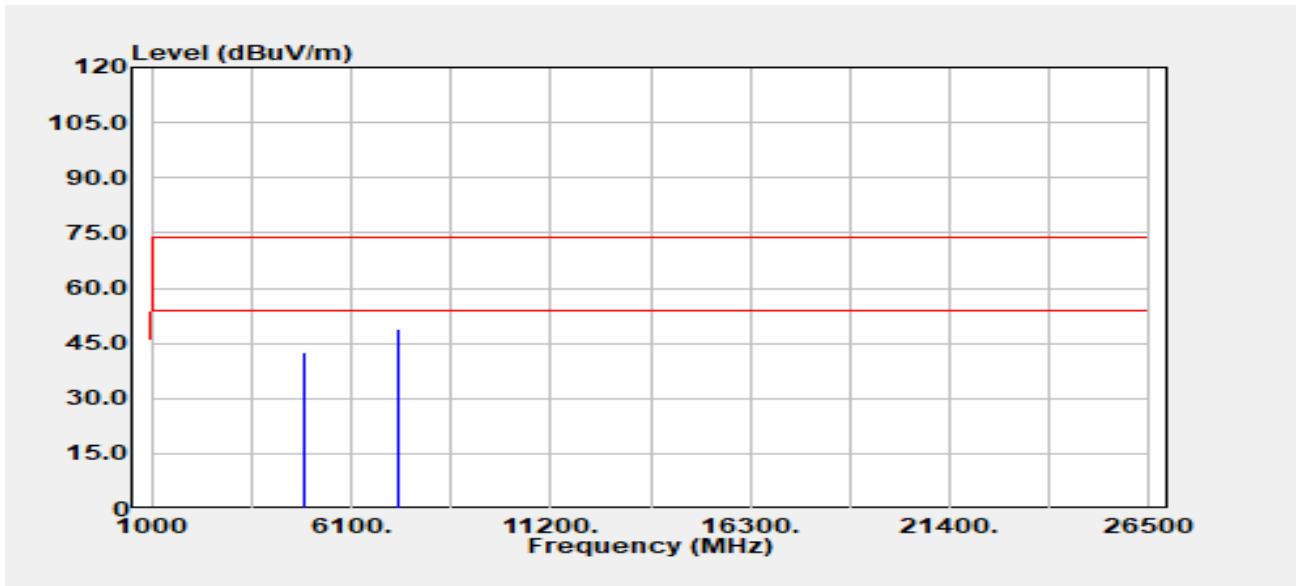


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	39.98	2.49	42.48	74.00	-31.52
4874.00	Average	30.54	2.49	33.03	54.00	-20.97
7311.00	Peak	39.91	8.96	48.88	74.00	-25.12
7311.00	Average	32.15	8.96	41.11	54.00	-12.89

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

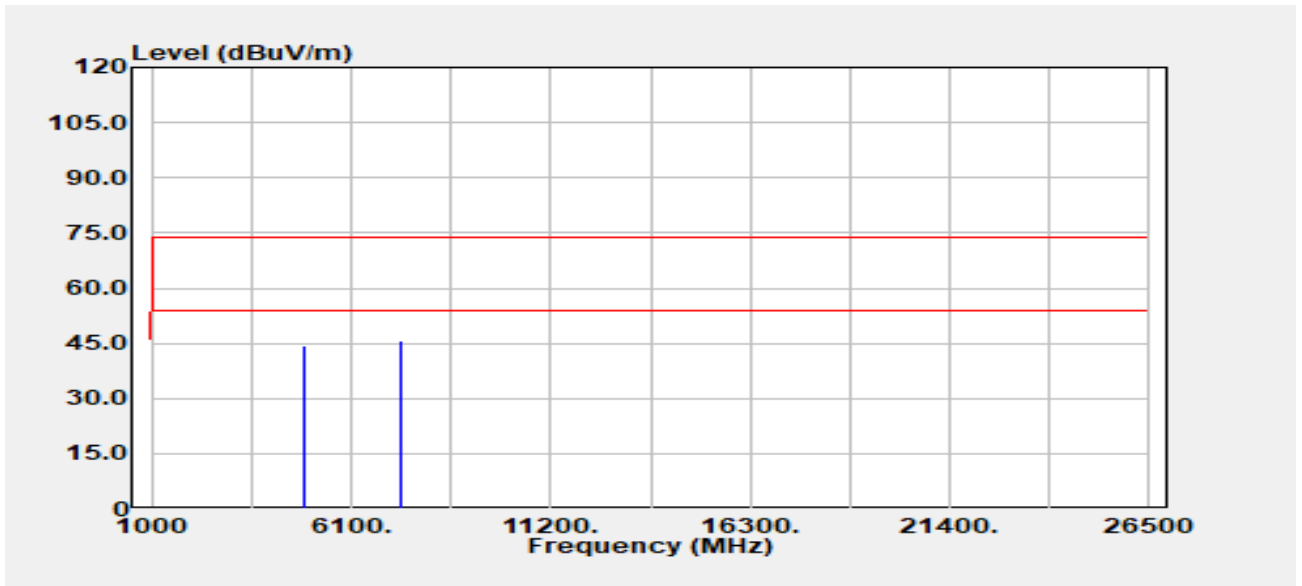


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	41.31	2.93	44.24	74.00	-29.76
4924.00	Average	33.48	2.93	36.41	54.00	-17.59
7386.00	Peak	36.63	9.01	45.64	74.00	-28.36
7386.00	Average	28.79	9.01	37.81	54.00	-16.19

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11g_CH1
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

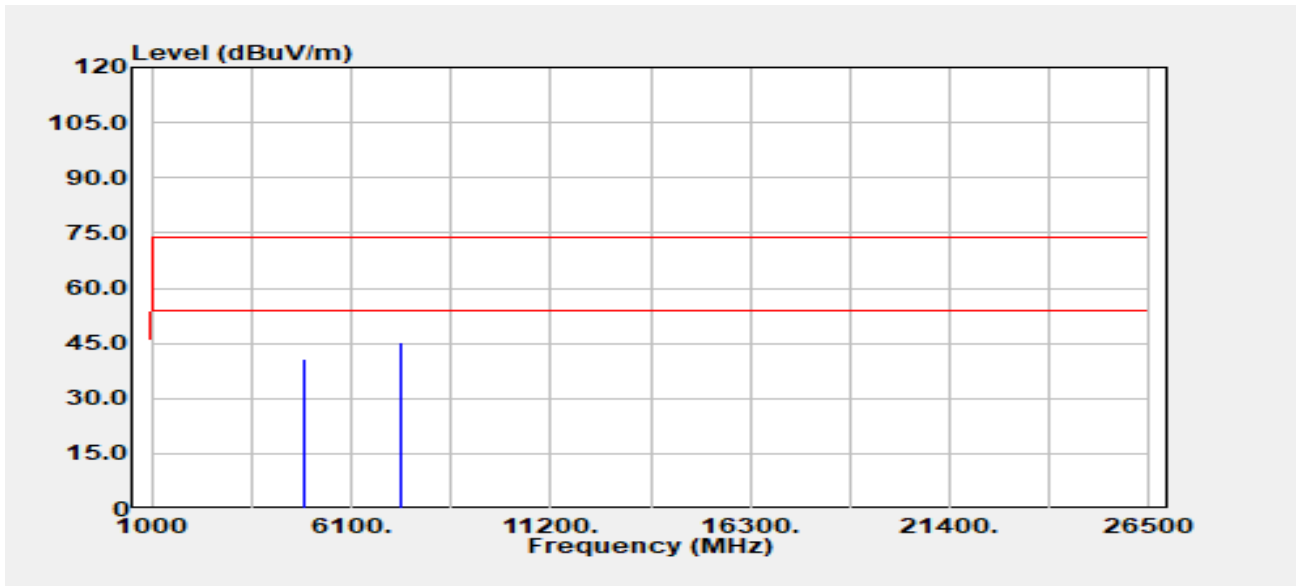


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	37.98	2.93	40.90	74.00	-33.10
4924.00	Average	30.45	2.93	33.38	54.00	-20.62
7386.00	Peak	36.39	9.01	45.40	74.00	-28.60
7386.00	Average	28.04	9.01	37.05	54.00	-16.95

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

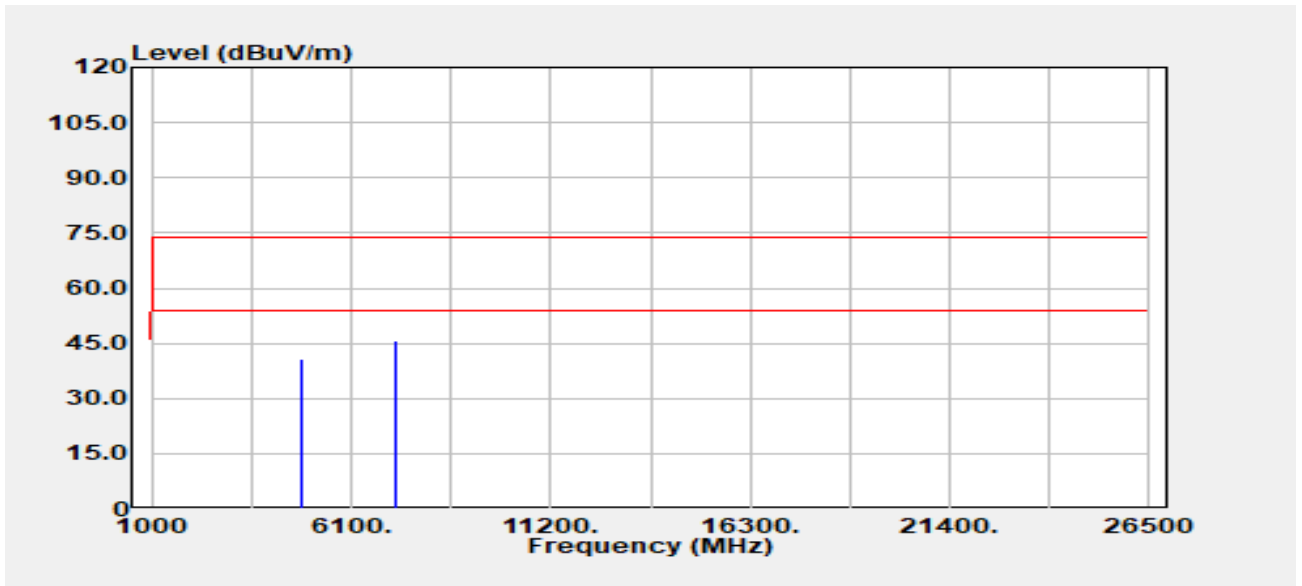


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	38.53	2.25	40.78	74.00	-33.22
4824.00	Average	29.67	2.25	31.92	54.00	-22.08
7236.00	Peak	36.76	9.17	45.92	74.00	-28.08
7236.00	Average	27.60	9.17	36.77	54.00	-17.23

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

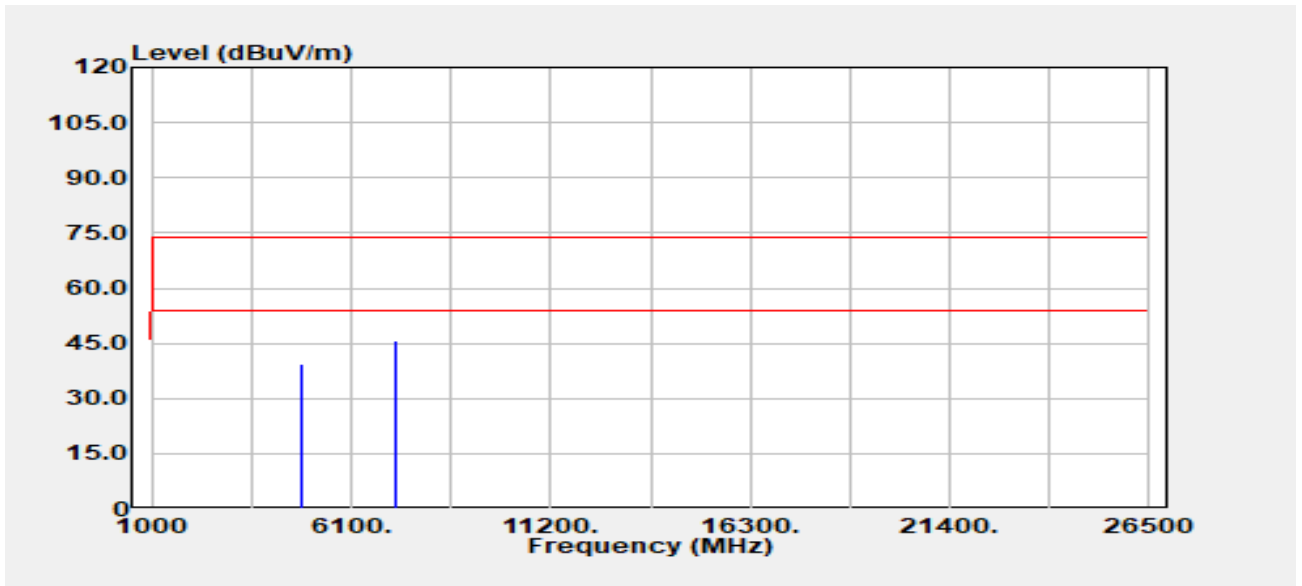


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	37.32	2.25	39.57	74.00	-34.43
4824.00	Average	28.41	2.25	30.66	54.00	-23.34
7236.00	Peak	36.51	9.17	45.68	74.00	-28.32
7236.00	Average	27.60	9.17	36.77	54.00	-17.23

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

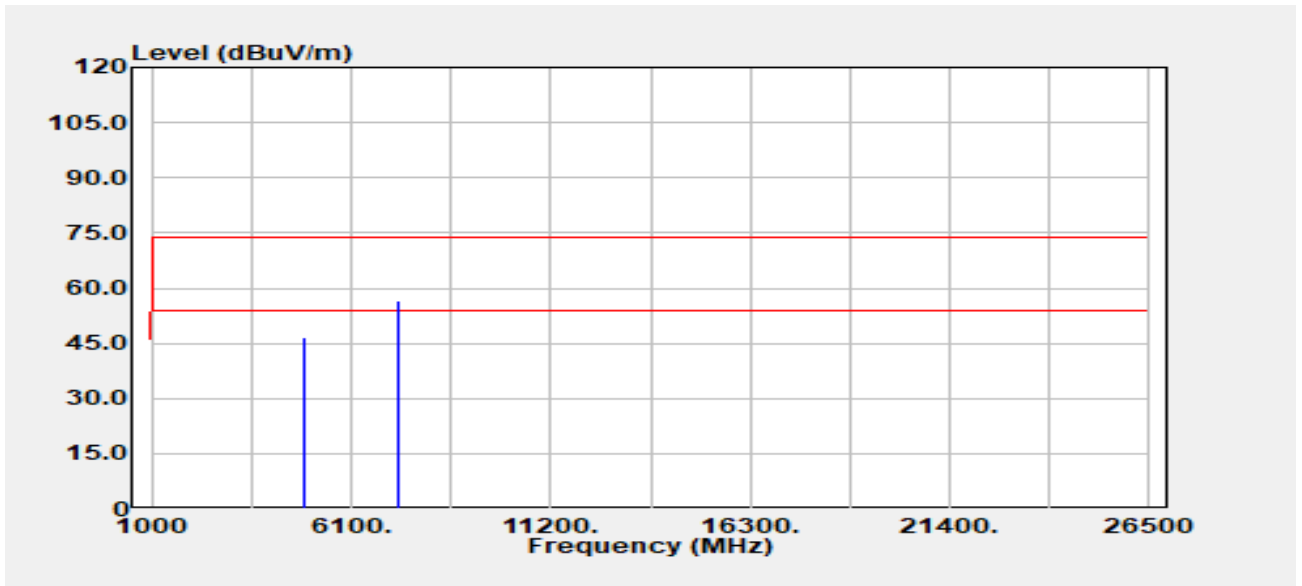


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	44.17	2.49	46.67	74.00	-27.33
4874.00	Average	35.82	2.49	38.31	54.00	-15.69
7311.00	Peak	47.70	8.96	56.66	74.00	-17.34
7311.00	Average	40.35	8.96	49.32	54.00	-4.68

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

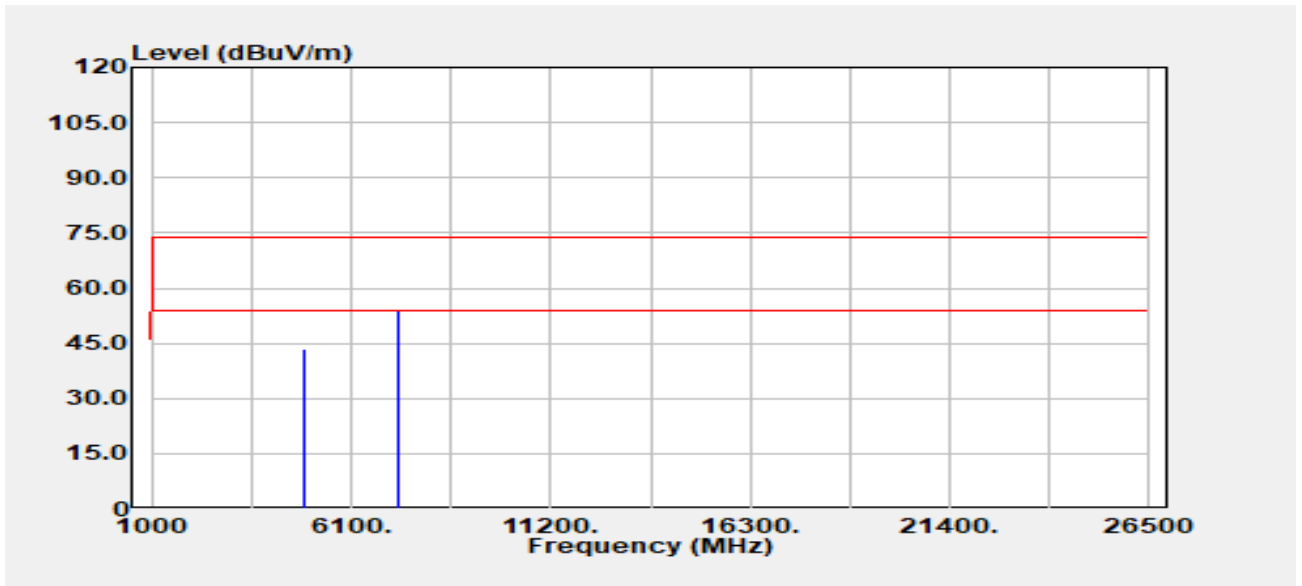


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	40.97	2.49	43.47	74.00	-30.53
4874.00	Average	31.66	2.49	34.16	54.00	-19.84
7311.00	Peak	44.81	8.96	53.77	74.00	-20.23
7311.00	Average	37.77	8.96	46.73	54.00	-7.27

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

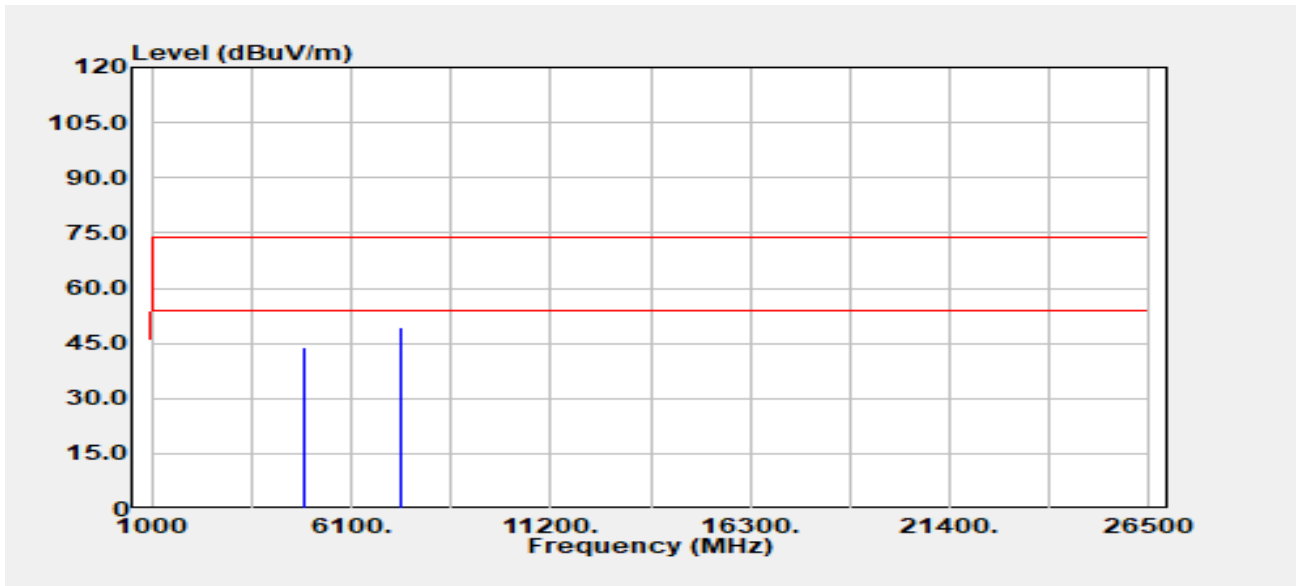


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	41.15	2.93	44.08	74.00	-29.92
4924.00	Average	33.92	2.93	36.85	54.00	-17.15
7386.00	Peak	40.39	9.01	49.40	74.00	-24.60
7386.00	Average	31.65	9.01	40.67	54.00	-13.33

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n20
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :18

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

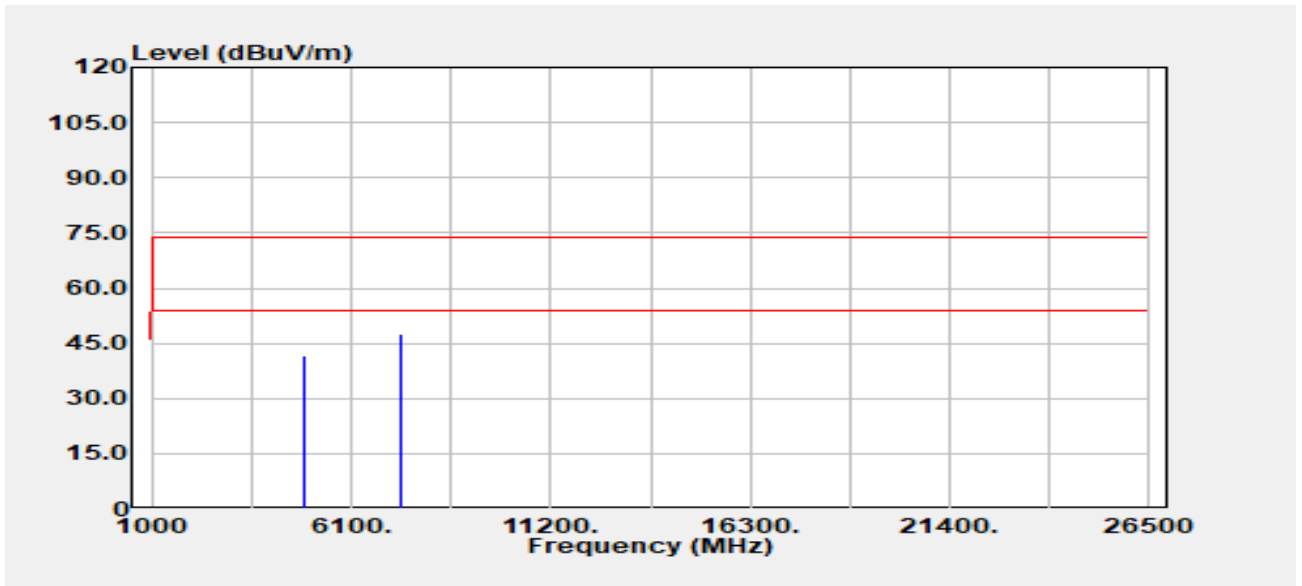


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	38.73	2.93	41.65	74.00	-32.35
4924.00	Average	29.78	2.93	32.70	54.00	-21.30
7386.00	Peak	38.75	9.01	47.76	74.00	-26.24
7386.00	Average	29.88	9.01	38.89	54.00	-15.11

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2422 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :16

Test Date :2024-05-13
 Temp./Humi. :24.4/58
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

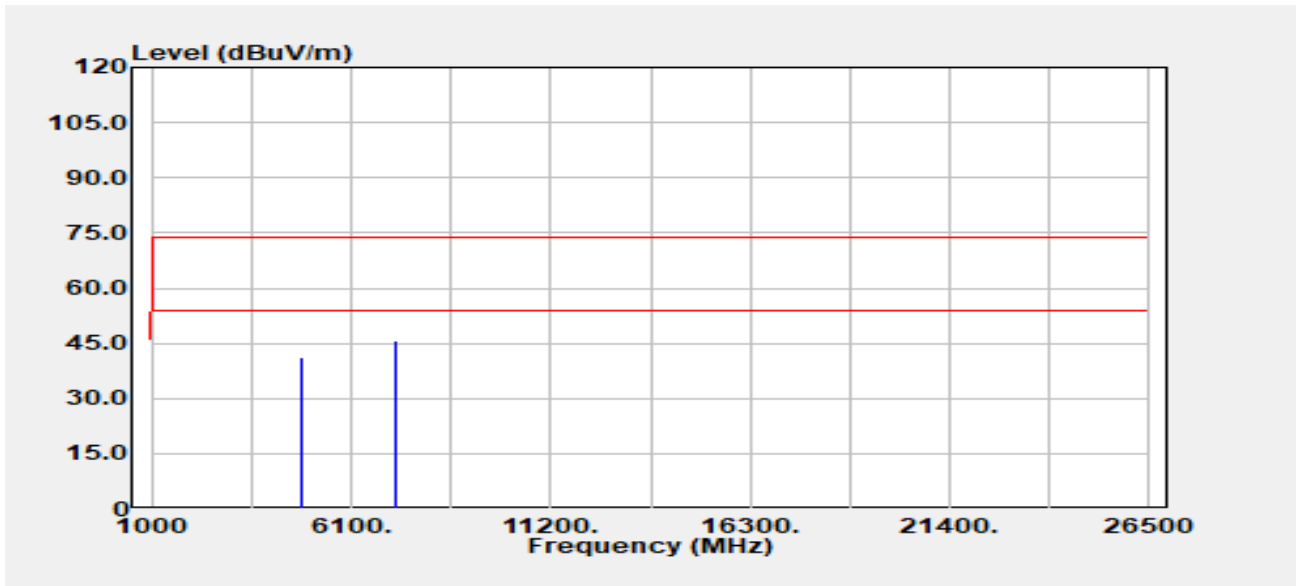


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4844.00	Peak	39.04	2.28	41.32	74.00	-32.68
4844.00	Average	34.28	2.28	36.56	54.00	-17.44
7266.00	Peak	36.57	9.15	45.72	74.00	-28.28
7266.00	Average	27.61	9.15	36.76	54.00	-17.24

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2422 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :16

Test Date :2024-05-13
 Temp./Humi. :24.4/58
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

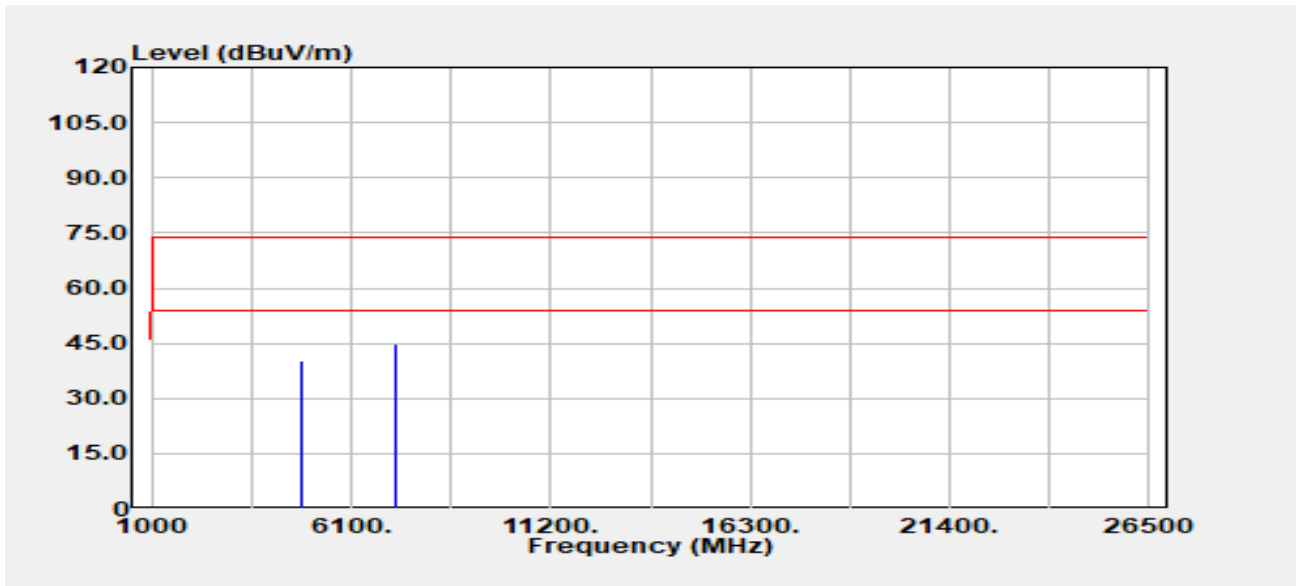


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4844.00	Peak	37.86	2.28	40.14	74.00	-33.86
4844.00	Average	32.10	2.28	34.38	54.00	-19.62
7266.00	Peak	35.65	9.15	44.81	74.00	-29.19
7266.00	Average	27.05	9.15	36.21	54.00	-17.79

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

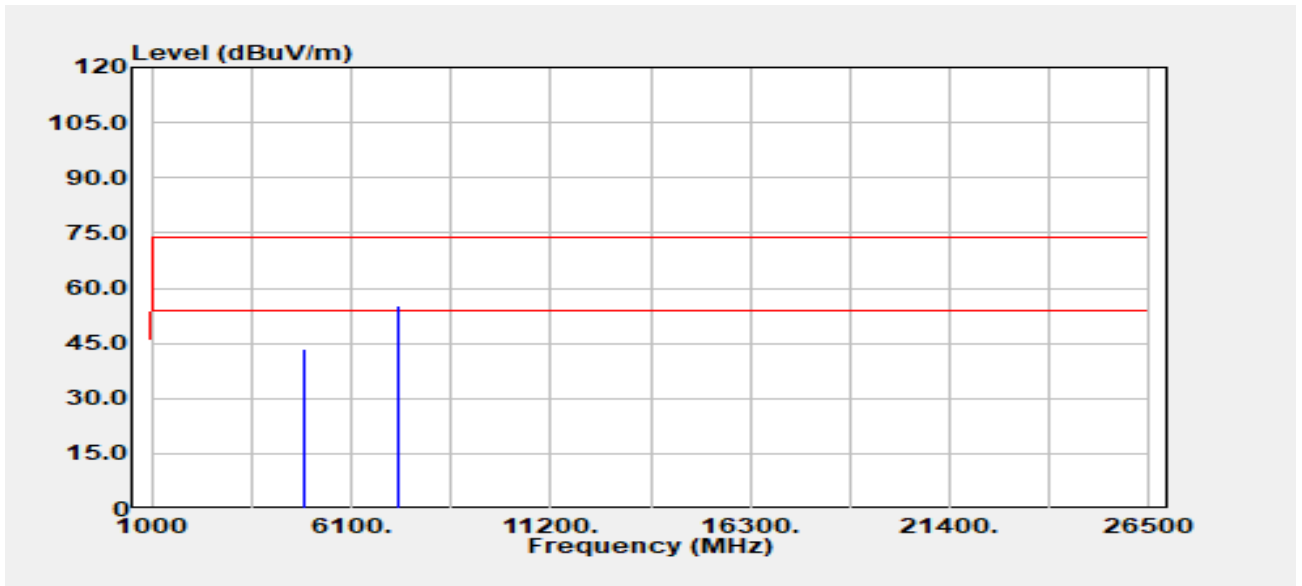


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	41.02	2.49	43.51	74.00	-30.49
4874.00	Average	33.61	2.49	36.10	54.00	-17.90
7311.00	Peak	46.26	8.96	55.22	74.00	-18.78
7311.00	Average	39.16	8.96	48.12	54.00	-5.88

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-23
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

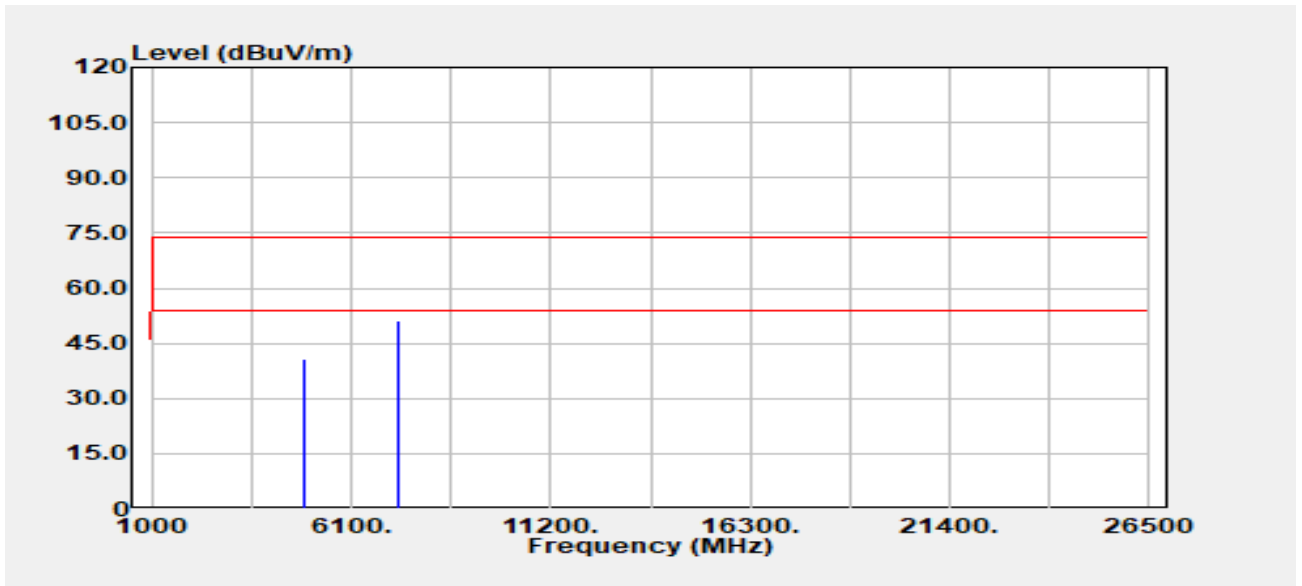


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	38.44	2.49	40.93	74.00	-33.07
4874.00	Average	29.89	2.49	32.38	54.00	-21.62
7311.00	Peak	42.08	8.96	51.04	74.00	-22.96
7311.00	Average	35.60	8.96	44.56	54.00	-9.44

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2452 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :15

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

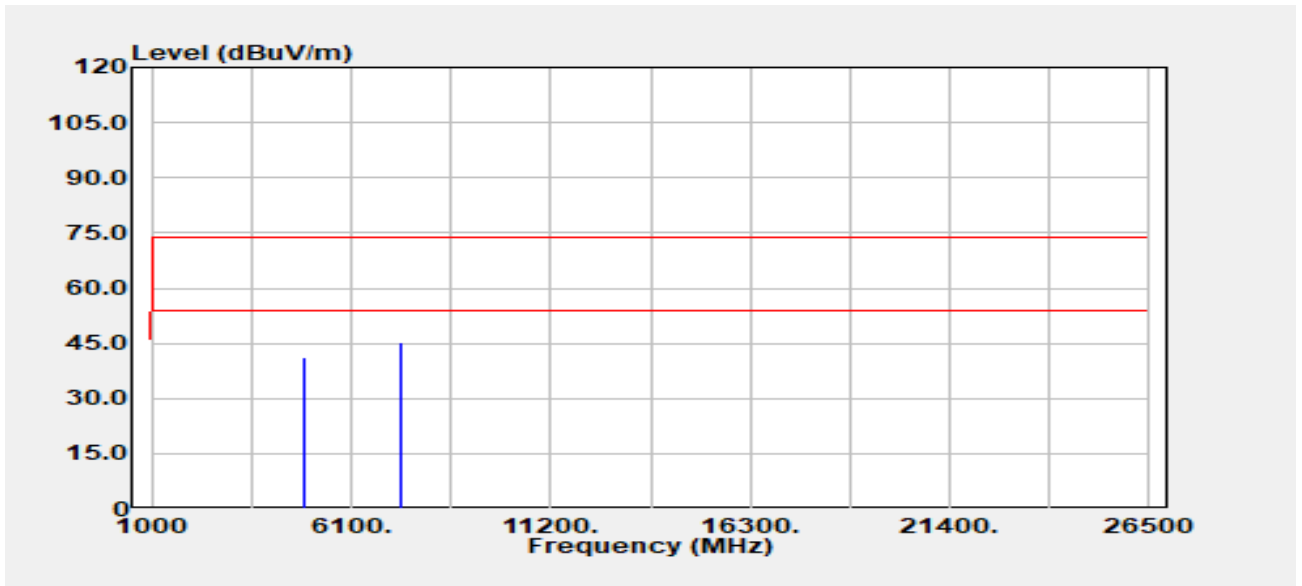


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4904.00	Peak	38.36	2.75	41.11	74.00	-32.89
4904.00	Average	29.64	2.75	32.40	54.00	-21.60
7356.00	Peak	36.33	8.95	45.28	74.00	-28.72
7356.00	Average	32.58	8.95	41.53	54.00	-12.47

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11n40
 Frequency :2452 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :15

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

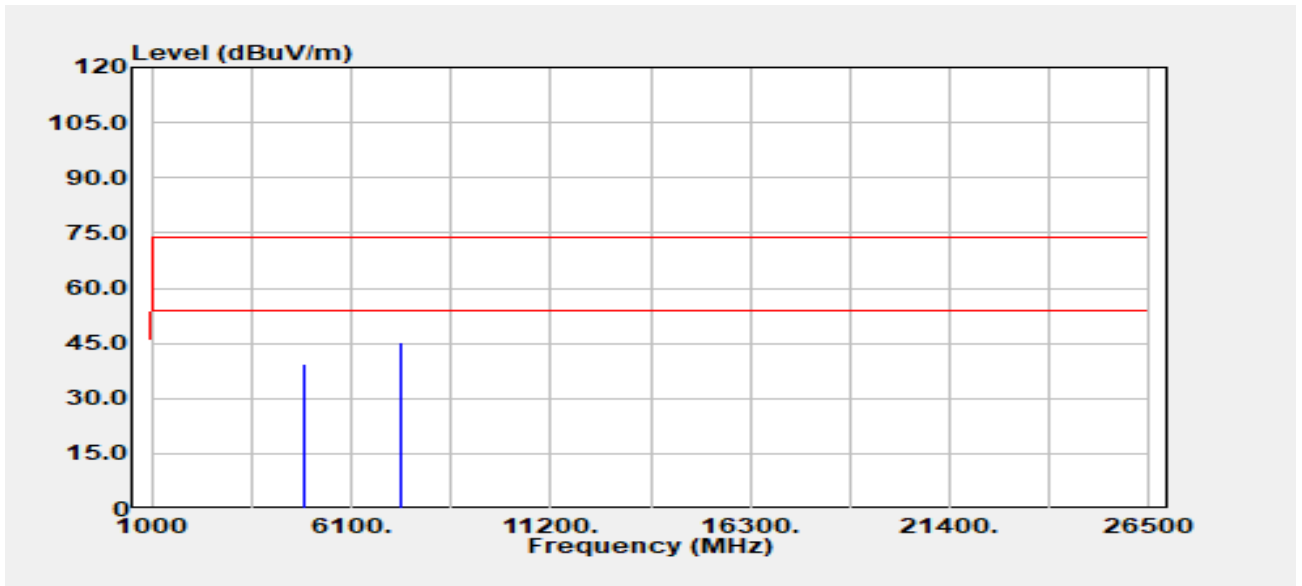


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4904.00	Peak	36.70	2.75	39.46	74.00	-34.54
4904.00	Average	28.53	2.75	31.28	54.00	-22.72
7356.00	Peak	36.40	8.95	45.35	74.00	-28.65
7356.00	Average	31.23	8.95	40.18	54.00	-13.82

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :16.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

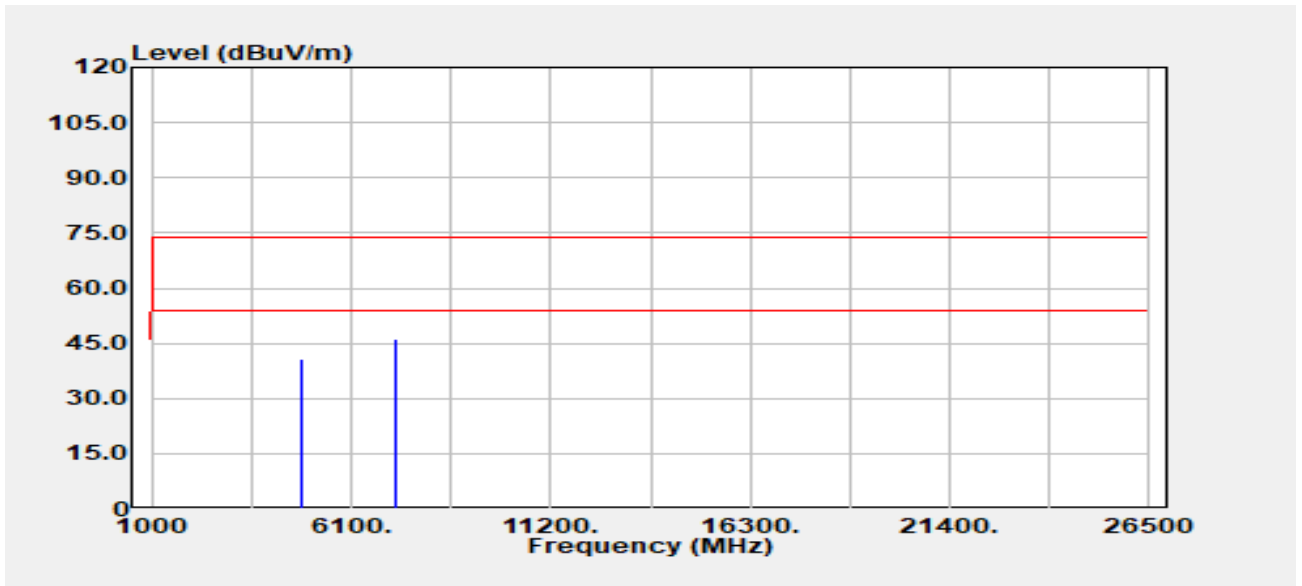


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	38.73	2.25	40.98	74.00	-33.02
4824.00	Average	31.44	2.25	33.69	54.00	-20.31
7236.00	Peak	36.87	9.17	46.03	74.00	-27.97
7236.00	Average	29.52	9.17	38.68	54.00	-15.32

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2412 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :16.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

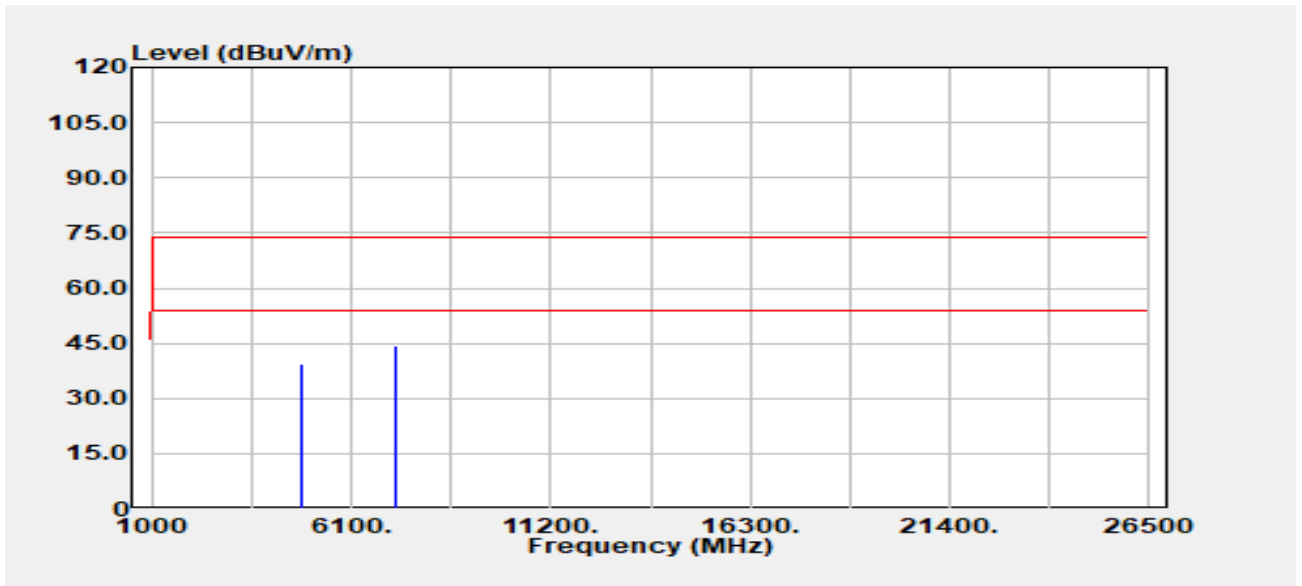


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4824.00	Peak	37.24	2.25	39.49	74.00	-34.51
4824.00	Average	29.63	2.25	31.88	54.00	-22.12
7236.00	Peak	35.02	9.17	44.18	74.00	-29.82
7236.00	Average	27.82	9.17	36.99	54.00	-17.01

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

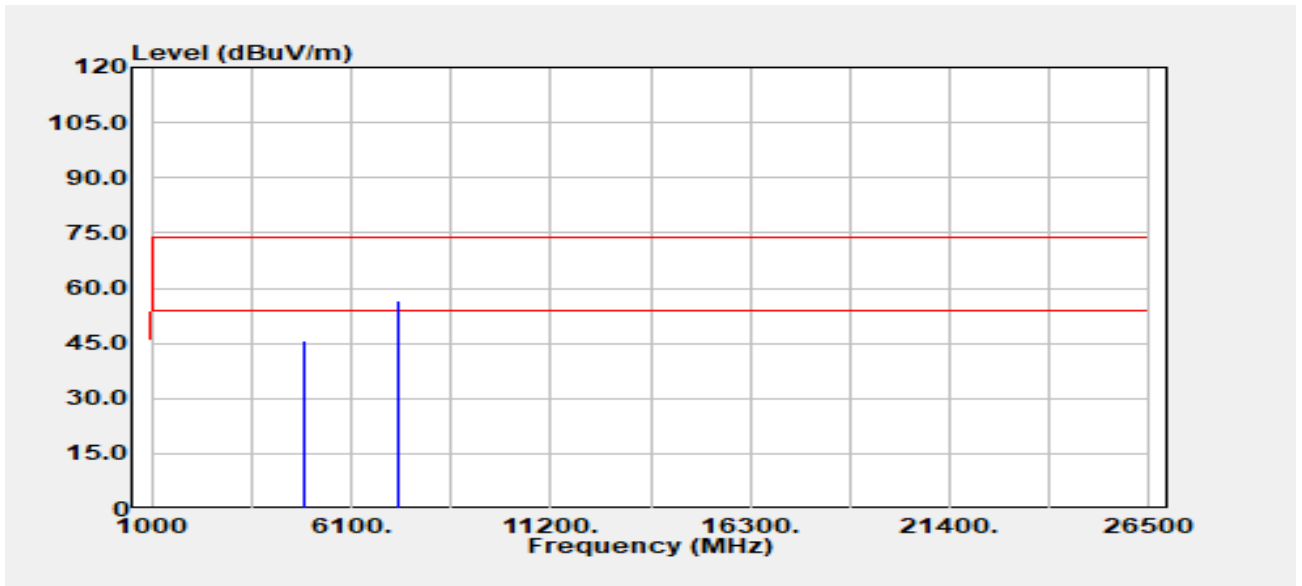


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4874.00	Peak	43.30	2.49	45.80	74.00	-28.20
4874.00	Average	35.86	2.49	38.36	54.00	-15.64
7311.00	Peak	47.77	8.96	56.73	74.00	-17.27
7311.00	Average	42.70	8.96	51.67	54.00	-2.33

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2437 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :22.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

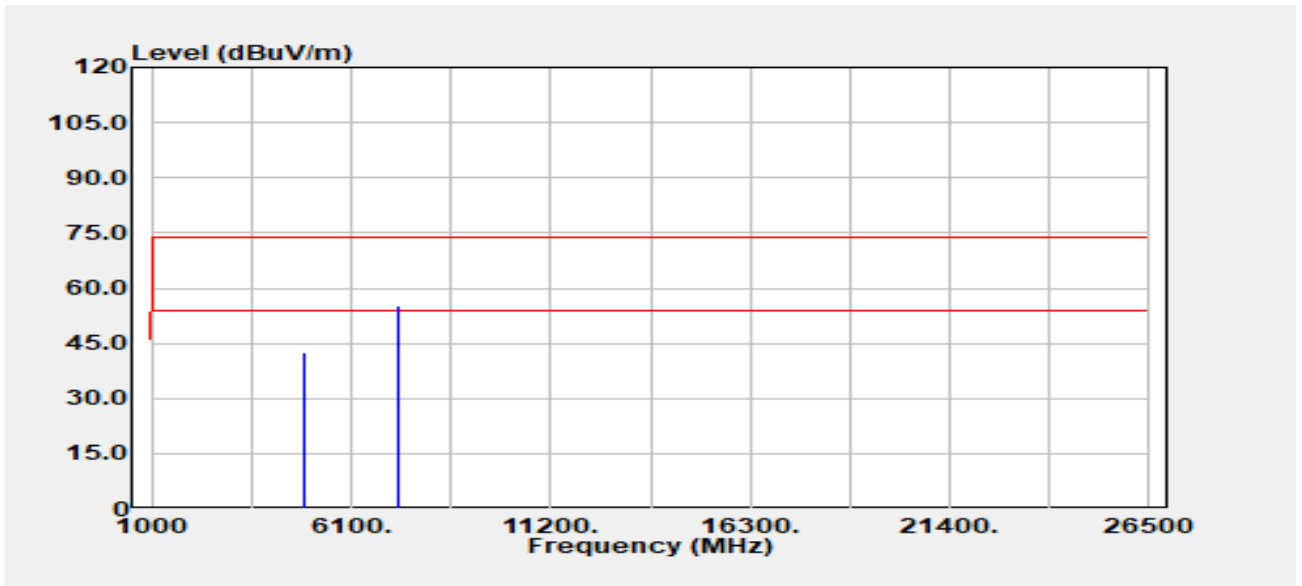


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	40.11	2.49	42.60	74.00	-31.40
4874.00	Average	32.03	2.49	34.53	54.00	-19.47
7311.00	Peak	46.48	8.96	55.44	74.00	-18.56
7311.00	Average	39.05	8.96	48.01	54.00	-5.99

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :17.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

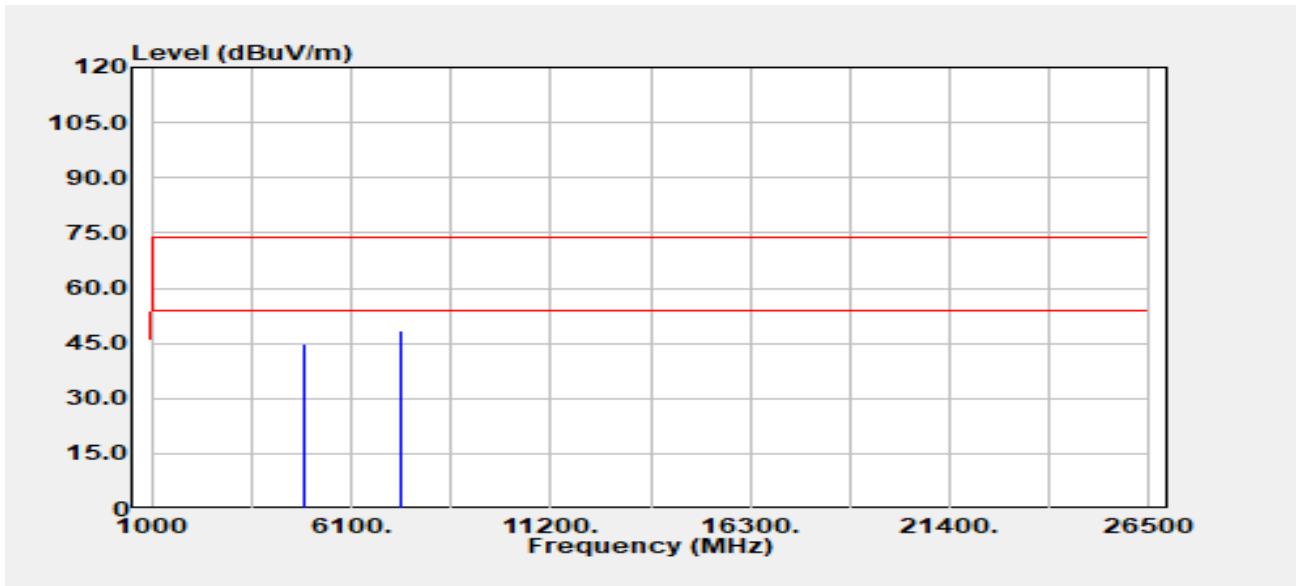


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	41.75	2.93	44.67	74.00	-29.33
4924.00	Average	33.45	2.93	36.38	54.00	-17.62
7386.00	Peak	39.46	9.01	48.47	74.00	-25.53
7386.00	Average	32.27	9.01	41.28	54.00	-12.72

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax20
 Frequency :2462 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :17.5

Test Date :2024-04-24
 Temp./Humi. :24.3/59
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

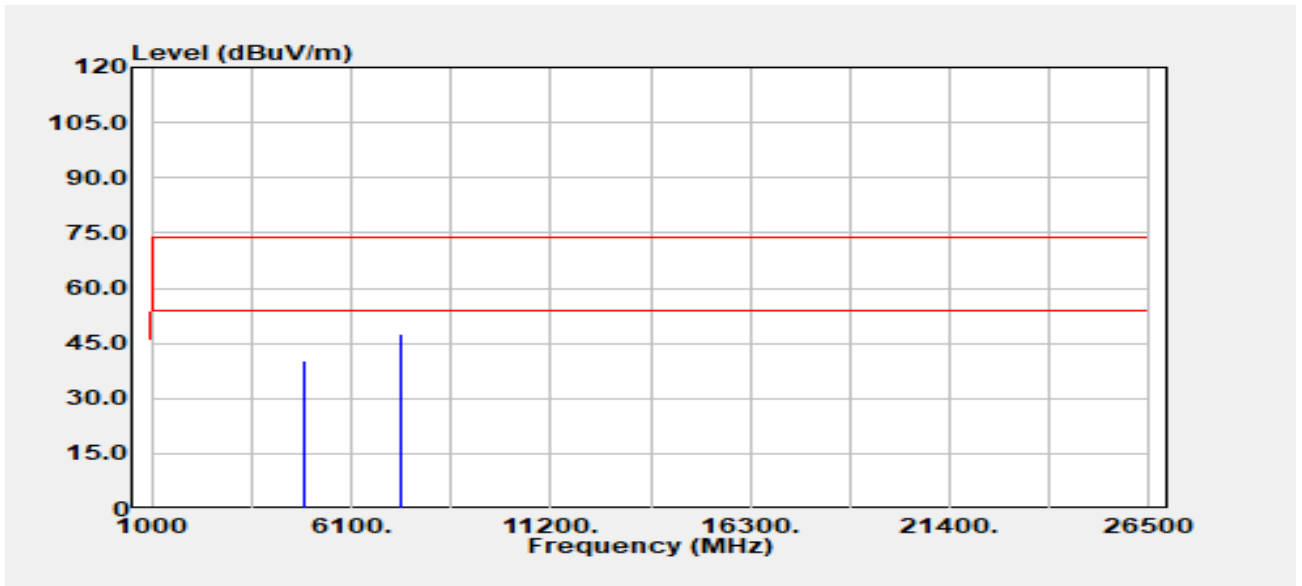


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4924.00	Peak	37.50	2.93	40.43	74.00	-33.57
4924.00	Average	30.33	2.93	33.26	54.00	-20.74
7386.00	Peak	38.61	9.01	47.63	74.00	-26.37
7386.00	Average	30.08	9.01	39.09	54.00	-14.91

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2422 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :14.5

Test Date :2024-05-13
 Temp./Humi. :24.4/58
 Antenna Pol. :Vertical
 Engineer :Ray Li
 Test Chamber : 966A

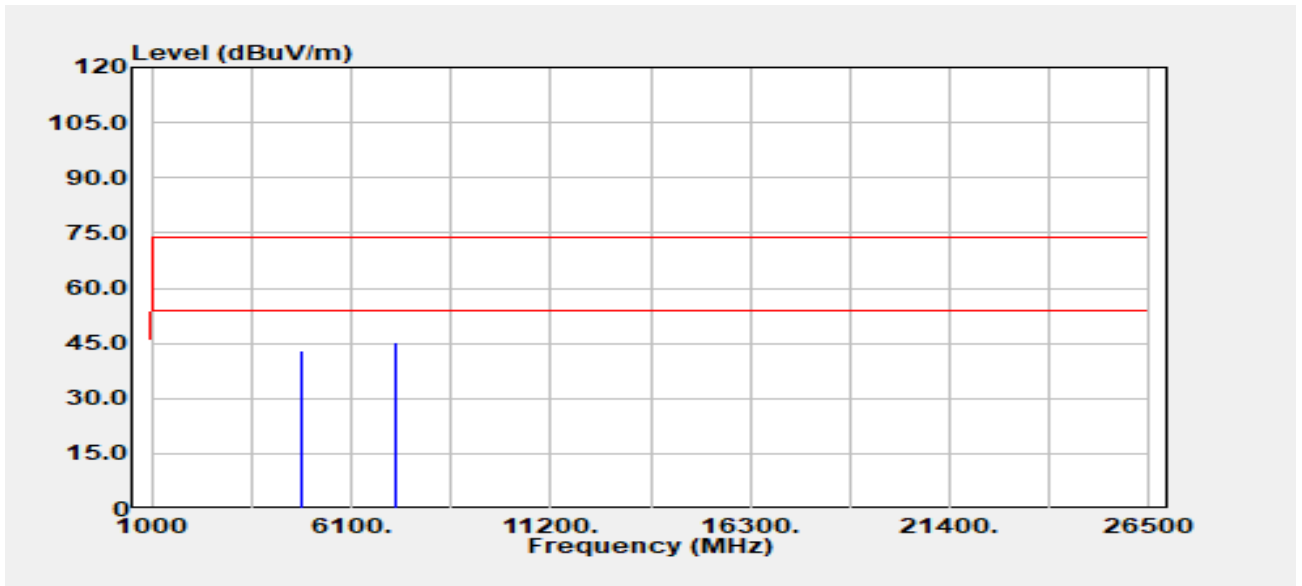


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4844.00	Peak	40.95	2.28	43.22	74.00	-30.78
4844.00	Average	36.21	2.28	38.49	54.00	-15.51
7266.00	Peak	36.35	9.15	45.50	74.00	-28.50
7266.00	Average	27.72	9.15	36.87	54.00	-17.13

Report No.: TMWK2309003308KR

Rev.: 00

Project No :TM-2309000207P
 Operation Band :802.11ax40
 Frequency :2422 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :14.5

Test Date :2024-05-13
 Temp./Humi. :24.4/58
 Antenna Pol. :Horizontal
 Engineer :Ray Li
 Test Chamber : 966A

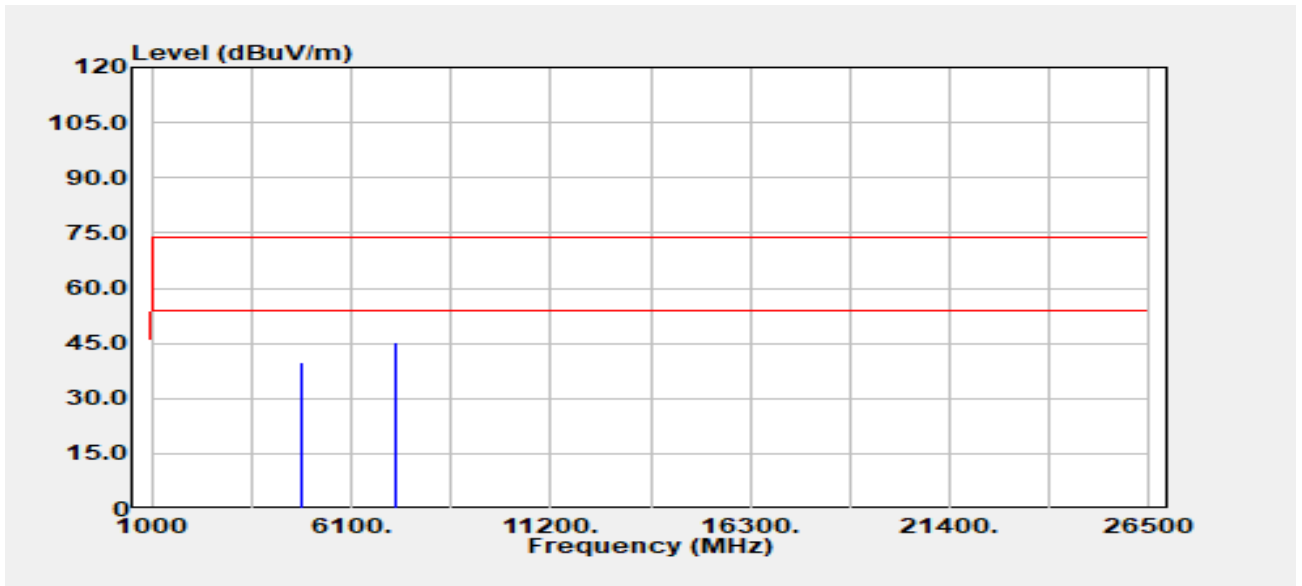

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4844.00	Peak	37.61	2.28	39.89	74.00	-34.11
4844.00	Average	33.55	2.28	35.83	54.00	-18.17
7266.00	Peak	36.08	9.15	45.23	74.00	-28.77
7266.00	Average	29.58	9.15	38.73	54.00	-15.27