

# **MPE Report**

**Applicant** : D-Link Corporation

**Product Name** : AX6000 Wi-Fi 6 Smart Home Gateway

Wi-Fi 6 AX6000 IoT Gateway

Trade Name D-Link

Model Number MS60

: 47 CFR § 2.1093 Applicable Standard

Dec. 29, 2023 Received Date

**Issued Date** : May 16, 2024

Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Tel: +886-3-2710188 / Fax: +886-3-2710190

## Taiwan Accreditation Foundation accreditation number: 1330

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report. 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd. 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

#### Approved By :







# **Table of Contents**

1.	General Information	4
2.	Description of Equipment under Test (EUT)	б
3.	RF Exposure Limit	
4.	RF Exposure Assessment	
5.	Maximum Transmitting Mode Evaluation	
6.	Result	
7.		







# **Revision History**

Rev.	Issued Date	Description	Revised by
00	May 16, 2024	Initial Issue	Snow Wang



# 1. General Information

# 1.1 Reference Applicable Standard

Standard	Description	Version
IEEE C95.1	American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 KHz to 100 GHz, New York.	1992
47 CFR § 2.1091	Radiofrequency radiation exposure evaluation: mobile devices.	-
47 CFR § 1.1310	Radiofrequency radiation exposure limits.	-
KDB 447498 D04	RF exposure procedures and equipment authorization policies for mobile and portable devices	v01



## 1.2 Testing Location

#### **Test Facilities**

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan

Website: https://www.atl.com.tw
Telephone: +886-3-271-0188
Fax: +886-3-271-0190

E-mail: infoEETW@eurofins.com

#### **Test Site Location**

■ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan

☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

### Laboratory Accreditation

Location	TAF	FCC	ISED	
No. 140-1, Changan Street, Bade District,	Accreditation No.:	Designation No.:	Company No.: 7381A	
Taoyuan City 334025, Taiwan	1330	TW0010	CAB ID: TW1330	
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei	Accreditation No.:	Designation No.:	Company No.: 28922	
City, Taiwan	1330	TW0034	CAB ID: TW1330	



2. Description of Equipment under Test (EUT)

2. Description of	n Equipment u	nuer	rest (EUT)					
Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606							
Product Name	AX6000 Wi-Fi 6 Smart Home Gateway Wi-Fi 6 AX6000 IoT Gateway							
Difference description of product name	For marketing purpose, No physical difference in specifications.							
Trade Name	D-Link							
Model Number	MS60							
FCC ID	KA2MS60A1							
Use Distance	20 cm							
Antenna Information	Model No.	Model No. Type Gain						
WLAN 2.4 GHz	FPC		Dipole Type Ar	itenna	1.86			
WLAN 5.2 GHz	FPC		Dipole Type Antenna		1.86			
WLAN 5.3 GHz	FPC		Dipole Type Antenna		1.86			
WLAN 5.6 GHz	FPC		Dipole Type Antenna		1.78			
WLAN 5.8 GHz	FPC		Dipole Type Antenna			1.88		
Bluetooth	FPC		Dipole Type Antenna		0.34			
Zigbee	FPC		Dipole Type Ar	Antenna		0.34		
		Access	ory Information					
	Trade Name	AMIGO		Model Numb	er	AMS200-1202000FU		
US Plug Adapter	I/P: 100-240 VAC, 50/60 Hz, 0.8 A MAX							
	O/P: 12.0 VDC, 2.0 A							
	Trade Name AMIGO Model Number				er	AMS200-1202000F		
Change Plug Adapter	I/P: 100-240 VAC, 50/60 Hz, 0.8 A MAX							
	O/P: 12.0 VDC, 2.0 A							
RJ45 Cable	Trade Name	Nienyi G	Group	Model Numb	er	NYS4710		

#### Note:

The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.







2.1 RF Specification

Wi-Fi 2.4G								
Support type:	⊠ 802.11b	⊠ 802.11g	⊠ 802.11n	802.11ax				
Support bandwidth:								
Wi-Fi 5G	Wi-Fi 5G							
Operation Band:	☑ U-NII-1	⊠ U-NII-2A	☑ U-NII-2C	☐ U-NII-3				
Operation Band.	□ U-NII-5							
Support type:	⊠ 802.11a	⊠ 802.11n	802.11ac	⊠ 802.11ax				
Support bandwidth:			⊠ 80 MHz					
Bluetooth								
Support type:	□ BR	□ EDR	☑ BLE-1 Mbps	☑ BLE-2 Mbps				
Zigbee								
Operation frequency	2405 - 2480MHz	·						



# 3. RF Exposure Limit

For devices that operate at larger distances from persons, where there are minimal RF coupling interactions between a device and the user or nearby persons, RF exposure compliance using maximum permissible exposure (MPE) limits is applied. The limits for MPE is listed as below:

Limits for General Population / Uncontrolled Exposure									
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm²)	Averaging Time E ², H ² or S (minutes)					
0.3-1.34	614	1.63	(100)*	30					
1.34-30	824 / f	2.19 / f	(180 / f2)*	30					
30-300	27.5	0.073	0.2	30					
300-1500	-	-	F / 1,500	30					
1,500-100,000	-	-	1.0	30					
	Limits for Occupational / Controlled Exposure								
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm²)	Averaging Time E ², H ² or S (minutes)					
0.3-3.0	614	1.63	(100)*	6					
		4.00.45	(000 / f0)*	^					
3.0-30	1,842 / f	4.89 / f	(900 / f2)*	6					
3.0-30	61.4	0.163	1.0	6					
	·		, ,	-					

f = frequency in MHz. \* = Plane-wave equivalent power density.




# 4. RF Exposure Assessment

### 4.1 Exemption Evaluation

Exemption evaluation was performed according to the appendix A and B in KDB447498 D04.

The General Sequence for Determination of Procedure demonstrated in Figure A.1 of KDB447498 D04 was applied.

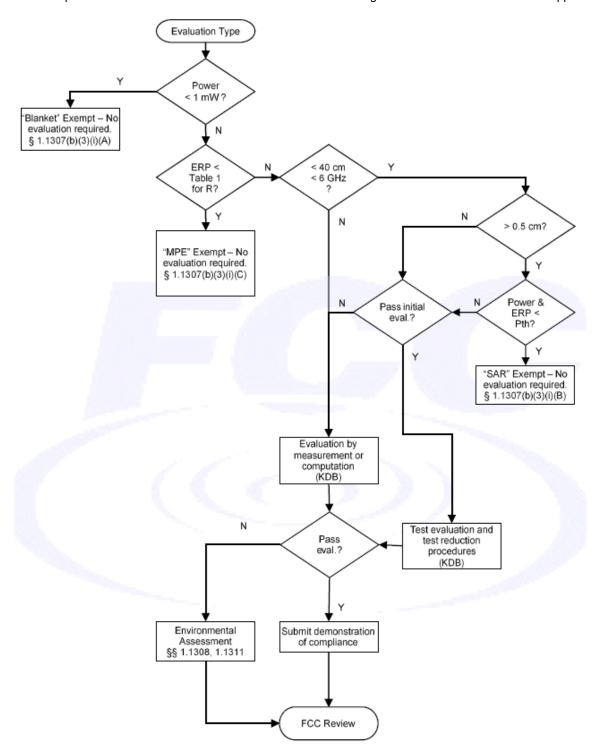



### 4.2 Human Exposure Assessment

Due to the design and installation of this product, it is not possible to conduct SAR evaluation. This is because client either manufactures or supplies the antenna(s) that will be used in the installation of this product. Therefore, this product will be evaluated as a mobile device per 47 CFR § 1.1310 titled "Radiofrequency radiation exposure limits", generally referred to as MPE limits.

In 47 CFR § 2.1091, paragraph (b) defines a mobile device as "a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 cm is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons."

#### **Exposure evaluation**

$$S_{einp} = \frac{EIRP}{4\pi d^2} = \frac{PG}{4\pi d^2} \left( W / m^2 \right)$$

Where

S: is the input power (W);

G: is the antenna gain;

d: is the distance between antennas and evaluation point (m).

Report No.: USSC23D390001 Issued Date: May 16, 2024

## 5. Maximum Transmitting Mode Evaluation

#### Antenna transmission description

WLAN 2.4 GHz: 1TX (Diversity) / 2TX (MIMO) / 4TX (MIMO) WLAN 5 GHz: 1TX (Diversity) / 2TX (MIMO) / 4TX (MIMO)

Bluetooth : 1TX (Diversity)
Zigbee : 1TX (Diversity)

## 6. Result

Band	Frequency (MHz)	Power (dBm) [P]	ANT Gain (dBi)	Numeric Gain [G]	Power with Duty cycle (mW) [P]x[G]	Power Density (mW/cm^2) [S]	Standalone Limit (mW/cm^2)	Evaluated / Exposure Limit	
WLAN 2.4 GHz	2412 - 2472	23.29	1.86	1.53	326.36	0.06	1.00	0.06	
WLAN 5.2 GHz	5150 - 5250	21.81	1.86	1.53	232.11	0.05	1.00	0.05	
WLAN 5.3 GHz	5250 - 5350	17.38	1.86	1.53	83.69	0.02	1.00	0.02	
WLAN 5.6 GHz	5470 - 5725	20.99	1.78	1.51	189.66	0.04	1.00	0.04	
WLAN 5.8 GHz	5725 - 5850	23.09	1.88	1.54	313.70	0.06	1.00	0.06	
Bluetooth	2402 - 2480	12.02	0.34	1.08	17.20	0.00	1.00	0.00	
Zigbee	2405 - 2480	11.62	0.34	1.08	15.68	0.00	1.00	0.00	

Note:


MAX MPE: 0.06 mW/cm<sup>2</sup>

#### Simultaneous Transmitting:

MAX WLAN + Bluetooth + Zigbee

**TER:** 0.06

### 7. Conclusion



<sup>1.</sup> The calculation uses the minimum distance defined by the regulations of 20 cm, which is more conservative than the actual use distance of the product.

<sup>2.</sup> The maximum power and gain were applied to evaluate MPE.