


Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) CH 2462MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Band Edge	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

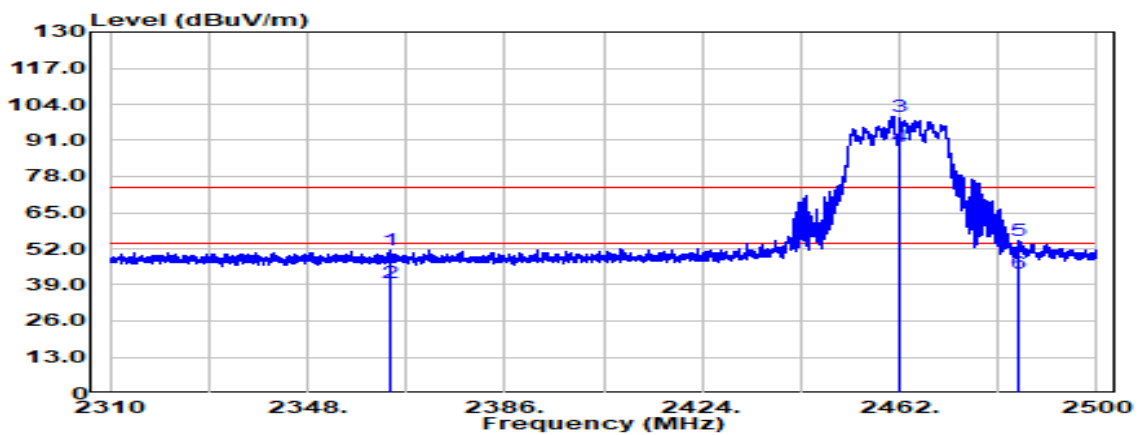

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2363.746	Peak	39.18	12.35	51.53	74.00	-22.47
2363.746	Average	27.29	12.35	39.64	54.00	-14.36
2462.000	Peak	86.74	12.93	99.67	--	--
2462.000	Average	75.69	12.93	88.62	--	--
2484.990	Peak	41.74	13.09	54.83	74.00	-19.17
2484.990	Average	29.92	13.09	43.00	54.00	-11.00

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) (26/8) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

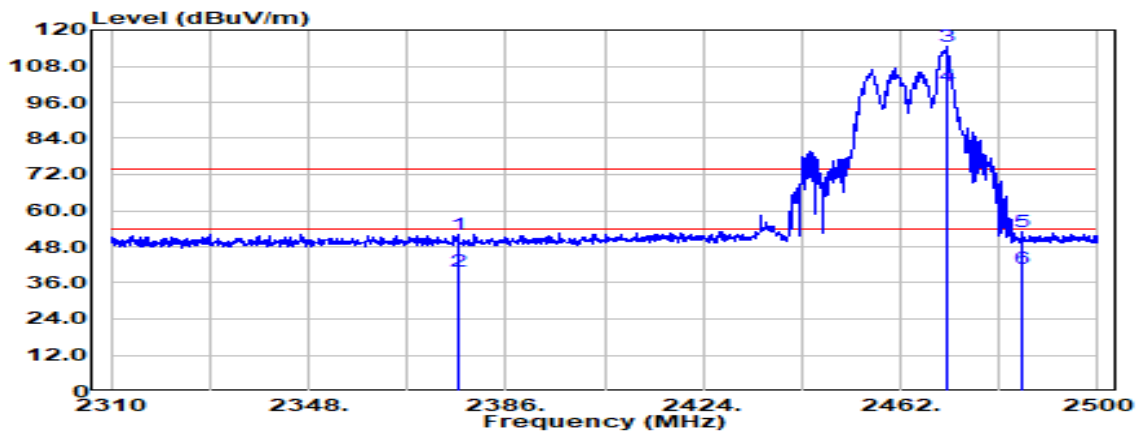

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2376.880	Peak	39.84	12.41	52.25	74.00	-21.75
2376.880	Average	27.36	12.41	39.77	54.00	-14.23
2470.930	Peak	101.39	12.99	114.39	--	--
2470.930	Average	88.59	12.99	101.58	--	--
2485.465	Peak	39.86	13.09	52.96	74.00	-21.04
2485.465	Average	27.49	13.09	40.58	54.00	-13.42

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) (26/8) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

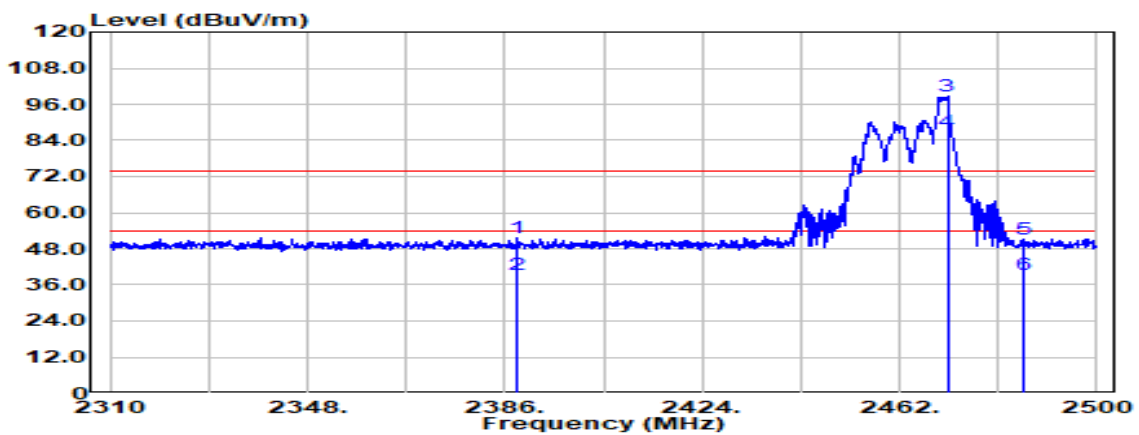

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2388.470	Peak	39.07	12.47	51.55	74.00	-22.45
2388.470	Average	26.70	12.47	39.17	54.00	-14.83
2471.215	Peak	85.66	12.99	98.66	--	--
2471.215	Average	74.15	12.99	87.14	--	--
2485.655	Peak	38.26	13.09	51.35	74.00	-22.65
2485.655	Average	26.19	13.09	39.29	54.00	-14.71

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) (52/40) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

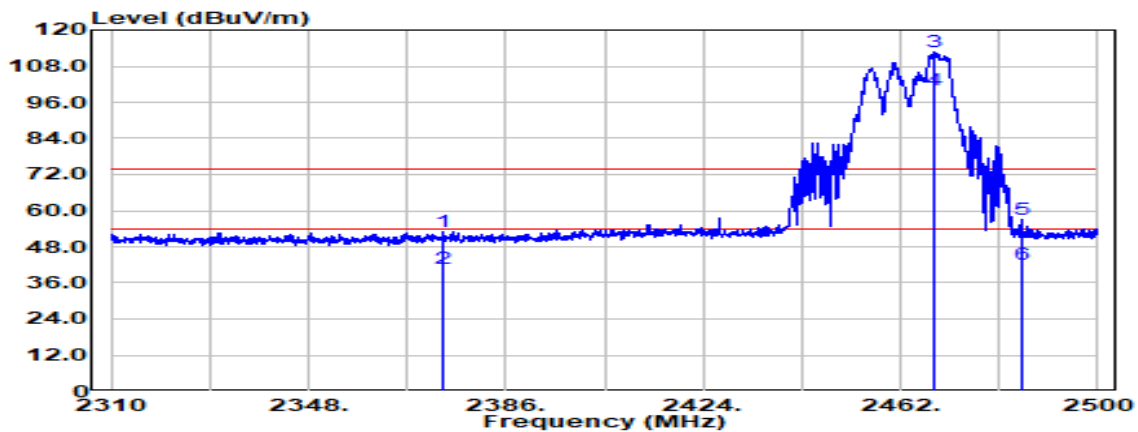


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2374.030	Peak	40.57	12.40	52.97	74.00	-21.03
2374.030	Average	28.21	12.40	40.61	54.00	-13.39
2468.555	Peak	99.70	12.98	112.67	--	--
2468.555	Average	86.96	12.98	99.94	--	--
2485.370	Peak	44.11	13.09	57.20	74.00	-16.80
2485.370	Average	28.80	13.09	41.89	54.00	-12.11



Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) (52/40) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

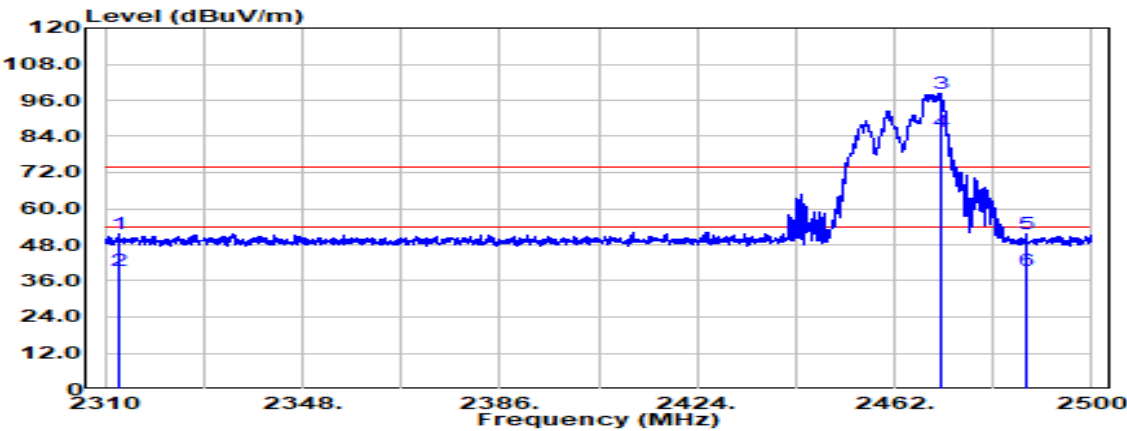

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2312.660	Peak	39.43	12.22	51.65	74.00	-22.35
2312.660	Average	27.11	12.22	39.33	54.00	-14.67
2470.740	Peak	85.29	12.99	98.28	--	--
2470.740	Average	72.72	12.99	85.71	--	--
2487.270	Peak	38.32	13.10	51.42	74.00	-22.58
2487.270	Average	26.36	13.10	39.46	54.00	-14.54

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) (106/54) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

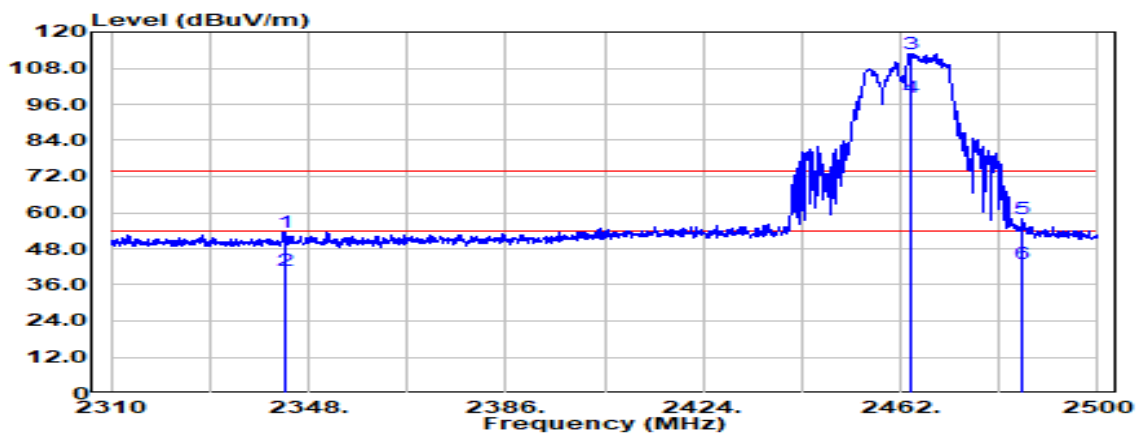

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2343.345	Peak	41.16	12.27	53.43	74.00	-20.57
2343.345	Average	28.49	12.27	40.76	54.00	-13.24
2463.995	Peak	99.97	12.95	112.91	--	--
2463.995	Average	85.22	12.95	98.16	--	--
2485.275	Peak	45.06	13.09	58.15	74.00	-15.85
2485.275	Average	30.07	13.09	43.15	54.00	-10.85

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) (106/54) CH 2462MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

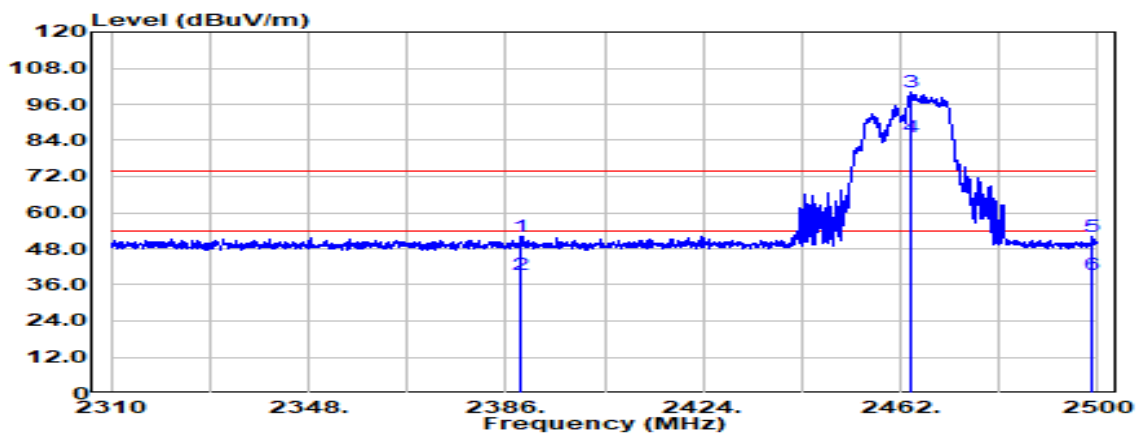

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2389.040	Peak	39.57	12.48	52.04	74.00	-21.96
2389.040	Average	26.70	12.48	39.17	54.00	-14.83
2463.900	Peak	87.35	12.94	100.30	--	--
2463.900	Average	72.17	12.94	85.12	--	--
2499.050	Peak	38.71	13.18	51.90	74.00	-22.10
2499.050	Average	26.36	13.18	39.54	54.00	-14.46

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Band Edge	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

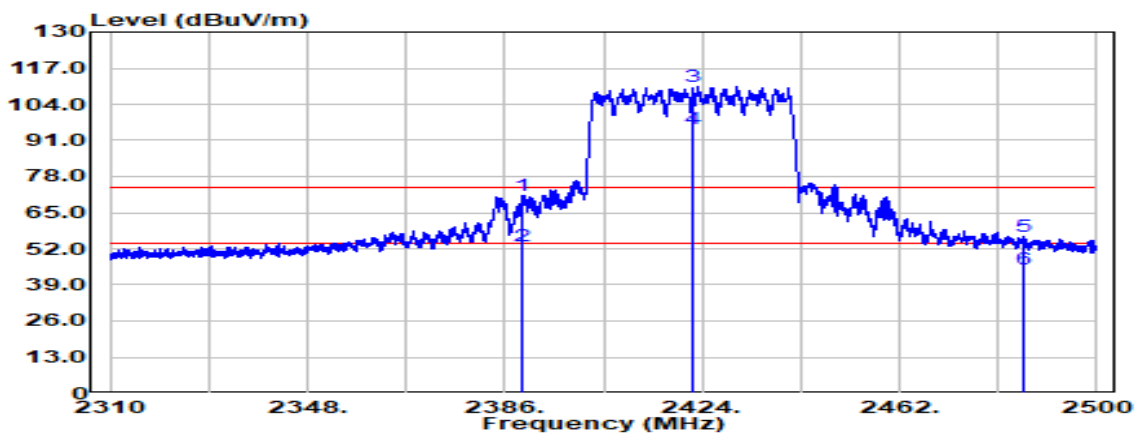

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.491	Peak	58.87	12.48	71.35	74.00	-2.65
2389.491	Average	40.62	12.48	53.10	54.00	-0.90
2422.000	Peak	97.62	12.67	110.29	--	--
2422.000	Average	82.57	12.67	95.24	--	--
2485.869	Peak	43.22	13.09	56.31	74.00	-17.69
2485.869	Average	31.46	13.09	44.55	54.00	-9.45

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Band Edge	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

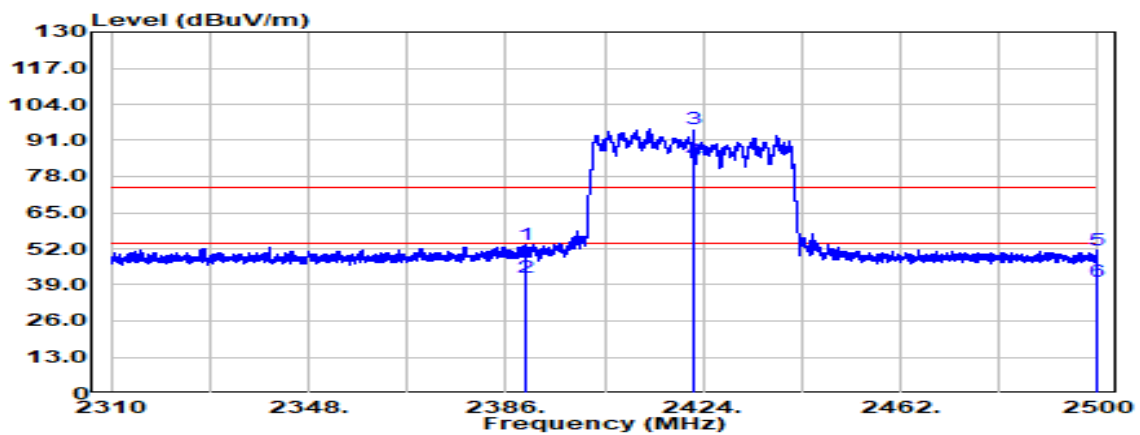

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.610	Peak	40.98	12.48	53.46	74.00	-20.54
2389.610	Average	29.38	12.48	41.85	54.00	-12.15
2422.000	Peak	82.39	12.67	95.06	--	--
2422.000	Average	71.15	12.67	83.82	--	--
2499.976	Peak	38.09	13.19	51.28	74.00	-22.72
2499.976	Average	27.05	13.19	40.24	54.00	-13.76


Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) (242/61)CH 2422MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

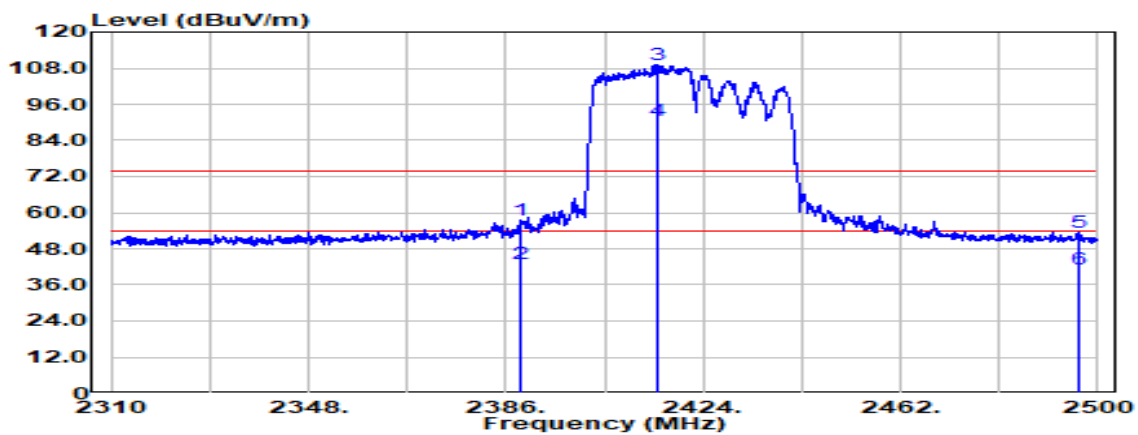

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.040	Peak	44.98	12.48	57.46	74.00	-16.54
2389.040	Average	30.76	12.48	43.24	54.00	-10.76
2415.070	Peak	96.66	12.63	109.29	--	--
2415.070	Average	78.10	12.63	90.72	--	--
2496.200	Peak	40.30	13.16	53.46	74.00	-20.54
2496.200	Average	28.04	13.16	41.20	54.00	-12.80


Test Mode	IEEE 802.11 ax (HE40) (242/61) CH 2422MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

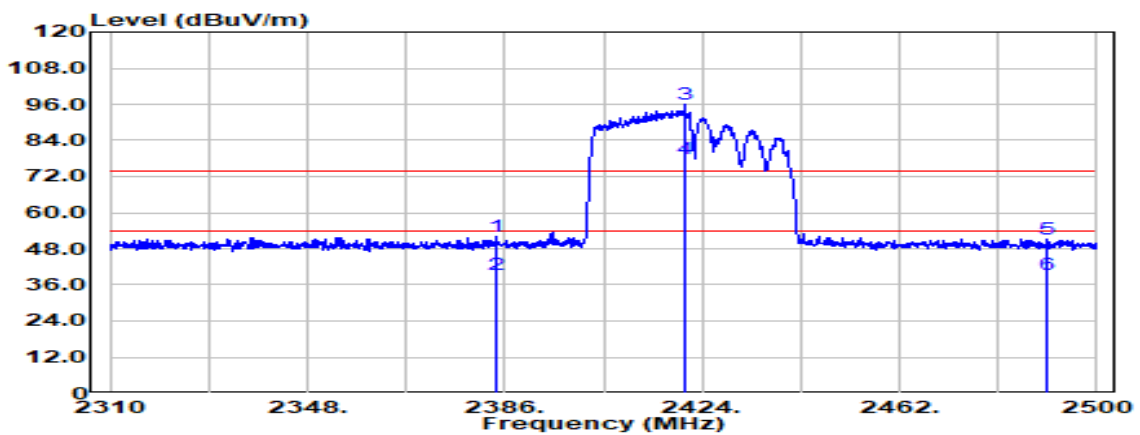

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2384.290	Peak	39.42	12.45	51.87	74.00	-22.13
2384.290	Average	26.89	12.45	39.34	54.00	-14.66
2420.580	Peak	83.19	12.66	95.85	--	--
2420.580	Average	65.27	12.66	77.93	--	--
2490.500	Peak	38.14	13.13	51.26	74.00	-22.74
2490.500	Average	26.16	13.13	39.28	54.00	-14.72

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2427MHz	Temp/Hum	23.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

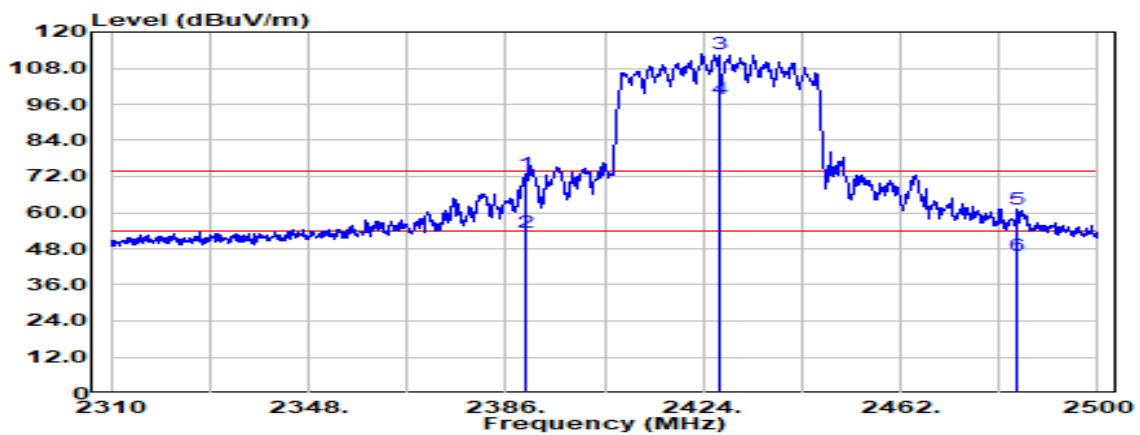

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.895	Peak	60.32	12.48	72.80	74.00	-1.20
2389.895	Average	40.82	12.48	53.30	54.00	-0.70
2427.000	Peak	100.09	12.70	112.80	--	--
2427.000	Average	84.89	12.70	97.59	--	--
2484.610	Peak	48.14	13.09	61.23	74.00	-12.77
2484.610	Average	32.87	13.09	45.96	54.00	-8.04

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2427MHz	Temp/Hum	23.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

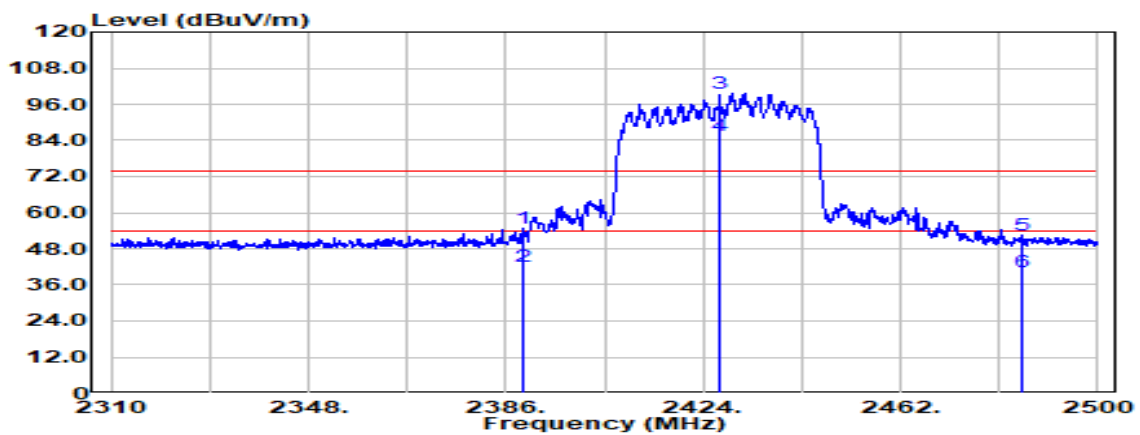

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
2389.325	Peak	42.40	12.48	54.88	74.00	-19.12
2389.325	Average	29.64	12.48	42.12	54.00	-11.88
2427.000	Peak	87.12	12.70	99.83	--	--
2427.000	Average	72.68	12.70	85.38	--	--
2485.465	Peak	39.54	13.09	52.63	74.00	-21.37
2485.465	Average	27.24	13.09	40.33	54.00	-13.67

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2432MHz	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 19, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

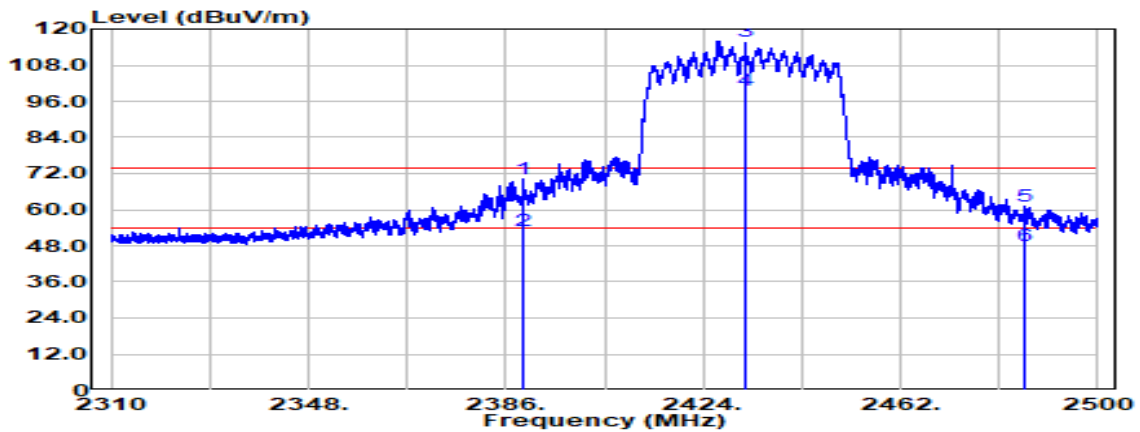

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.491	Peak	57.55	12.48	70.02	74.00	-3.98
2389.491	Average	40.65	12.48	53.13	54.00	-0.87
2432.000	Peak	103.41	12.73	116.15	--	--
2432.000	Average	87.03	12.73	99.77	--	--
2486.106	Peak	47.91	13.10	61.01	74.00	-12.99
2486.106	Average	34.93	13.10	48.02	54.00	-5.98

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2432MHz	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 19, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

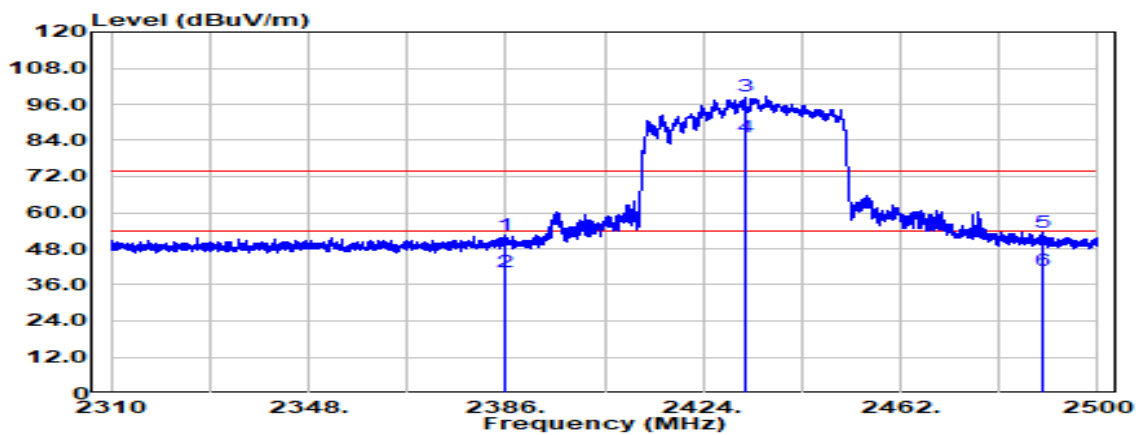

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2385.691	Peak	39.86	12.46	52.31	74.00	-21.69
2385.691	Average	27.90	12.46	40.36	54.00	-13.64
2432.000	Peak	85.77	12.73	98.50	--	--
2432.000	Average	72.28	12.73	85.01	--	--
2489.502	Peak	40.42	13.12	53.54	74.00	-20.46
2489.502	Average	27.72	13.12	40.84	54.00	-13.16

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2442MHz	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 19, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

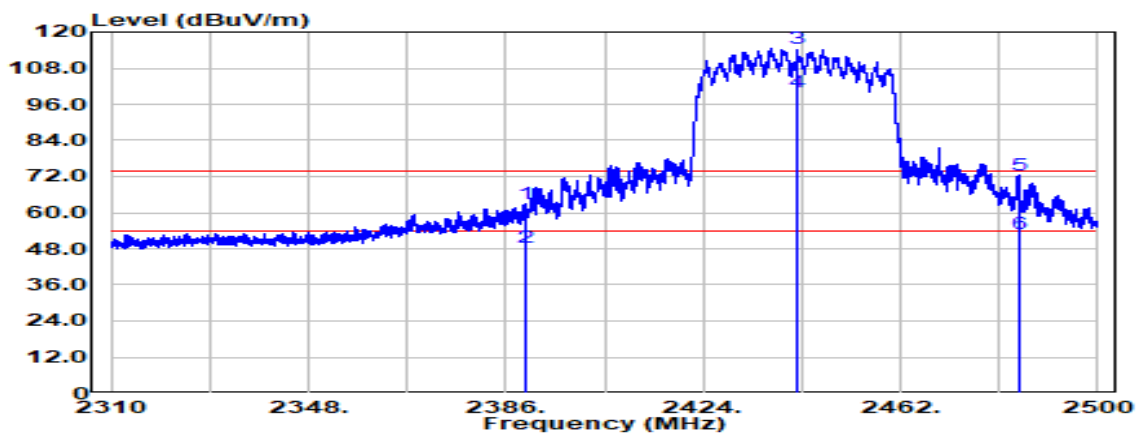

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.610	Peak	50.68	12.48	63.16	74.00	-10.84
2389.610	Average	36.00	12.48	48.48	54.00	-5.52
2442.000	Peak	101.98	12.80	114.78	--	--
2442.000	Average	87.36	12.80	100.16	--	--
2484.681	Peak	59.48	13.09	72.57	74.00	-1.43
2484.681	Average	39.98	13.09	53.06	54.00	-0.94

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2442MHz	Temp/Hum	23.3(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 19, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

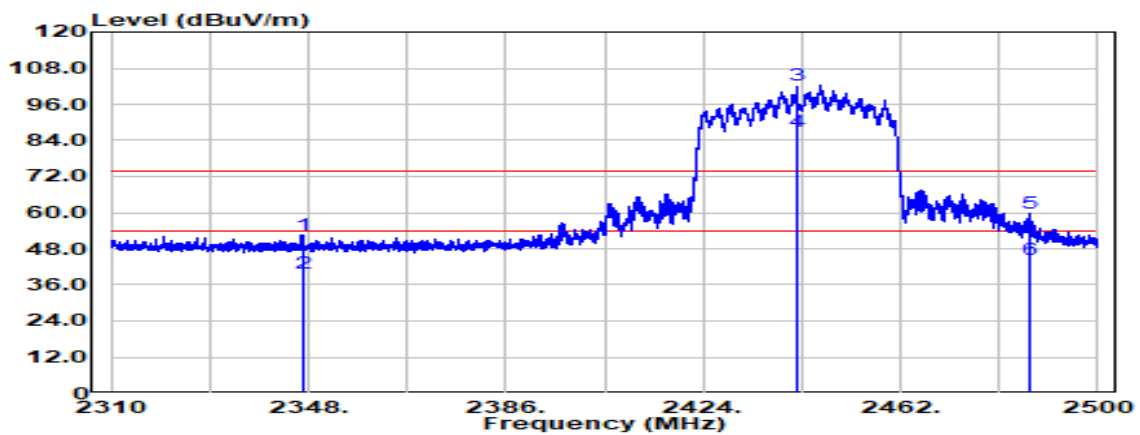

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2346.789	Peak	40.07	12.27	52.34	74.00	-21.66
2346.789	Average	27.72	12.27	40.00	54.00	-14.00
2442.000	Peak	89.64	12.80	102.44	--	--
2442.000	Average	74.33	12.80	87.13	--	--
2486.724	Peak	46.48	13.10	59.58	74.00	-14.42
2486.724	Average	31.12	13.10	44.22	54.00	-9.78

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2447MHz	Temp/Hum	23.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 18, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

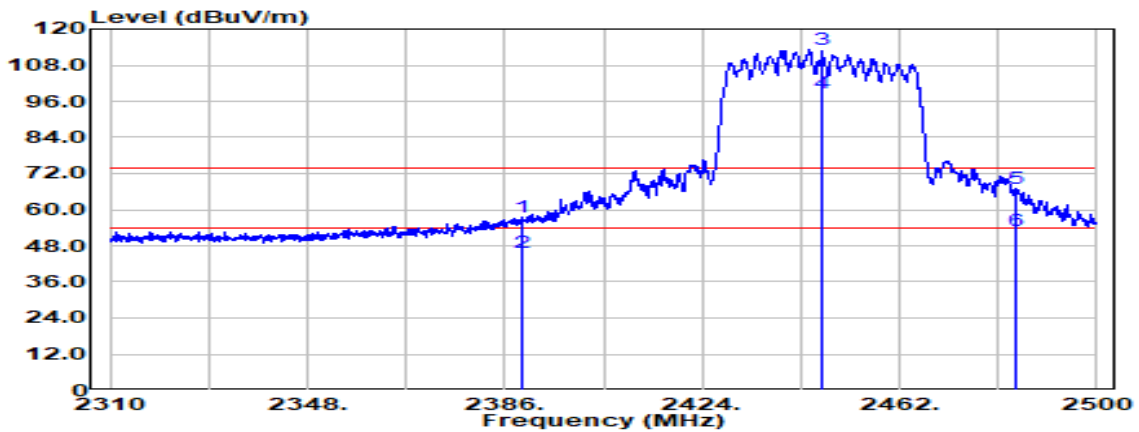

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.230	Peak	44.99	12.48	57.47	74.00	-16.53
2389.230	Average	33.09	12.48	45.57	54.00	-8.43
2447.000	Peak	100.15	12.83	112.99	--	--
2447.000	Average	85.95	12.83	98.78	--	--
2484.230	Peak	53.89	13.08	66.97	74.00	-7.03
2484.230	Average	40.12	13.08	53.20	54.00	-0.80


Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2447MHz	Temp/Hum	23.8(°C)/ 64%RH
Test Item	Band Edge	Test Date	March 18, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

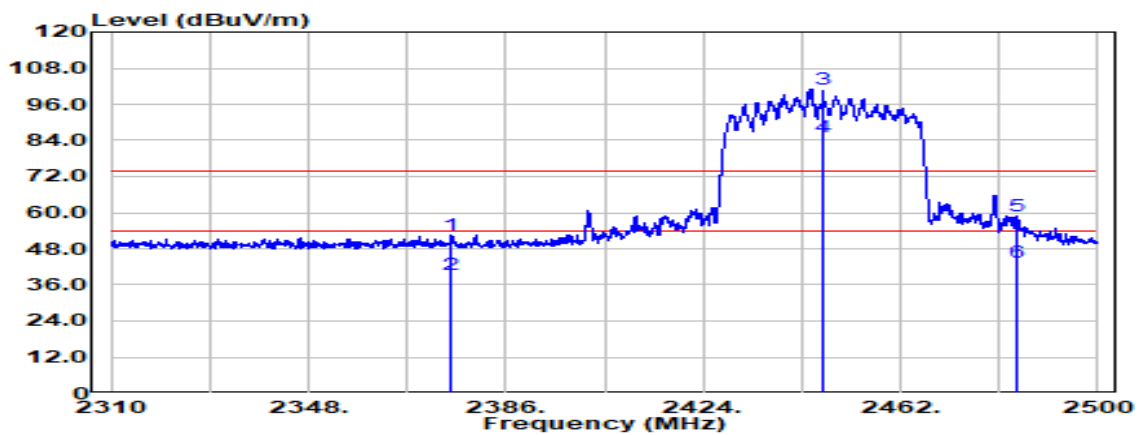

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2375.550	Peak	39.93	12.41	52.34	74.00	-21.66
2375.550	Average	26.91	12.41	39.32	54.00	-14.68
2447.000	Peak	88.19	12.83	101.02	--	--
2447.000	Average	72.37	12.83	85.20	--	--
2484.515	Peak	45.58	13.08	58.67	74.00	-15.33
2484.515	Average	30.24	13.08	43.32	54.00	-10.68


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Band Edge	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

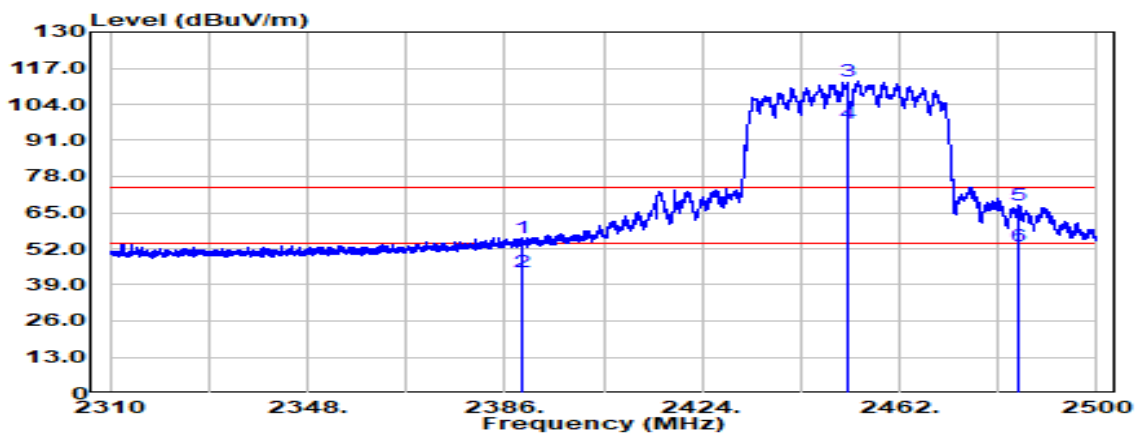

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.135	Peak	43.59	12.48	56.07	74.00	-17.93
2389.135	Average	31.06	12.48	43.53	54.00	-10.47
2452.000	Peak	99.48	12.86	112.34	--	--
2452.000	Average	84.41	12.86	97.27	--	--
2485.133	Peak	54.42	13.09	67.51	74.00	-6.49
2485.133	Average	39.92	13.09	53.01	54.00	-0.99

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Band Edge	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

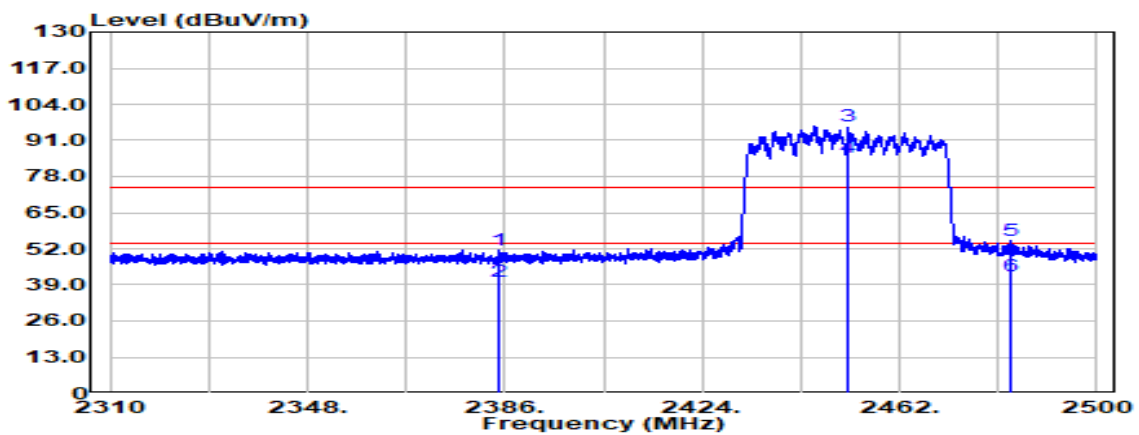

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2384.670	Peak	38.90	12.45	51.35	74.00	-22.65
2384.670	Average	27.80	12.45	40.25	54.00	-13.75
2452.000	Peak	83.15	12.86	96.02	--	--
2452.000	Average	72.24	12.86	85.10	--	--
2483.565	Peak	41.67	13.08	54.75	74.00	-19.25
2483.565	Average	28.96	13.08	42.04	54.00	-11.96

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) (242/62) CH 2452MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

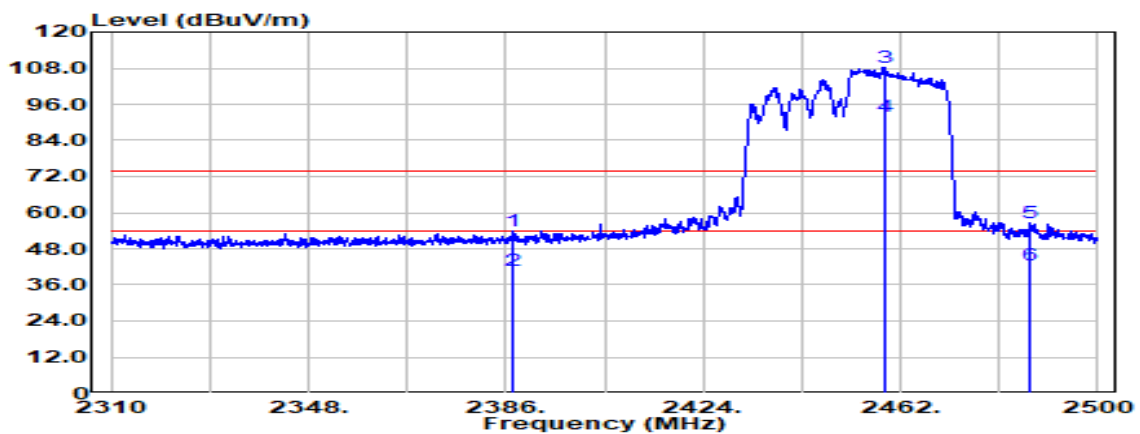

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2387.425	Peak	41.52	12.47	53.99	74.00	-20.01
2387.425	Average	28.35	12.47	40.82	54.00	-13.18
2459.055	Peak	95.30	12.91	108.21	--	--
2459.055	Average	79.06	12.91	91.98	--	--
2486.795	Peak	43.60	13.10	56.70	74.00	-17.30
2486.795	Average	29.26	13.10	42.36	54.00	-11.64

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) (242/62) CH 2452MHz	Temp/Hum	23.9(°C)/ 55%RH
Test Item	Band Edge	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

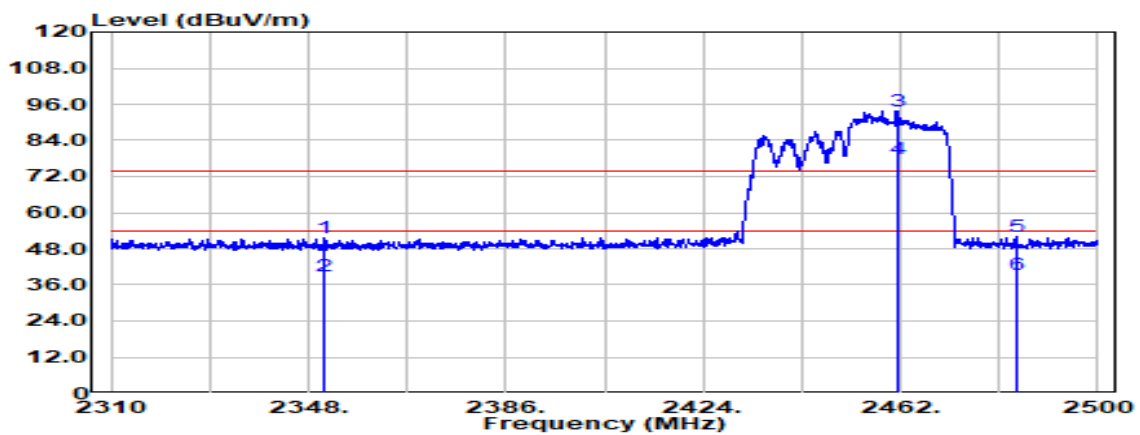


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2351.135	Peak	39.20	12.29	51.49	74.00	-22.51
2351.135	Average	26.75	12.29	39.03	54.00	-14.97
2461.335	Peak	80.98	12.93	93.90	--	--
2461.335	Average	65.17	12.93	78.10	--	--
2484.230	Peak	38.89	13.08	51.97	74.00	-22.03
2484.230	Average	26.30	13.08	39.39	54.00	-14.61

Report No.: TMWK2201000140KR

BFM ON


Test Mode	IEEE 802.11 ac (VHT20) CH 2412MHz	Temp/Hum	19.4(°C)/ 55%RH
Test Item	Band Edge	Test Date	April 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

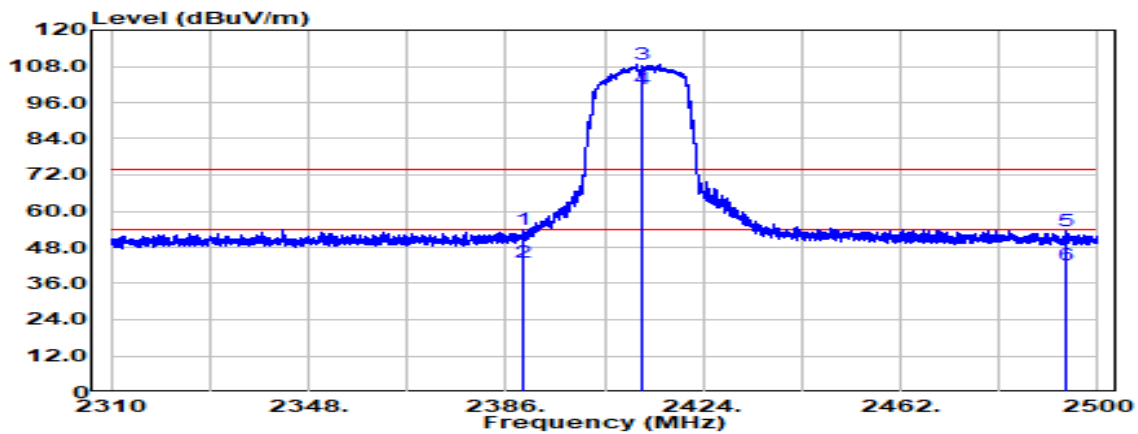

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.278	Peak	41.31	12.48	53.79	74.00	-20.21
2389.278	Average	30.54	12.48	43.02	54.00	-10.98
2412.000	Peak	96.09	12.61	108.69	--	--
2412.000	Average	87.80	12.61	100.40	--	--
2493.706	Peak	40.16	13.15	53.30	74.00	-20.70
2493.706	Average	28.83	13.15	41.98	54.00	-12.02

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT20) CH 2412MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

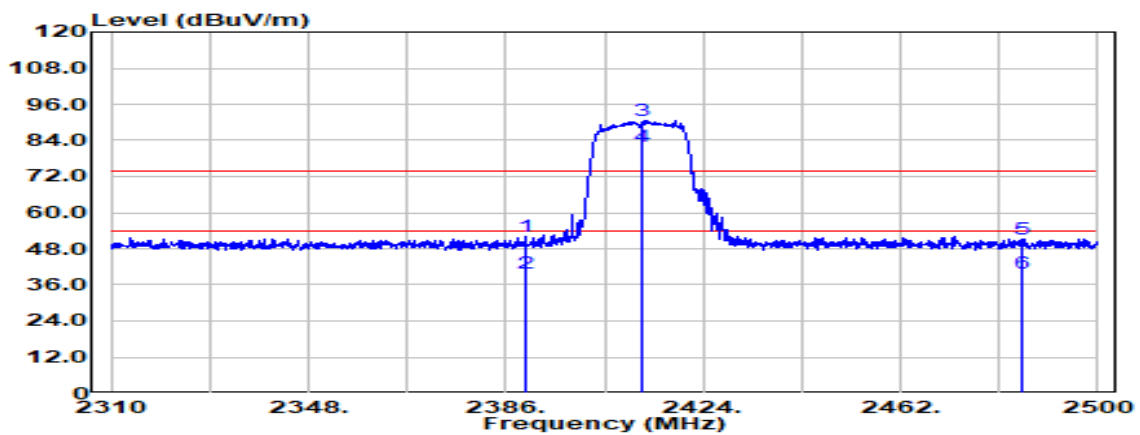

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.800	Peak	39.48	12.48	51.96	74.00	-22.04
2389.800	Average	27.47	12.48	39.94	54.00	-14.06
2412.000	Peak	77.98	12.61	90.59	--	--
2412.000	Average	69.50	12.61	82.11	--	--
2485.180	Peak	38.26	13.09	51.35	74.00	-22.65
2485.180	Average	26.74	13.09	39.83	54.00	-14.17

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT20) CH 2462MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

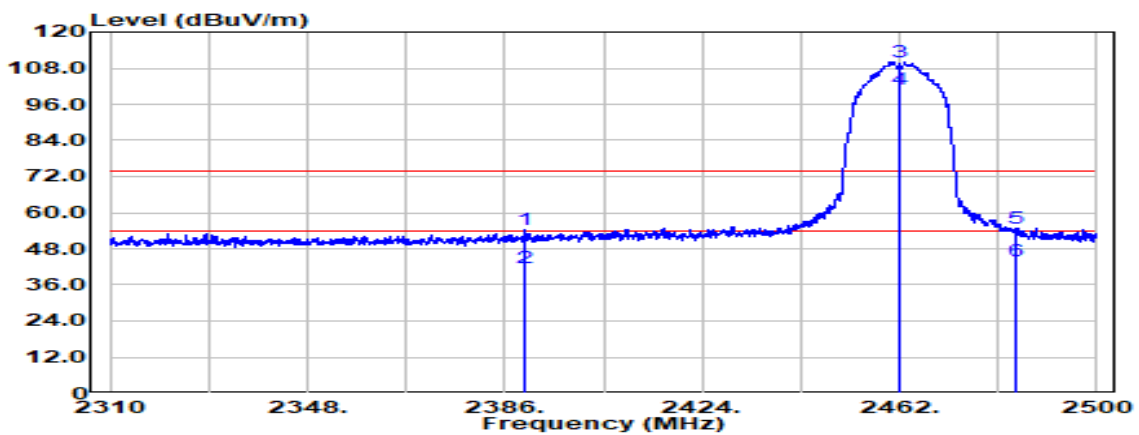

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2389.895	Peak	41.84	12.48	54.32	74.00	-19.68
2389.895	Average	29.37	12.48	41.85	54.00	-12.15
2462.000	Peak	97.28	12.93	110.21	--	--
2462.000	Average	88.11	12.93	101.04	--	--
2484.230	Peak	41.67	13.08	54.75	74.00	-19.25
2484.230	Average	30.68	13.08	43.76	54.00	-10.24

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT20) CH 2462MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

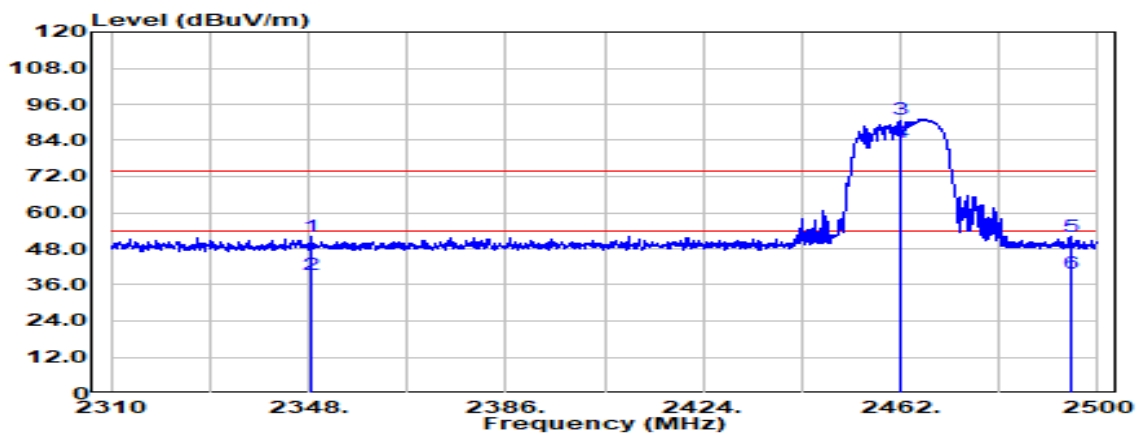

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2348.380	Peak	40.00	12.28	52.28	74.00	-21.72
2348.380	Average	27.29	12.28	39.57	54.00	-14.43
2462.000	Peak	78.01	12.93	90.94	--	--
2462.000	Average	70.39	12.93	83.32	--	--
2494.775	Peak	38.83	13.15	51.98	74.00	-22.02
2494.775	Average	26.91	13.15	40.06	54.00	-13.94

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2422MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

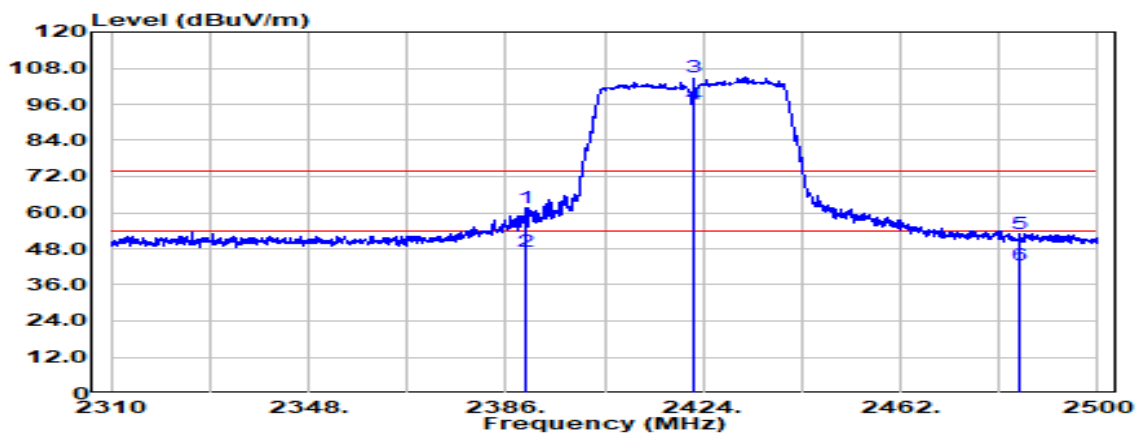

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2389.990	Peak	49.25	12.48	61.73	74.00	-12.27
2389.990	Average	34.68	12.48	47.16	54.00	-6.84
2422.000	Peak	92.55	12.67	105.22	--	--
2422.000	Average	83.32	12.67	95.99	--	--
2485.085	Peak	40.11	13.09	53.20	74.00	-20.80
2485.085	Average	29.40	13.09	42.49	54.00	-11.51

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2422MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

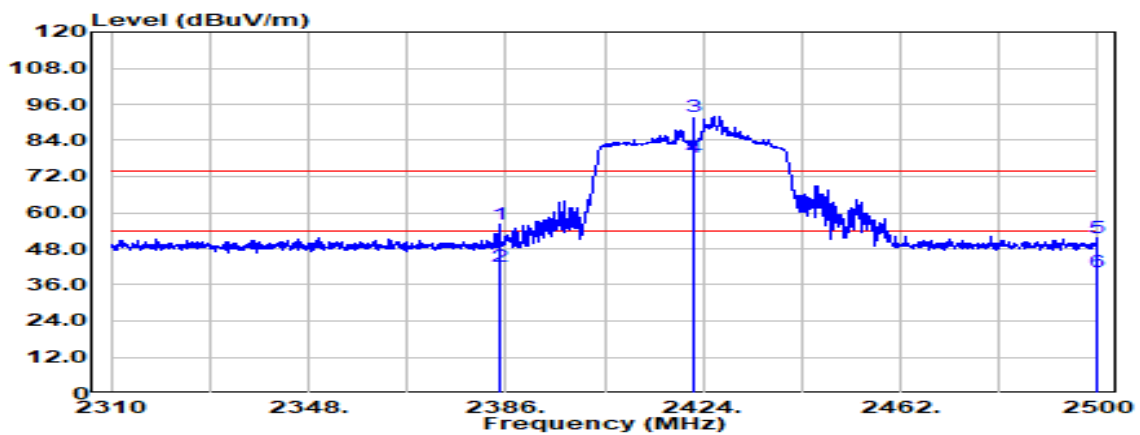

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2384.765	Peak	43.67	12.45	56.13	74.00	-17.87
2384.765	Average	29.73	12.45	42.19	54.00	-11.81
2422.000	Peak	79.45	12.67	92.12	--	--
2422.000	Average	65.76	12.67	78.43	--	--
2499.810	Peak	38.23	13.19	51.42	74.00	-22.58
2499.810	Average	27.33	13.19	40.52	54.00	-13.48

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2452MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

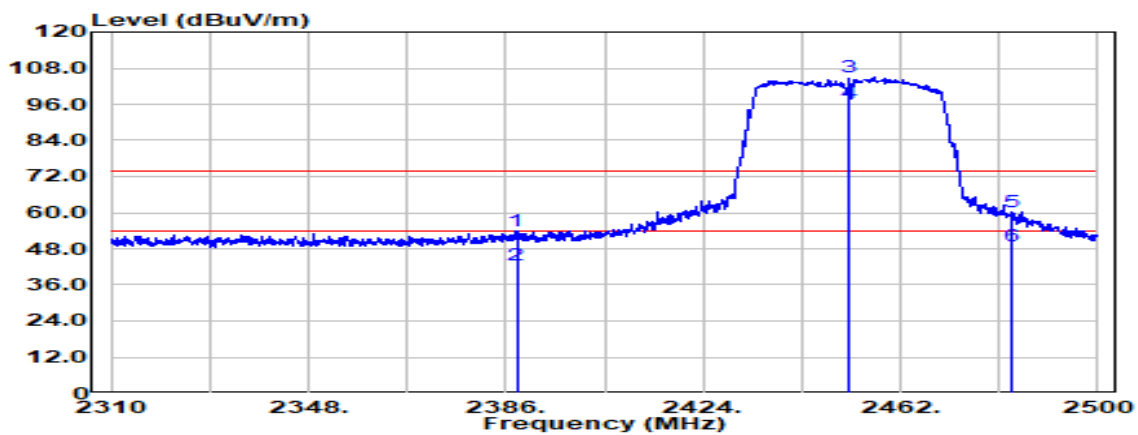

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2388.090	Peak	41.29	12.47	53.76	74.00	-20.24
2388.090	Average	30.13	12.47	42.60	54.00	-11.40
2452.000	Peak	92.33	12.86	105.19	--	--
2452.000	Average	83.60	12.86	96.47	--	--
2483.565	Peak	47.17	13.08	60.25	74.00	-13.75
2483.565	Average	35.65	13.08	48.72	54.00	-5.28

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ac (VHT40) CH 2452MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

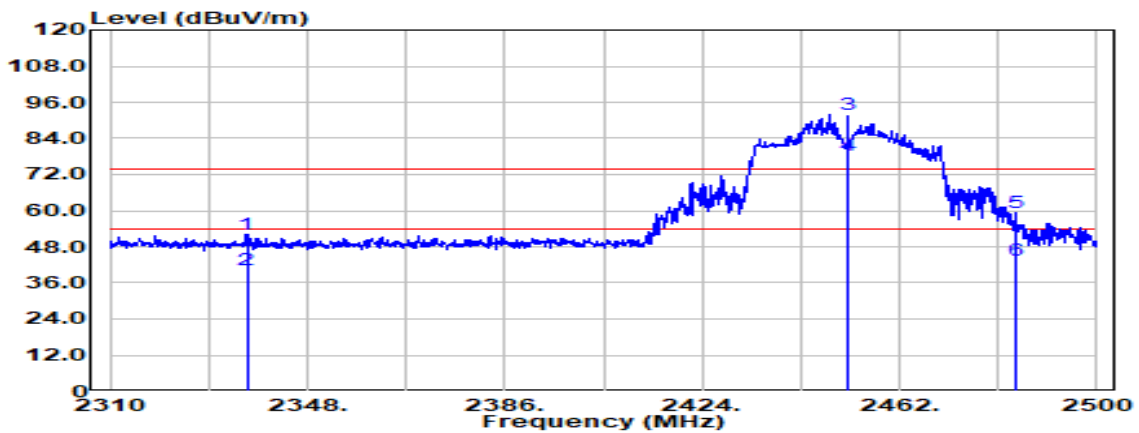

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2336.315	Peak	39.85	12.26	52.10	74.00	-21.90
2336.315	Average	27.84	12.26	40.10	54.00	-13.90
2452.000	Peak	78.95	12.86	91.81	--	--
2452.000	Average	65.40	12.86	78.27	--	--
2484.325	Peak	46.04	13.08	59.13	74.00	-14.87
2484.325	Average	30.21	13.08	43.29	54.00	-10.71

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) CH 2412MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

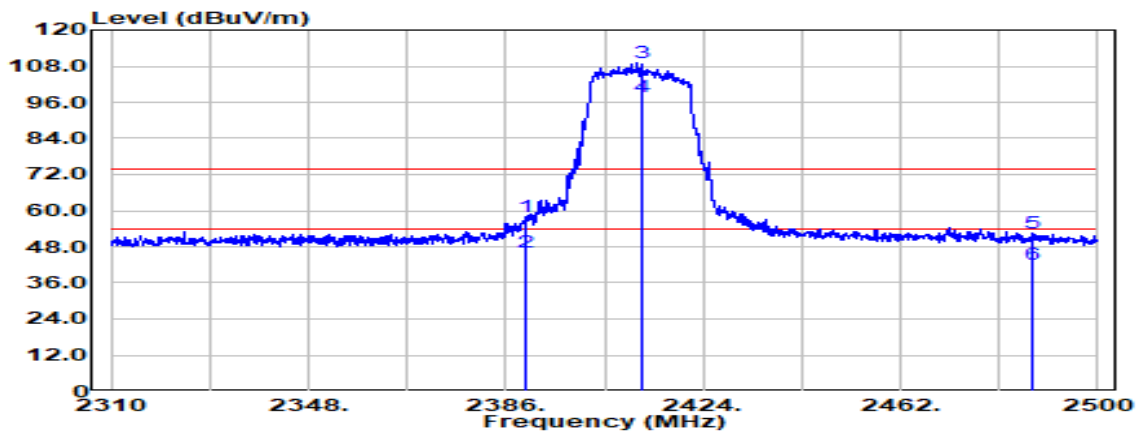

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.800	Peak	45.28	12.48	57.76	74.00	-16.24
2389.800	Average	33.51	12.48	45.99	54.00	-8.01
2412.000	Peak	96.63	12.61	109.24	--	--
2412.000	Average	85.11	12.61	97.71	--	--
2487.365	Peak	39.38	13.10	52.49	74.00	-21.51
2487.365	Average	28.81	13.10	41.91	54.00	-12.09

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) CH 2412MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

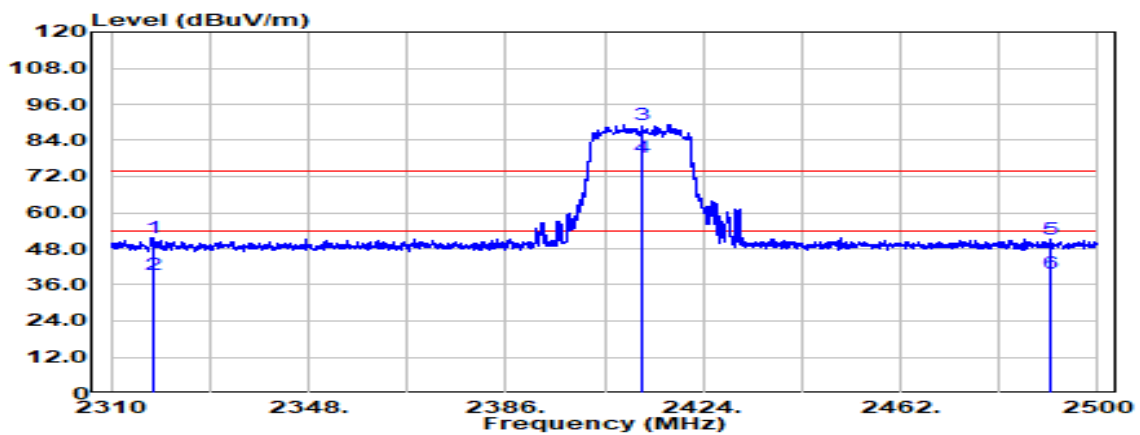

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2317.980	Peak	39.44	12.23	51.67	74.00	-22.33
2317.980	Average	27.34	12.23	39.57	54.00	-14.43
2412.000	Peak	76.43	12.61	89.04	--	--
2412.000	Average	65.72	12.61	78.33	--	--
2490.880	Peak	37.95	13.13	51.07	74.00	-22.93
2490.880	Average	26.65	13.13	39.78	54.00	-14.22

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) CH 2462MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

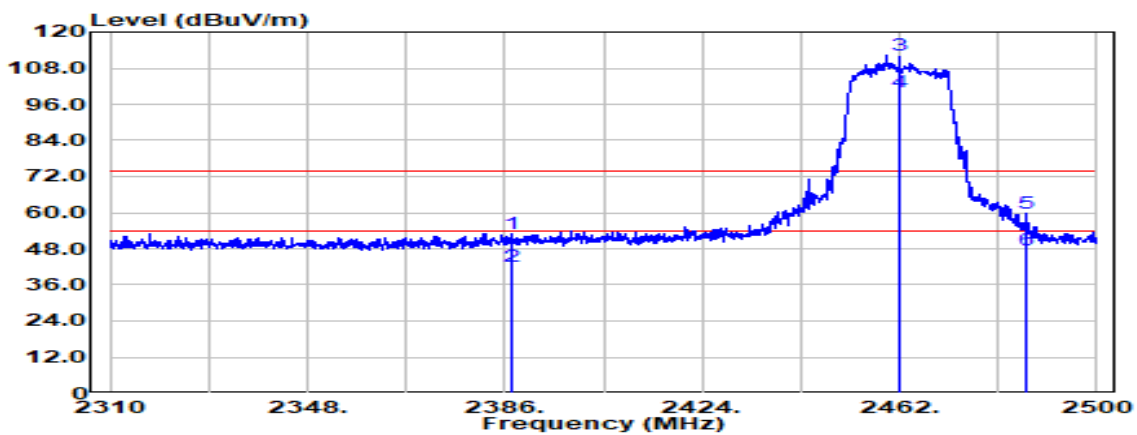

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2387.425	Peak	40.67	12.47	53.14	74.00	-20.86
2387.425	Average	29.44	12.47	41.91	54.00	-12.09
2462.000	Peak	99.32	12.93	112.26	--	--
2462.000	Average	87.13	12.93	100.07	--	--
2486.320	Peak	46.70	13.10	59.80	74.00	-14.20
2486.320	Average	34.53	13.10	47.63	54.00	-6.37

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE20) CH 2462MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

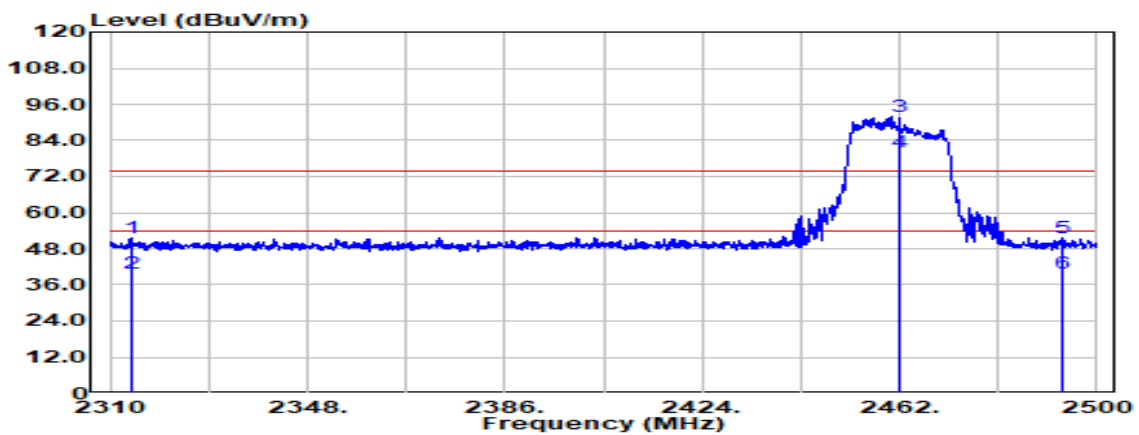

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2314.180	Peak	39.34	12.22	51.56	74.00	-22.44
2314.180	Average	27.61	12.22	39.84	54.00	-14.16
2462.000	Peak	78.89	12.93	91.82	--	--
2462.000	Average	67.15	12.93	80.08	--	--
2493.255	Peak	38.69	13.14	51.84	74.00	-22.16
2493.255	Average	26.76	13.14	39.90	54.00	-14.10

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

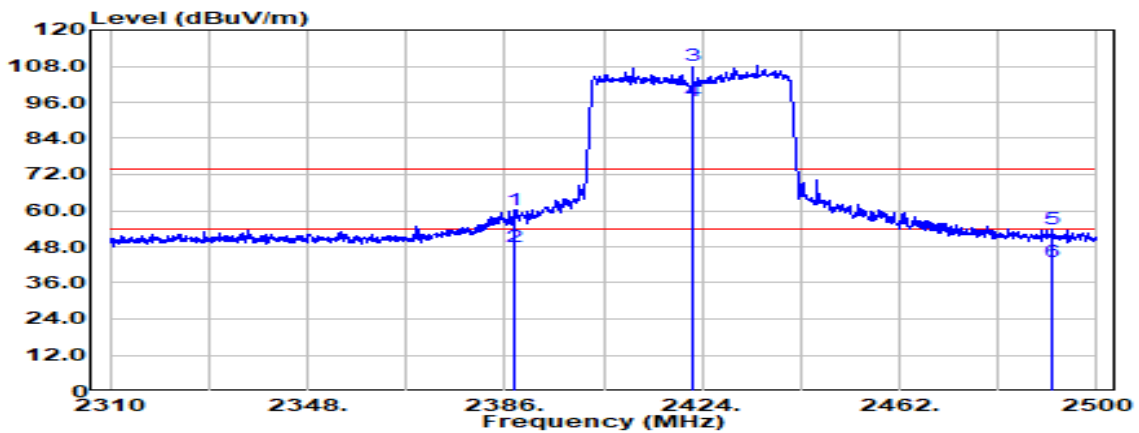

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2387.900	Peak	47.89	12.47	60.36	74.00	-13.64
2387.900	Average	35.50	12.47	47.97	54.00	-6.03
2422.000	Peak	95.62	12.67	108.29	--	--
2422.000	Average	83.76	12.67	96.43	--	--
2491.450	Peak	40.53	13.13	53.66	74.00	-20.34
2491.450	Average	29.93	13.13	43.06	54.00	-10.94

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2422MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

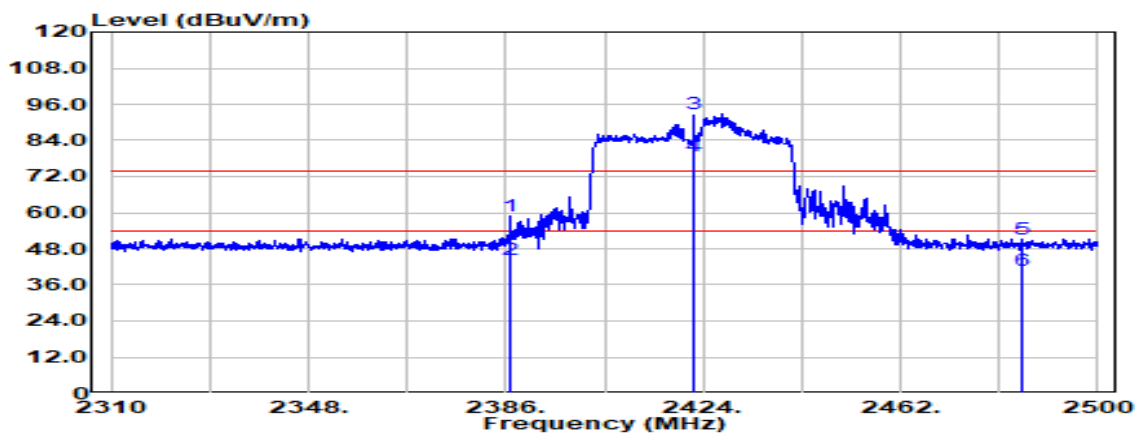

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2386.950	Peak	46.20	12.46	58.67	74.00	-15.33
2386.950	Average	31.88	12.46	44.35	54.00	-9.65
2422.000	Peak	79.98	12.67	92.66	--	--
2422.000	Average	66.33	12.67	79.00	--	--
2485.465	Peak	38.13	13.09	51.22	74.00	-22.78
2485.465	Average	27.62	13.09	40.71	54.00	-13.29

Report No.: TMWK2201000140KR


Test Mode	IEEE 802.11 ax (HE40) CH 2452MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

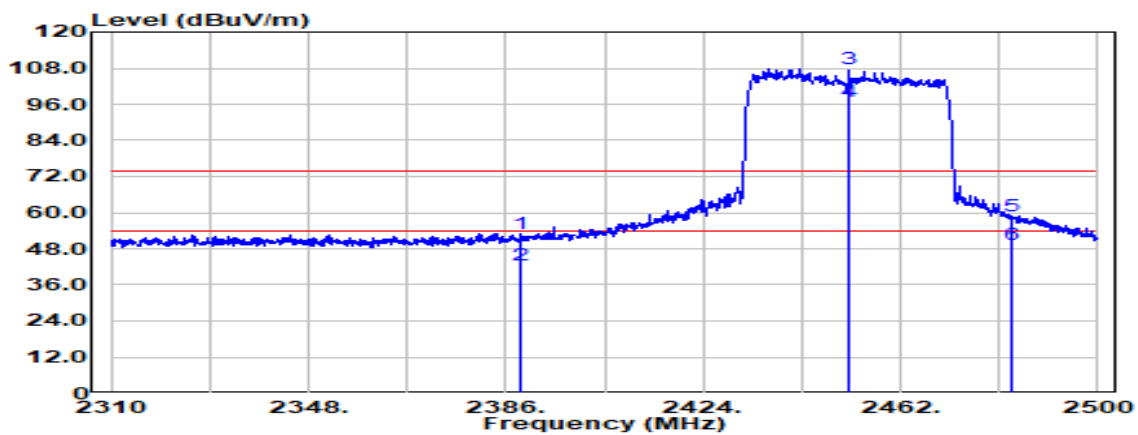

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2388.945	Peak	40.54	12.47	53.01	74.00	-20.99
2388.945	Average	30.21	12.47	42.68	54.00	-11.32
2452.000	Peak	94.71	12.86	107.57	--	--
2452.000	Average	83.88	12.86	96.75	--	--
2483.565	Peak	45.93	13.08	59.01	74.00	-14.99
2483.565	Average	36.24	13.08	49.32	54.00	-4.68

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) Low CH 2452MHz	Temp/Hum	21.6(°C)/ 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

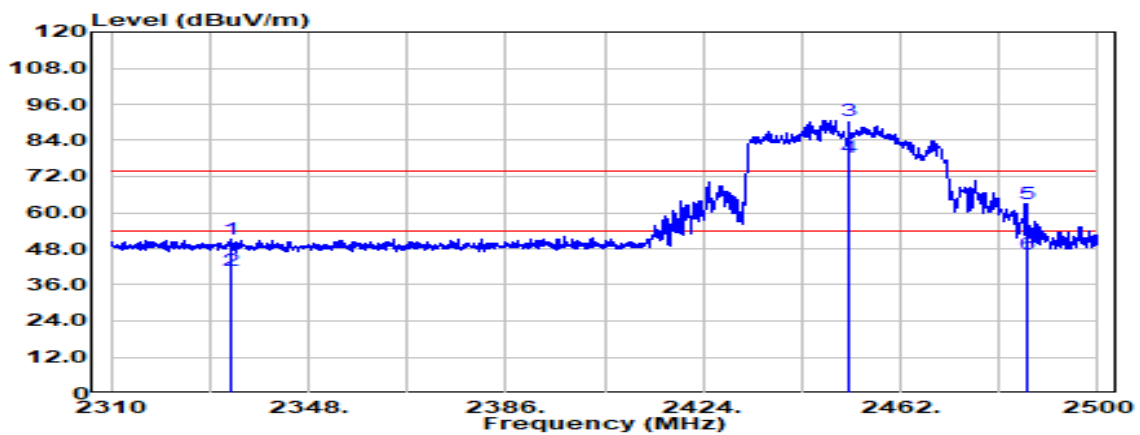


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2333.275	Peak	38.99	12.25	51.24	74.00	-22.76
2333.275	Average	28.35	12.25	40.60	54.00	-13.40
2452.000	Peak	77.81	12.86	90.67	--	--
2452.000	Average	65.57	12.86	78.43	--	--
2486.225	Peak	49.99	13.10	63.09	74.00	-10.91
2486.225	Average	33.08	13.10	46.17	54.00	-7.83

Report No.: TMWK2201000140KR

Below 1G Test Data

BFM OFF

Test Mode	Mode 1	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

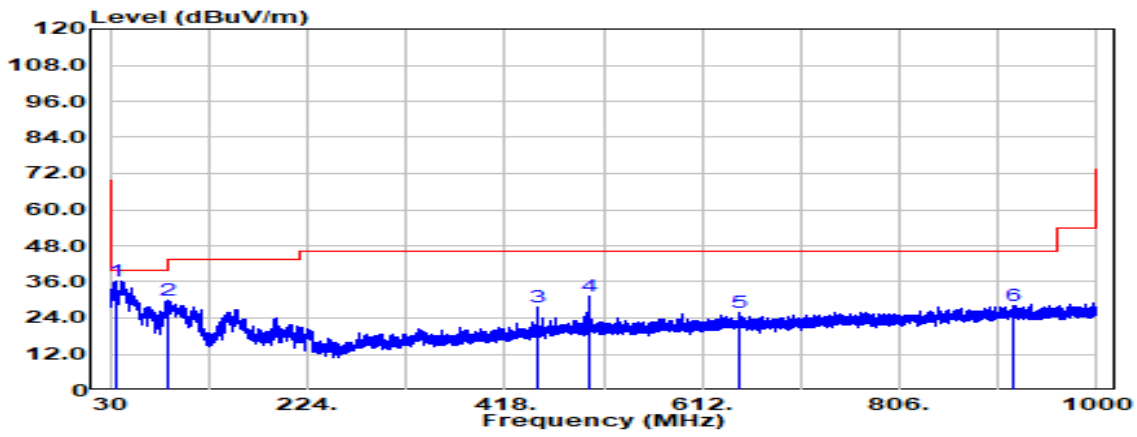


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
35.214	Peak	42.68	-6.32	36.36	40.00	-3.64
85.896	Peak	46.34	-16.24	30.11	40.00	-9.89
450.010	Peak	32.21	-4.78	27.43	46.00	-18.57
501.299	Peak	35.06	-3.60	31.47	46.00	-14.53
647.890	Peak	26.58	-0.81	25.77	46.00	-20.23
918.641	Peak	25.06	3.13	28.19	46.00	-17.81

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000140KR

Test Mode	Mode 1	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

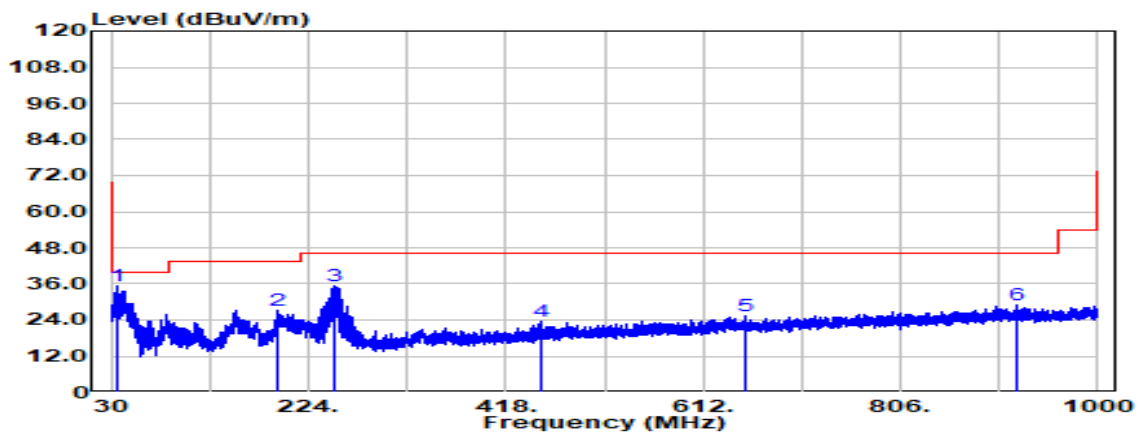

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
35.214	Peak	41.68	-6.32	35.36	40.00	-4.64
193.081	Peak	38.35	-11.07	27.28	43.50	-16.22
249.220	Peak	46.42	-10.96	35.46	46.00	-10.54
451.829	Peak	28.13	-4.69	23.44	46.00	-22.56
652.983	Peak	26.21	-0.80	25.41	46.00	-20.59
920.581	Peak	25.78	3.17	28.95	46.00	-17.05


Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000140KR

Above 1G Test Data

BFM OFF

Test Mode	IEEE 802.11b CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

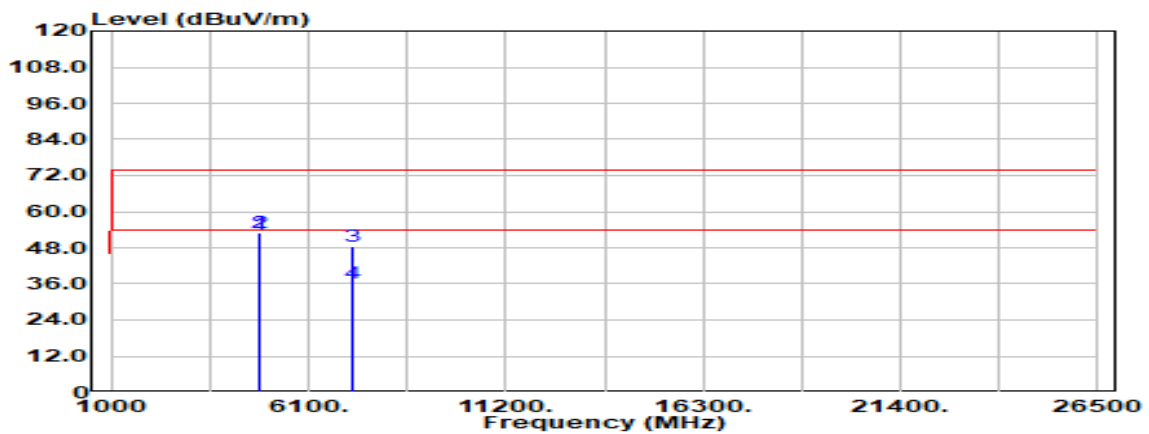


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	44.47	9.53	54.00	74.00	-20.00
4824.000	Average	43.28	9.53	52.81	54.00	-1.19
7236.000	Peak	34.86	13.41	48.27	74.00	-25.73
7236.000	Average	22.95	13.41	36.36	54.00	-17.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11b CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

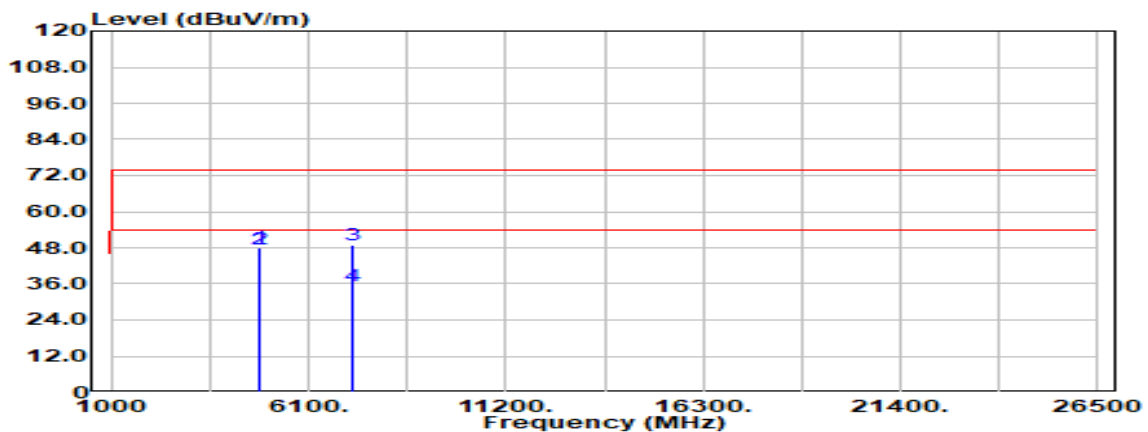


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.000	Peak	38.59	9.53	48.11	74.00	-25.89
4824.000	Average	37.99	9.53	47.52	54.00	-6.48
7236.000	Peak	35.30	13.41	48.71	74.00	-25.29
7236.000	Average	22.11	13.41	35.52	54.00	-18.48
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11b CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

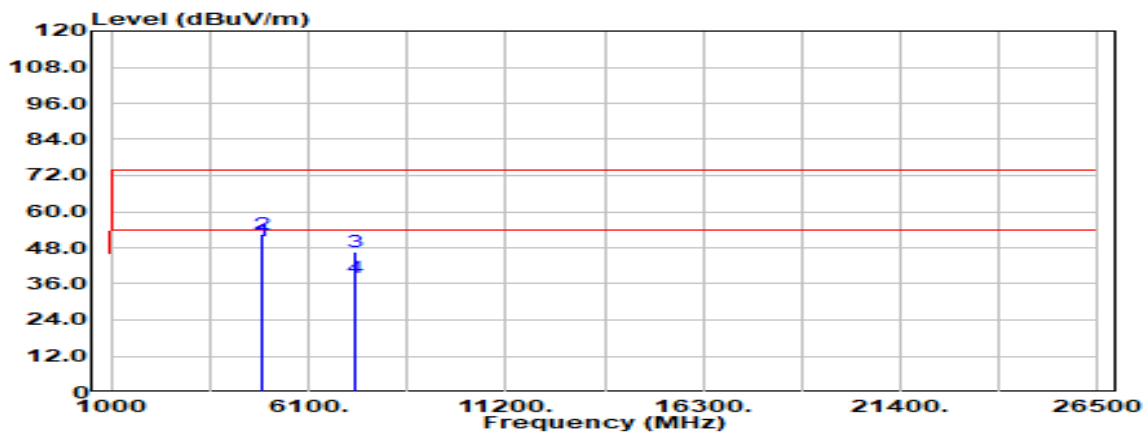


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	44.41	9.60	54.01	74.00	-19.99
4874.000	Average	42.98	9.60	52.58	54.00	-1.42
7311.000	Peak	33.23	13.23	46.47	74.00	-27.53
7311.000	Average	24.93	13.23	38.16	54.00	-15.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11b CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

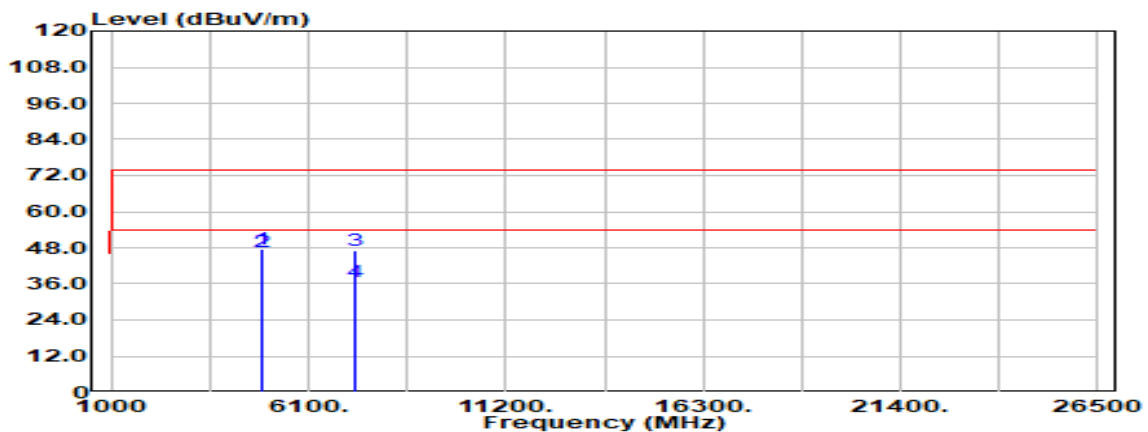


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	37.85	9.60	47.45	74.00	-26.55
4874.000	Average	36.99	9.60	46.59	54.00	-7.41
7311.000	Peak	33.74	13.23	46.98	74.00	-27.02
7311.000	Average	23.33	13.23	36.56	54.00	-17.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11b CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

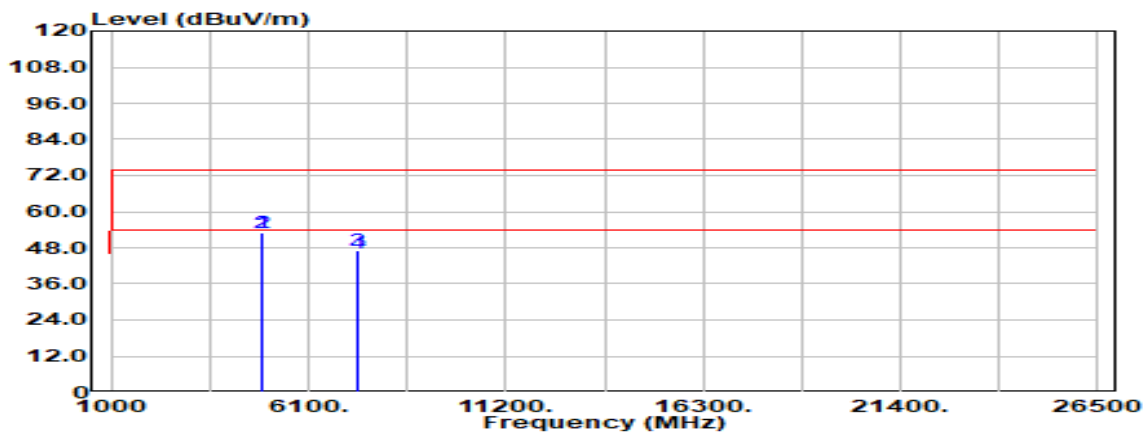


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	43.55	9.63	53.17	74.00	-20.83
4924.000	Average	43.21	9.63	52.84	54.00	-1.16
7386.000	Peak	33.62	13.43	47.05	74.00	-26.95
7386.000	Average	32.66	13.43	46.09	54.00	-7.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11b CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

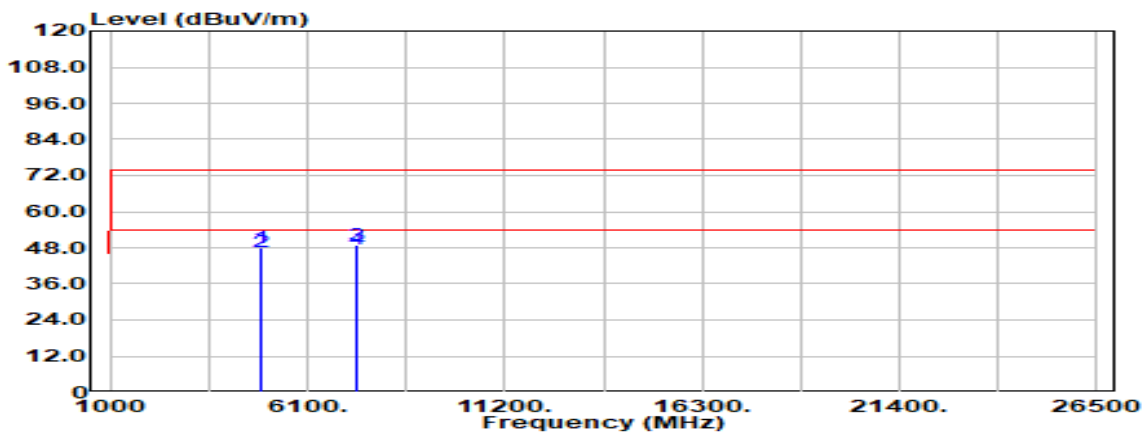


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	38.24	9.63	47.87	74.00	-26.13
4924.000	Average	37.13	9.63	46.76	54.00	-7.24
7386.000	Peak	35.63	13.43	49.06	74.00	-24.94
7386.000	Average	34.06	13.43	47.49	54.00	-6.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

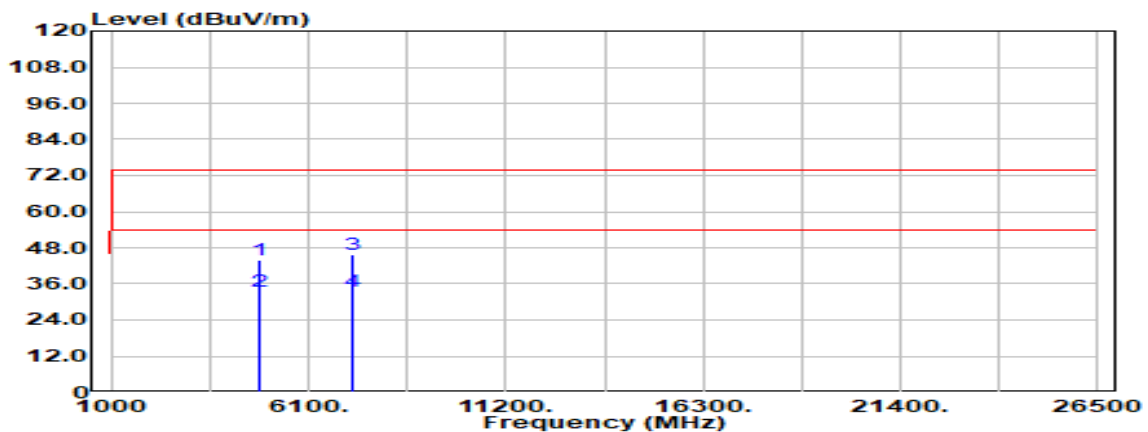


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	34.35	9.53	43.88	74.00	-30.12
4824.000	Average	23.83	9.53	33.36	54.00	-20.64
7236.000	Peak	32.29	13.41	45.70	74.00	-28.30
7236.000	Average	20.11	13.41	33.52	54.00	-20.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

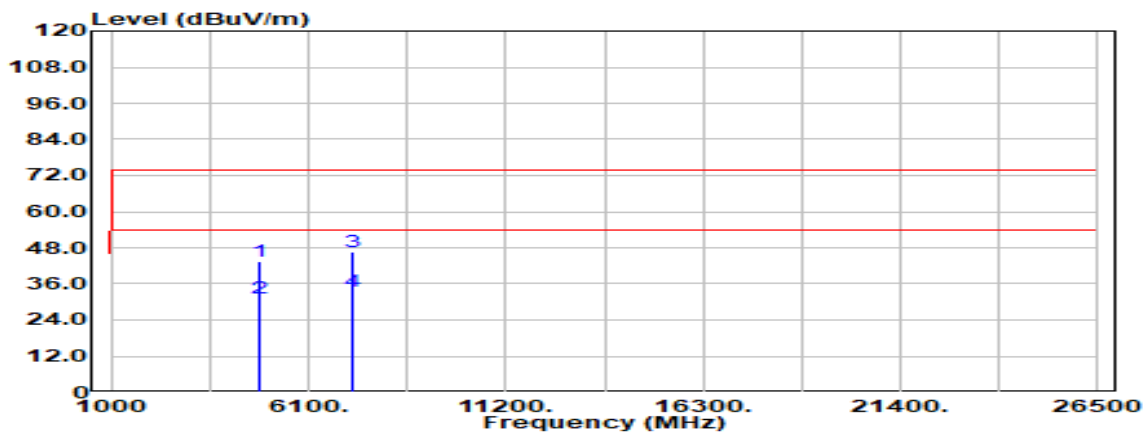


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	33.99	9.53	43.52	74.00	-30.48
4824.000	Average	21.91	9.53	31.44	54.00	-22.56
7236.000	Peak	33.01	13.41	46.42	74.00	-27.58
7236.000	Average	20.04	13.41	33.45	54.00	-20.55
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

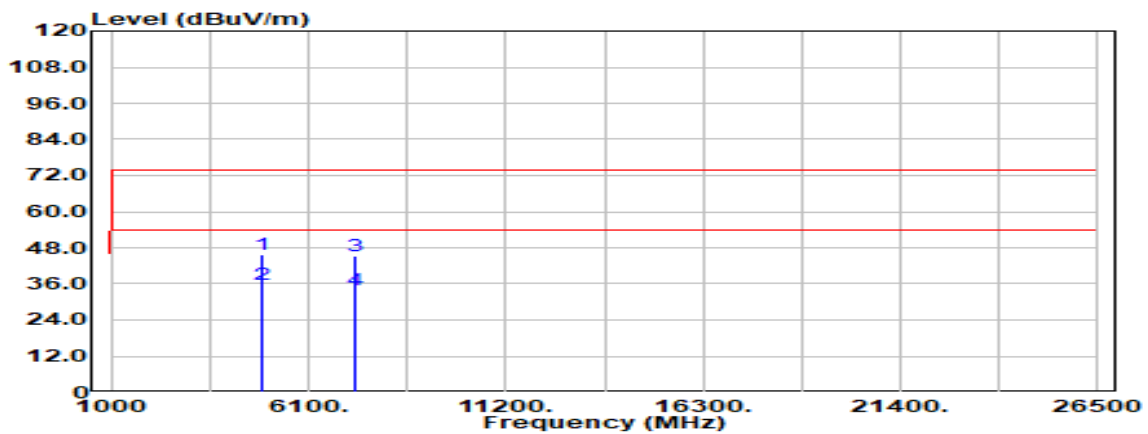


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	36.22	9.60	45.81	74.00	-28.19
4874.000	Average	26.27	9.60	35.87	54.00	-18.13
7311.000	Peak	31.84	13.23	45.08	74.00	-28.92
7311.000	Average	20.61	13.23	33.85	54.00	-20.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

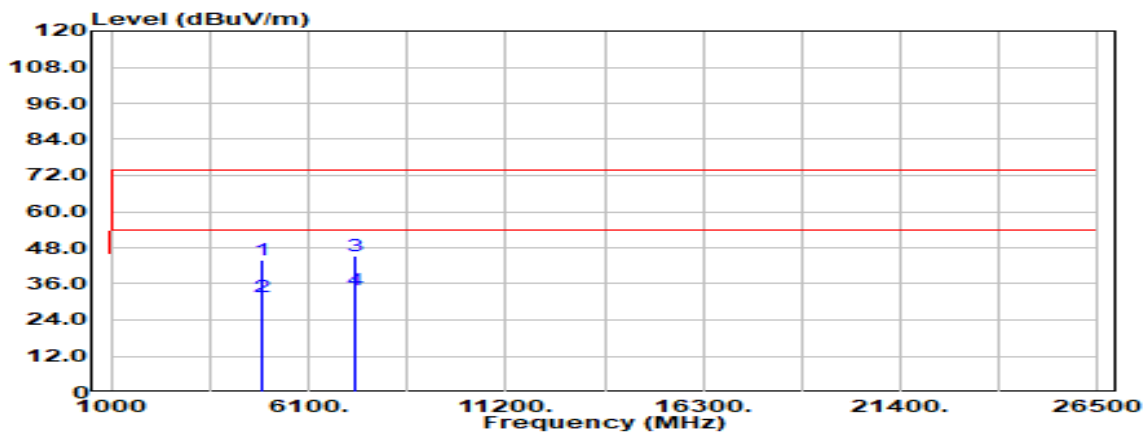


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	34.49	9.60	44.08	74.00	-29.92
4874.000	Average	22.32	9.60	31.91	54.00	-22.09
7311.000	Peak	32.22	13.23	45.46	74.00	-28.54
7311.000	Average	20.78	13.23	34.01	54.00	-19.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

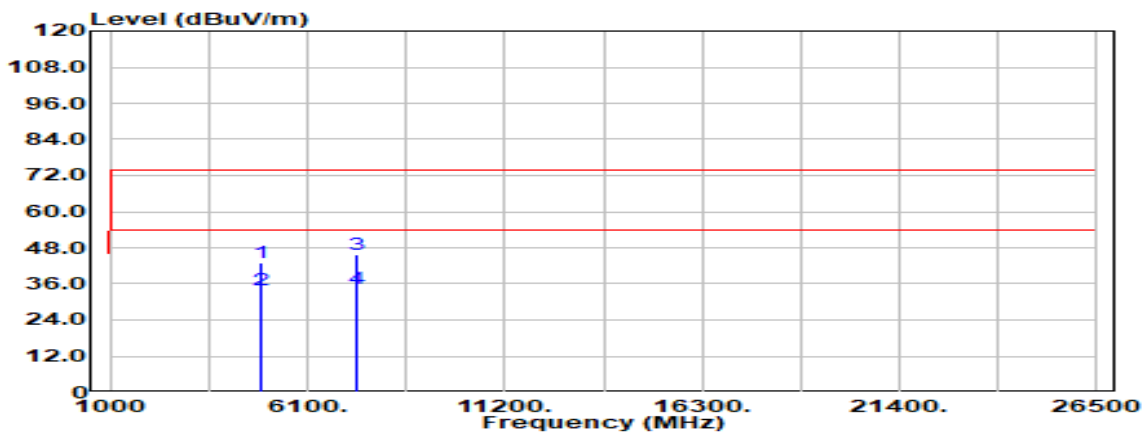


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.000	Peak	33.50	9.63	43.12	74.00	-30.88
4924.000	Average	24.13	9.63	33.76	54.00	-20.24
7386.000	Peak	32.45	13.43	45.88	74.00	-28.12
7386.000	Average	20.89	13.43	34.32	54.00	-19.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11g CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

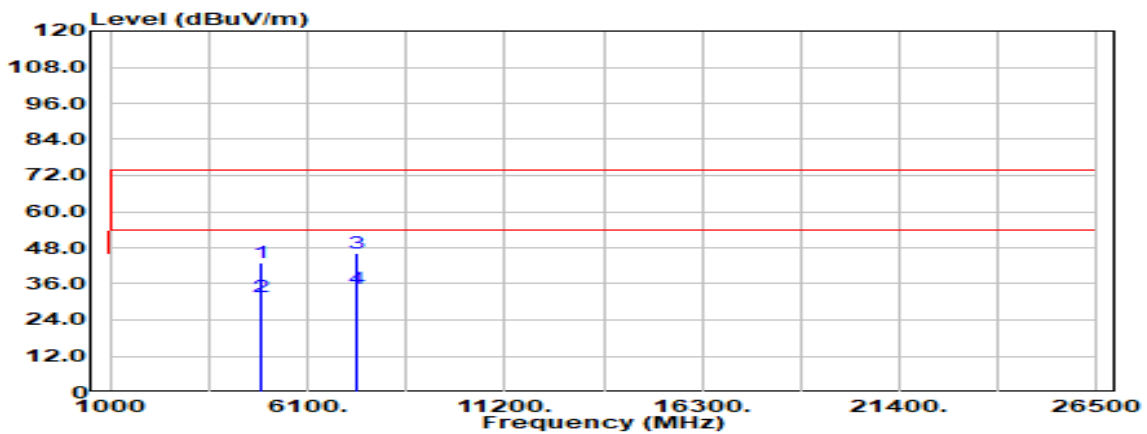


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	33.53	9.63	43.16	74.00	-30.84
4924.000	Average	22.03	9.63	31.66	54.00	-22.34
7386.000	Peak	32.62	13.43	46.05	74.00	-27.95
7386.000	Average	20.95	13.43	34.38	54.00	-19.62
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

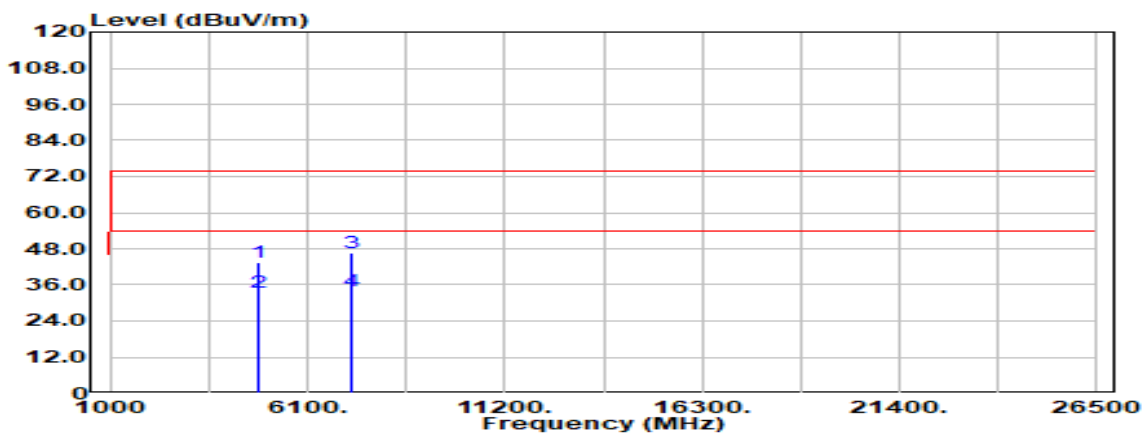


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4824.000	Peak	33.95	9.53	43.48	74.00	-30.52
4824.000	Average	23.94	9.53	33.47	54.00	-20.53
7236.000	Peak	33.07	13.41	46.47	74.00	-27.53
7236.000	Average	20.74	13.41	34.14	54.00	-19.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

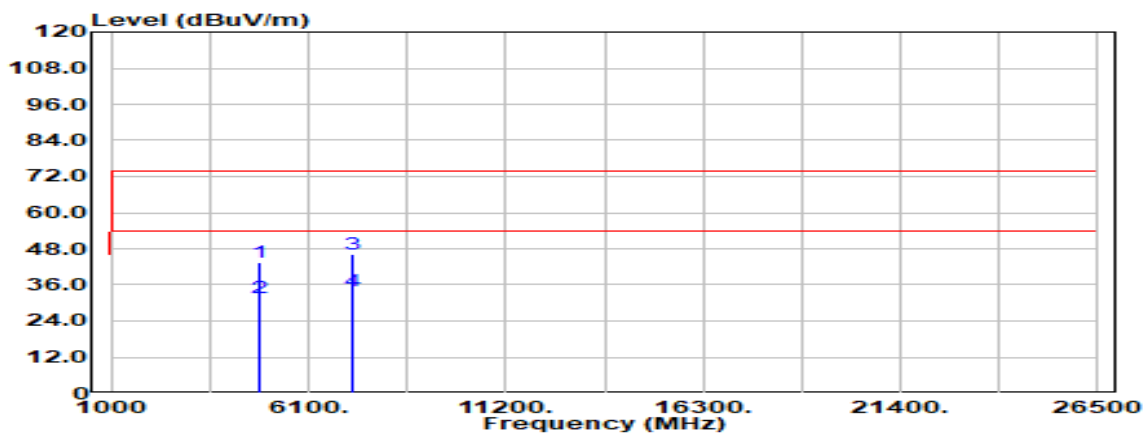


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	33.96	9.53	43.48	74.00	-30.52
4824.000	Average	22.22	9.53	31.75	54.00	-22.25
7236.000	Peak	32.91	13.41	46.31	74.00	-27.69
7236.000	Average	20.67	13.41	34.08	54.00	-19.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

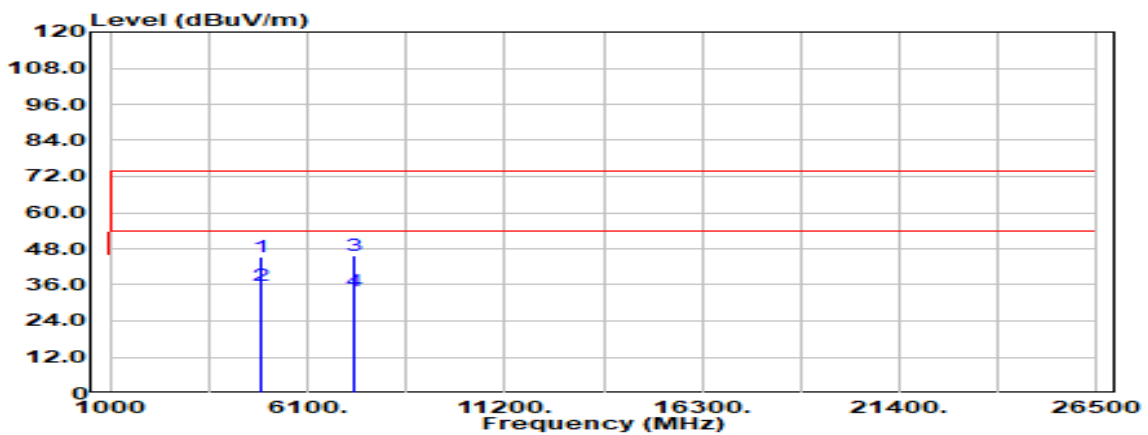


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	35.87	9.60	45.47	74.00	-28.53
4874.000	Average	26.21	9.60	35.81	54.00	-18.19
7311.000	Peak	32.53	13.23	45.76	74.00	-28.24
7311.000	Average	20.95	13.23	34.19	54.00	-19.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

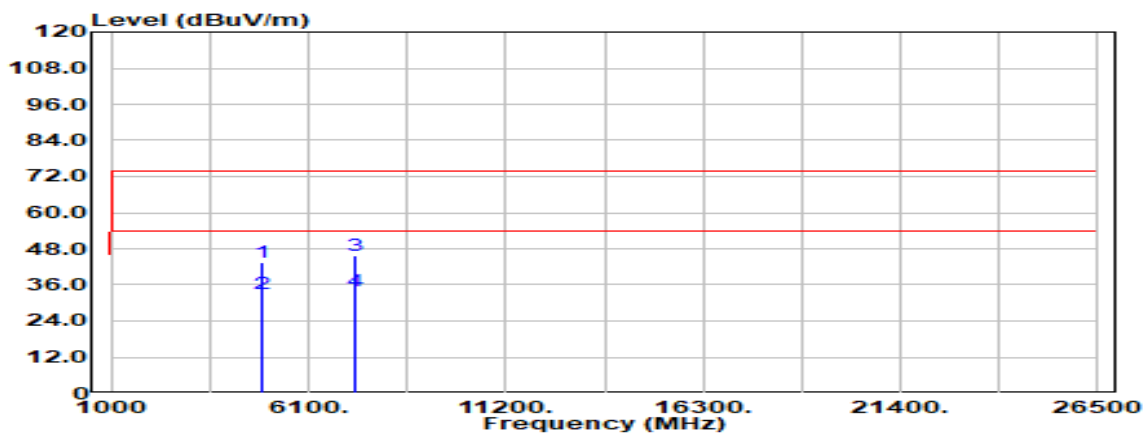


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	33.94	9.60	43.54	74.00	-30.46
4874.000	Average	23.43	9.60	33.02	54.00	-20.98
7311.000	Peak	32.71	13.23	45.94	74.00	-28.06
7311.000	Average	20.68	13.23	33.91	54.00	-20.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

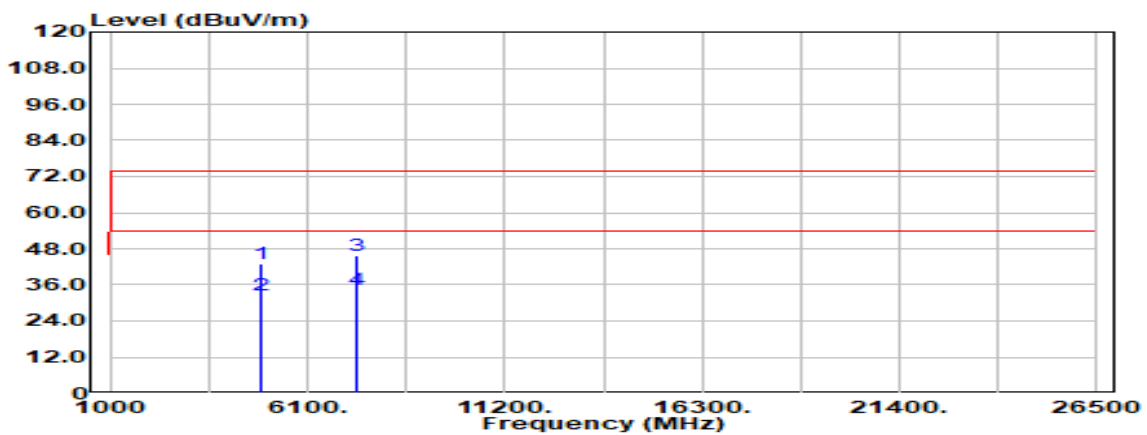


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	33.49	9.63	43.12	74.00	-30.88
4924.000	Average	22.77	9.63	32.39	54.00	-21.61
7386.000	Peak	32.39	13.43	45.82	74.00	-28.18
7386.000	Average	20.91	13.43	34.34	54.00	-19.66
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

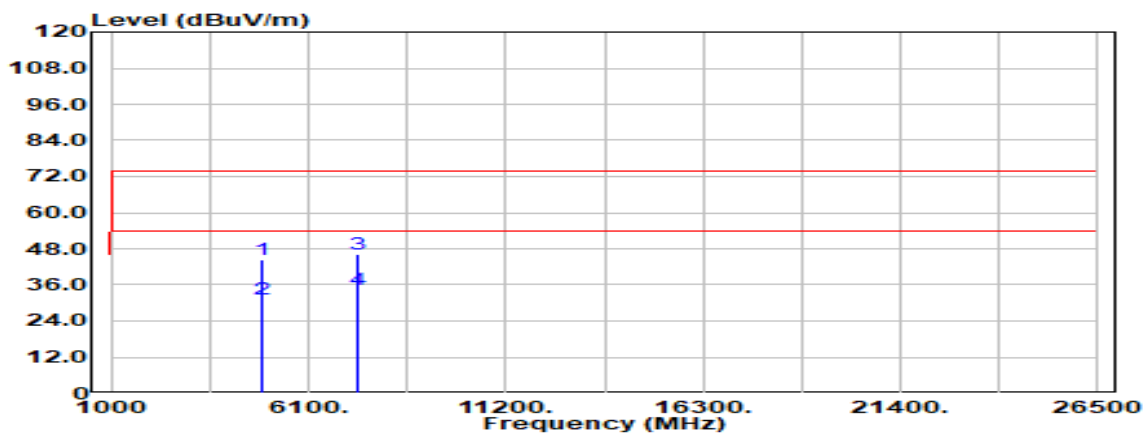


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	34.71	9.63	44.34	74.00	-29.66
4924.000	Average	21.68	9.63	31.31	54.00	-22.69
7386.000	Peak	32.70	13.43	46.13	74.00	-27.87
7386.000	Average	20.82	13.43	34.25	54.00	-19.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

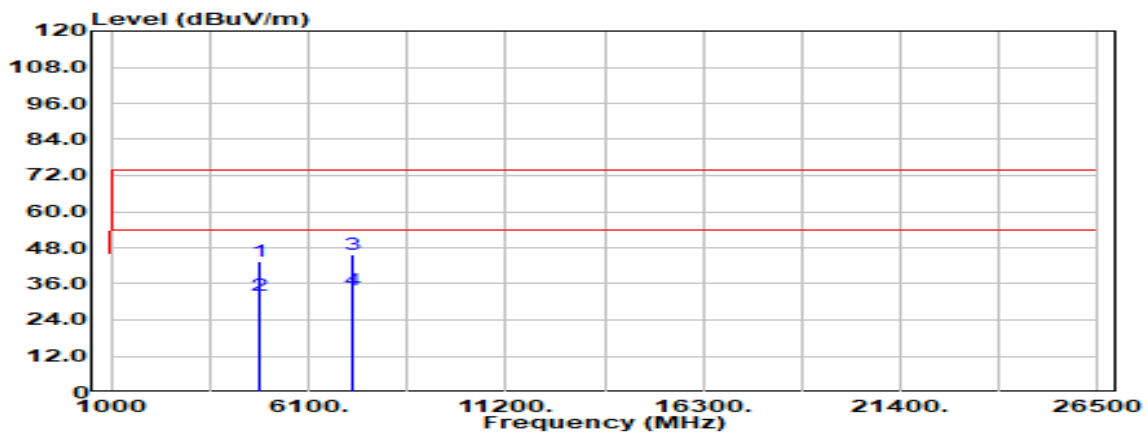


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.86	9.59	43.45	74.00	-30.55
4844.000	Average	22.70	9.59	32.29	54.00	-21.71
7266.000	Peak	32.27	13.32	45.59	74.00	-28.41
7266.000	Average	20.79	13.32	34.11	54.00	-19.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

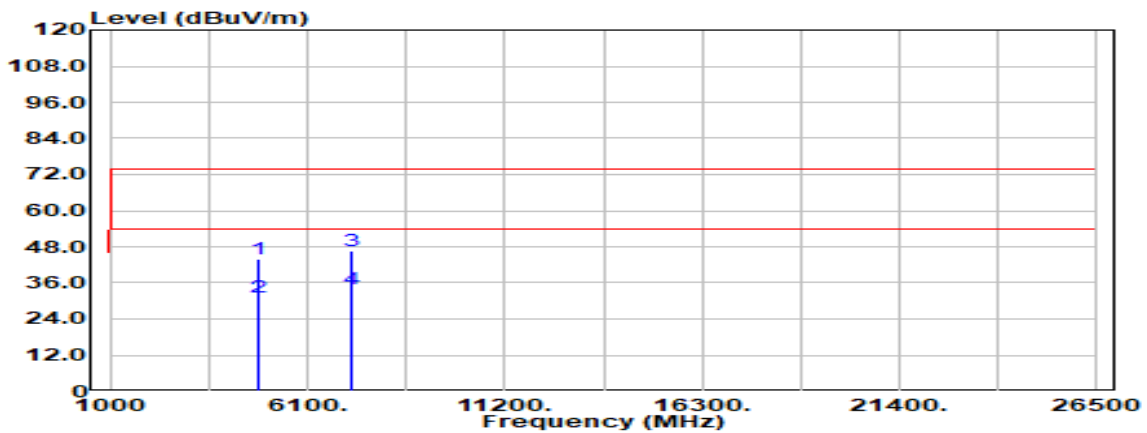


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	34.17	9.59	43.76	74.00	-30.24
4844.000	Average	21.75	9.59	31.34	54.00	-22.66
7266.000	Peak	33.42	13.32	46.74	74.00	-27.26
7266.000	Average	20.83	13.32	34.15	54.00	-19.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

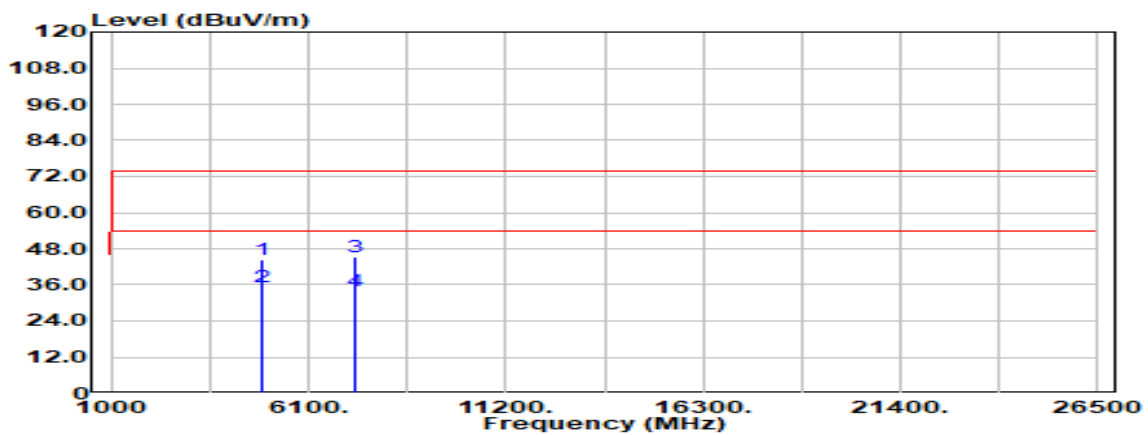


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	34.98	9.60	44.58	74.00	-29.42
4874.000	Average	25.79	9.60	35.38	54.00	-18.62
7311.000	Peak	32.23	13.23	45.46	74.00	-28.54
7311.000	Average	20.82	13.23	34.06	54.00	-19.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 22, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

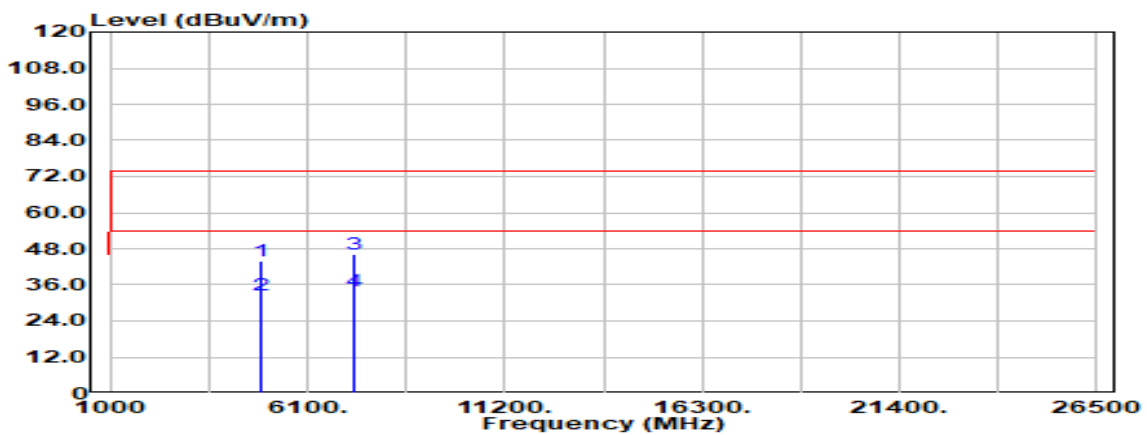


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	34.24	9.60	43.84	74.00	-30.16
4874.000	Average	23.18	9.60	32.78	54.00	-21.22
7311.000	Peak	32.83	13.23	46.06	74.00	-27.94
7311.000	Average	20.50	13.23	33.74	54.00	-20.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

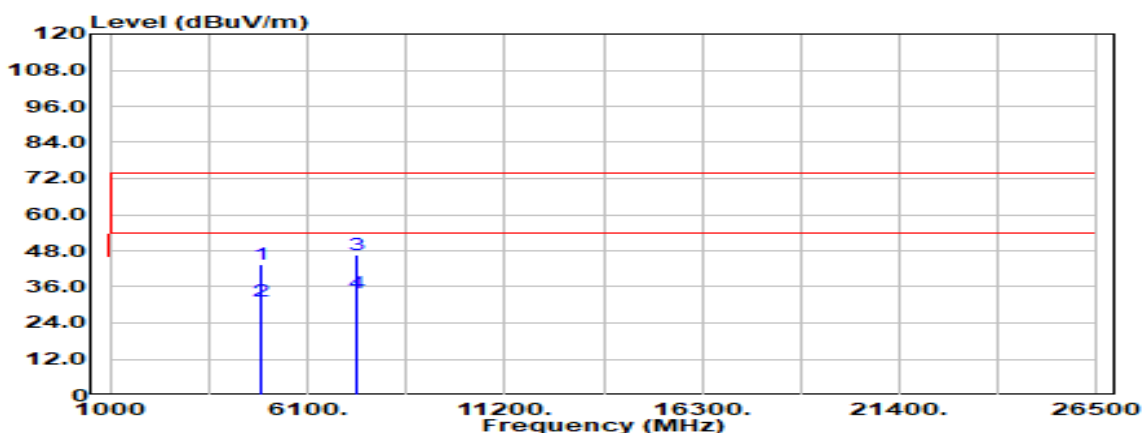


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	33.97	9.59	43.56	74.00	-30.44
4904.000	Average	21.86	9.59	31.45	54.00	-22.55
7356.000	Peak	33.26	13.28	46.54	74.00	-27.46
7356.000	Average	20.76	13.28	34.04	54.00	-19.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

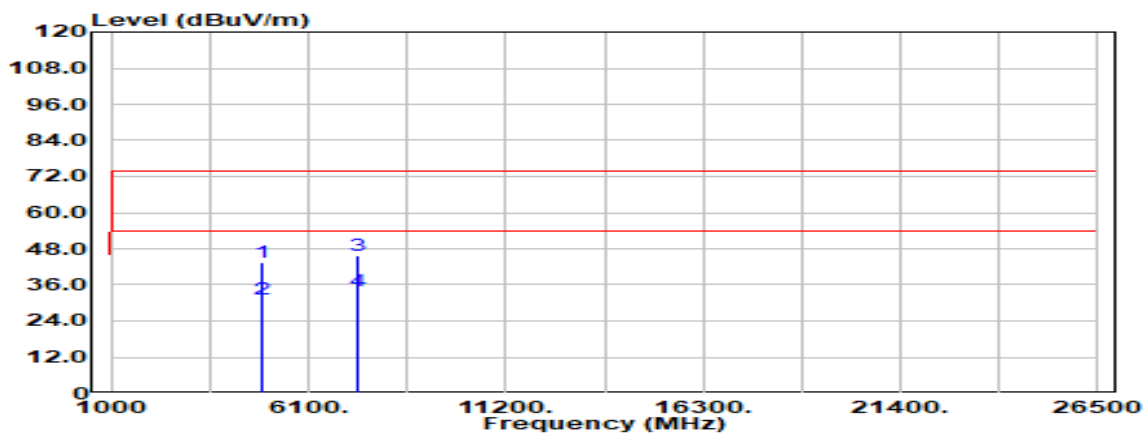


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	34.05	9.59	43.64	74.00	-30.36
4904.000	Average	21.80	9.59	31.39	54.00	-22.61
7356.000	Peak	32.56	13.28	45.84	74.00	-28.16
7356.000	Average	20.84	13.28	34.12	54.00	-19.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

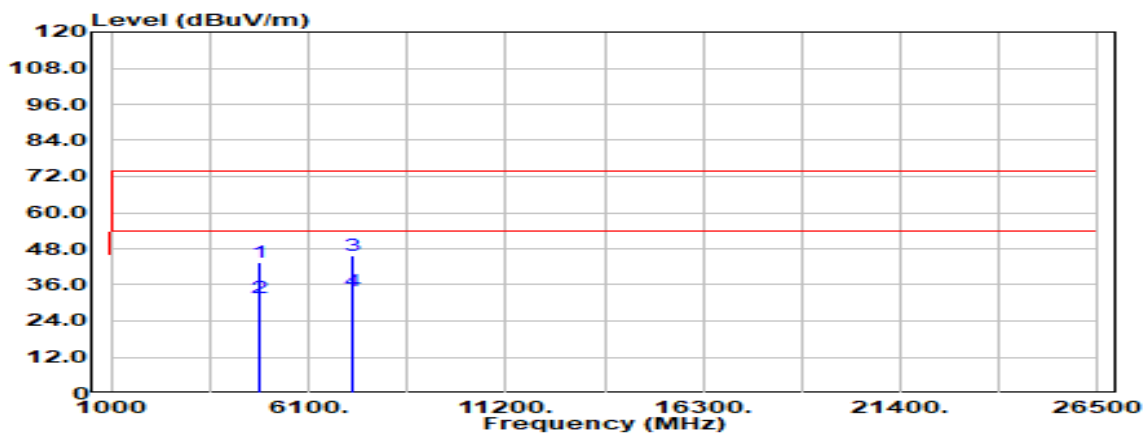


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	33.91	9.53	43.43	74.00	-30.57
4824.000	Average	21.99	9.53	31.52	54.00	-22.48
7236.000	Peak	32.17	13.41	45.58	74.00	-28.42
7236.000	Average	20.37	13.41	33.78	54.00	-20.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

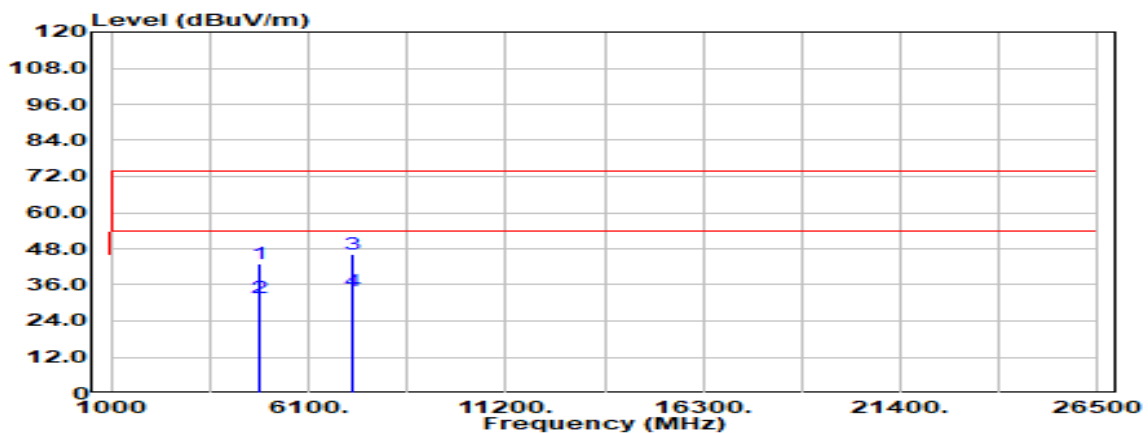


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	33.46	9.53	42.99	74.00	-31.01
4824.000	Average	22.06	9.53	31.59	54.00	-22.41
7236.000	Peak	32.65	13.41	46.06	74.00	-27.94
7236.000	Average	20.52	13.41	33.93	54.00	-20.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

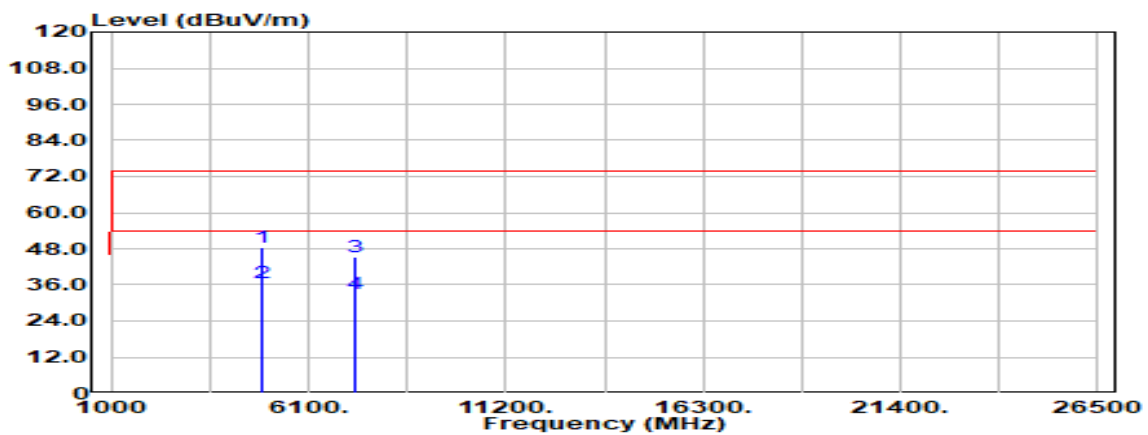


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	38.81	9.60	48.41	74.00	-25.59
4874.000	Average	27.02	9.60	36.62	54.00	-17.38
7311.000	Peak	32.20	13.23	45.44	74.00	-28.56
7311.000	Average	19.76	13.23	32.99	54.00	-21.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

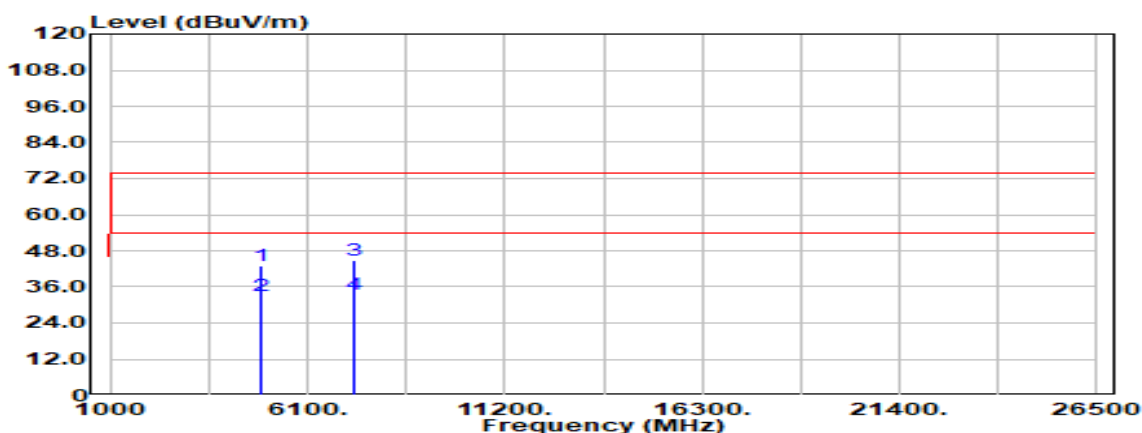


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.55	9.60	43.14	74.00	-30.86
4874.000	Average	23.45	9.60	33.05	54.00	-20.95
7311.000	Peak	31.61	13.23	44.84	74.00	-29.16
7311.000	Average	20.17	13.23	33.40	54.00	-20.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

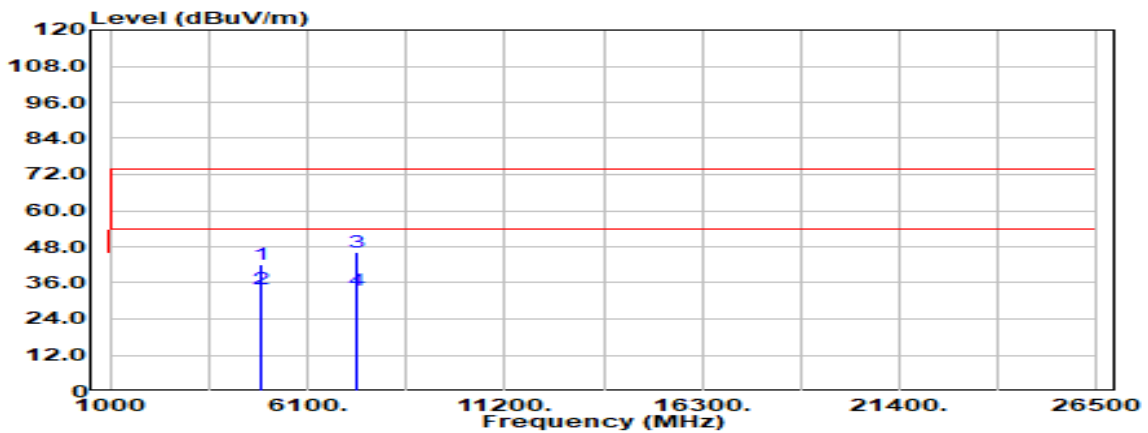


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	32.44	9.63	42.07	74.00	-31.93
4924.000	Average	24.24	9.63	33.87	54.00	-20.13
7386.000	Peak	32.91	13.43	46.34	74.00	-27.66
7386.000	Average	20.22	13.43	33.65	54.00	-20.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

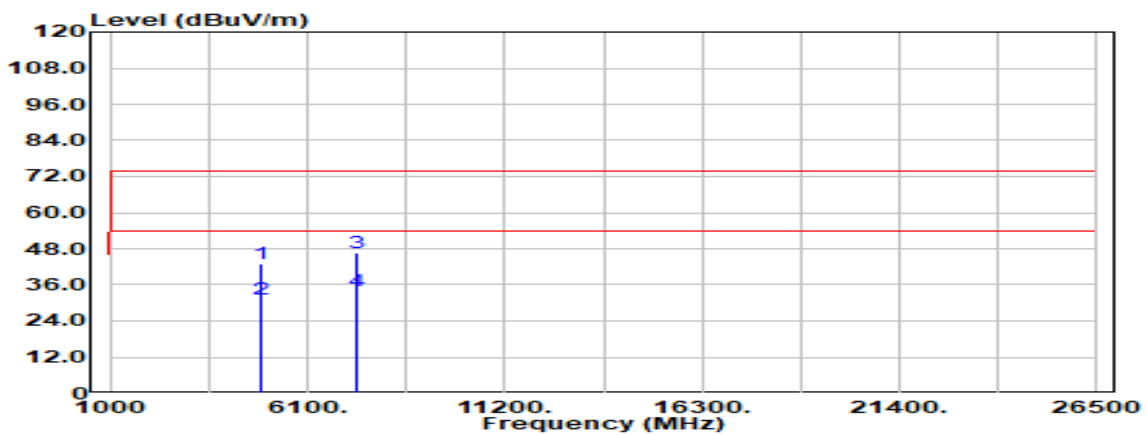


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	33.51	9.63	43.14	74.00	-30.86
4924.000	Average	21.62	9.63	31.25	54.00	-22.75
7386.000	Peak	33.43	13.43	46.86	74.00	-27.14
7386.000	Average	20.31	13.43	33.74	54.00	-20.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

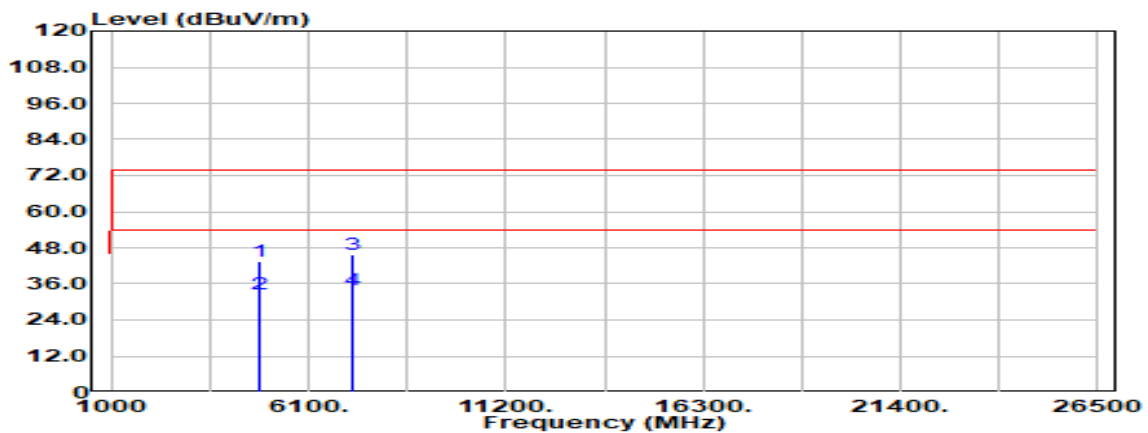


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	33.91	9.53	43.43	74.00	-30.57
4824.000	Average	23.27	9.53	32.80	54.00	-21.20
7236.000	Peak	32.17	13.41	45.58	74.00	-28.42
7236.000	Average	20.45	13.41	33.86	54.00	-20.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

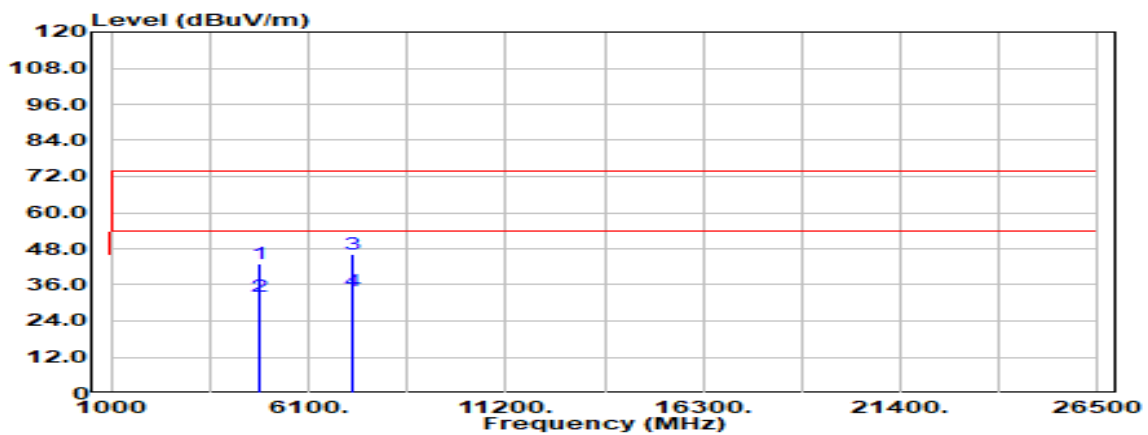


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.000	Peak	33.46	9.53	42.99	74.00	-31.01
4824.000	Average	22.58	9.53	32.11	54.00	-21.89
7236.000	Peak	32.65	13.41	46.06	74.00	-27.94
7236.000	Average	20.51	13.41	33.92	54.00	-20.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

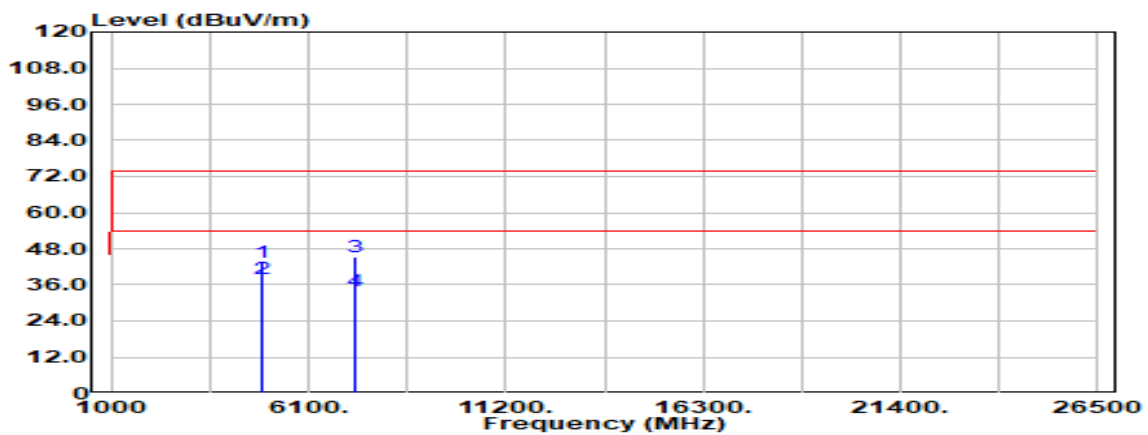


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.84	9.60	43.43	74.00	-30.57
4874.000	Average	28.52	9.60	38.12	54.00	-15.88
7311.000	Peak	32.20	13.23	45.44	74.00	-28.56
7311.000	Average	20.90	13.23	34.13	54.00	-19.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

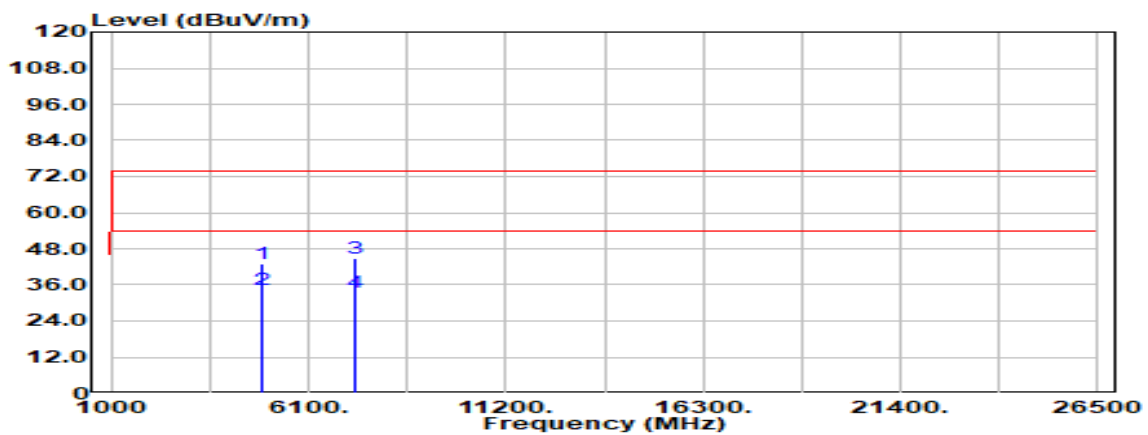


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.55	9.60	43.14	74.00	-30.86
4874.000	Average	24.63	9.60	34.23	54.00	-19.77
7311.000	Peak	31.61	13.23	44.84	74.00	-29.16
7311.000	Average	20.49	13.23	33.72	54.00	-20.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

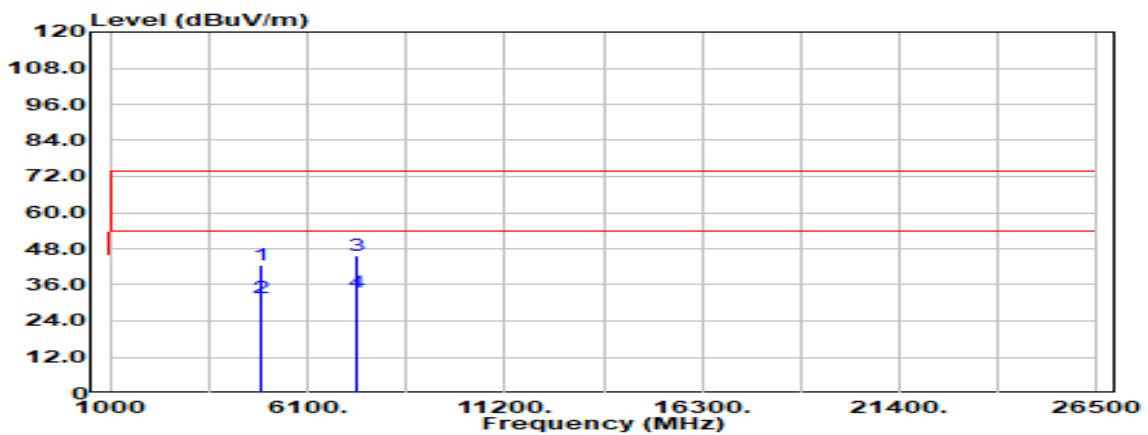


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	33.01	9.59	42.59	74.00	-31.41
4904.000	Average	22.31	9.59	31.90	54.00	-22.10
7356.000	Peak	32.33	13.28	45.61	74.00	-28.39
7356.000	Average	20.41	13.28	33.69	54.00	-20.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Harmonic	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

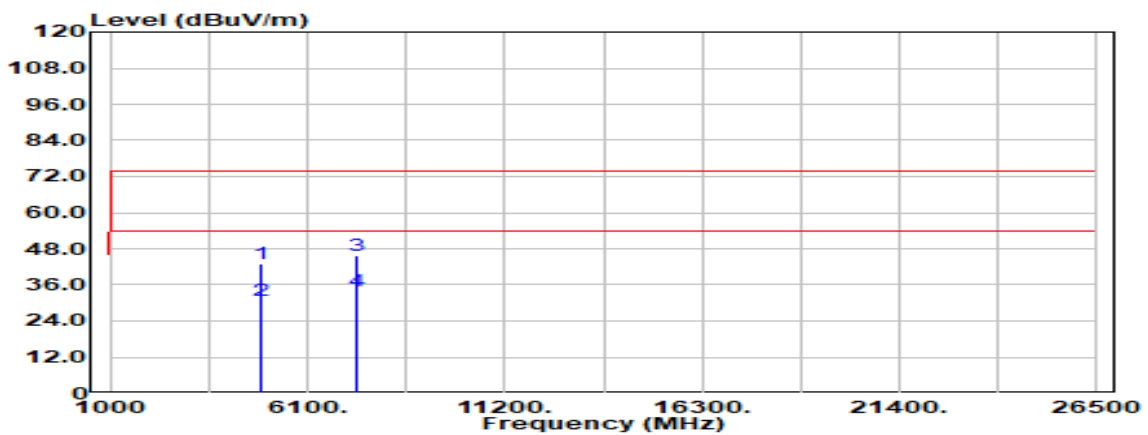

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.000	Peak	33.55	9.59	43.14	74.00	-30.86
4904.000	Average	21.36	9.59	30.95	54.00	-23.05
7356.000	Peak	32.43	13.28	45.71	74.00	-28.29
7356.000	Average	20.52	13.28	33.80	54.00	-20.20
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

BFM ON

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

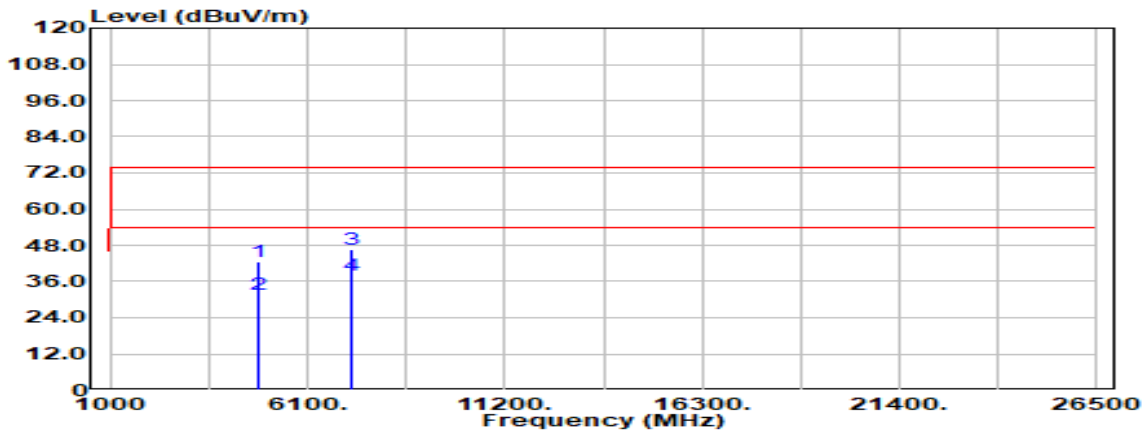


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	32.88	9.53	42.41	74.00	-31.59
4824.000	Average	22.28	9.53	31.81	54.00	-22.19
7236.000	Peak	33.08	13.41	46.49	74.00	-27.51
7236.000	Average	24.43	13.41	37.84	54.00	-16.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2412	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

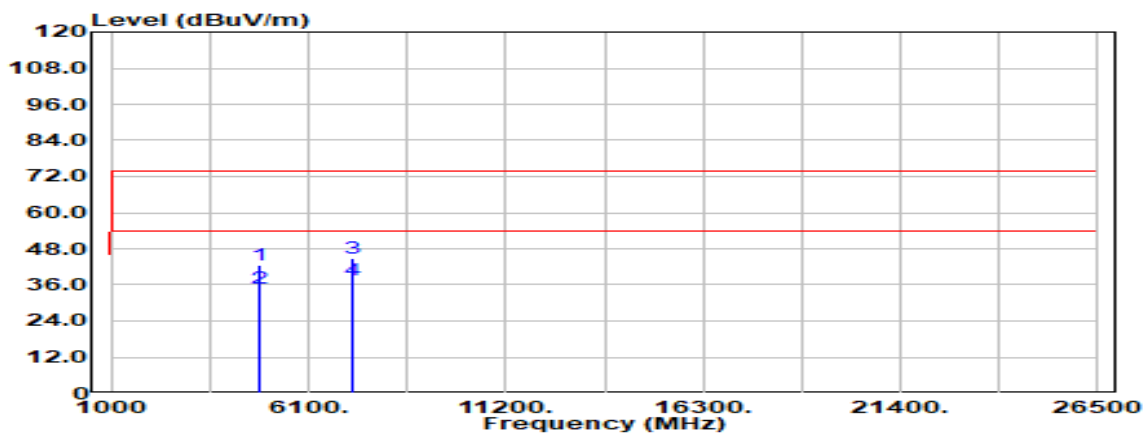


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	32.97	9.53	42.49	74.00	-31.51
4824.000	Average	25.56	9.53	35.09	54.00	-18.91
7236.000	Peak	31.35	13.41	44.76	74.00	-29.24
7236.000	Average	24.03	13.41	37.44	54.00	-16.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

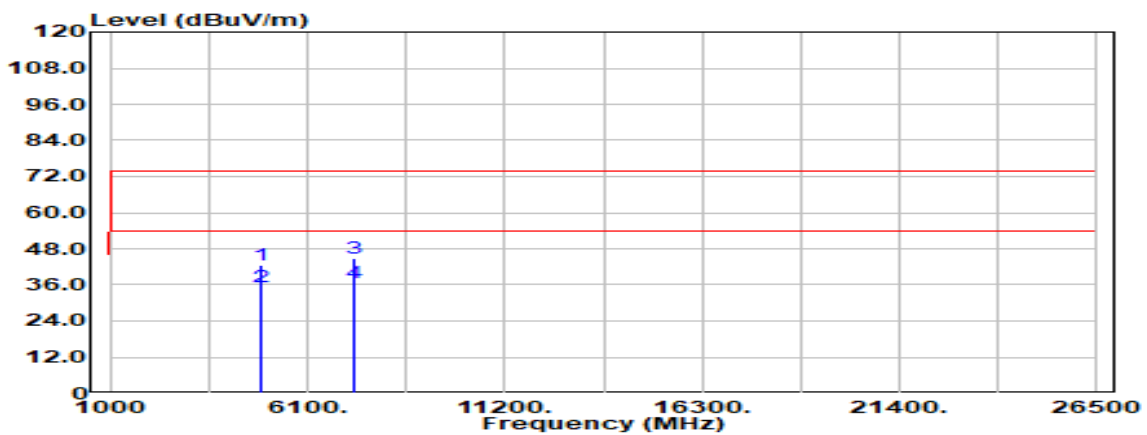


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	33.19	9.60	42.78	74.00	-31.22
4874.000	Average	25.82	9.60	35.42	54.00	-18.58
7311.000	Peak	31.81	13.23	45.05	74.00	-28.96
7311.000	Average	23.27	13.23	36.50	54.00	-17.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

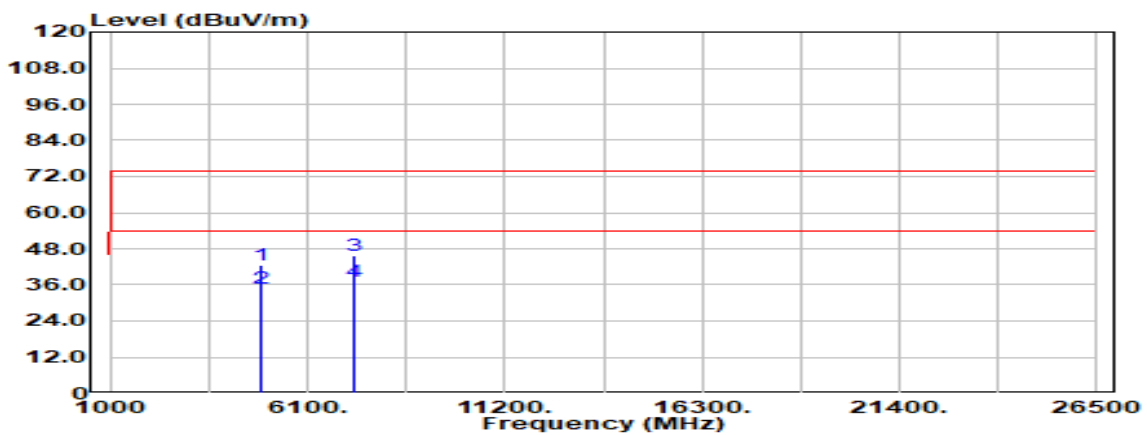


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.000	Peak	33.00	9.60	42.60	74.00	-31.40
4874.000	Average	25.41	9.60	35.01	54.00	-18.99
7311.000	Peak	32.31	13.23	45.54	74.00	-28.46
7311.000	Average	23.83	13.23	37.06	54.00	-16.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

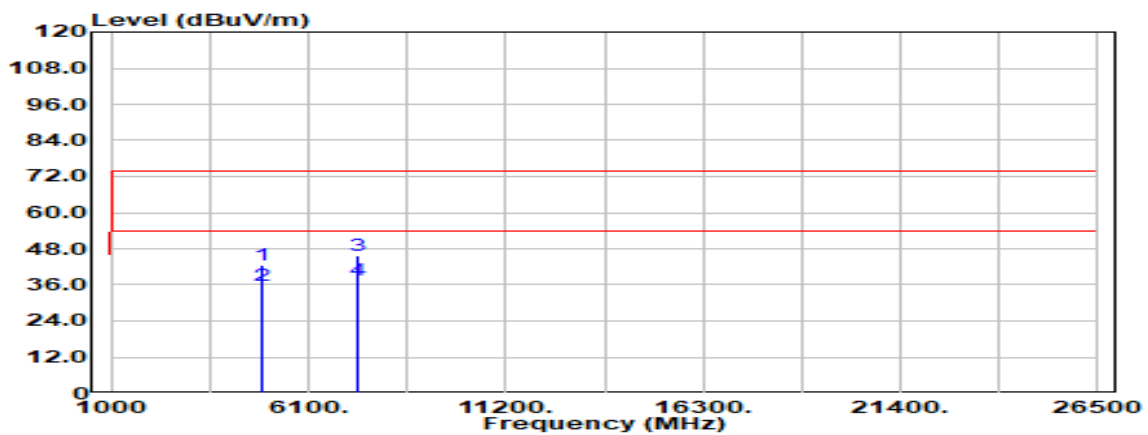


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	32.72	9.63	42.35	74.00	-31.65
4924.000	Average	26.01	9.63	35.64	54.00	-18.36
7386.000	Peak	32.12	13.43	45.55	74.00	-28.45
7386.000	Average	24.23	13.43	37.66	54.00	-16.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT20) CH 2462	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

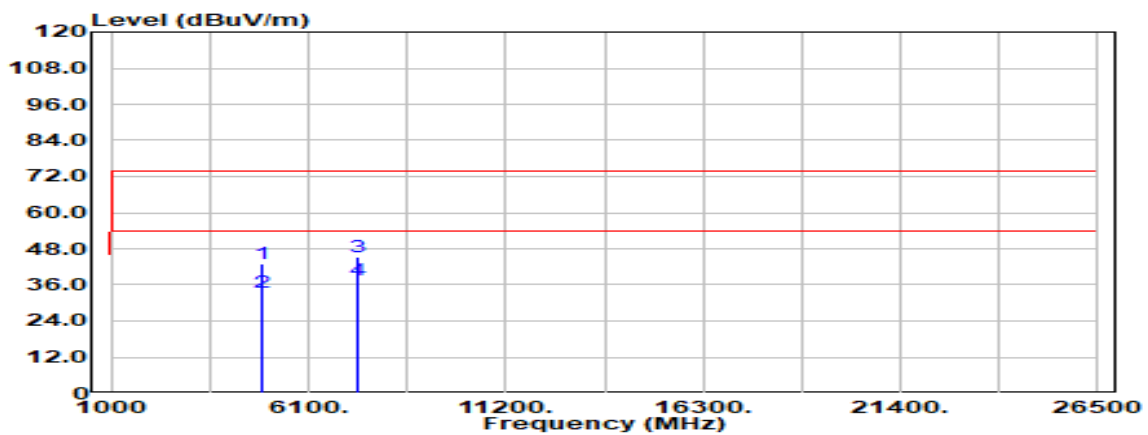


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.000	Peak	33.44	9.63	43.07	74.00	-30.93
4924.000	Average	24.06	9.63	33.69	54.00	-20.31
7386.000	Peak	32.04	13.43	45.47	74.00	-28.53
7386.000	Average	24.15	13.43	37.58	54.00	-16.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

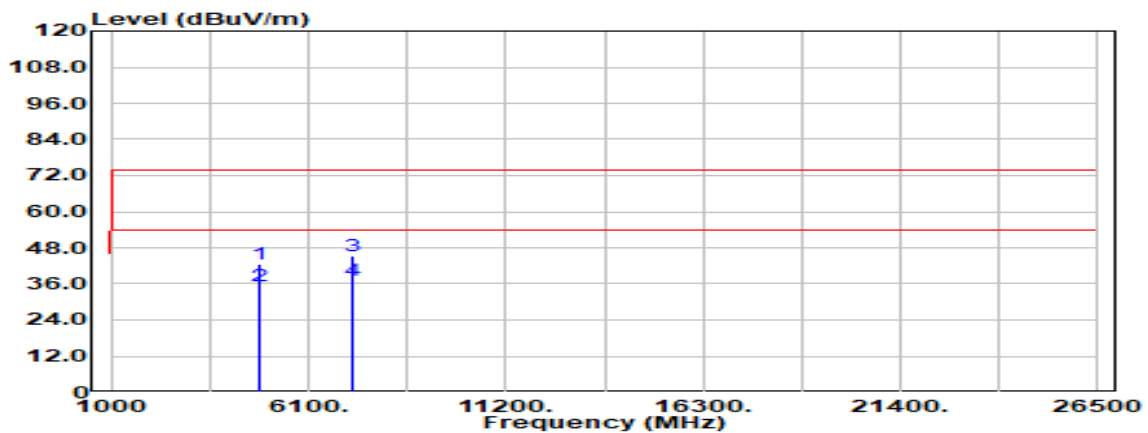


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	32.98	9.59	42.57	74.00	-31.43
4844.000	Average	25.82	9.59	35.41	54.00	-18.59
7266.000	Peak	32.16	13.32	45.48	74.00	-28.52
7266.000	Average	23.66	13.32	36.98	54.00	-17.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2422	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

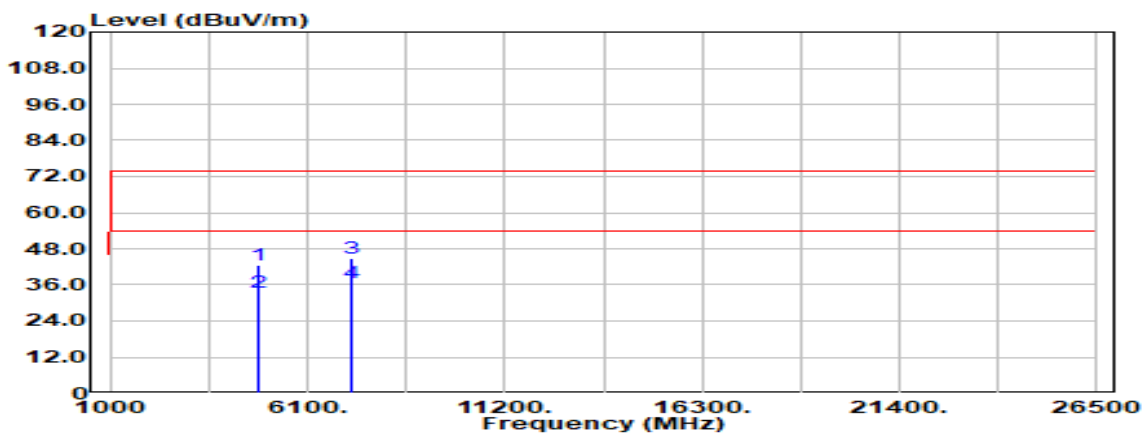


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	32.94	9.59	42.53	74.00	-31.47
4844.000	Average	24.05	9.59	33.64	54.00	-20.36
7266.000	Peak	31.59	13.32	44.91	74.00	-29.09
7266.000	Average	23.56	13.32	36.88	54.00	-17.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

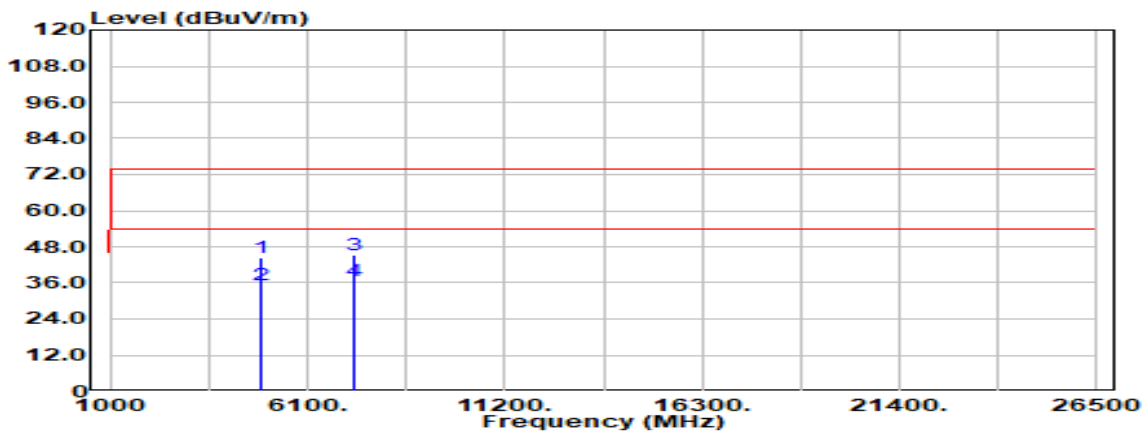


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	34.71	9.60	44.31	74.00	-29.69
4874.000	Average	25.62	9.60	35.22	54.00	-18.78
7311.000	Peak	32.11	13.23	45.34	74.00	-28.66
7311.000	Average	23.49	13.23	36.72	54.00	-17.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

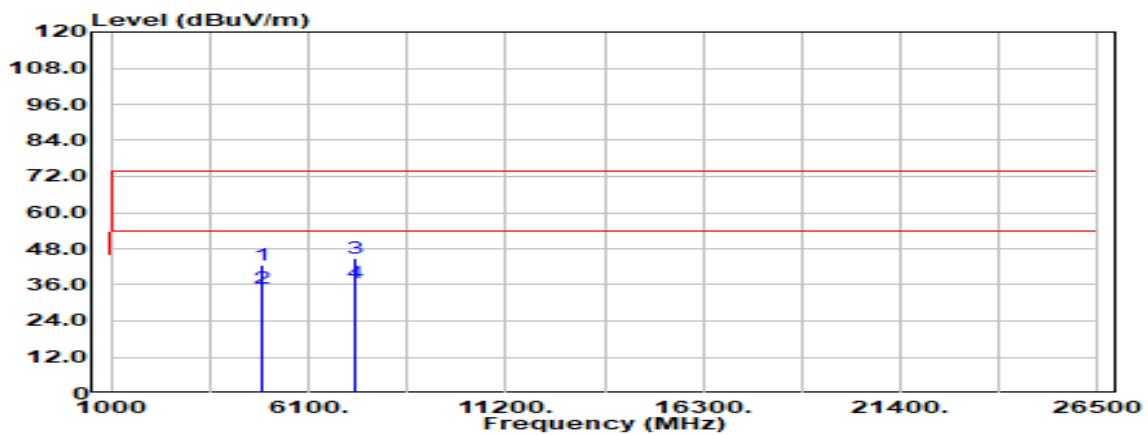


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.05	9.60	42.64	74.00	-31.36
4874.000	Average	25.33	9.60	34.93	54.00	-19.07
7311.000	Peak	31.80	13.23	45.03	74.00	-28.97
7311.000	Average	23.28	13.23	36.51	54.00	-17.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

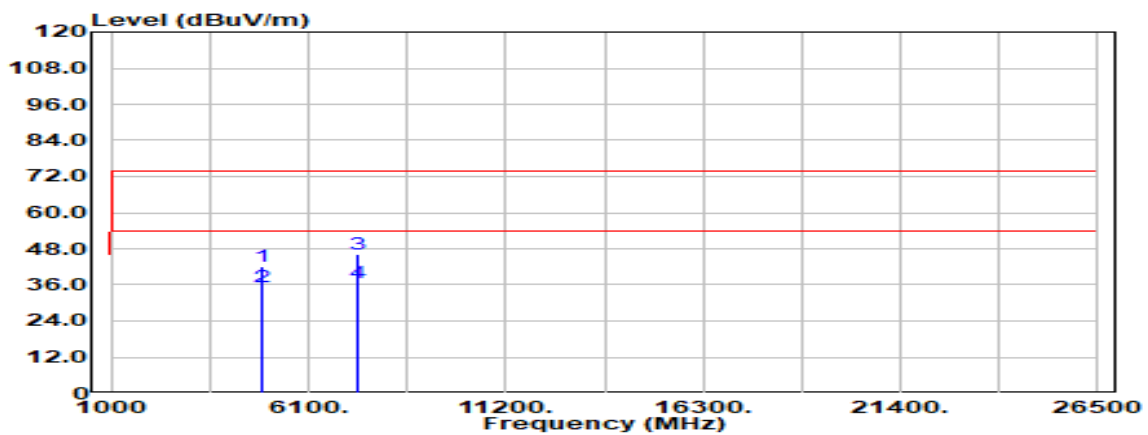


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.000	Peak	32.40	9.59	41.99	74.00	-32.01
4904.000	Average	25.54	9.59	35.13	54.00	-18.87
7356.000	Peak	32.69	13.28	45.97	74.00	-28.03
7356.000	Average	23.56	13.28	36.84	54.00	-17.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ac (VHT40) CH 2452	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

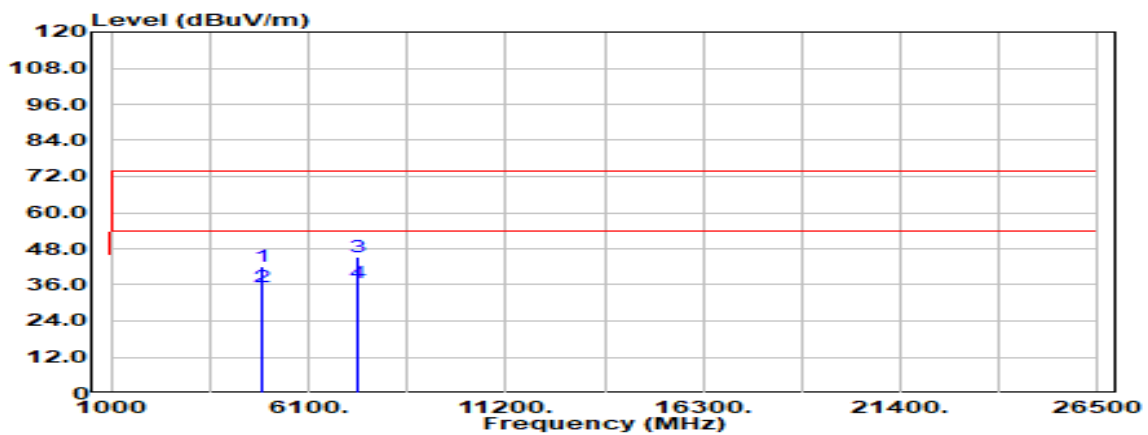


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	32.71	9.59	42.30	74.00	-31.70
4904.000	Average	25.57	9.59	35.16	54.00	-18.84
7356.000	Peak	32.00	13.28	45.28	74.00	-28.72
7356.000	Average	23.51	13.28	36.79	54.00	-17.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

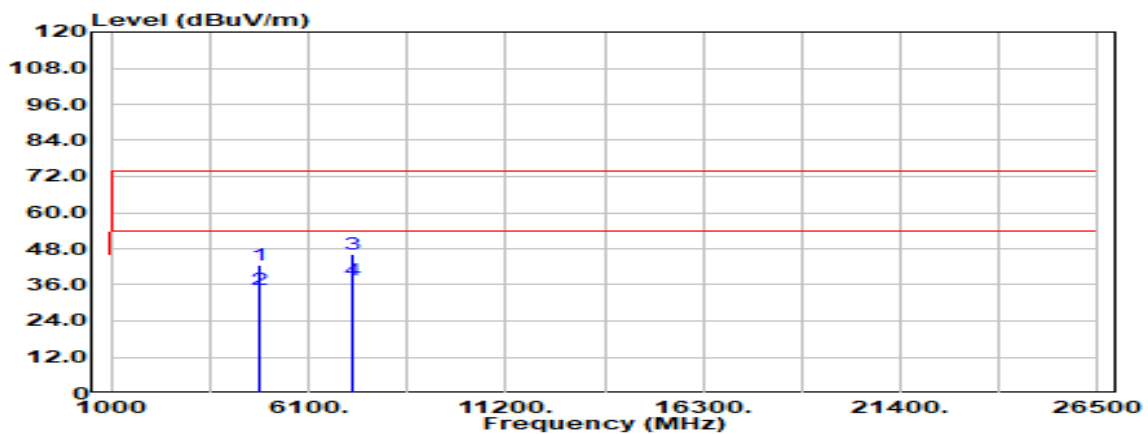


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.000	Peak	33.18	9.53	42.70	74.00	-31.30
4824.000	Average	24.80	9.53	34.33	54.00	-19.67
7236.000	Peak	32.74	13.41	46.15	74.00	-27.85
7236.000	Average	24.37	13.41	37.78	54.00	-16.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2412	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

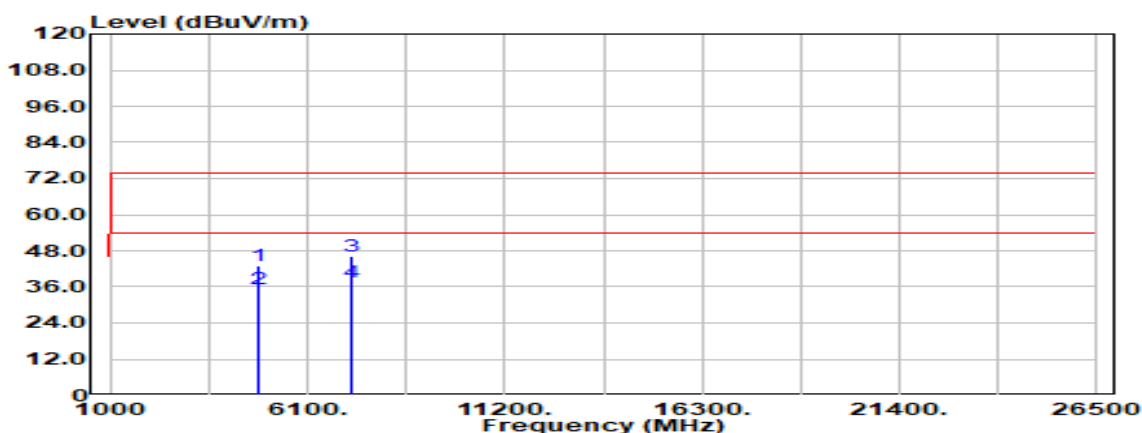

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.000	Peak	33.42	9.53	42.94	74.00	-31.06
4824.000	Average	25.82	9.53	35.35	54.00	-18.65
7236.000	Peak	32.64	13.41	46.05	74.00	-27.95
7236.000	Average	24.24	13.41	37.65	54.00	-16.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.