


Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

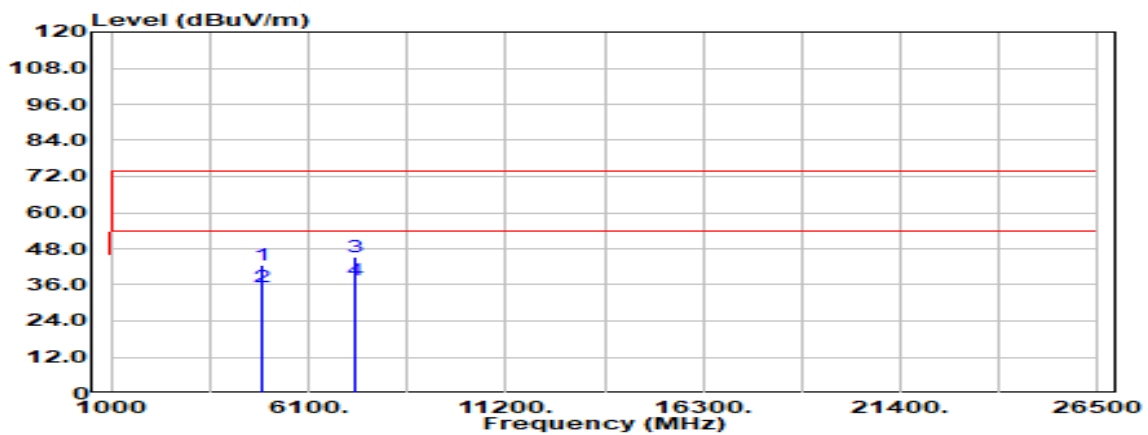


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	32.86	9.60	42.45	74.00	-31.55
4874.000	Average	25.79	9.60	35.39	54.00	-18.61
7311.000	Peak	32.17	13.23	45.41	74.00	-28.59
7311.000	Average	24.37	13.23	37.60	54.00	-16.40
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

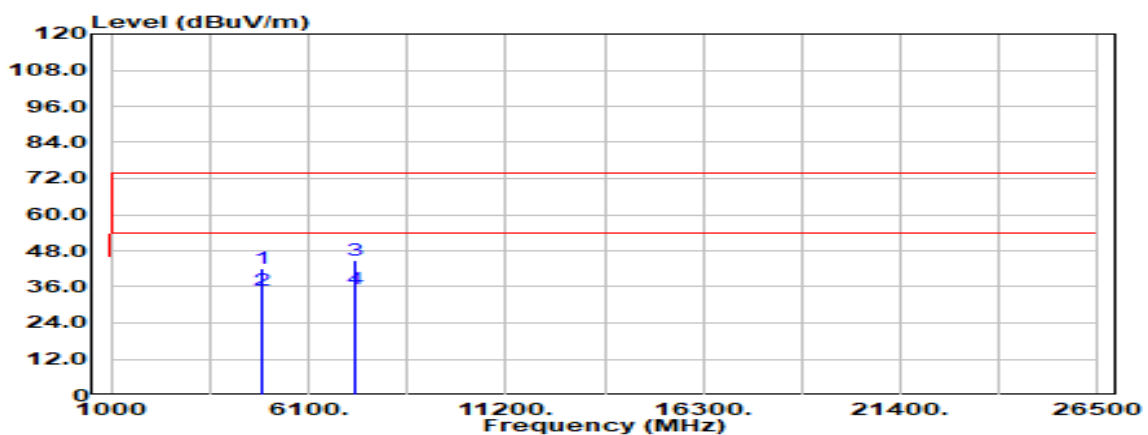


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.000	Peak	32.32	9.60	41.91	74.00	-32.09
4874.000	Average	25.40	9.60	35.00	54.00	-19.00
7311.000	Peak	31.72	13.23	44.95	74.00	-29.05
7311.000	Average	22.15	13.23	35.38	54.00	-18.62
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

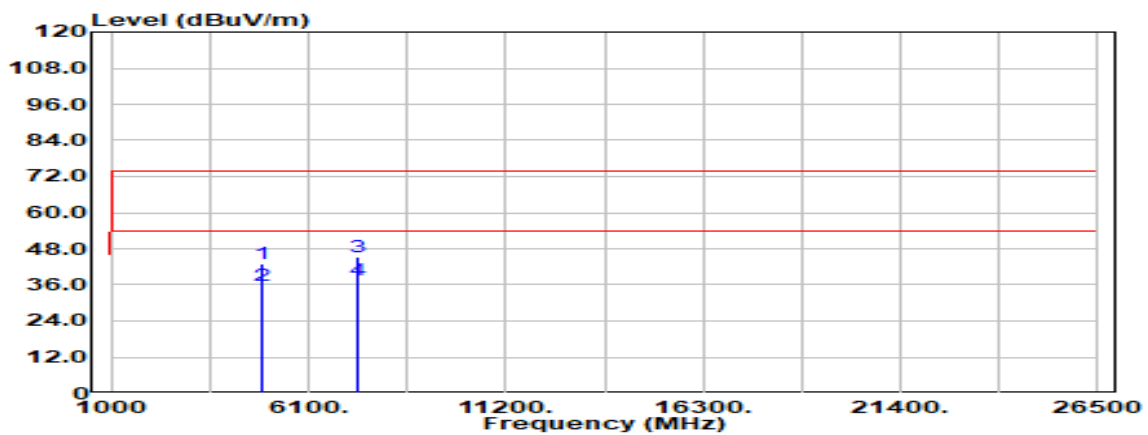


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.000	Peak	33.40	9.63	43.02	74.00	-30.98
4924.000	Average	26.25	9.63	35.88	54.00	-18.12
7386.000	Peak	32.08	13.43	45.51	74.00	-28.49
7386.000	Average	24.23	13.43	37.66	54.00	-16.34
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE20) CH 2462	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

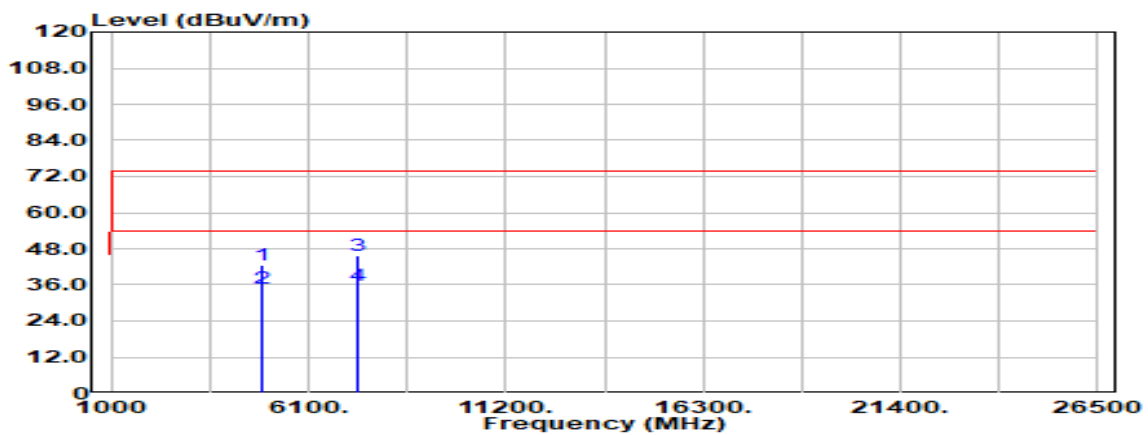


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.000	Peak	32.96	9.63	42.59	74.00	-31.41
4924.000	Average	25.41	9.63	35.04	54.00	-18.96
7386.000	Peak	32.12	13.43	45.55	74.00	-28.45
7386.000	Average	22.28	13.43	35.71	54.00	-18.29
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

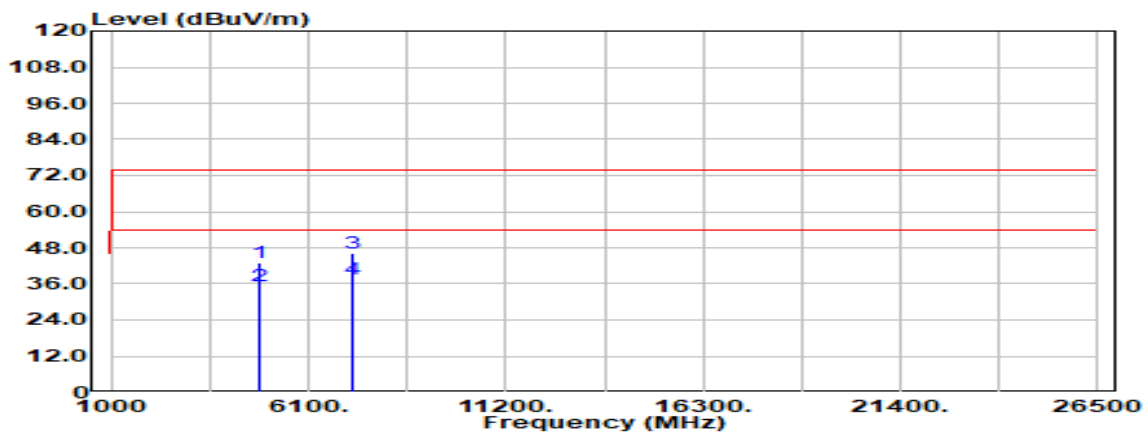


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.26	9.59	42.85	74.00	-31.15
4844.000	Average	25.84	9.59	35.43	54.00	-18.57
7266.000	Peak	32.96	13.32	46.28	74.00	-27.72
7266.000	Average	24.09	13.32	37.41	54.00	-16.59
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2422	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

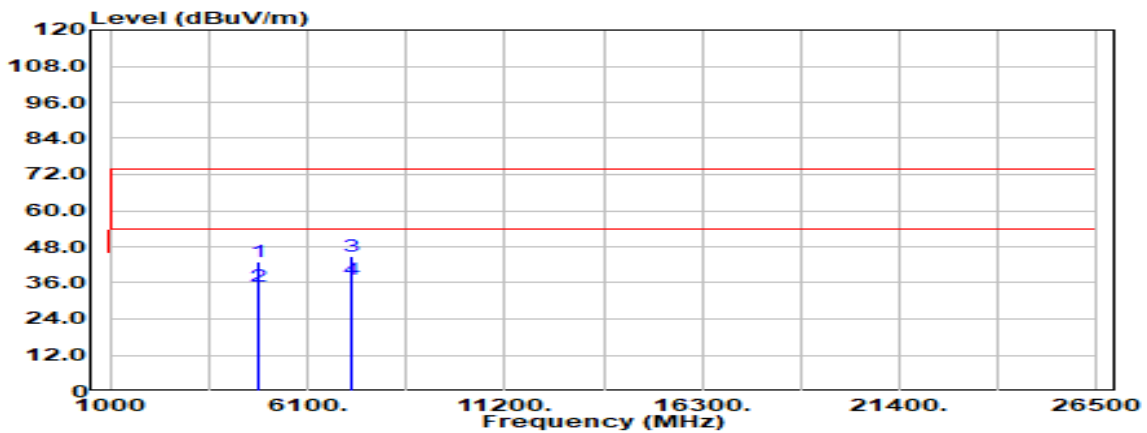


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.000	Peak	33.22	9.59	42.81	74.00	-31.19
4844.000	Average	25.20	9.59	34.79	54.00	-19.21
7266.000	Peak	31.31	13.32	44.63	74.00	-29.37
7266.000	Average	23.86	13.32	37.18	54.00	-16.82
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

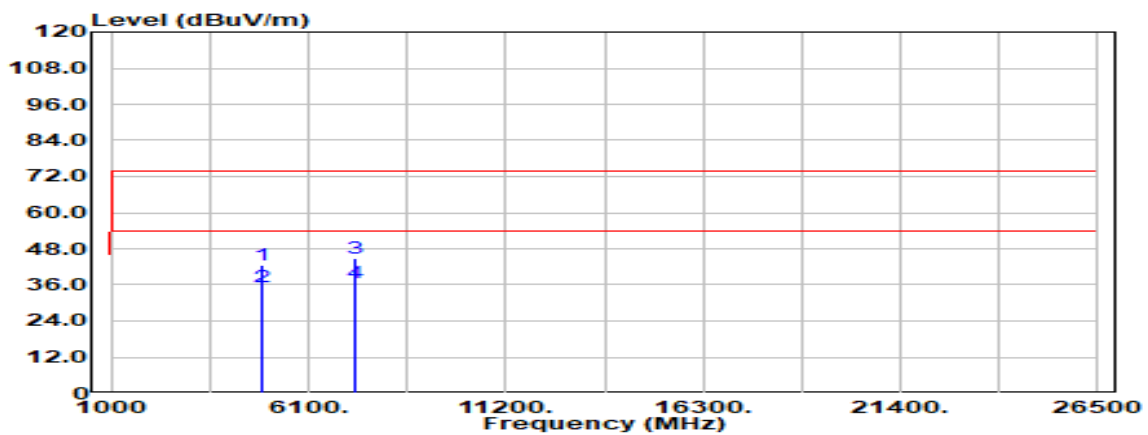


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	33.06	9.60	42.66	74.00	-31.34
4874.000	Average	25.55	9.60	35.15	54.00	-18.85
7311.000	Peak	31.75	13.23	44.98	74.00	-29.02
7311.000	Average	23.36	13.23	36.59	54.00	-17.41
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2437	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

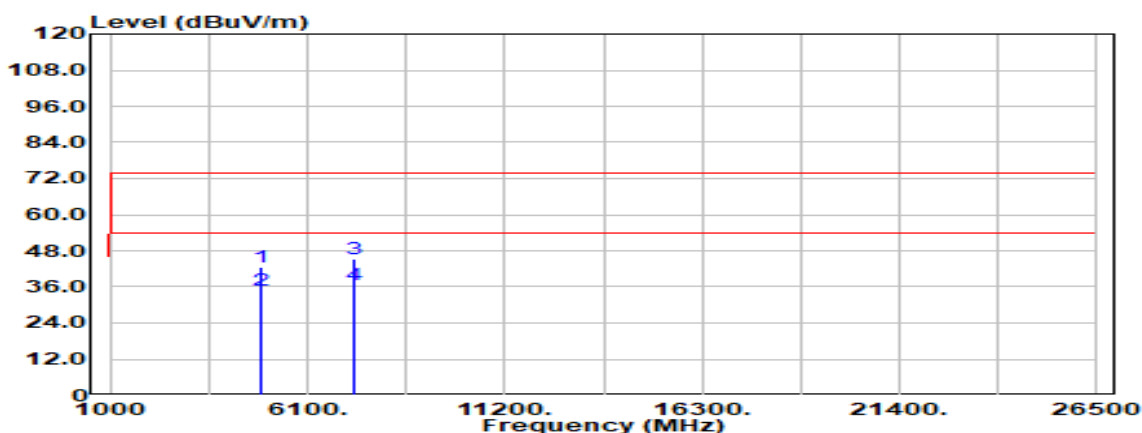

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.000	Peak	32.91	9.60	42.50	74.00	-31.50
4874.000	Average	25.31	9.60	34.91	54.00	-19.09
7311.000	Peak	31.90	13.23	45.13	74.00	-28.87
7311.000	Average	23.64	13.23	36.87	54.00	-17.13
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Vertical	Test Engineer	Czerny Lin
Detector	Peak and Average		

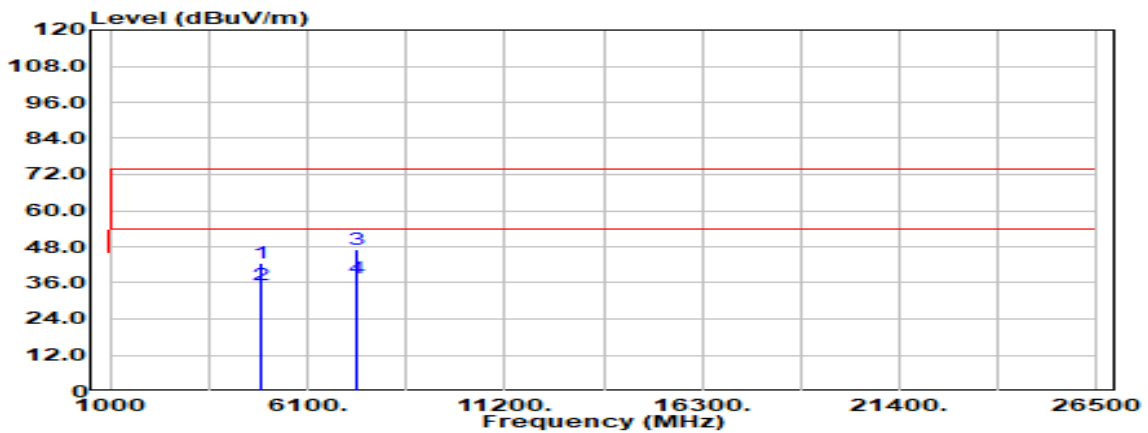


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.000	Peak	32.87	9.59	42.46	74.00	-31.54
4904.000	Average	25.75	9.59	35.34	54.00	-18.66
7356.000	Peak	33.62	13.28	46.90	74.00	-27.10
7356.000	Average	24.08	13.28	37.36	54.00	-16.64
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000140KR

Test Mode	IEEE 802.11 ax (HE40) CH 2452	Temp/Hum	19.9(°C)/ 61%RH
Test Item	Harmonic	Test Date	April 3, 2022
Polarize	Horizontal	Test Engineer	Czerny Lin
Detector	Peak and Average		

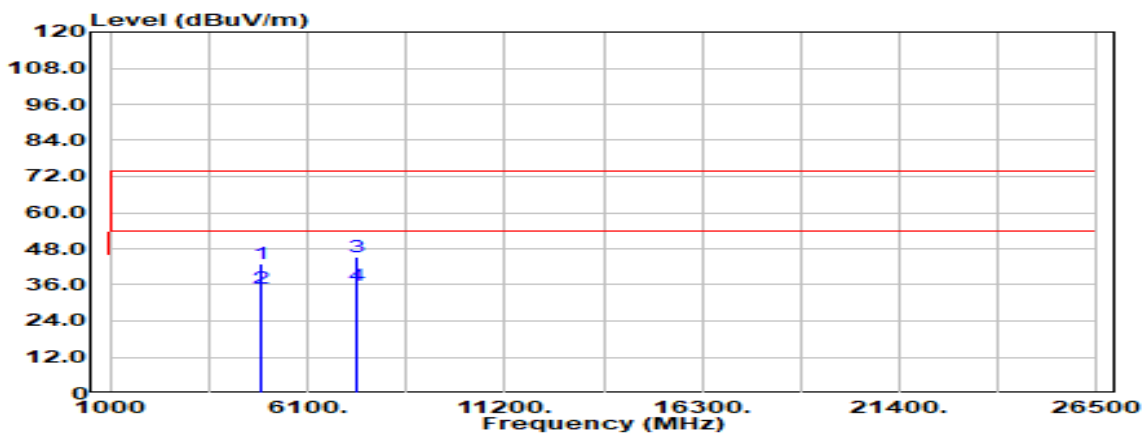

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.000	Peak	33.54	9.59	43.13	74.00	-30.87
4904.000	Average	25.41	9.59	35.00	54.00	-19.00
7356.000	Peak	31.80	13.28	45.08	74.00	-28.92
7356.000	Average	22.55	13.28	35.83	54.00	-18.17
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**- End of Test Report -**