


Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

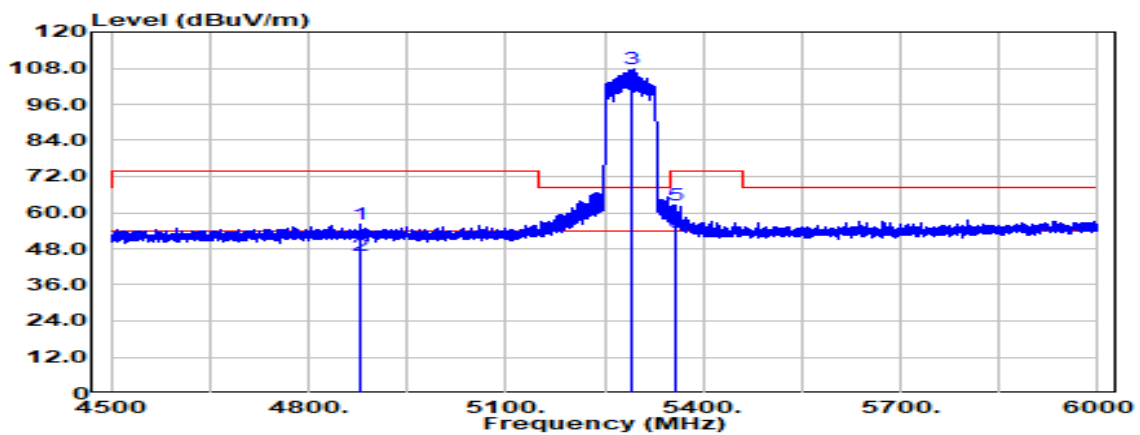

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4878.000	Peak	37.41	18.59	56.00	74.00	-18.00
4878.000	Average	27.08	18.59	45.67	54.00	-8.33
5290.000	Peak	88.10	19.78	107.88	--	--
5290.000	Average	79.04	19.78	98.82	--	--
5356.688	Peak	42.66	19.85	62.51	74.00	-11.49
5356.688	Average	33.38	19.85	53.23	54.00	-0.77

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	20.0(°C) / 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

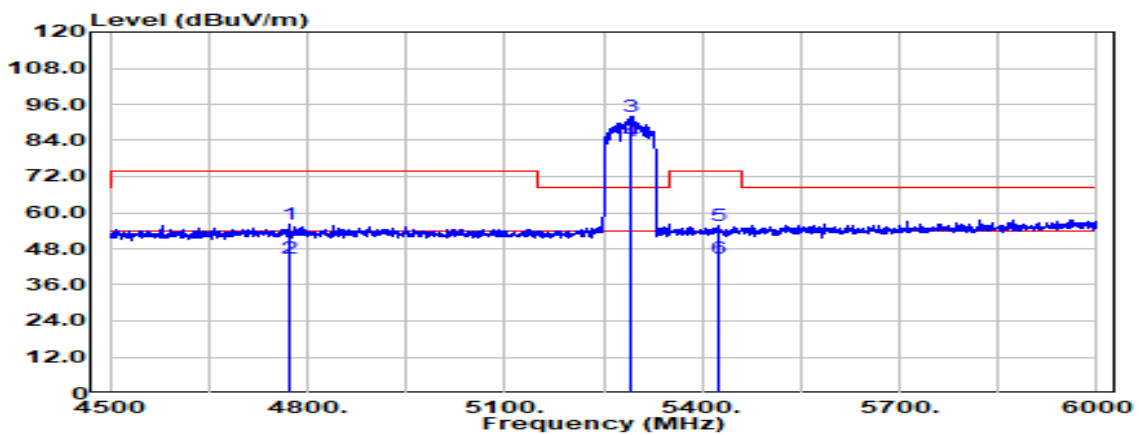

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4773.750	Peak	37.58	18.48	56.06	74.00	-17.94
4773.750	Average	26.18	18.48	44.66	54.00	-9.34
5290.000	Peak	72.37	19.78	92.15	--	--
5290.000	Average	63.88	19.78	83.66	--	--
5424.000	Peak	35.81	20.06	55.87	74.00	-18.13
5424.000	Average	24.76	20.06	44.82	54.00	-9.18

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	20.0(°C) / 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

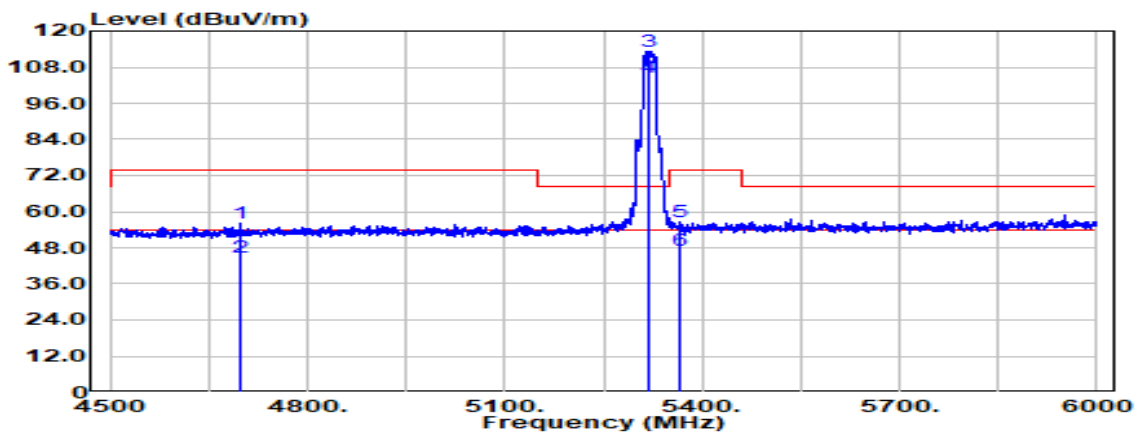

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4698.000	Peak	37.57	18.45	56.02	74.00	-17.98
4698.000	Average	26.45	18.45	44.90	54.00	-9.10
5320.000	Peak	93.40	19.81	113.21	--	--
5320.000	Average	84.85	19.81	104.66	--	--
5365.500	Peak	36.89	19.89	56.79	74.00	-17.21
5365.500	Average	27.10	19.89	47.00	54.00	-7.00

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

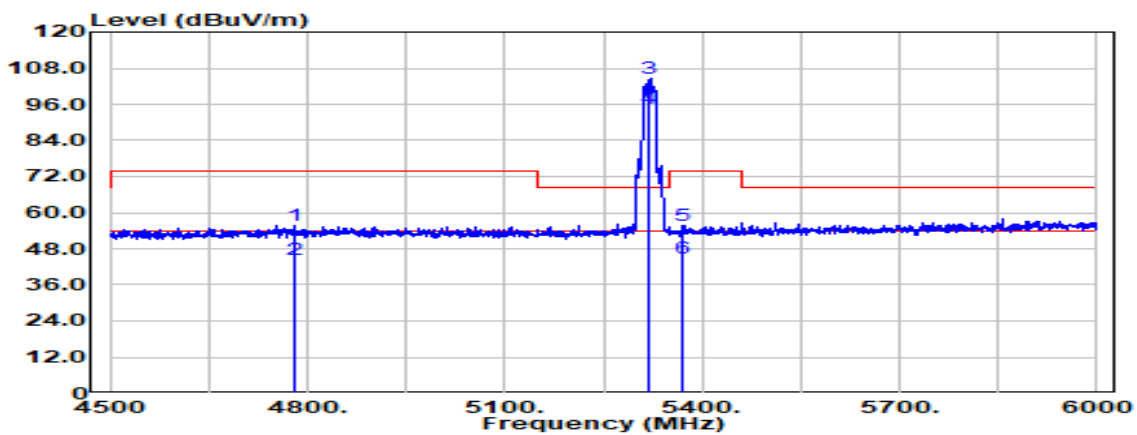

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4782.000	Peak	37.35	18.47	55.82	74.00	-18.18
4782.000	Average	26.10	18.47	44.57	54.00	-9.43
5320.000	Peak	84.61	19.81	104.43	--	--
5320.000	Average	74.69	19.81	94.50	--	--
5371.500	Peak	35.65	19.92	55.57	74.00	-18.43
5371.500	Average	25.01	19.92	44.94	54.00	-9.06

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_26/8	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

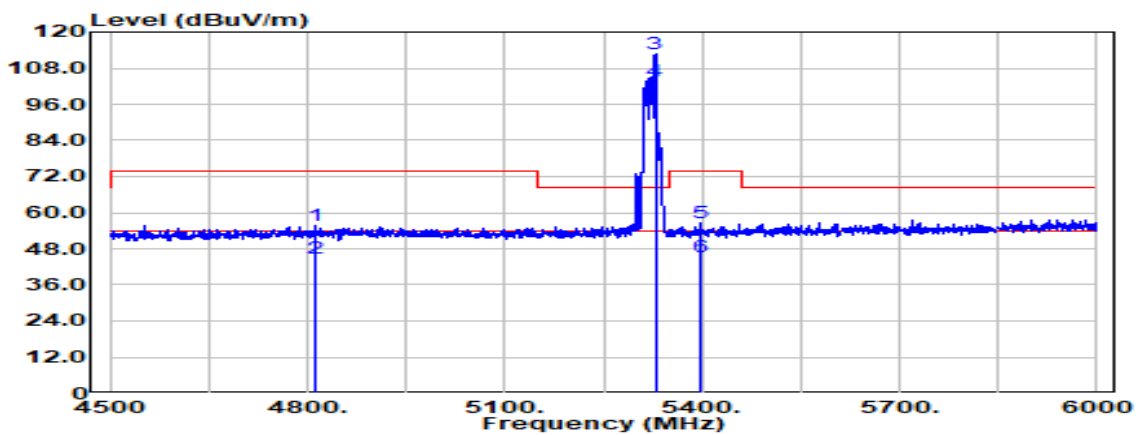

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4813.500	Peak	37.26	18.49	55.75	74.00	-18.25
4813.500	Average	26.41	18.49	44.91	54.00	-9.09
5328.750	Peak	92.75	19.82	112.57	--	--
5328.750	Average	83.66	19.82	103.48	--	--
5397.000	Peak	36.34	20.05	56.39	74.00	-17.61
5397.000	Average	25.07	20.05	45.12	54.00	-8.88


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz_26/8	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

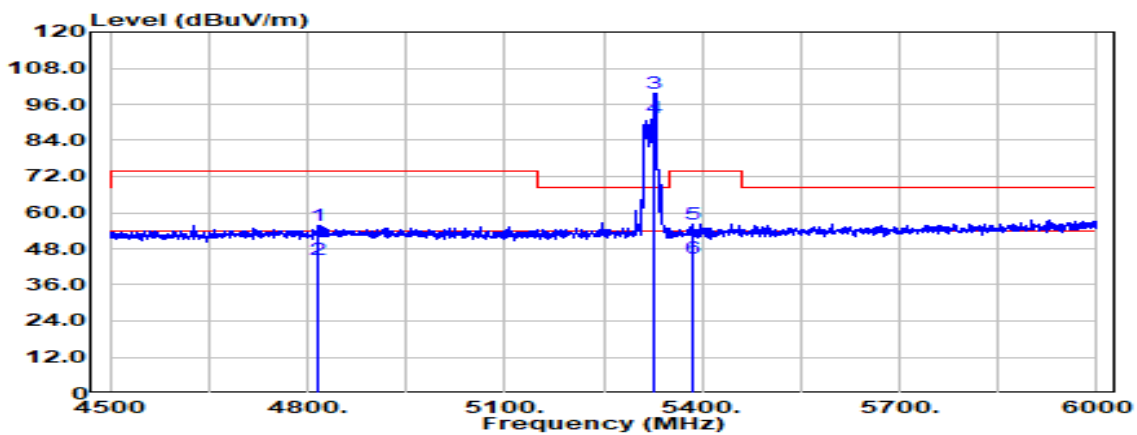


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4816.500	Peak	37.22	18.50	55.72	74.00	-18.28
4816.500	Average	25.97	18.50	44.47	54.00	-9.53
5328.000	Peak	79.97	19.82	99.79	--	--
5328.000	Average	71.60	19.82	91.42	--	--
5385.750	Peak	36.28	19.99	56.27	74.00	-17.73
5385.750	Average	24.97	19.99	44.96	54.00	-9.04

Test Mode	IEEE 802.11ax HE20 / 5320 MHz_52/40	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

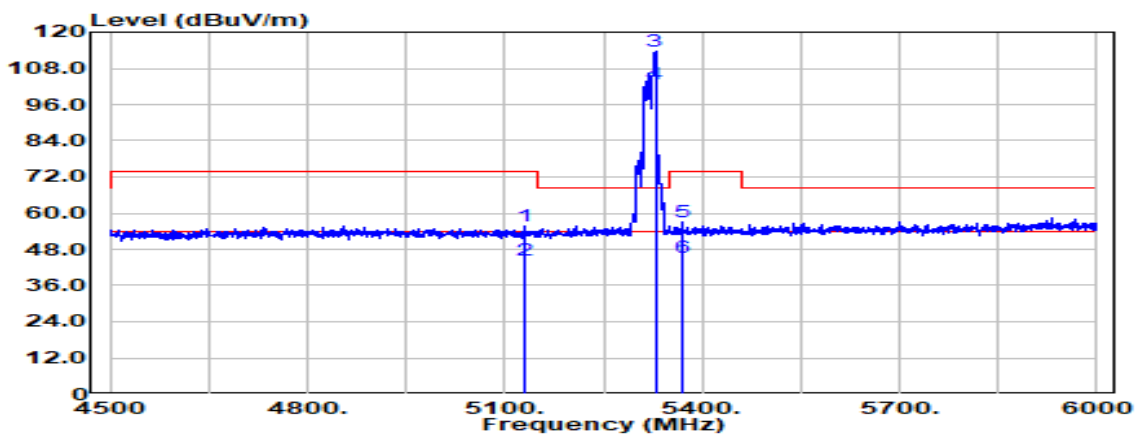


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5128.500	Peak	36.87	18.93	55.80	74.00	-18.20
5128.500	Average	25.66	18.93	44.59	54.00	-9.41
5328.750	Peak	93.67	19.82	113.49	--	--
5328.750	Average	83.07	19.82	102.88	--	--
5369.250	Peak	36.96	19.91	56.87	74.00	-17.13
5369.250	Average	25.51	19.91	45.42	54.00	-8.58

Test Mode	IEEE 802.11ax HE20 / 5320 MHz_52/40	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

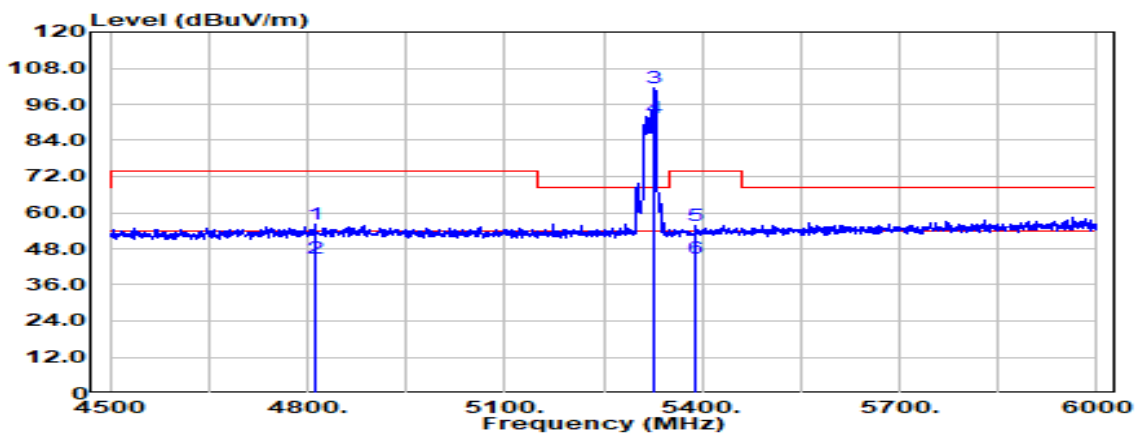


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4812.000	Peak	37.49	18.49	55.97	74.00	-18.03
4812.000	Average	26.19	18.49	44.68	54.00	-9.32
5325.750	Peak	81.56	19.82	101.37	--	--
5325.750	Average	71.60	19.82	91.42	--	--
5391.000	Peak	35.82	20.02	55.84	74.00	-18.16
5391.000	Average	24.90	20.02	44.91	54.00	-9.09

Test Mode	IEEE 802.11ax HE20 / 5320 MHz_106/54	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

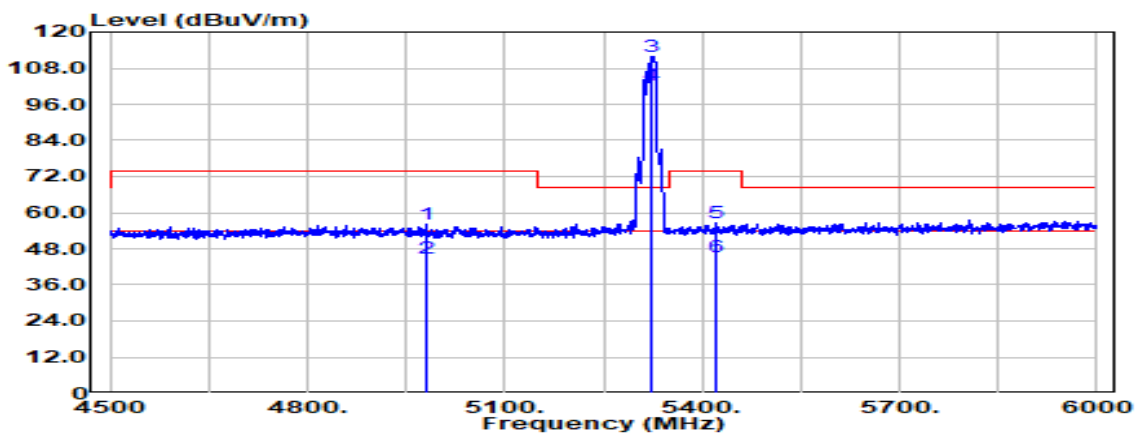

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4979.250	Peak	37.18	18.76	55.94	74.00	-18.06
4979.250	Average	25.93	18.76	44.69	54.00	-9.31
5324.250	Peak	92.02	19.81	111.84	--	--
5324.250	Average	82.48	19.81	102.29	--	--
5422.500	Peak	36.39	20.06	56.45	74.00	-17.55
5422.500	Average	25.15	20.06	45.22	54.00	-8.78


Test Mode	IEEE 802.11ax HE20 / 5320 MHz_106/54	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

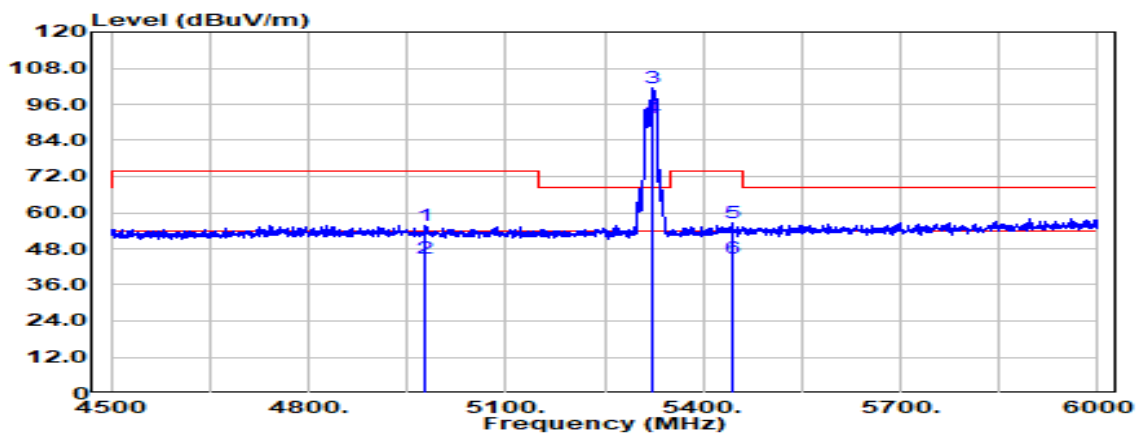

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4978.500	Peak	36.84	18.76	55.60	74.00	-18.40
4978.500	Average	25.96	18.76	44.72	54.00	-9.28
5322.750	Peak	81.49	19.81	101.30	--	--
5322.750	Average	71.69	19.81	91.51	--	--
5444.250	Peak	36.69	20.07	56.76	74.00	-17.24
5444.250	Average	24.97	20.07	45.04	54.00	-8.96

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

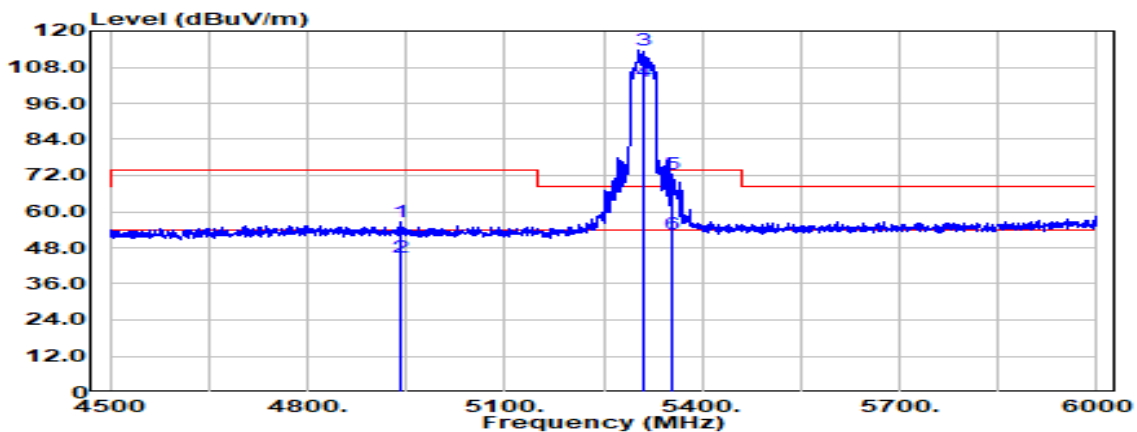

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4941.000	Peak	37.74	18.66	56.40	74.00	-17.60
4941.000	Average	26.05	18.66	44.71	54.00	-9.29
5310.000	Peak	93.89	19.81	113.70	--	--
5310.000	Average	83.37	19.81	103.18	--	--
5353.500	Peak	52.69	19.84	72.53	74.00	-1.47
5353.500	Average	32.84	19.84	52.68	54.00	-1.32

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

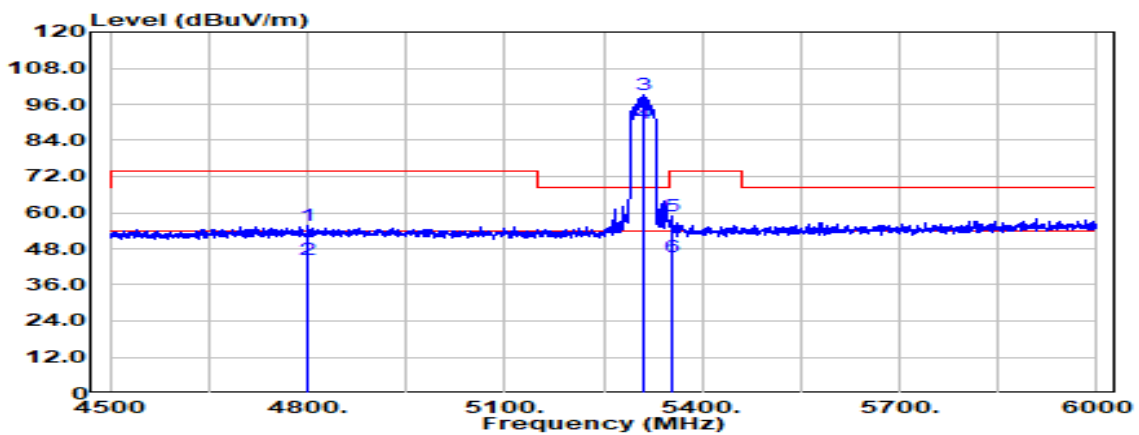

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4800.750	Peak	37.03	18.45	55.48	74.00	-18.52
4800.750	Average	26.12	18.45	44.57	54.00	-9.43
5310.000	Peak	79.42	19.81	99.23	--	--
5310.000	Average	69.79	19.81	89.60	--	--
5353.500	Peak	38.83	19.84	58.66	74.00	-15.34
5353.500	Average	25.53	19.84	45.37	54.00	-8.63


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz 242/62	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

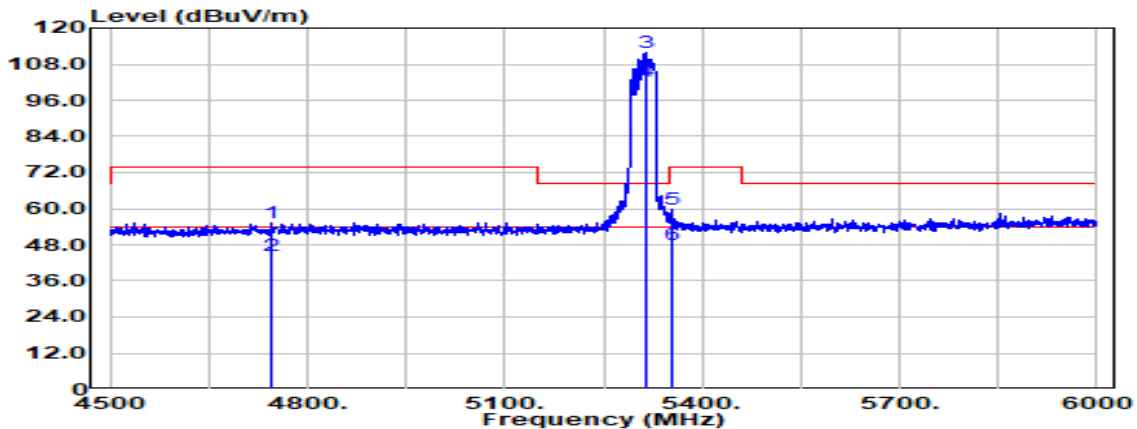

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4744.500	Peak	36.67	18.49	55.17	74.00	-18.83
4744.500	Average	25.87	18.49	44.36	54.00	-9.64
5313.750	Peak	91.93	19.81	111.75	--	--
5313.750	Average	82.49	19.81	102.31	--	--
5354.250	Peak	39.86	19.84	59.70	74.00	-14.30
5354.250	Average	28.35	19.84	48.19	54.00	-5.81


Test Mode	IEEE 802.11ax HE40 / 5310 MHz 242/62	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

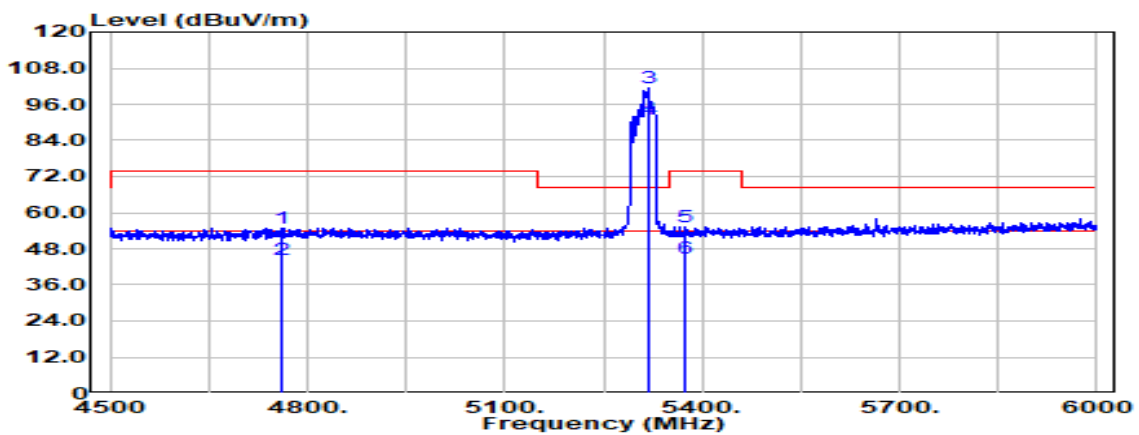

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4759.500	Peak	36.49	18.49	54.99	74.00	-19.01
4759.500	Average	26.00	18.49	44.49	54.00	-9.51
5318.250	Peak	81.67	19.81	101.49	--	--
5318.250	Average	71.12	19.81	90.93	--	--
5373.000	Peak	35.49	19.93	55.42	74.00	-18.58
5373.000	Average	24.93	19.93	44.86	54.00	-9.14


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

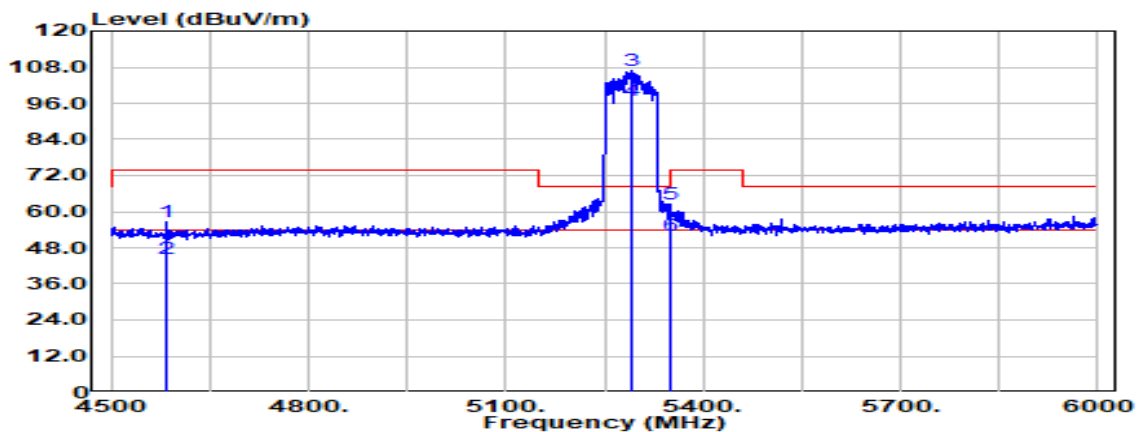

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4585.500	Peak	38.35	18.22	56.56	74.00	-17.44
4585.500	Average	26.36	18.22	44.58	54.00	-9.42
5290.000	Peak	87.21	19.78	106.99	--	--
5290.000	Average	76.92	19.78	96.70	--	--
5350.500	Peak	42.53	19.82	62.36	74.00	-11.64
5350.500	Average	32.11	19.82	51.93	54.00	-2.07


Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

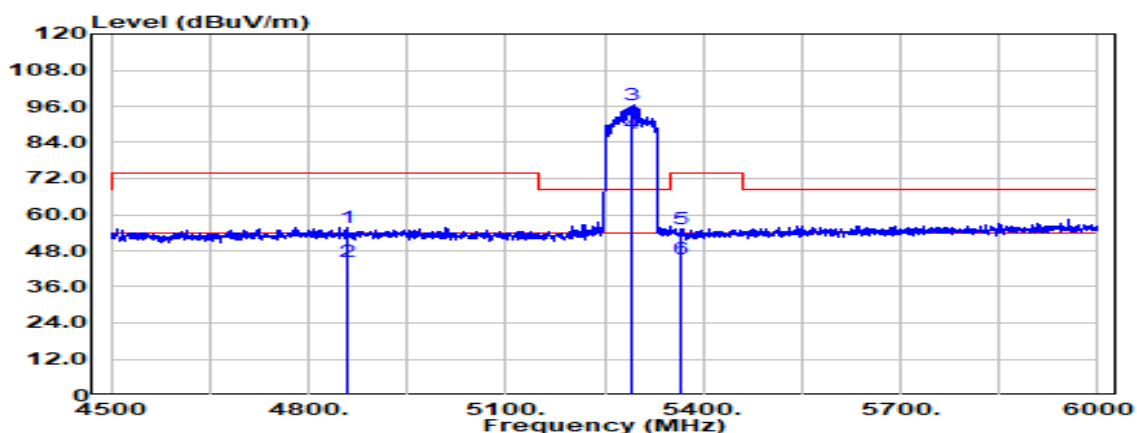

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4860.000	Peak	37.21	18.60	55.81	74.00	-18.19
4860.000	Average	25.91	18.60	44.52	54.00	-9.48
5290.000	Peak	76.73	19.78	96.51	--	--
5290.000	Average	67.29	19.78	87.07	--	--
5365.500	Peak	35.55	19.89	55.44	74.00	-18.56
5365.500	Average	25.58	19.89	45.47	54.00	-8.53


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz 484/66	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

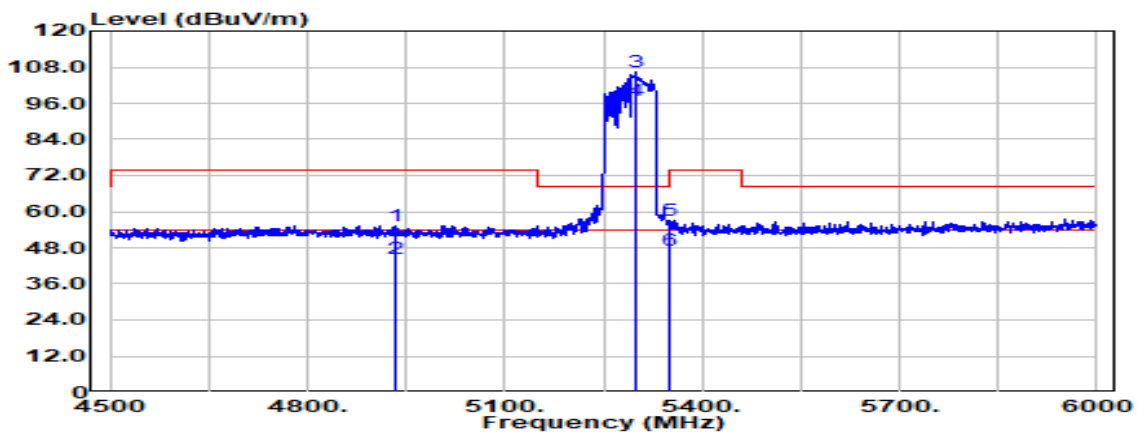

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4935.000	Peak	36.73	18.65	55.38	74.00	-18.62
4935.000	Average	25.85	18.65	44.50	54.00	-9.50
5300.250	Peak	86.63	19.81	106.44	--	--
5300.250	Average	76.91	19.81	96.72	--	--
5350.500	Peak	37.22	19.82	57.04	74.00	-16.96
5350.500	Average	27.35	19.82	47.18	54.00	-6.82

Test Mode	IEEE 802.11ax HE80 / 5290 MHz 484/66	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

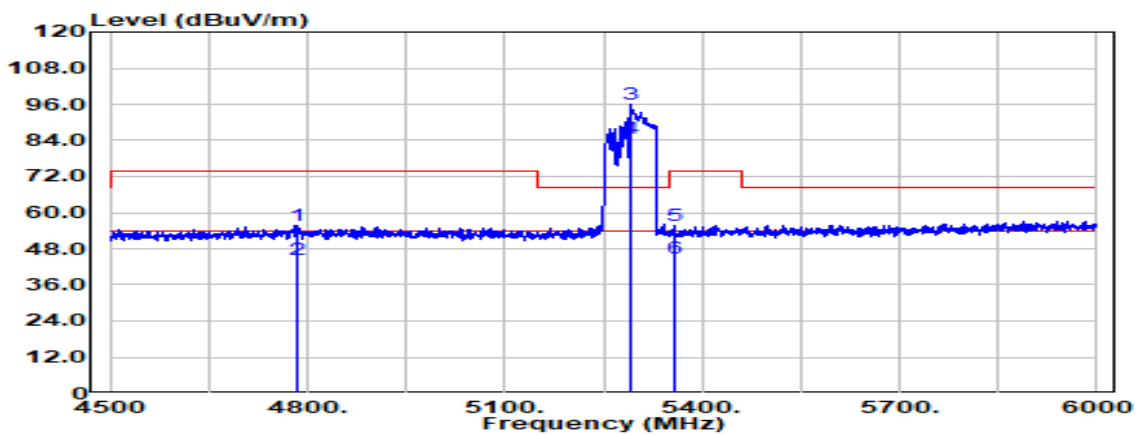


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4782.750	Peak	37.29	18.47	55.76	74.00	-18.24
4782.750	Average	26.04	18.47	44.51	54.00	-9.49
5292.000	Peak	76.07	19.79	95.85	--	--
5292.000	Average	64.96	19.79	84.75	--	--
5356.500	Peak	35.68	19.85	55.53	74.00	-18.47
5356.500	Average	24.94	19.85	44.79	54.00	-9.21

Report No.: TMWK2201000141KR

Test Data for UNII-2c


Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

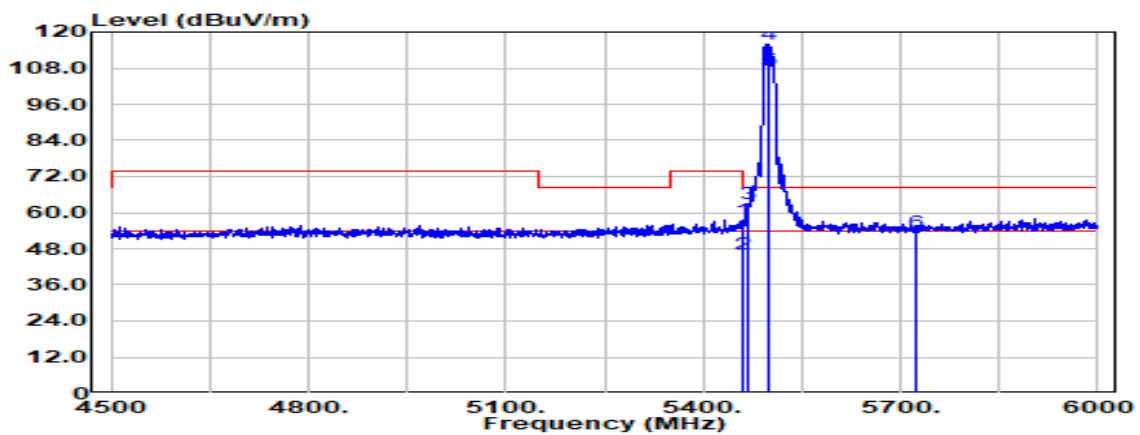

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5459.250	Peak	37.59	20.06	57.65	74.00	-16.35
5459.250	Average	26.11	20.06	46.17	54.00	-7.83
5470.000	Peak	42.93	20.05	62.98	68.20	-5.22
5500.000	Peak	95.86	20.02	115.88	--	--
5500.000	Average	87.16	20.02	107.18	--	--
5725.000	Peak	33.14	20.32	53.46	68.20	-14.74

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

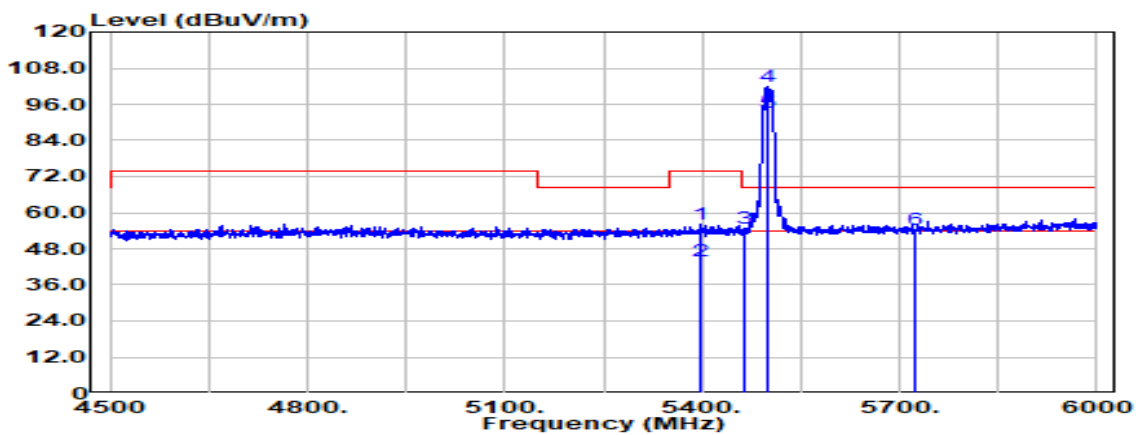

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5399.250	Peak	36.09	20.06	56.15	74.00	-17.85
5399.250	Average	23.78	20.06	43.84	54.00	-10.16
5466.000	Peak	34.96	20.05	55.02	68.20	-13.18
5500.000	Peak	82.01	20.02	102.03	--	--
5500.000	Average	73.31	20.02	93.33	--	--
5725.000	Peak	34.12	20.32	54.44	68.20	-13.76


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5440.500	Peak	35.89	20.07	55.96	74.00	-18.04
5440.500	Average	23.92	20.07	43.99	54.00	-10.01
5466.750	Peak	35.34	20.05	55.39	68.20	-12.81
5700.000	Peak	95.10	20.16	115.26	--	--
5700.000	Average	86.22	20.16	106.38	--	--
5725.000	Peak	44.45	20.32	64.77	68.20	-3.43


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

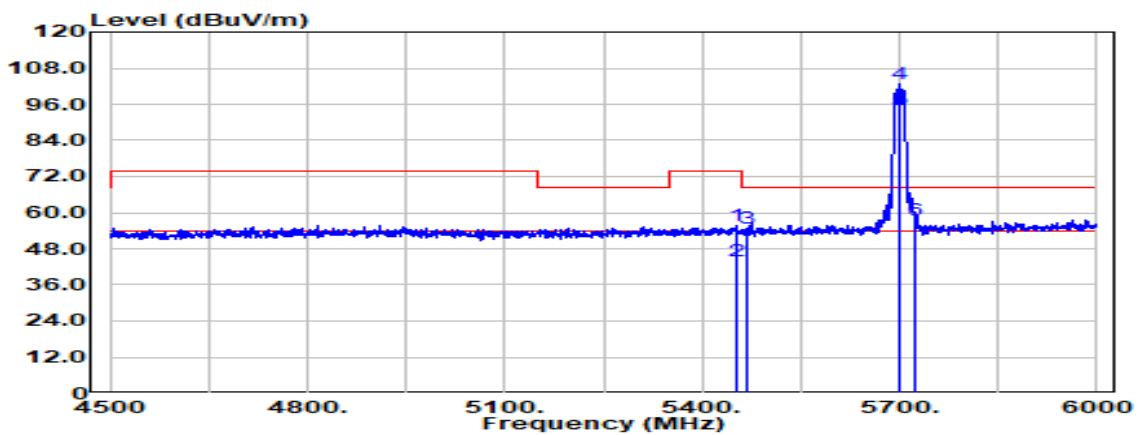

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5452.500	Peak	35.45	20.07	55.52	74.00	-18.48
5452.500	Average	23.83	20.07	43.90	54.00	-10.10
5466.750	Peak	34.87	20.05	54.92	68.20	-13.28
5700.000	Peak	82.54	20.16	102.70	--	--
5700.000	Average	73.88	20.16	94.04	--	--
5725.000	Peak	37.30	20.32	57.62	68.20	-10.58


Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

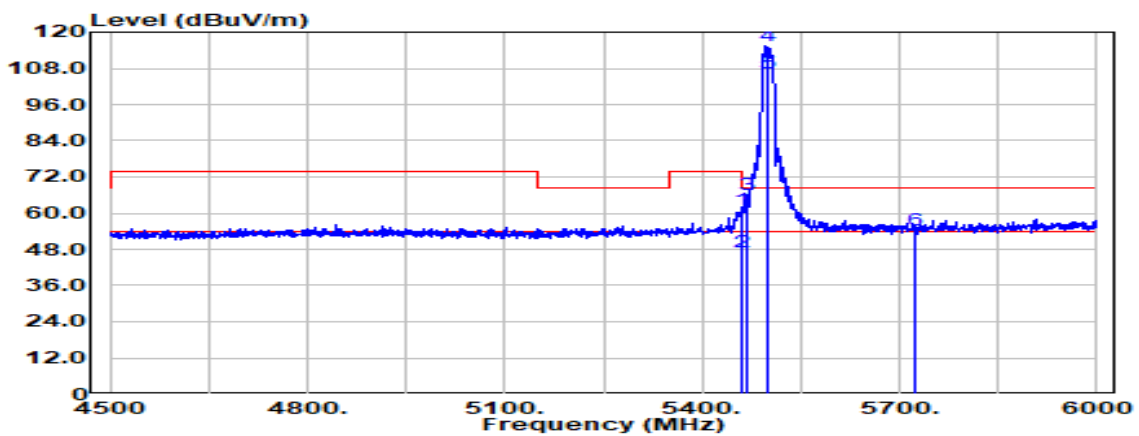

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.500	Peak	41.02	20.06	61.08	74.00	-12.92
5458.500	Average	27.11	20.06	47.17	54.00	-6.83
5467.500	Peak	45.99	20.05	66.04	68.20	-2.16
5500.000	Peak	95.31	20.02	115.33	--	--
5500.000	Average	86.24	20.02	106.26	--	--
5725.000	Peak	34.10	20.32	54.42	68.20	-13.78

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

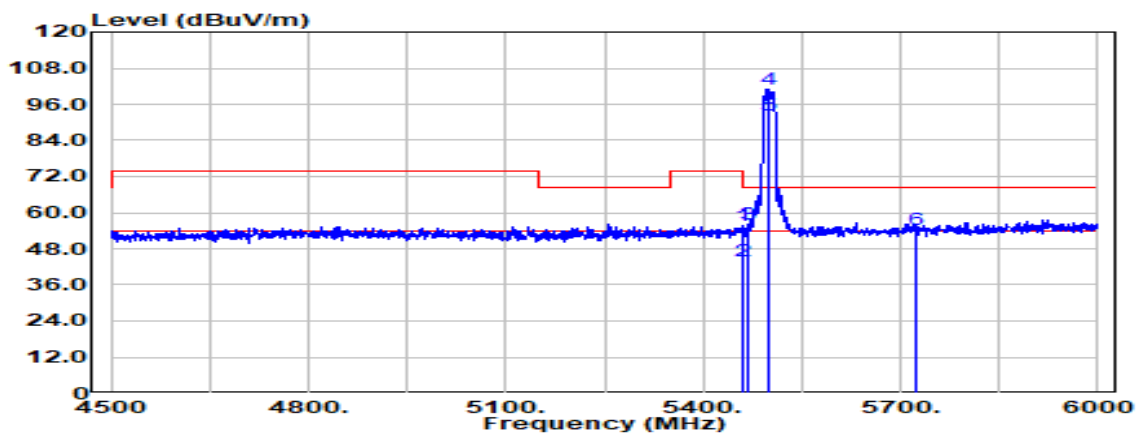

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.500	Peak	35.55	20.06	55.62	74.00	-18.38
5458.500	Average	23.79	20.06	43.85	54.00	-10.15
5467.500	Peak	36.08	20.05	56.13	68.20	-12.07
5500.000	Peak	81.12	20.02	101.14	--	--
5500.000	Average	72.31	20.02	92.33	--	--
5725.000	Peak	34.24	20.32	54.56	68.20	-13.64

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

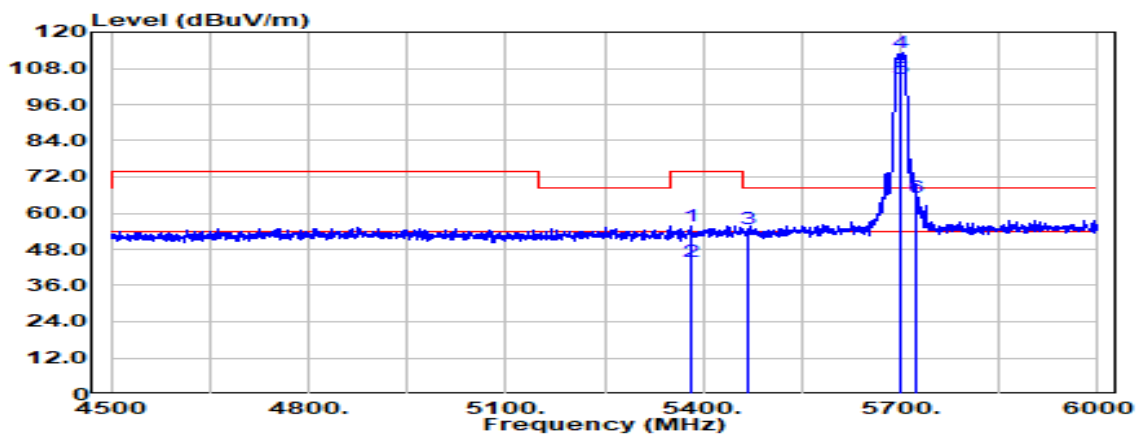

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5382.000	Peak	35.82	19.97	55.79	74.00	-18.21
5382.000	Average	23.83	19.97	43.80	54.00	-10.20
5466.750	Peak	34.69	20.05	54.74	68.20	-13.46
5700.000	Peak	92.94	20.16	113.10	--	--
5700.000	Average	84.52	20.16	104.68	--	--
5725.000	Peak	44.93	20.32	65.25	68.20	-2.95

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

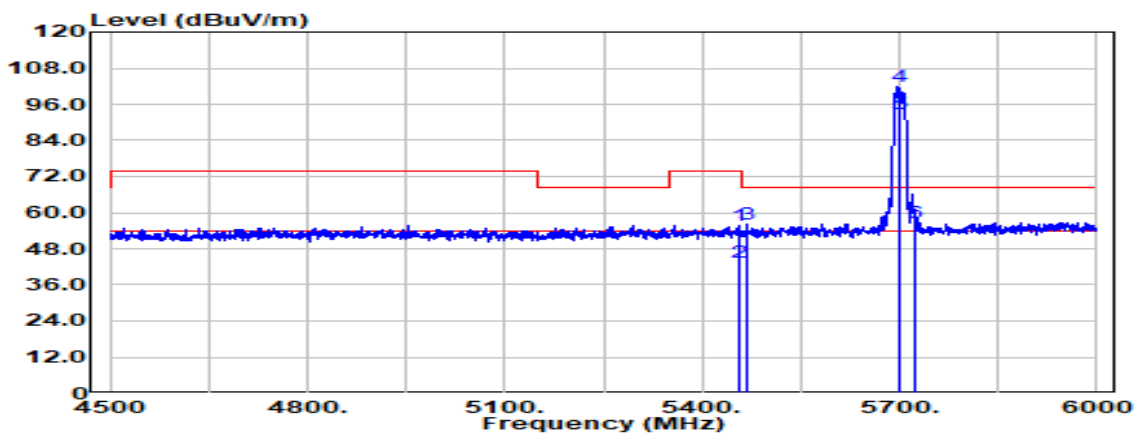

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.750	Peak	35.57	20.07	55.63	74.00	-18.37
5454.750	Average	23.55	20.07	43.62	54.00	-10.38
5467.500	Peak	36.03	20.05	56.08	68.20	-12.12
5700.000	Peak	81.52	20.16	101.68	--	--
5700.000	Average	72.85	20.16	93.01	--	--
5725.000	Peak	36.42	20.32	56.74	68.20	-11.46


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

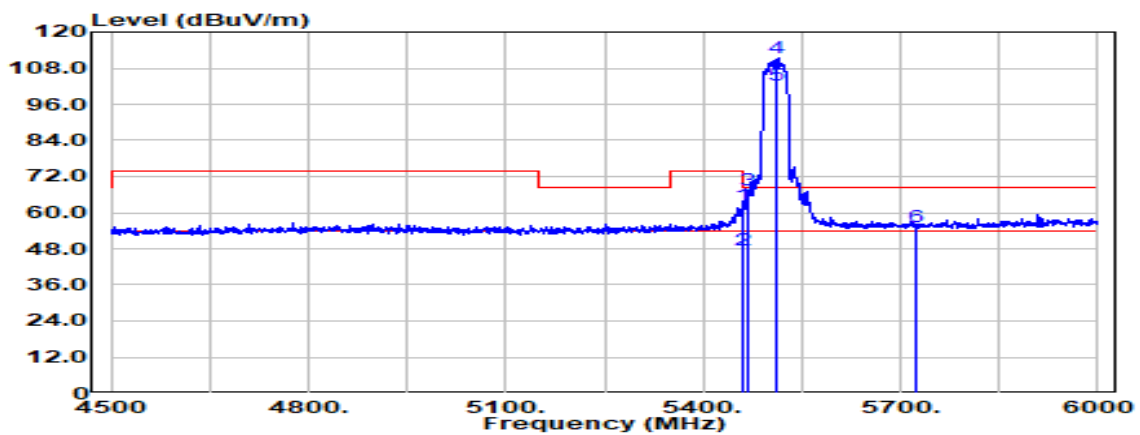

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.500	Peak	42.21	20.06	62.27	74.00	-11.73
5458.500	Average	27.39	20.06	47.45	54.00	-6.55
5469.750	Peak	47.38	20.05	67.43	68.20	-0.77
5510.000	Peak	91.52	20.02	111.55	--	--
5510.000	Average	82.25	20.02	102.27	--	--
5725.000	Peak	34.74	20.32	55.06	68.20	-13.14


Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

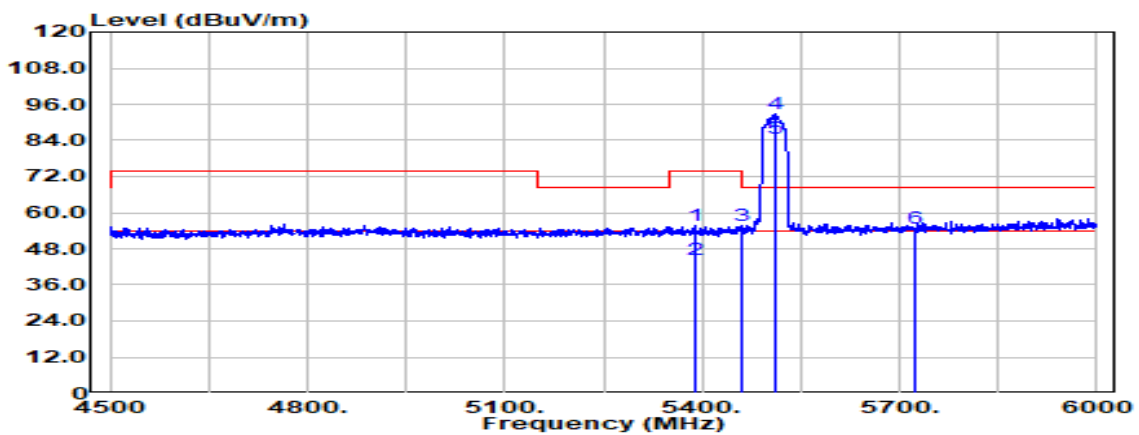

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5389.500	Peak	35.70	20.01	55.71	74.00	-18.29
5389.500	Average	24.26	20.01	44.27	54.00	-9.73
5460.750	Peak	35.74	20.06	55.80	68.20	-12.40
5510.000	Peak	72.86	20.02	92.88	--	--
5510.000	Average	64.48	20.02	84.50	--	--
5725.000	Peak	34.27	20.32	54.59	68.20	-13.61


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

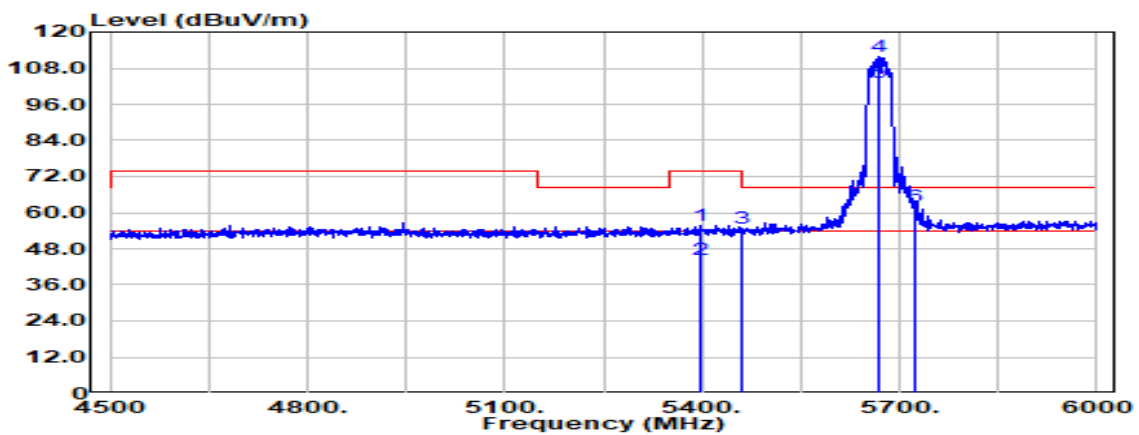


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5397.750	Peak	35.87	20.05	55.92	74.00	-18.08
5397.750	Average	24.47	20.05	44.52	54.00	-9.48
5460.750	Peak	34.95	20.06	55.01	68.20	-13.19
5670.000	Peak	91.83	20.15	111.98	--	--
5670.000	Average	83.25	20.15	103.41	--	--
5725.000	Peak	41.88	20.32	62.20	68.20	-6.00

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	20.0(°C) / 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

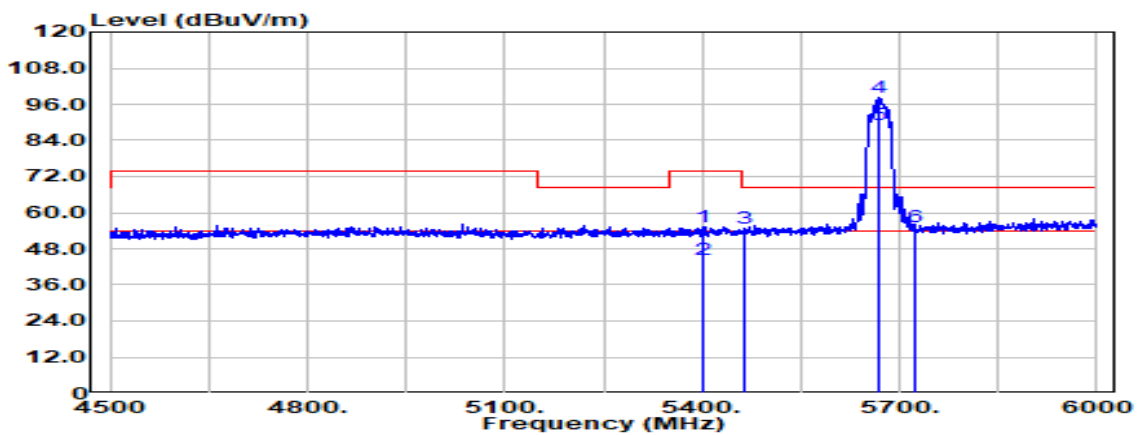


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5402.250	Peak	35.39	20.06	55.45	74.00	-18.55
5402.250	Average	24.34	20.06	44.40	54.00	-9.60
5466.000	Peak	34.63	20.05	54.68	68.20	-13.52
5670.000	Peak	78.10	20.15	98.26	--	--
5670.000	Average	69.18	20.15	89.33	--	--
5725.000	Peak	34.85	20.32	55.17	68.20	-13.03

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.0(°C) / 62%RH
Test Item	Band Edge	Test Date	March 31, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

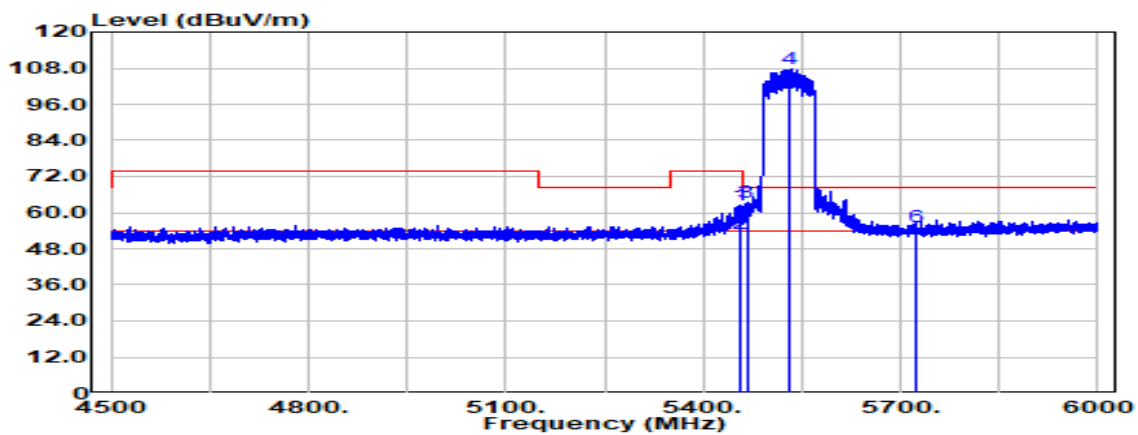

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.938	Peak	42.38	20.07	62.44	74.00	-11.56
5454.938	Average	33.13	20.07	53.20	54.00	-0.80
5466.188	Peak	43.45	20.05	63.51	68.20	-4.69
5530.000	Peak	87.89	20.03	107.91	--	--
5530.000	Average	79.52	20.03	99.54	--	--
5725.000	Peak	34.84	20.32	55.16	68.20	-13.04


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

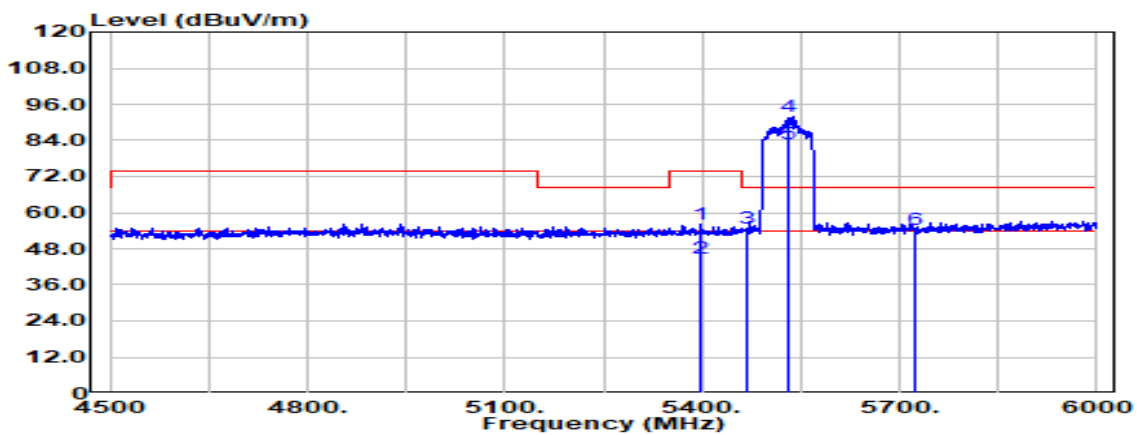

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5399.250	Peak	35.89	20.06	55.95	74.00	-18.05
5399.250	Average	24.76	20.06	44.81	54.00	-9.19
5469.750	Peak	34.60	20.05	54.65	68.20	-13.55
5530.000	Peak	71.69	20.03	91.72	--	--
5530.000	Average	62.76	20.03	82.78	--	--
5725.000	Peak	34.09	20.32	54.41	68.20	-13.79


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	20.0(°C) / 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

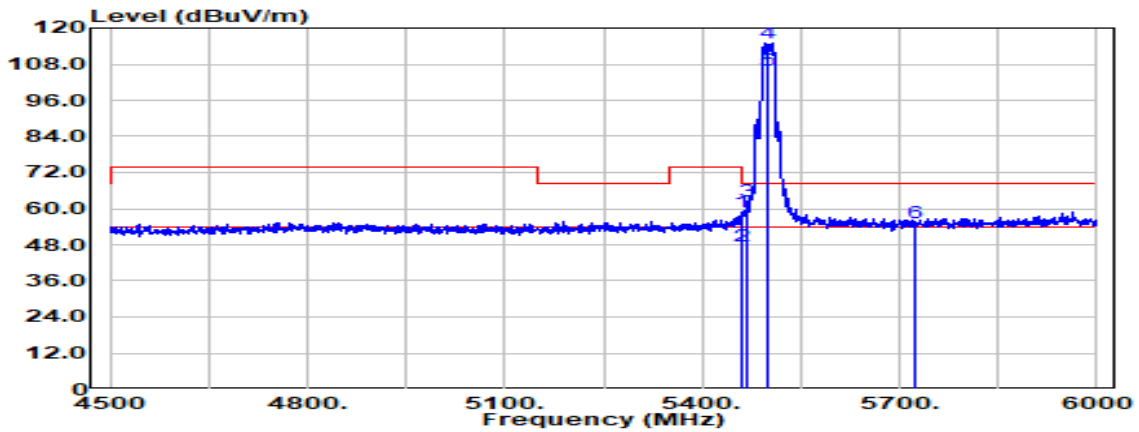


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5459.250	Peak	38.95	20.06	59.01	74.00	-14.99
5459.250	Average	27.44	20.06	47.50	54.00	-6.50
5469.000	Peak	42.27	20.05	62.32	68.20	-5.88
5500.000	Peak	94.97	20.02	114.99	--	--
5500.000	Average	85.82	20.02	105.84	--	--
5725.000	Peak	35.12	20.32	55.44	68.20	-12.76

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

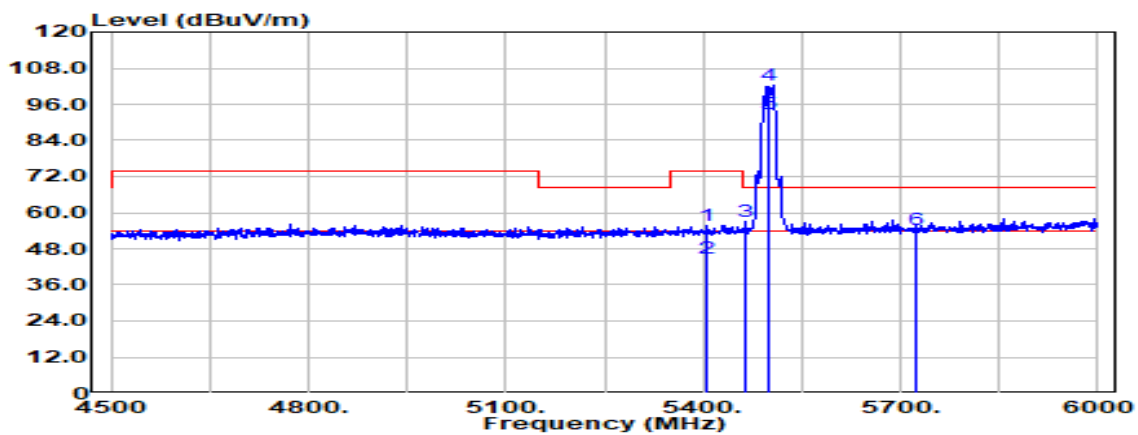


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5406.000	Peak	35.84	20.06	55.90	74.00	-18.10
5406.000	Average	24.76	20.06	44.82	54.00	-9.18
5466.000	Peak	37.11	20.05	57.17	68.20	-11.03
5500.000	Peak	82.49	20.02	102.51	--	--
5500.000	Average	72.76	20.02	92.78	--	--
5725.000	Peak	34.23	20.32	54.55	68.20	-13.65

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_26/0	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

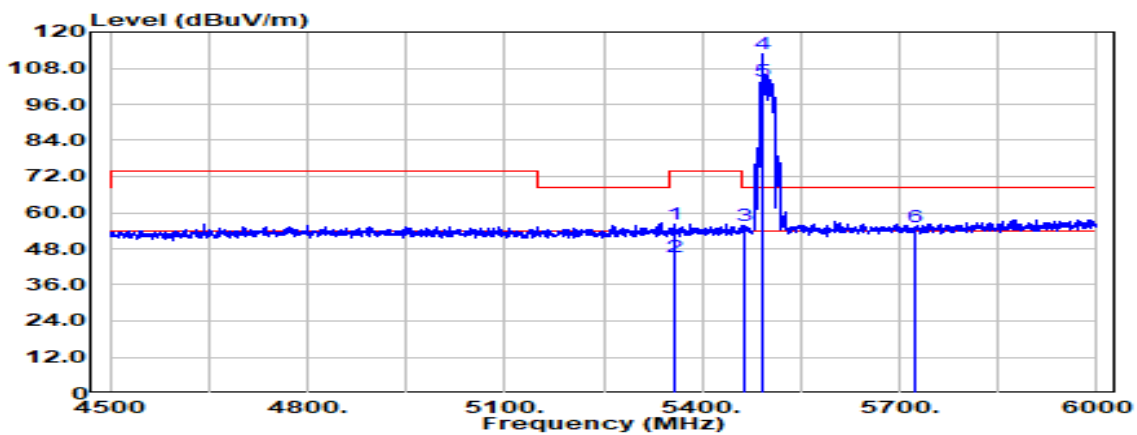


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5356.500	Peak	36.28	19.85	56.13	74.00	-17.87
5356.500	Average	25.38	19.85	45.23	54.00	-8.77
5465.250	Peak	35.67	20.05	55.73	68.20	-12.47
5491.500	Peak	92.54	20.03	112.57	--	--
5491.500	Average	83.45	20.03	103.48	--	--
5725.000	Peak	34.91	20.32	55.23	68.20	-12.97

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_26/0	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

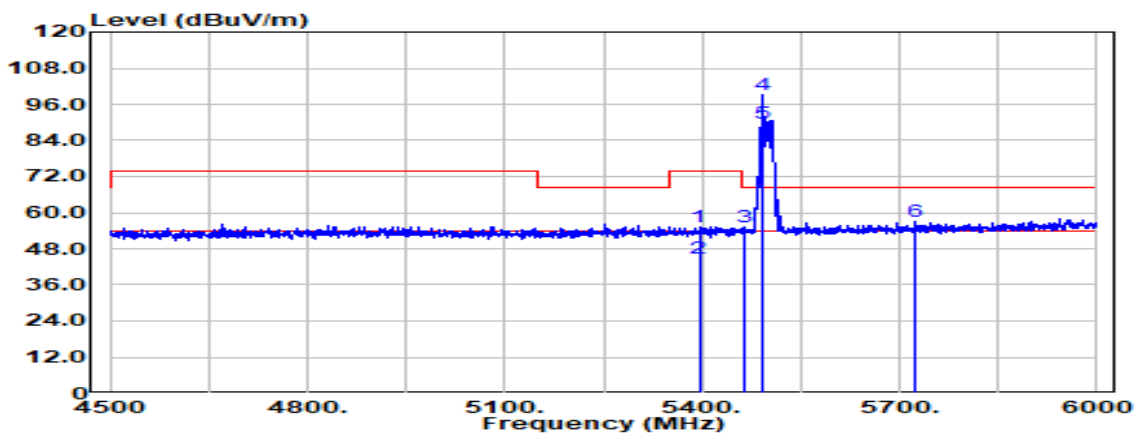

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5395.500	Peak	35.27	20.04	55.31	74.00	-18.69
5395.500	Average	24.70	20.04	44.74	54.00	-9.26
5463.000	Peak	35.16	20.06	55.21	68.20	-12.99
5491.500	Peak	79.24	20.03	99.27	--	--
5491.500	Average	69.84	20.03	89.87	--	--
5725.000	Peak	36.74	20.32	57.06	68.20	-11.14


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_52/37	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

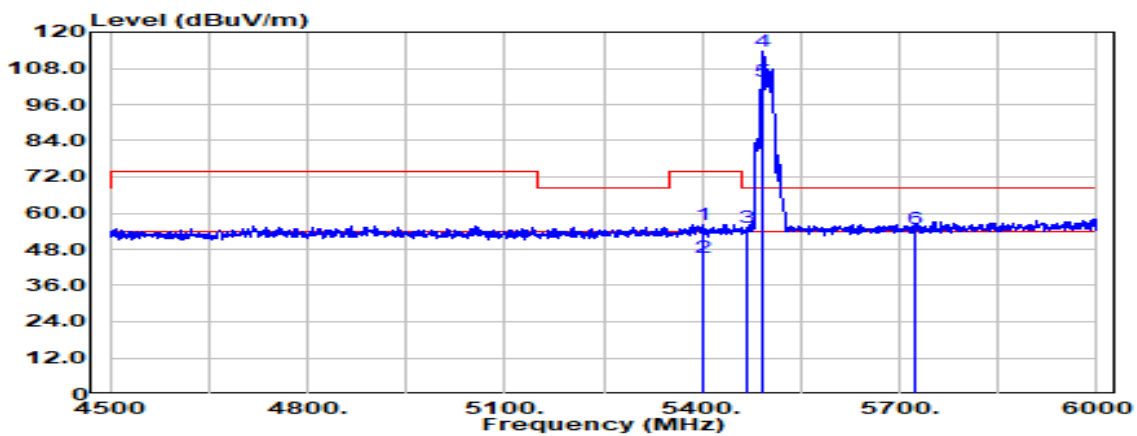

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5403.000	Peak	36.29	20.06	56.35	74.00	-17.65
5403.000	Average	25.25	20.06	45.31	54.00	-8.69
5466.750	Peak	35.28	20.05	55.33	68.20	-12.87
5491.500	Peak	93.60	20.03	113.63	--	--
5491.500	Average	83.57	20.03	103.60	--	--
5725.000	Peak	34.25	20.32	54.57	68.20	-13.63

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_52/37	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

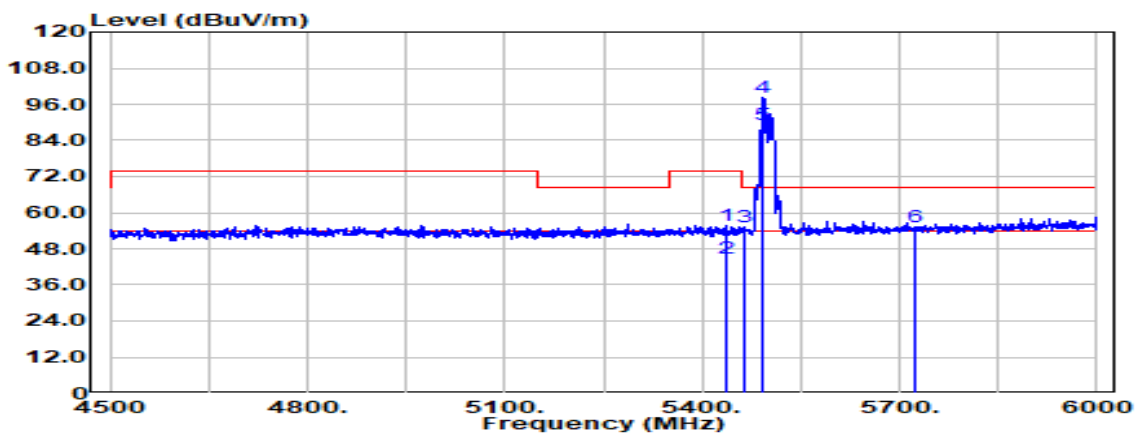

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5436.750	Peak	35.59	20.07	55.66	74.00	-18.34
5436.750	Average	24.75	20.07	44.81	54.00	-9.19
5465.250	Peak	35.09	20.05	55.14	68.20	-13.06
5491.500	Peak	78.39	20.03	98.42	--	--
5491.500	Average	69.02	20.03	89.04	--	--
5725.000	Peak	34.75	20.32	55.07	68.20	-13.13


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz_106/53	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

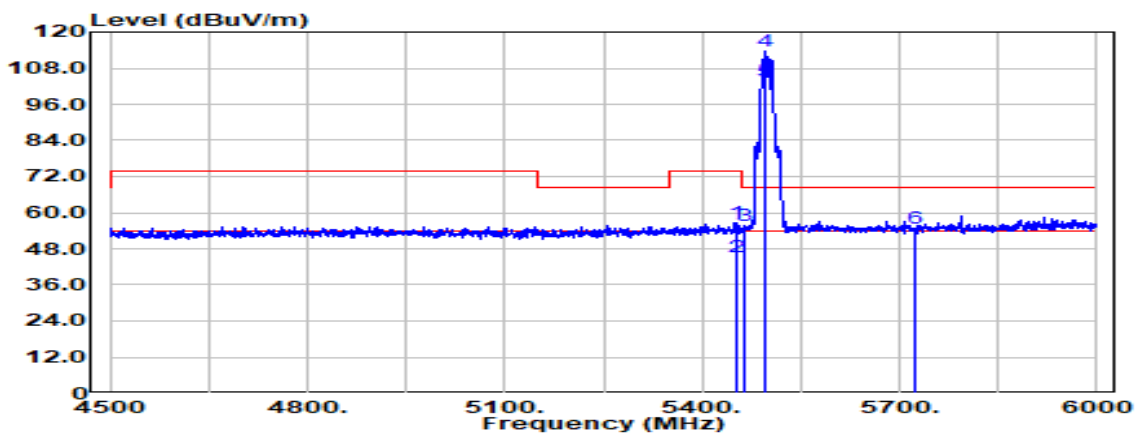

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.750	Peak	36.66	20.07	56.73	74.00	-17.27
5451.750	Average	25.25	20.07	45.32	54.00	-8.68
5463.750	Peak	35.56	20.06	55.62	68.20	-12.58
5496.000	Peak	93.68	20.02	113.71	--	--
5496.000	Average	83.65	20.02	103.67	--	--
5725.000	Peak	34.58	20.32	54.90	68.20	-13.30


Test Mode	IEEE 802.11ax HE20 / 5500 MHz_106/53	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

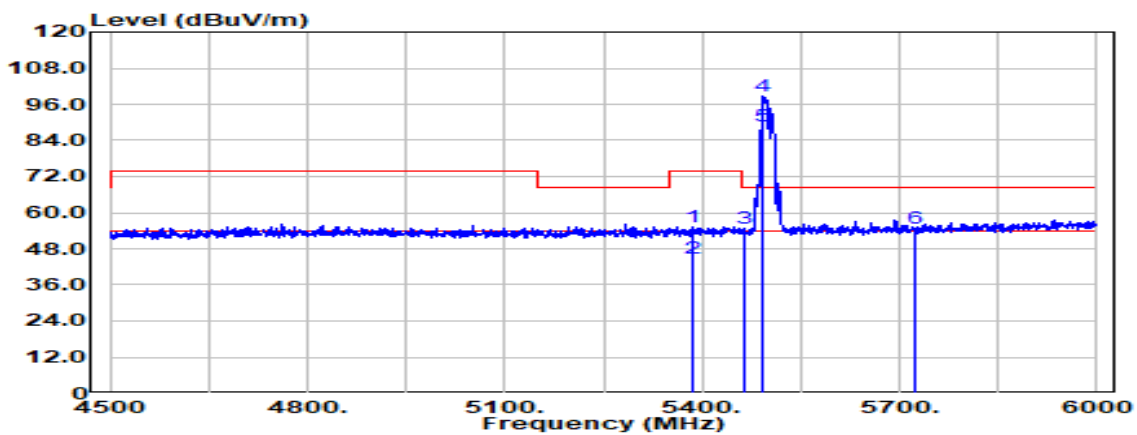

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5387.250	Peak	35.37	20.00	55.37	74.00	-18.63
5387.250	Average	24.84	20.00	44.84	54.00	-9.16
5465.250	Peak	34.83	20.05	54.89	68.20	-13.31
5492.250	Peak	78.70	20.03	98.73	--	--
5492.250	Average	68.56	20.03	88.59	--	--
5725.000	Peak	34.36	20.32	54.68	68.20	-13.52


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	20.0(°C) / 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

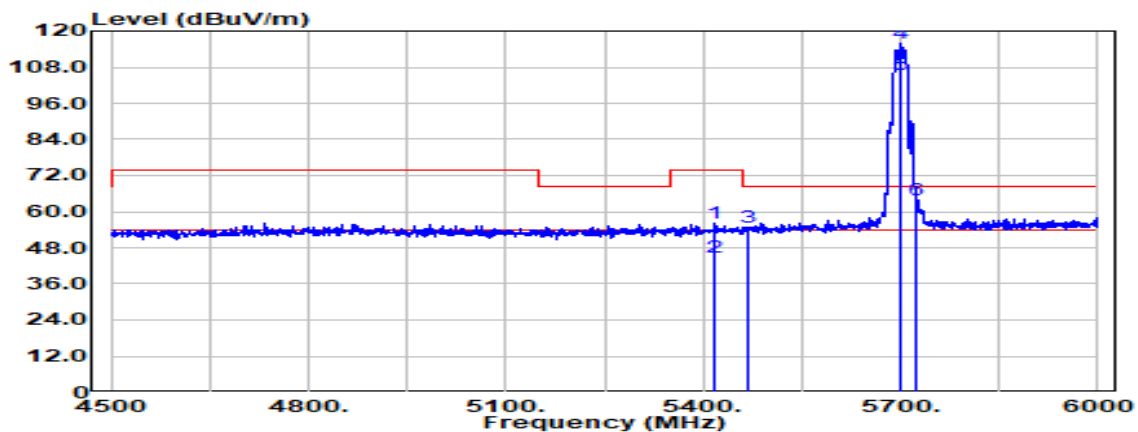


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5418.000	Peak	36.12	20.06	56.18	74.00	-17.82
5418.000	Average	24.79	20.06	44.86	54.00	-9.14
5469.000	Peak	34.96	20.05	55.01	68.20	-13.19
5700.000	Peak	95.67	20.16	115.83	--	--
5700.000	Average	85.53	20.16	105.69	--	--
5725.000	Peak	43.36	20.32	63.68	68.20	-4.52

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

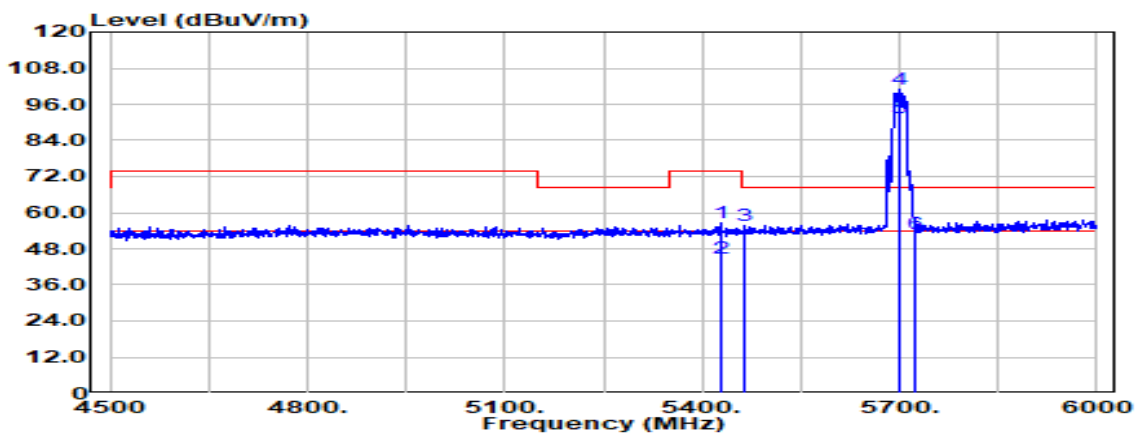

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5427.000	Peak	36.49	20.07	56.55	74.00	-17.45
5427.000	Average	24.85	20.07	44.92	54.00	-9.08
5463.750	Peak	35.65	20.06	55.71	68.20	-12.49
5700.000	Peak	80.96	20.16	101.12	--	--
5700.000	Average	71.38	20.16	91.54	--	--
5725.000	Peak	32.84	20.32	53.16	68.20	-15.04


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_26/8	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

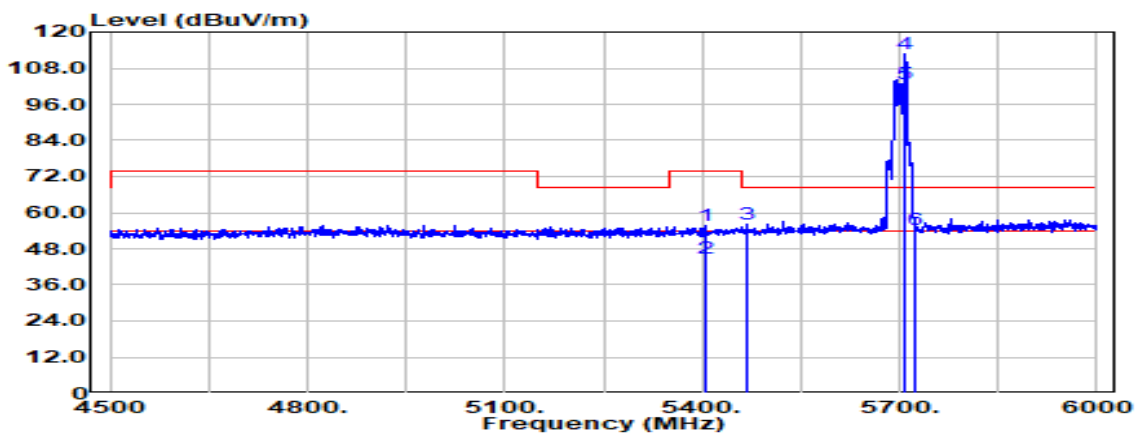

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5403.750	Peak	35.50	20.06	55.56	74.00	-18.44
5403.750	Average	24.86	20.06	44.93	54.00	-9.07
5466.750	Peak	35.91	20.05	55.97	68.20	-12.23
5708.250	Peak	92.41	20.21	112.62	--	--
5708.250	Average	82.60	20.21	102.82	--	--
5725.000	Peak	33.99	20.32	54.31	68.20	-13.89

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_26/8	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

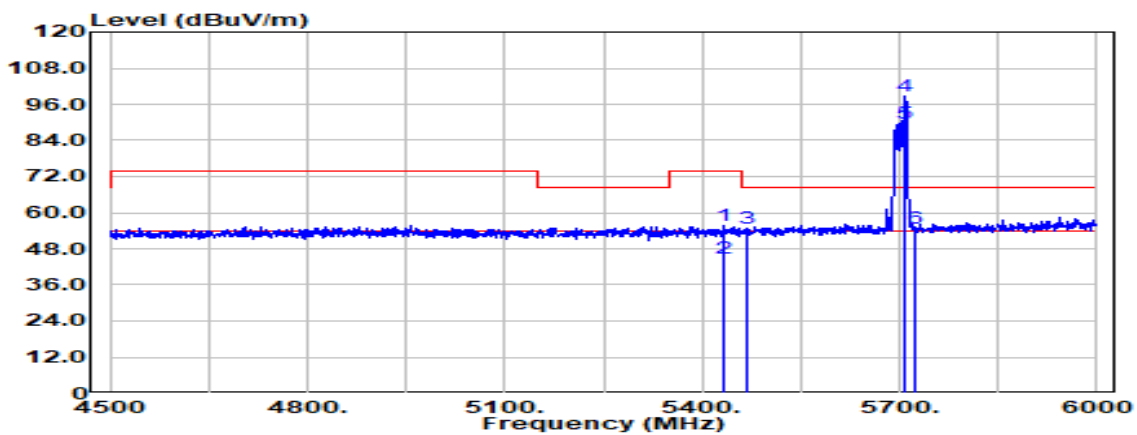

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5432.250	Peak	35.51	20.07	55.58	74.00	-18.42
5432.250	Average	24.73	20.07	44.80	54.00	-9.20
5467.500	Peak	34.95	20.05	55.00	68.20	-13.20
5709.000	Peak	78.31	20.22	98.53	--	--
5709.000	Average	69.30	20.22	89.51	--	--
5725.000	Peak	34.37	20.32	54.69	68.20	-13.51


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz_52/40	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

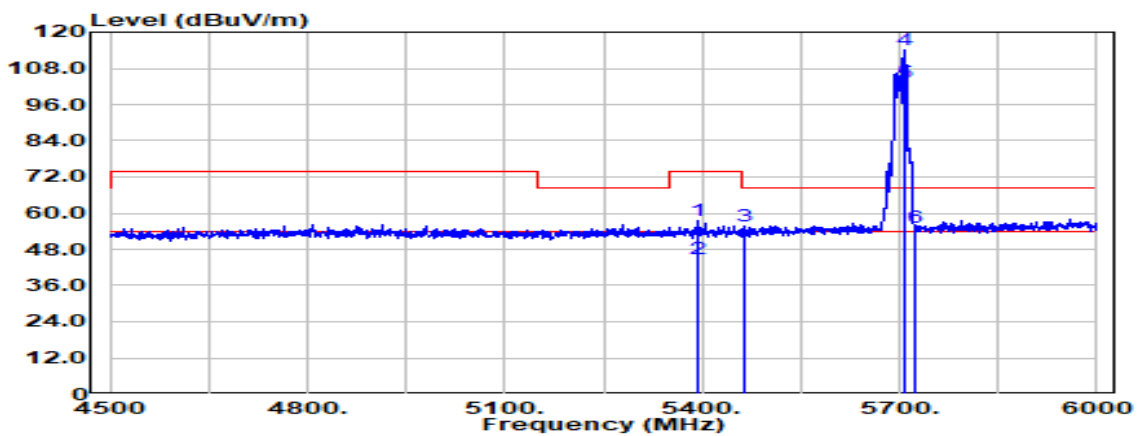


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5394.000	Peak	37.42	20.03	57.45	74.00	-16.55
5394.000	Average	24.99	20.03	45.02	54.00	-8.98
5466.000	Peak	35.54	20.05	55.60	68.20	-12.60
5706.750	Peak	93.74	20.20	113.95	--	--
5706.750	Average	83.18	20.20	103.39	--	--
5725.000	Peak	34.71	20.32	55.03	68.20	-13.17

Test Mode	IEEE 802.11ax HE20 / 5700 MHz_52/40	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

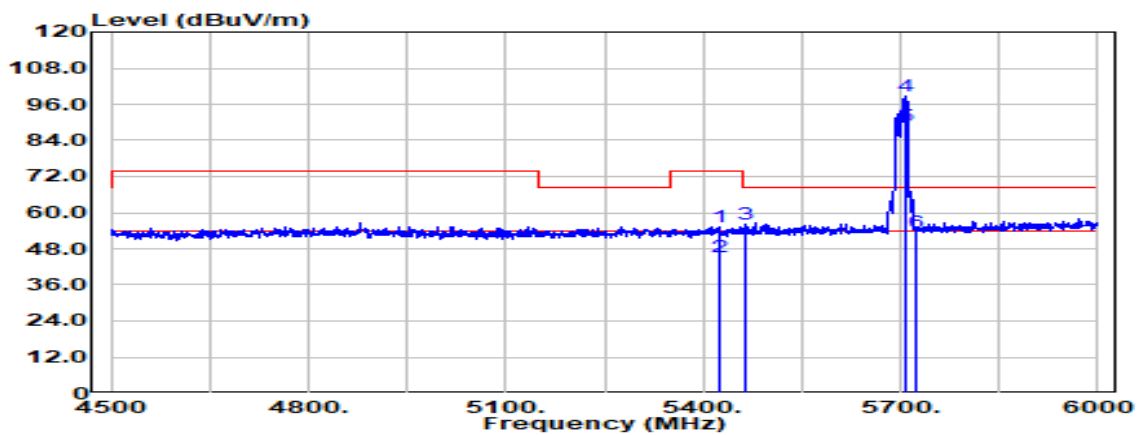

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5425.500	Peak	35.33	20.07	55.40	74.00	-18.60
5425.500	Average	25.05	20.07	45.12	54.00	-8.88
5464.500	Peak	35.90	20.06	55.95	68.20	-12.25
5706.750	Peak	78.64	20.20	98.84	--	--
5706.750	Average	68.66	20.20	88.86	--	--
5725.000	Peak	33.31	20.32	53.63	68.20	-14.57


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_106/54	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

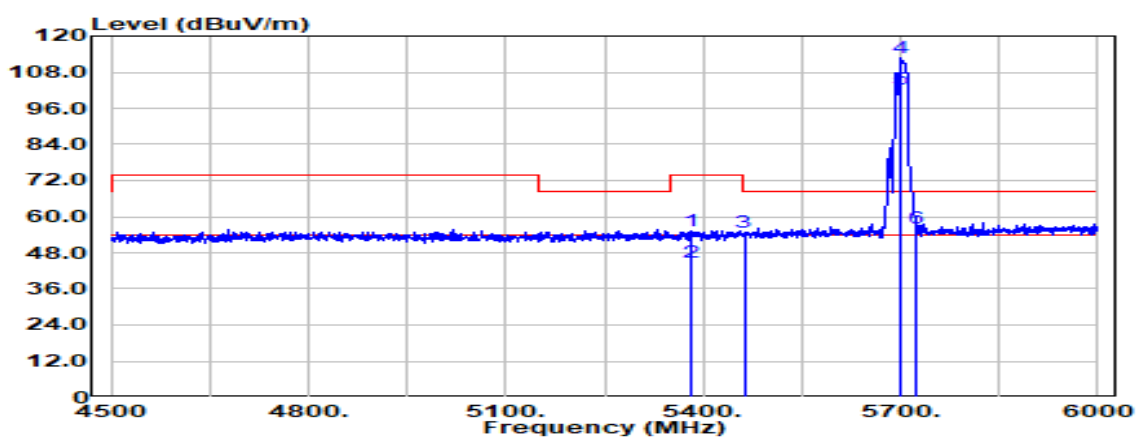

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5382.000	Peak	35.46	19.97	55.44	74.00	-18.56
5382.000	Average	24.99	19.97	44.97	54.00	-9.03
5462.250	Peak	34.88	20.06	54.94	68.20	-13.26
5701.500	Peak	92.45	20.17	112.62	--	--
5701.500	Average	82.22	20.17	102.39	--	--
5725.000	Peak	35.70	20.32	56.02	68.20	-12.18

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz_106/54	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

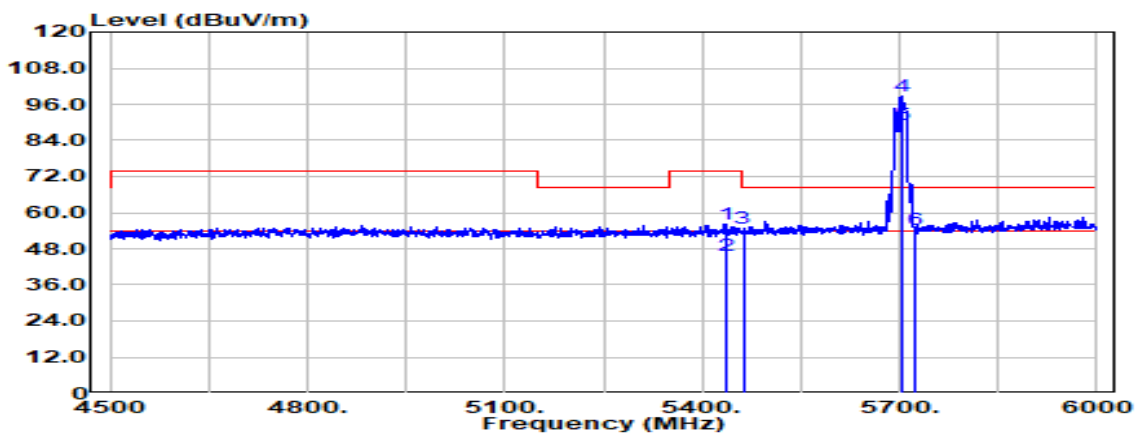

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5435.250	Peak	36.11	20.07	56.18	74.00	-17.82
5435.250	Average	25.55	20.07	45.62	54.00	-8.38
5462.250	Peak	34.60	20.06	54.66	68.20	-13.54
5702.250	Peak	78.71	20.17	98.89	--	--
5702.250	Average	68.96	20.17	89.13	--	--
5725.000	Peak	33.88	20.32	54.20	68.20	-14.00

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

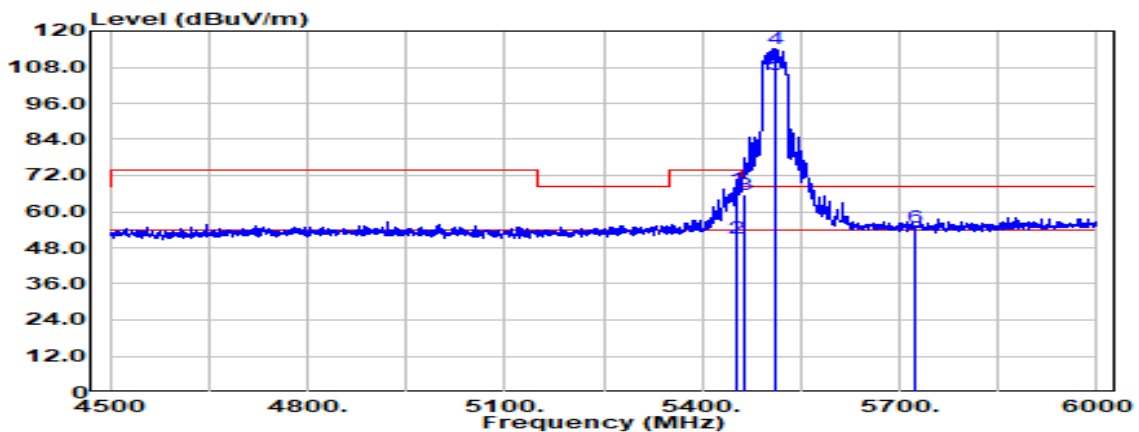

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5454.000	Peak	47.43	20.07	67.50	74.00	-6.50
5454.000	Average	31.30	20.07	51.37	54.00	-2.63
5465.250	Peak	45.64	20.05	65.69	68.20	-2.51
5510.000	Peak	94.04	20.02	114.06	--	--
5510.000	Average	85.50	20.02	105.52	--	--
5725.000	Peak	34.64	20.32	54.96	68.20	-13.24

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

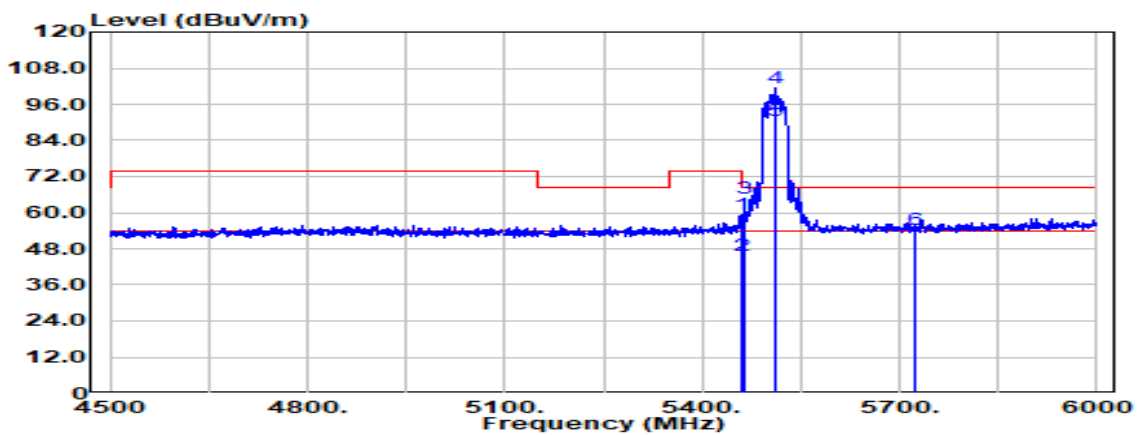

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.000	Peak	39.10	20.06	59.16	68.20	-9.04
5460.000	Average	25.77	20.06	45.83	54.00	-8.17
5464.500	Peak	44.85	20.06	64.91	68.20	-3.29
5510.000	Peak	81.29	20.02	101.31	--	--
5510.000	Average	70.37	20.02	90.39	--	--
5725.000	Peak	33.80	20.32	54.12	68.20	-14.08

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz_242/61	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

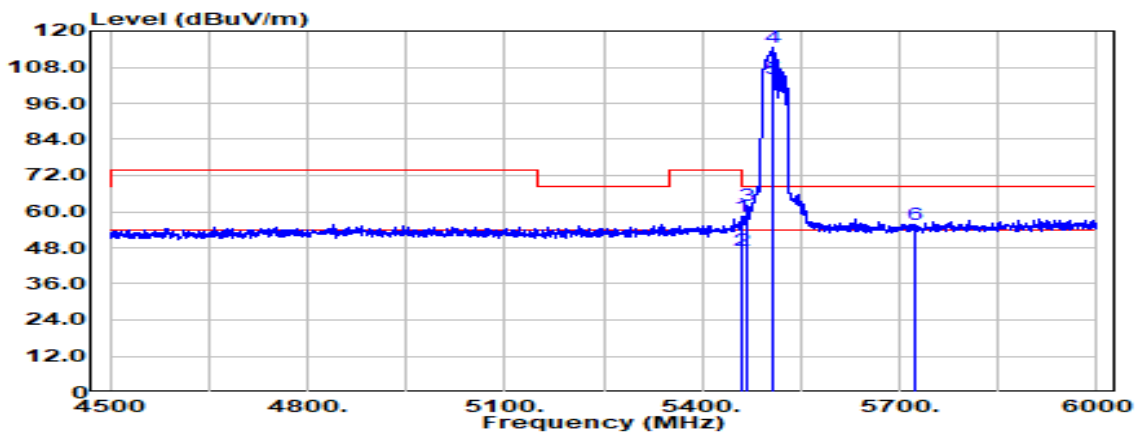

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5459.250	Peak	38.24	20.06	58.30	74.00	-15.70
5459.250	Average	27.26	20.06	47.32	54.00	-6.68
5468.250	Peak	42.16	20.05	62.21	68.20	-5.99
5505.750	Peak	94.71	20.02	114.73	--	--
5505.750	Average	84.10	20.02	104.12	--	--
5725.000	Peak	35.15	20.32	55.47	68.20	-12.73

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz 242/61	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

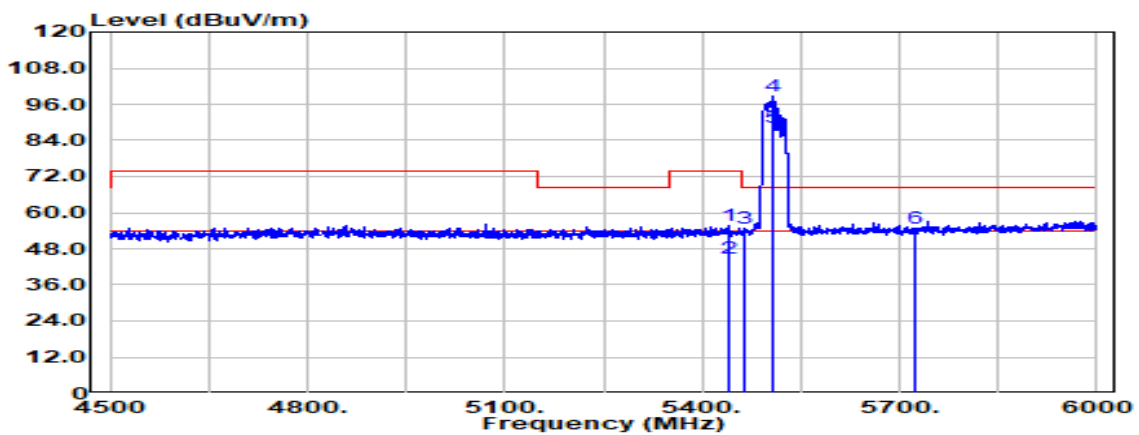

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5441.250	Peak	35.55	20.07	55.61	74.00	-18.39
5441.250	Average	24.74	20.07	44.81	54.00	-9.19
5465.250	Peak	34.74	20.05	54.80	68.20	-13.40
5508.000	Peak	78.59	20.02	98.62	--	--
5508.000	Average	68.47	20.02	88.49	--	--
5725.000	Peak	34.40	20.32	54.72	68.20	-13.48

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

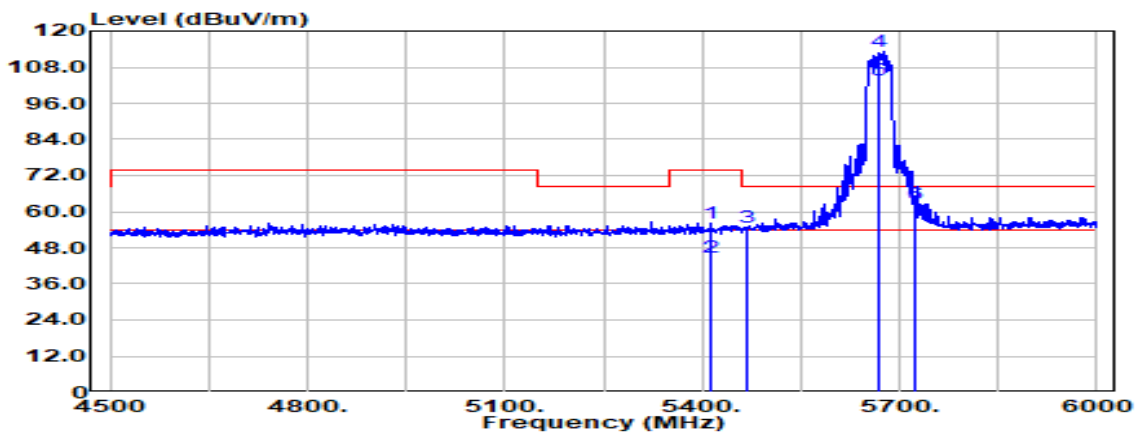

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5412.000	Peak	36.29	20.06	56.35	74.00	-17.65
5412.000	Average	24.95	20.06	45.01	54.00	-8.99
5467.500	Peak	34.87	20.05	54.92	68.20	-13.28
5670.000	Peak	93.23	20.15	113.38	--	--
5670.000	Average	83.75	20.15	103.90	--	--
5725.000	Peak	42.20	20.32	62.52	68.20	-5.68

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	19.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

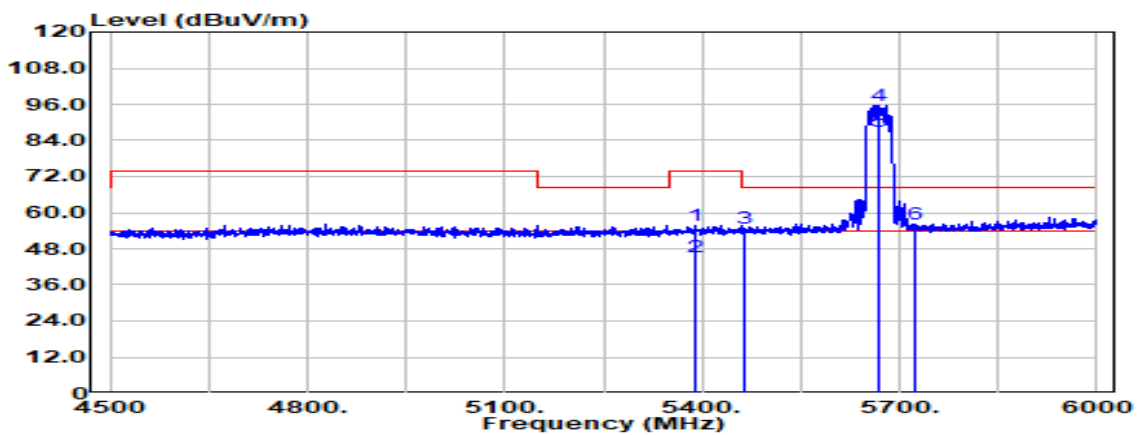

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5391.000	Peak	35.81	20.02	55.83	74.00	-18.17
5391.000	Average	25.44	20.02	45.46	54.00	-8.54
5463.750	Peak	34.67	20.06	54.73	68.20	-13.47
5670.000	Peak	75.50	20.15	95.65	--	--
5670.000	Average	67.00	20.15	87.16	--	--
5725.000	Peak	35.97	20.32	56.29	68.20	-11.91

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_242/62	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

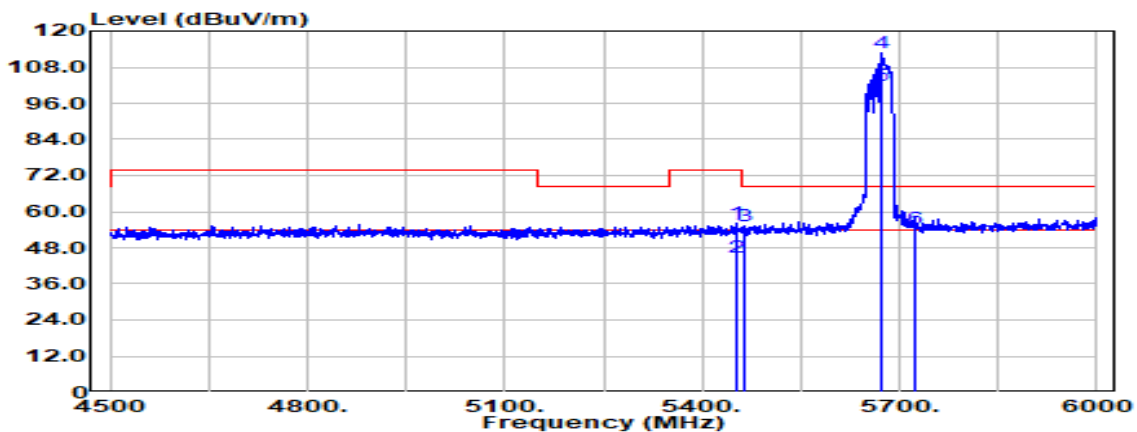

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5454.000	Peak	36.12	20.07	56.19	74.00	-17.81
5454.000	Average	24.95	20.07	45.01	54.00	-8.99
5464.500	Peak	35.00	20.06	55.06	68.20	-13.14
5673.000	Peak	92.58	20.15	112.74	--	--
5673.000	Average	81.58	20.15	101.73	--	--
5725.000	Peak	34.06	20.32	54.38	68.20	-13.82

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz 242/62	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

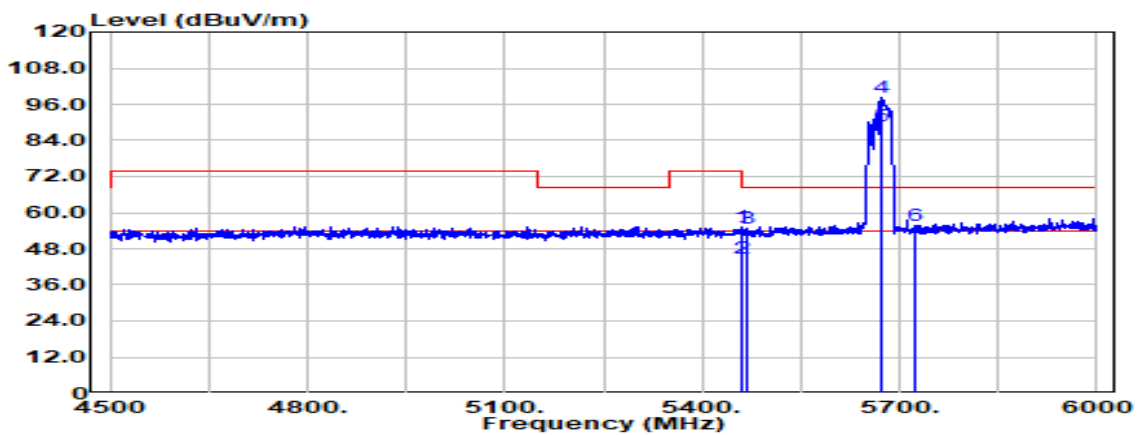

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.000	Peak	34.99	20.06	55.05	68.20	-13.15
5460.000	Average	24.82	20.06	44.88	54.00	-9.12
5467.500	Peak	34.65	20.05	54.70	68.20	-13.50
5671.500	Peak	78.20	20.15	98.36	--	--
5671.500	Average	68.58	20.15	88.73	--	--
5725.000	Peak	35.38	20.32	55.70	68.20	-12.50

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz_	Temp/Hum	19.6(°C) / 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

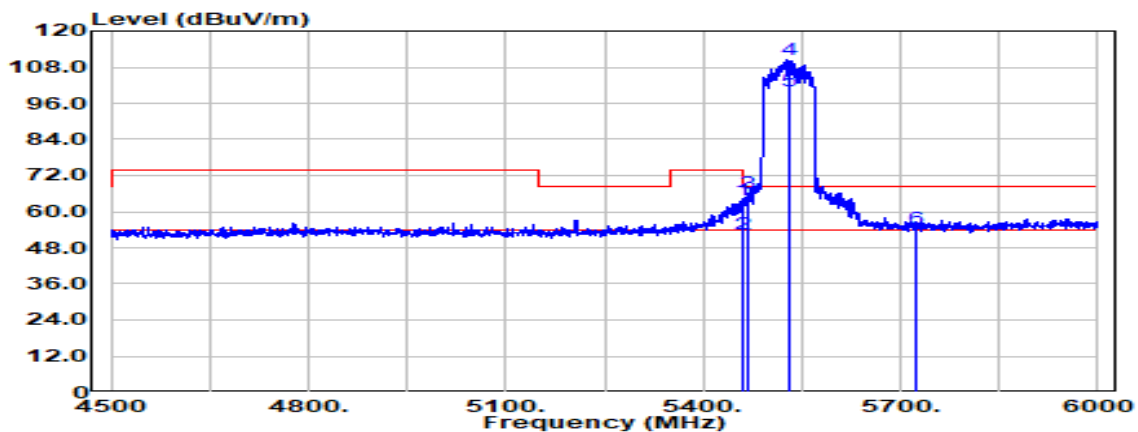

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5459.250	Peak	43.75	20.06	63.81	74.00	-10.19
5459.250	Average	32.66	20.06	52.72	54.00	-1.28
5469.750	Peak	46.23	20.05	66.28	68.20	-1.92
5530.000	Peak	90.40	20.03	110.43	--	--
5530.000	Average	80.23	20.03	100.25	--	--
5725.000	Peak	34.21	20.32	54.53	68.20	-13.67

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	19.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

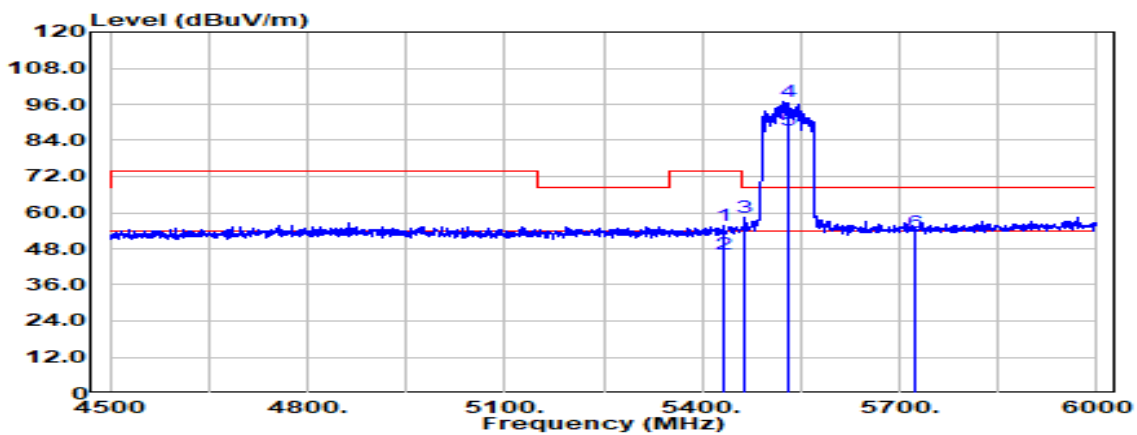

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5433.750	Peak	35.63	20.07	55.69	74.00	-18.31
5433.750	Average	25.98	20.07	46.04	54.00	-7.96
5463.750	Peak	38.57	20.06	58.63	68.20	-9.57
5530.000	Peak	76.76	20.03	96.79	--	--
5530.000	Average	67.46	20.03	87.48	--	--
5725.000	Peak	33.02	20.32	53.34	68.20	-14.86

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz_484/65	Temp/Hum	23.9(°C) / 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

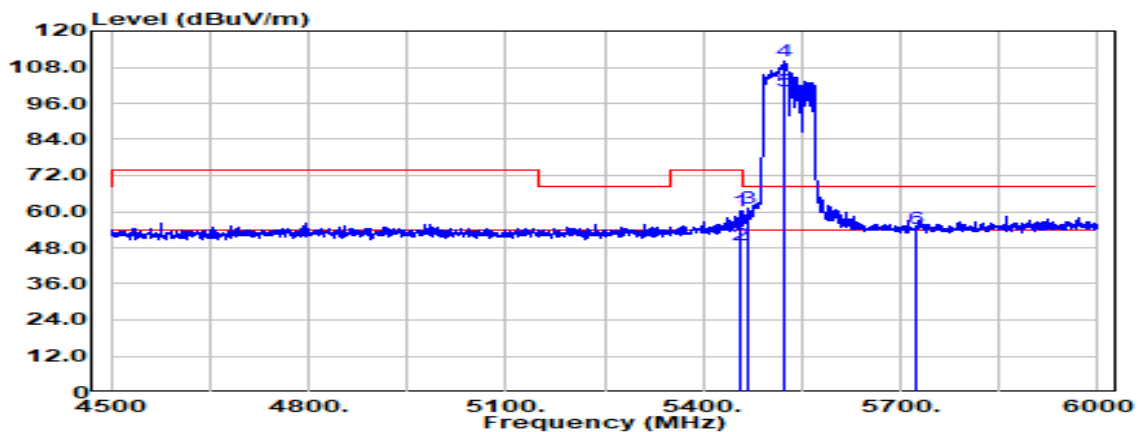

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.750	Peak	40.18	20.06	60.24	74.00	-13.76
5457.750	Average	29.05	20.06	49.11	54.00	-4.89
5469.000	Peak	40.90	20.05	60.95	68.20	-7.25
5524.500	Peak	89.87	20.02	109.89	--	--
5524.500	Average	80.22	20.02	100.25	--	--
5725.000	Peak	33.89	20.32	54.21	68.20	-13.99

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE80 / 5530 MHz 484/65	Temp/Hum	23.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	March 4, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

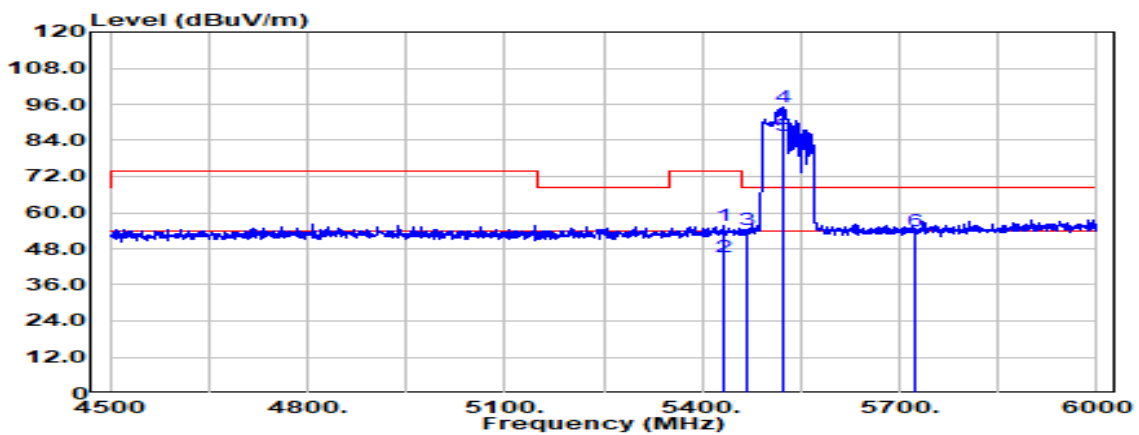

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5433.750	Peak	35.66	20.07	55.72	74.00	-18.28
5433.750	Average	25.13	20.07	45.20	54.00	-8.80
5466.750	Peak	34.41	20.05	54.47	68.20	-13.73
5524.500	Peak	75.10	20.02	95.12	--	--
5524.500	Average	65.61	20.02	85.63	--	--
5725.000	Peak	33.64	20.32	53.96	68.20	-14.24

Test Data for UNII-3


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

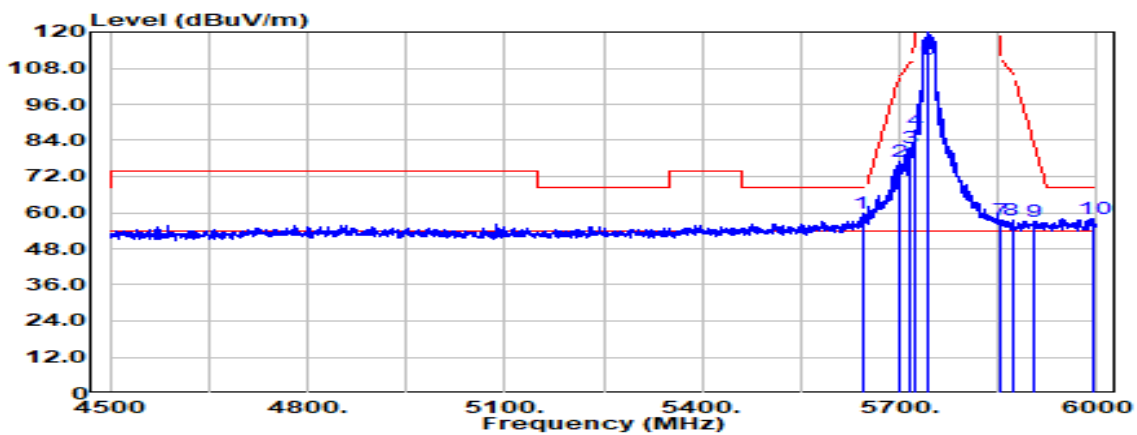

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5643.000	Peak	39.49	20.14	59.63	68.20	-8.57
5698.500	Peak	56.88	20.16	77.04	104.09	-27.05
5717.250	Peak	61.27	20.27	81.54	110.03	-28.49
5722.500	Peak	67.17	20.30	87.47	116.50	-29.03
5745.000	Peak	99.49	20.45	119.94	--	--
5745.000	Average	90.55	20.45	111.00	--	--
5853.000	Peak	36.99	20.74	57.73	115.36	-57.63
5871.000	Peak	36.79	20.82	57.62	106.32	-48.70
5905.500	Peak	36.15	20.97	57.13	82.59	-25.47
5994.000	Peak	36.69	21.17	57.86	68.20	-10.34

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

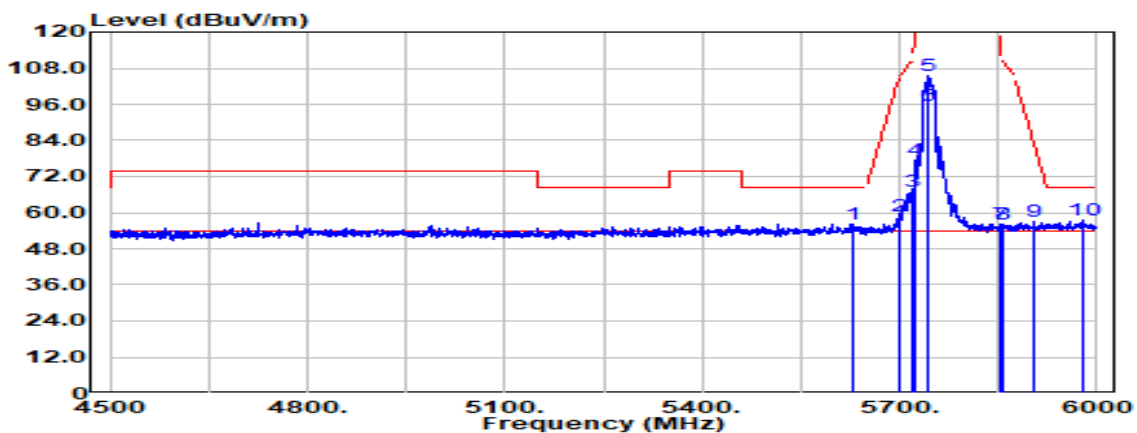

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5629.500	Peak	36.14	20.12	56.26	68.20	-11.94
5699.250	Peak	38.50	20.16	58.66	104.65	-45.99
5718.750	Peak	46.67	20.28	66.95	110.45	-43.50
5724.000	Peak	57.10	20.31	77.41	119.92	-42.51
5745.000	Peak	84.85	20.45	105.30	--	--
5745.000	Average	75.04	20.45	95.49	--	--
5852.250	Peak	35.21	20.74	55.95	117.07	-61.12
5856.000	Peak	35.22	20.76	55.97	110.52	-54.55
5904.750	Peak	36.19	20.97	57.16	83.15	-25.99
5979.000	Peak	36.19	21.17	57.36	68.20	-10.84

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

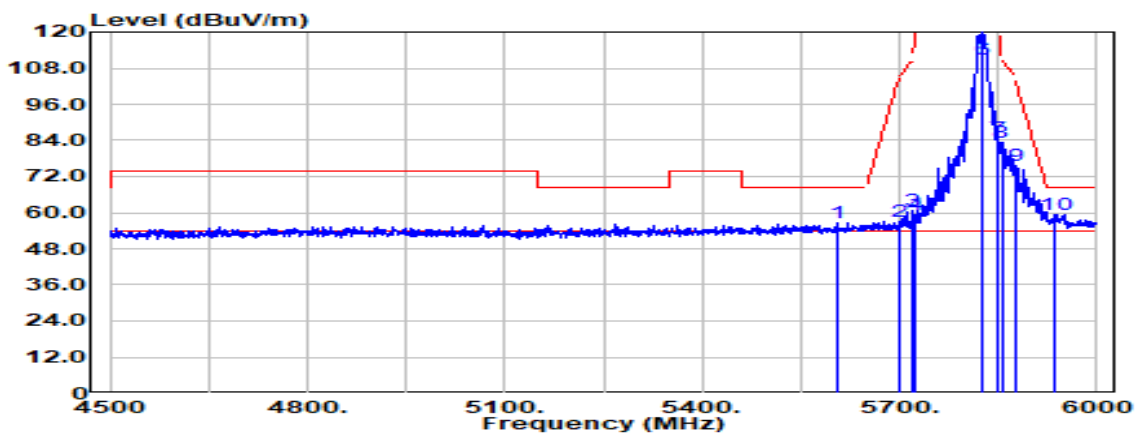

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5604.750	Peak	36.54	20.08	56.62	68.20	-11.58
5700.000	Peak	37.02	20.16	57.18	105.20	-48.02
5718.750	Peak	40.55	20.28	60.83	110.45	-49.62
5724.750	Peak	38.90	20.32	59.22	121.63	-62.41
5825.000	Peak	99.86	20.64	120.49	--	--
5825.000	Average	90.33	20.64	110.96	--	--
5850.750	Peak	63.74	20.73	84.48	120.49	-36.01
5855.250	Peak	62.57	20.75	83.32	110.73	-27.41
5875.500	Peak	54.61	20.84	75.45	104.83	-29.37
5934.750	Peak	38.34	21.10	59.44	68.20	-8.76

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

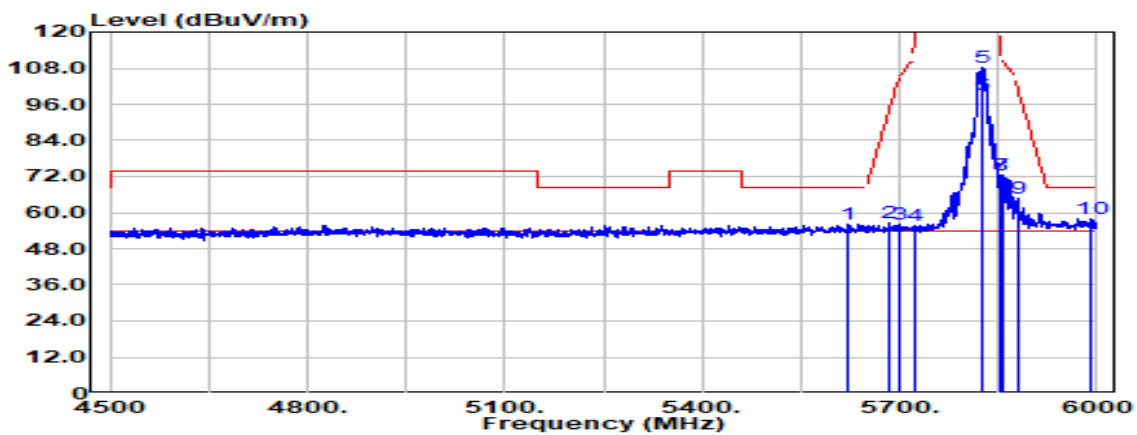

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5620.500	Peak	35.99	20.10	56.10	68.20	-12.10
5683.500	Peak	36.26	20.16	56.42	93.03	-36.61
5699.250	Peak	36.17	20.16	56.33	104.65	-48.32
5724.750	Peak	35.29	20.32	55.61	121.63	-66.02
5825.000	Peak	87.40	20.64	108.04	--	--
5825.000	Average	78.60	20.64	99.23	--	--
5853.750	Peak	51.60	20.75	72.35	113.65	-41.30
5855.250	Peak	51.85	20.75	72.60	110.73	-38.13
5879.250	Peak	43.69	20.86	64.54	102.04	-37.50
5992.500	Peak	36.76	21.17	57.93	68.20	-10.27

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

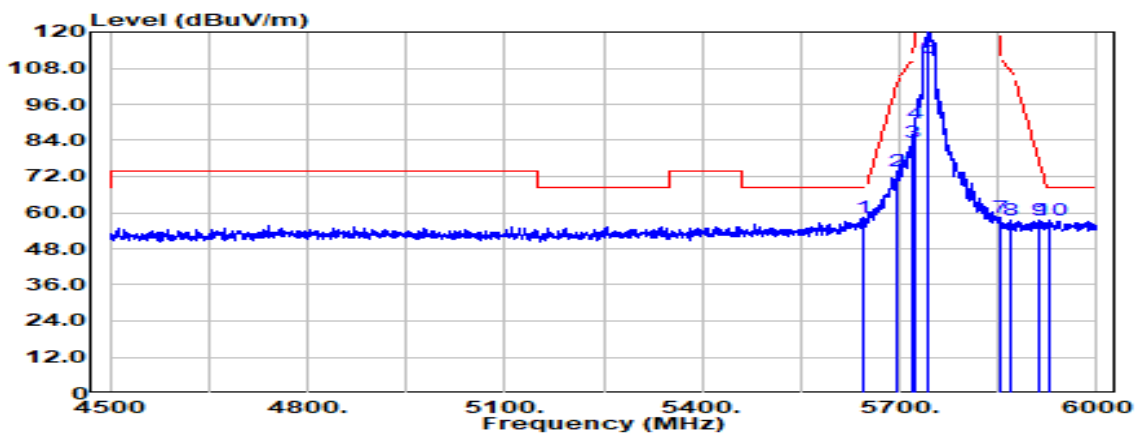

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5643.750	Peak	38.25	20.14	58.39	68.20	-9.81
5697.750	Peak	53.78	20.16	73.94	103.54	-29.60
5718.750	Peak	62.98	20.28	83.26	110.45	-27.19
5724.750	Peak	69.55	20.32	89.87	121.63	-31.76
5745.000	Peak	100.11	20.45	120.56	--	--
5745.000	Average	90.73	20.45	111.18	--	--
5853.000	Peak	37.81	20.74	58.55	115.36	-56.81
5869.500	Peak	36.71	20.82	57.52	106.74	-49.22
5913.750	Peak	36.42	21.01	57.43	76.50	-19.07
5929.500	Peak	36.56	21.07	57.64	68.20	-10.56

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	19.9(°C)/ 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

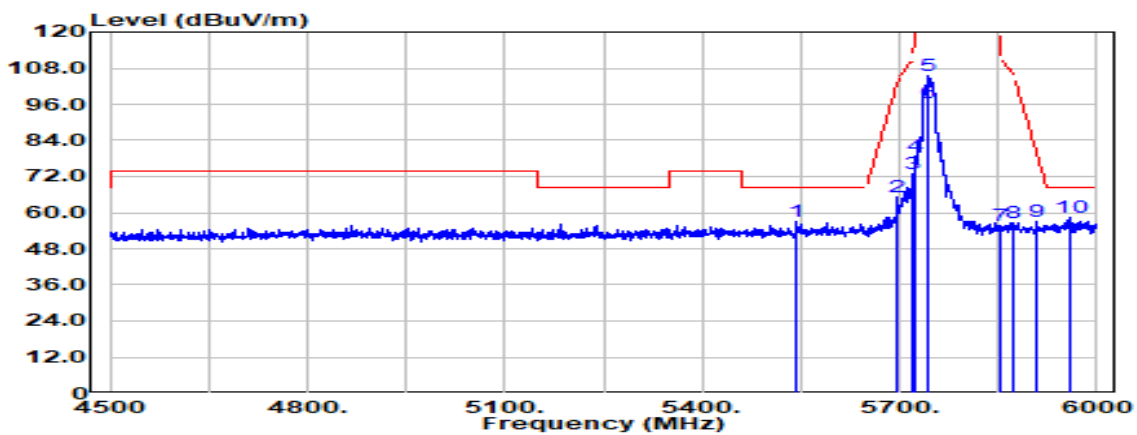

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5542.500	Peak	36.89	20.03	56.92	68.20	-11.28
5696.250	Peak	45.15	20.16	65.31	102.44	-37.12
5719.500	Peak	52.56	20.28	72.84	110.66	-37.82
5724.000	Peak	58.58	20.31	78.89	119.92	-41.03
5745.000	Peak	85.12	20.45	105.57	--	--
5745.000	Average	76.10	20.45	96.54	--	--
5852.250	Peak	35.02	20.74	55.76	117.07	-61.31
5872.500	Peak	35.89	20.83	56.72	105.90	-49.18
5907.750	Peak	36.22	20.98	57.21	80.93	-23.72
5958.000	Peak	37.08	21.16	58.24	68.20	-9.96

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

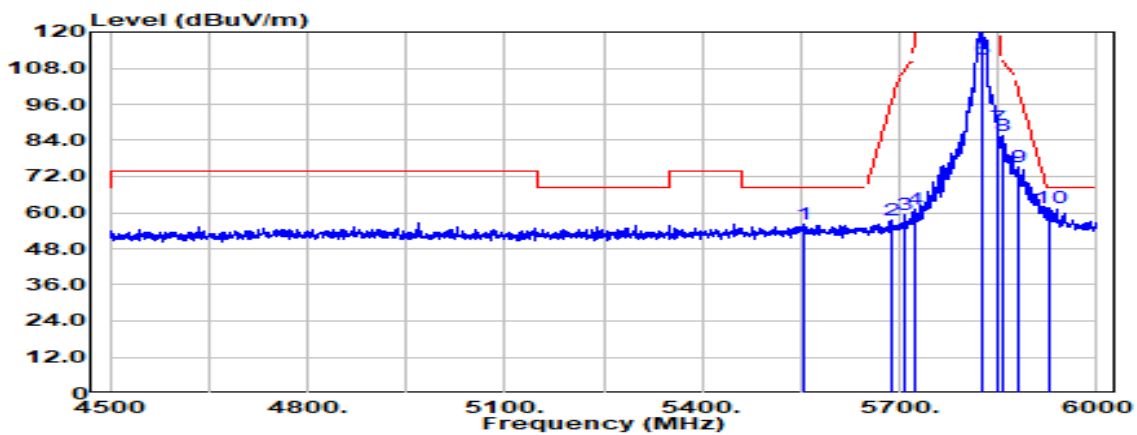

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5556.000	Peak	36.02	20.03	56.06	68.20	-12.14
5688.000	Peak	37.37	20.16	57.52	96.35	-38.83
5708.250	Peak	39.27	20.21	59.48	107.51	-48.03
5724.750	Peak	40.70	20.32	61.02	121.63	-60.61
5825.000	Peak	99.31	20.64	119.94	--	--
5825.000	Average	90.27	20.64	110.91	--	--
5850.000	Peak	67.62	20.73	88.35	122.20	-33.85
5857.500	Peak	65.05	20.76	85.81	110.10	-24.29
5879.250	Peak	54.13	20.86	74.99	102.04	-27.05
5927.250	Peak	40.63	21.06	61.70	68.20	-6.50


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	19.9(°C) / 65%RH
Test Item	Band Edge	Test Date	February 23, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

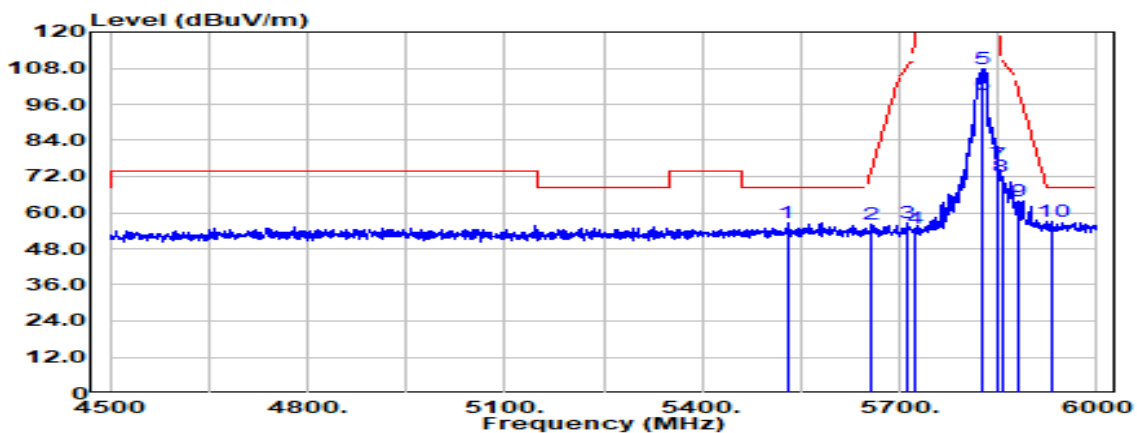


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.000	Peak	36.77	20.03	56.79	68.20	-11.41
5658.000	Peak	36.02	20.15	56.18	74.14	-17.97
5710.500	Peak	36.24	20.23	56.47	108.14	-51.68
5724.750	Peak	34.51	20.32	54.83	121.63	-66.80
5825.000	Peak	87.11	20.64	107.74	--	--
5825.000	Average	78.39	20.64	99.03	--	--
5850.000	Peak	55.37	20.73	76.10	122.20	-46.10
5855.250	Peak	51.17	20.75	71.93	110.73	-38.80
5879.250	Peak	42.89	20.86	63.75	102.04	-38.29
5930.250	Peak	36.09	21.08	57.16	68.20	-11.04

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

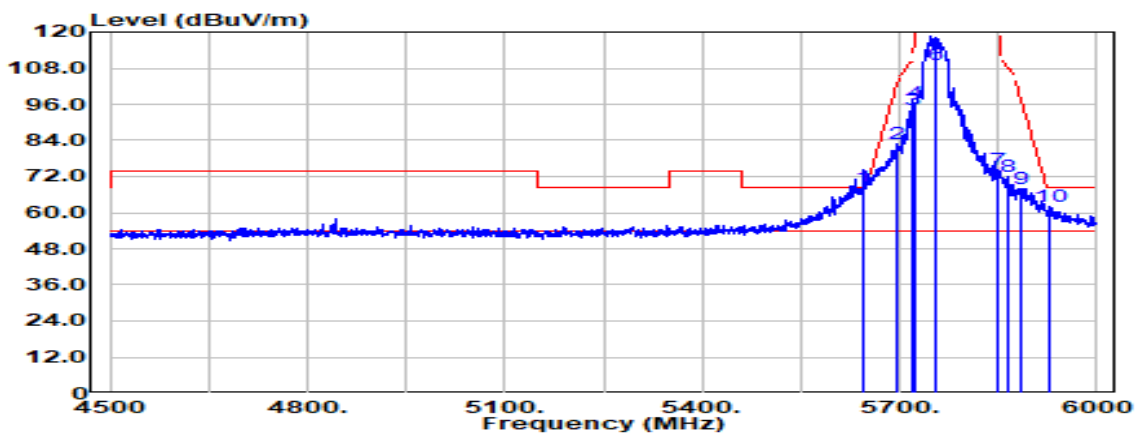

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5646.000	Peak	48.02	20.14	68.16	68.20	-0.04
5697.750	Peak	62.64	20.16	82.80	103.54	-20.74
5718.750	Peak	74.01	20.28	94.29	110.45	-16.16
5722.500	Peak	76.21	20.30	96.51	116.50	-19.99
5755.000	Peak	98.07	20.49	118.55	--	--
5755.000	Average	88.71	20.49	109.20	--	--
5850.750	Peak	53.44	20.73	74.18	120.49	-46.31
5864.250	Peak	51.11	20.79	71.90	108.21	-36.31
5885.250	Peak	47.24	20.89	68.13	97.59	-29.46
5929.500	Peak	40.92	21.07	61.99	68.20	-6.21


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

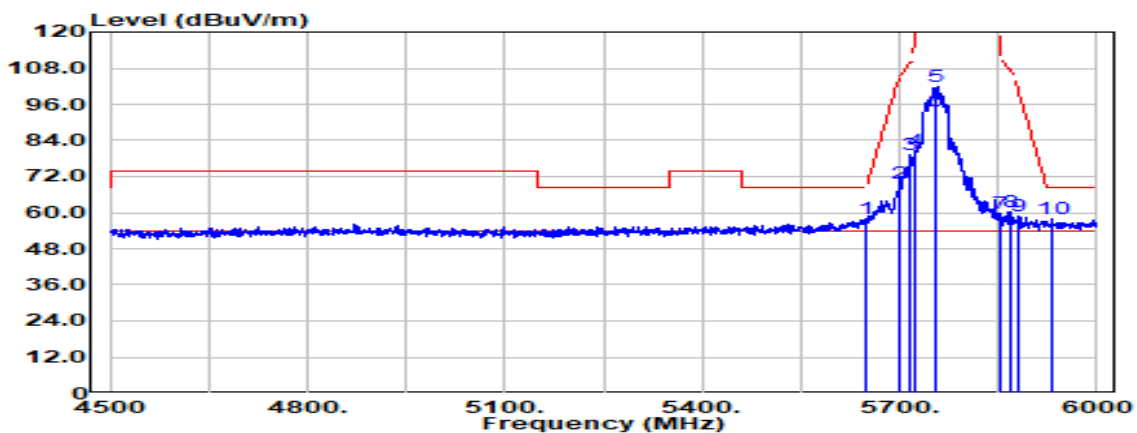

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.000	Peak	37.88	20.15	58.03	68.20	-10.17
5700.000	Peak	49.38	20.16	69.54	105.20	-35.66
5717.250	Peak	59.05	20.27	79.32	110.03	-30.71
5723.250	Peak	60.34	20.31	80.64	118.21	-37.57
5755.000	Peak	81.18	20.49	101.67	--	--
5755.000	Average	73.12	20.49	93.61	--	--
5853.750	Peak	39.02	20.75	59.76	113.65	-53.88
5867.250	Peak	39.60	20.81	60.40	107.37	-46.96
5881.500	Peak	37.86	20.87	58.73	100.37	-41.64
5931.750	Peak	37.07	21.08	58.15	68.20	-10.05

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	20.0(°C)/ 62%RH
Test Item	Band Edge	Test Date	February 24, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

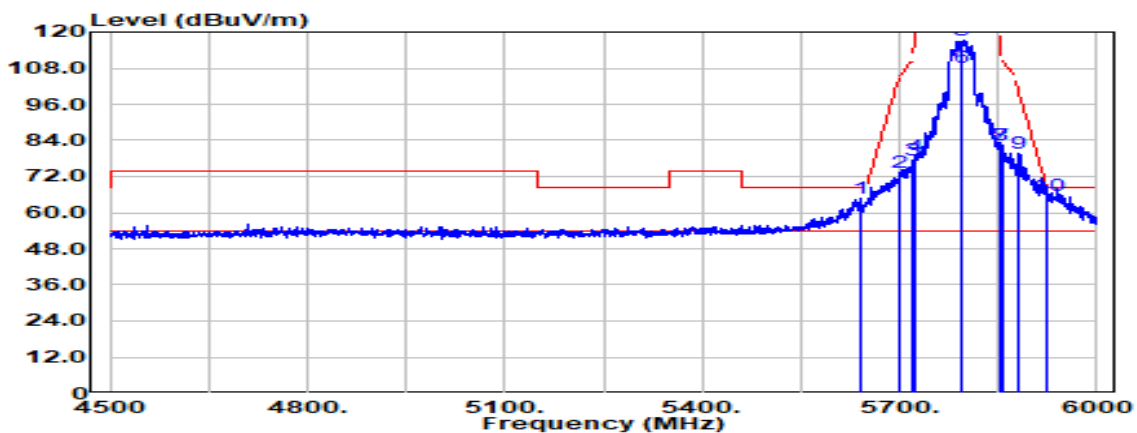

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5640.000	Peak	44.60	20.13	64.73	68.20	-3.47
5700.000	Peak	53.23	20.16	73.39	105.20	-31.81
5720.250	Peak	57.17	20.29	77.46	111.37	-33.91
5722.500	Peak	58.56	20.30	78.86	116.50	-37.64
5795.000	Peak	96.96	20.53	117.50	--	--
5795.000	Average	87.91	20.53	108.44	--	--
5852.250	Peak	61.57	20.74	82.31	117.07	-34.75
5855.250	Peak	61.82	20.75	82.57	110.73	-28.16
5880.000	Peak	58.68	20.86	79.54	101.49	-21.95
5925.000	Peak	44.64	21.06	65.70	68.20	-2.50