


Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

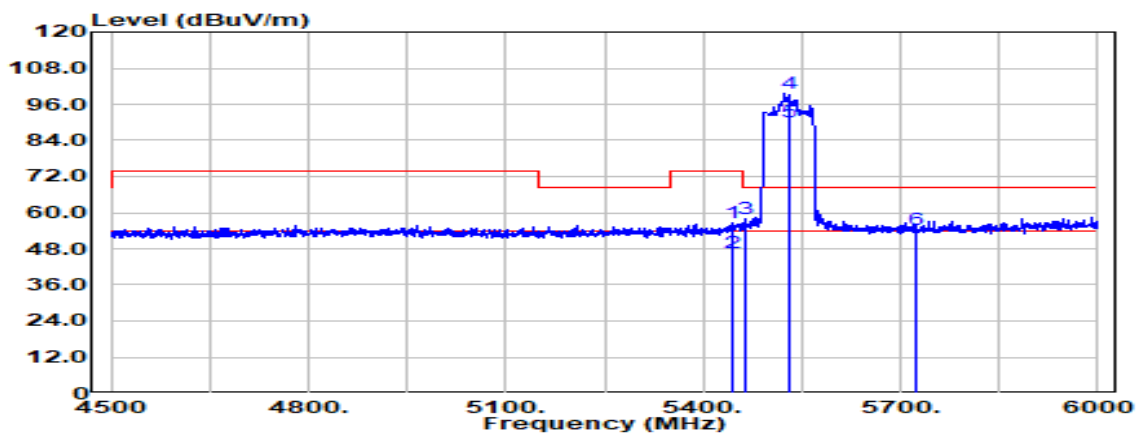

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5444.250	Peak	36.63	20.07	56.70	74.00	-17.30
5444.250	Average	26.68	20.07	46.74	54.00	-7.26
5463.750	Peak	37.97	20.06	58.03	68.20	-10.17
5530.000	Peak	79.40	20.03	99.43	--	--
5530.000	Average	70.27	20.03	90.30	--	--
5725.000	Peak	33.96	20.32	54.28	68.20	-13.92

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

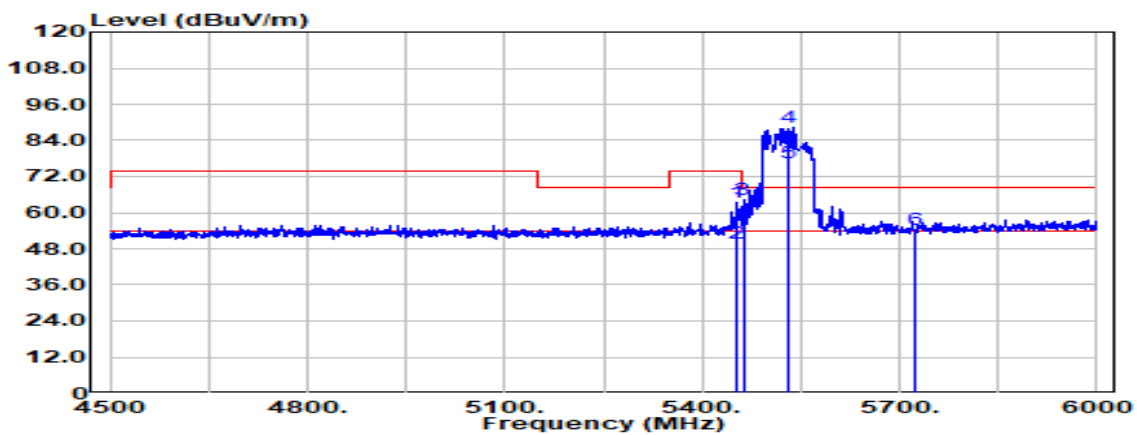

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.500	Peak	43.11	20.07	63.18	74.00	-10.82
5452.500	Average	29.66	20.07	49.73	54.00	-4.27
5462.250	Peak	44.20	20.06	64.25	68.20	-3.95
5530.000	Peak	68.29	20.03	88.31	--	--
5530.000	Average	56.52	20.03	76.55	--	--
5725.000	Peak	34.04	20.32	54.36	68.20	-13.84


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

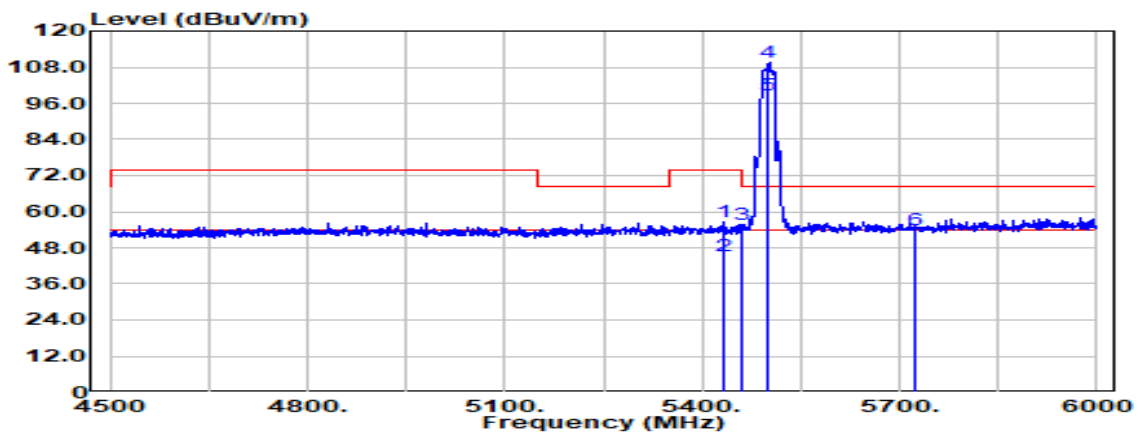


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5432.250	Peak	36.41	20.07	56.48	74.00	-17.52
5432.250	Average	25.05	20.07	45.12	54.00	-8.88
5461.500	Peak	35.53	20.06	55.59	68.20	-12.61
5500.000	Peak	89.56	20.02	109.58	--	--
5500.000	Average	78.54	20.02	98.56	--	--
5725.000	Peak	33.35	20.32	53.67	68.20	-14.53

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	22.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

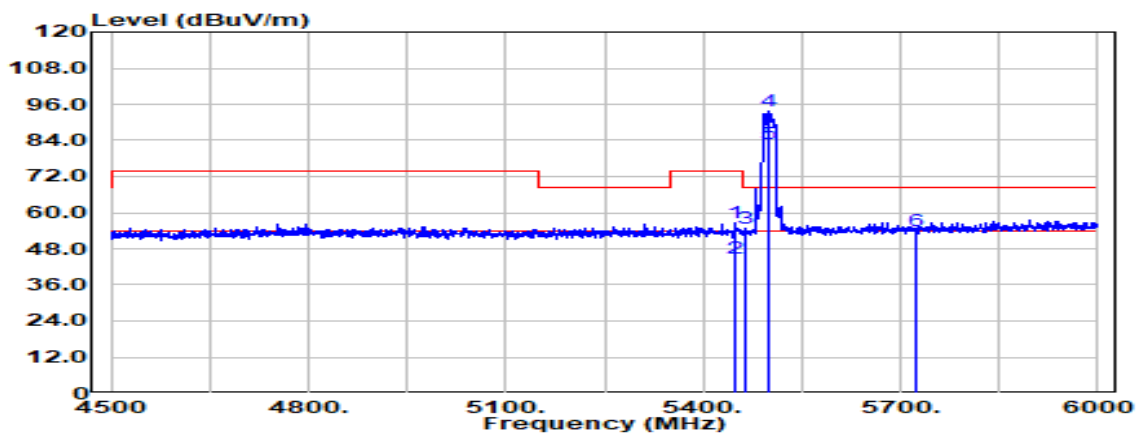

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5447.250	Peak	36.52	20.07	56.59	74.00	-17.41
5447.250	Average	24.86	20.07	44.93	54.00	-9.07
5465.250	Peak	34.60	20.05	54.66	68.20	-13.54
5500.000	Peak	73.87	20.02	93.89	--	--
5500.000	Average	62.64	20.02	82.66	--	--
5725.000	Peak	33.58	20.32	53.90	68.20	-14.30


Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

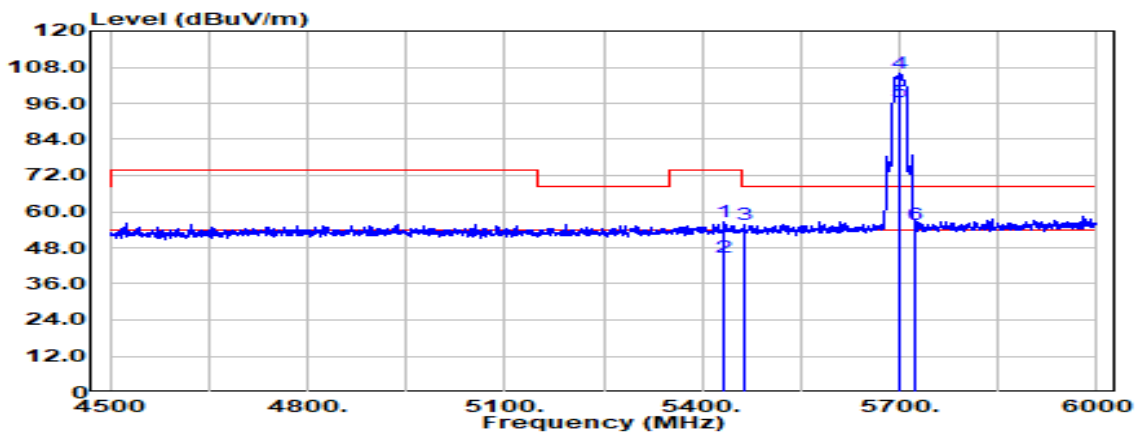

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5433.000	Peak	36.52	20.07	56.58	74.00	-17.42
5433.000	Average	24.90	20.07	44.97	54.00	-9.03
5465.250	Peak	35.64	20.05	55.69	68.20	-12.51
5700.000	Peak	85.75	20.16	105.91	--	--
5700.000	Average	76.51	20.16	96.67	--	--
5725.000	Peak	35.36	20.32	55.68	68.20	-12.52

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

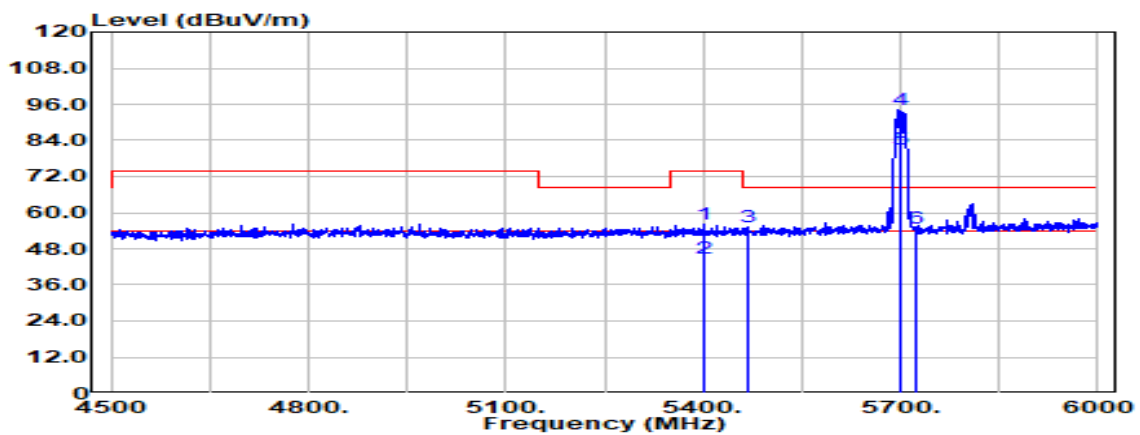

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5400.750	Peak	36.23	20.06	56.29	74.00	-17.71
5400.750	Average	24.77	20.06	44.83	54.00	-9.17
5469.000	Peak	34.98	20.05	55.03	68.20	-13.17
5700.000	Peak	74.21	20.16	94.37	--	--
5700.000	Average	61.02	20.16	81.18	--	--
5725.000	Peak	34.30	20.32	54.62	68.20	-13.58

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

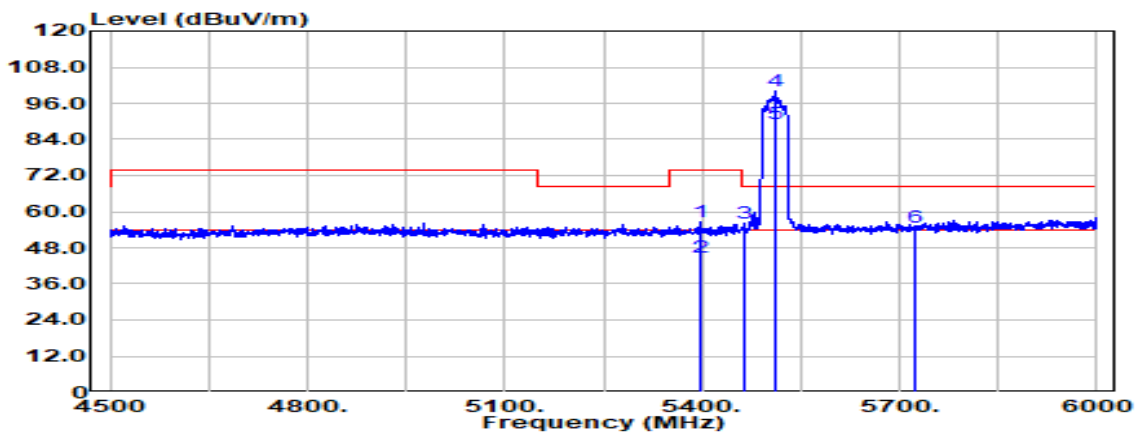

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5397.000	Peak	36.46	20.05	56.50	74.00	-17.50
5397.000	Average	24.74	20.05	44.79	54.00	-9.21
5465.250	Peak	35.93	20.05	55.99	68.20	-12.21
5510.000	Peak	80.09	20.02	100.11	--	--
5510.000	Average	68.99	20.02	89.01	--	--
5725.000	Peak	34.34	20.32	54.66	68.20	-13.54

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

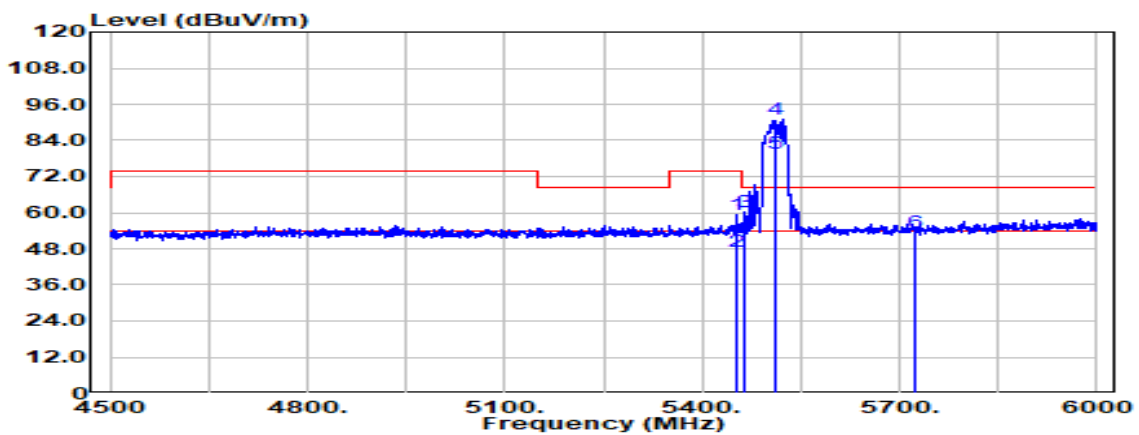

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.000	Peak	39.03	20.07	59.10	74.00	-14.90
5454.000	Average	27.05	20.07	47.11	54.00	-6.89
5466.000	Peak	40.11	20.05	60.17	68.20	-8.03
5510.000	Peak	71.05	20.02	91.07	--	--
5510.000	Average	59.46	20.02	79.48	--	--
5725.000	Peak	32.96	20.32	53.28	68.20	-14.92

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

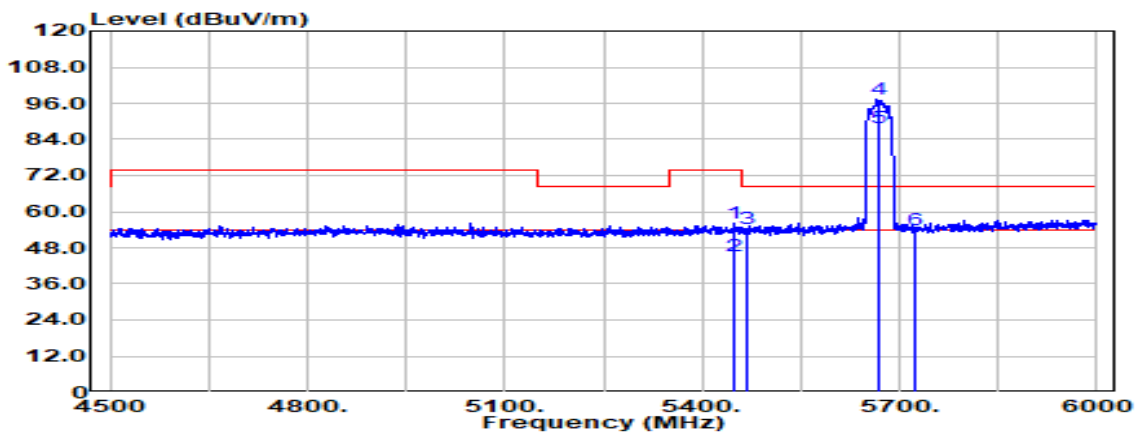

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5448.750	Peak	35.87	20.07	55.94	74.00	-18.06
5448.750	Average	25.41	20.07	45.48	54.00	-8.52
5469.000	Peak	34.50	20.05	54.55	68.20	-13.65
5670.000	Peak	77.10	20.15	97.26	--	--
5670.000	Average	67.71	20.15	87.86	--	--
5725.000	Peak	33.42	20.32	53.74	68.20	-14.46


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

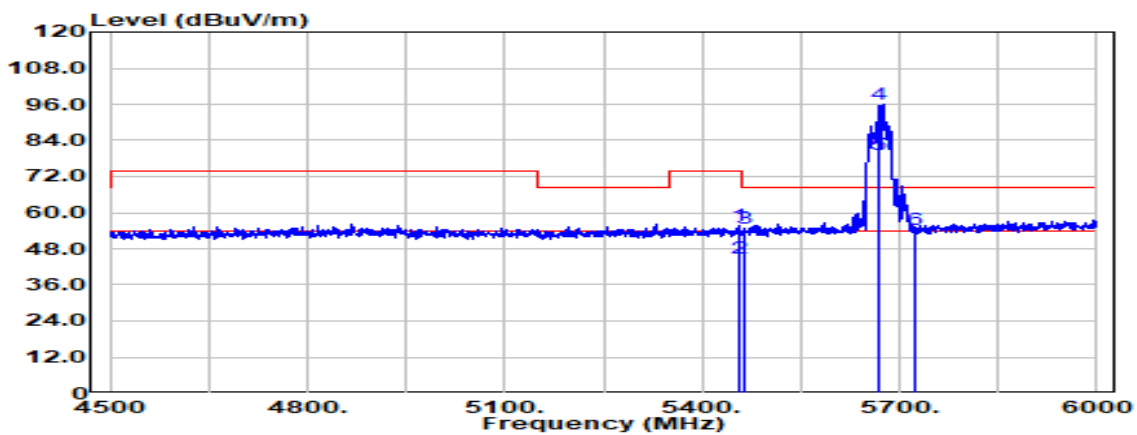


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5457.000	Peak	35.58	20.06	55.65	74.00	-18.35
5457.000	Average	24.76	20.06	44.83	54.00	-9.17
5463.750	Peak	34.82	20.06	54.88	68.20	-13.32
5670.000	Peak	75.81	20.15	95.96	--	--
5670.000	Average	59.08	20.15	79.23	--	--
5725.000	Peak	33.86	20.32	54.18	68.20	-14.02

Test Mode	IEEE 802.11ax HE80 / 5530 MHz_	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

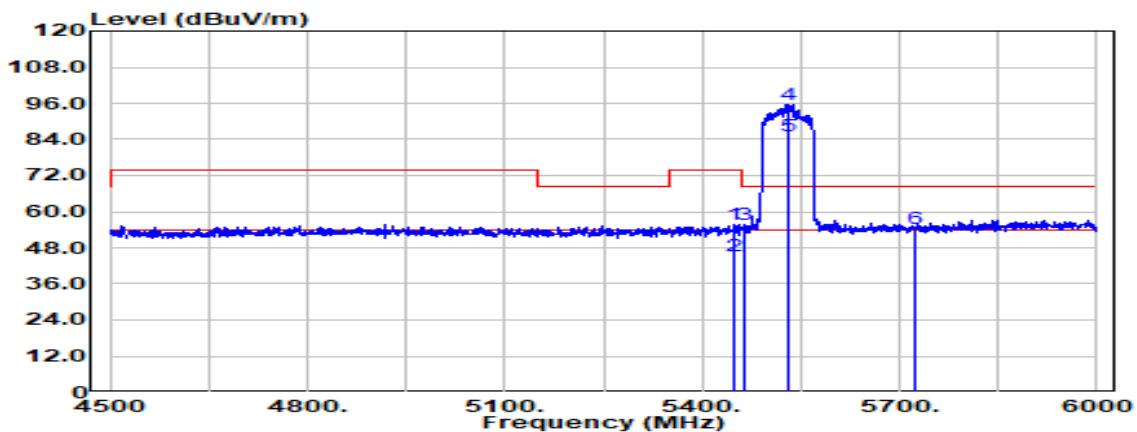

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.000	Peak	35.71	20.07	55.78	74.00	-18.22
5448.000	Average	25.37	20.07	45.44	54.00	-8.56
5463.000	Peak	35.43	20.06	55.49	68.20	-12.71
5530.000	Peak	75.72	20.03	95.75	--	--
5530.000	Average	64.92	20.03	84.95	--	--
5725.000	Peak	33.82	20.32	54.14	68.20	-14.06

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	21.1(°C)/ 51%RH
Test Item	Band Edge	Test Date	April 8, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

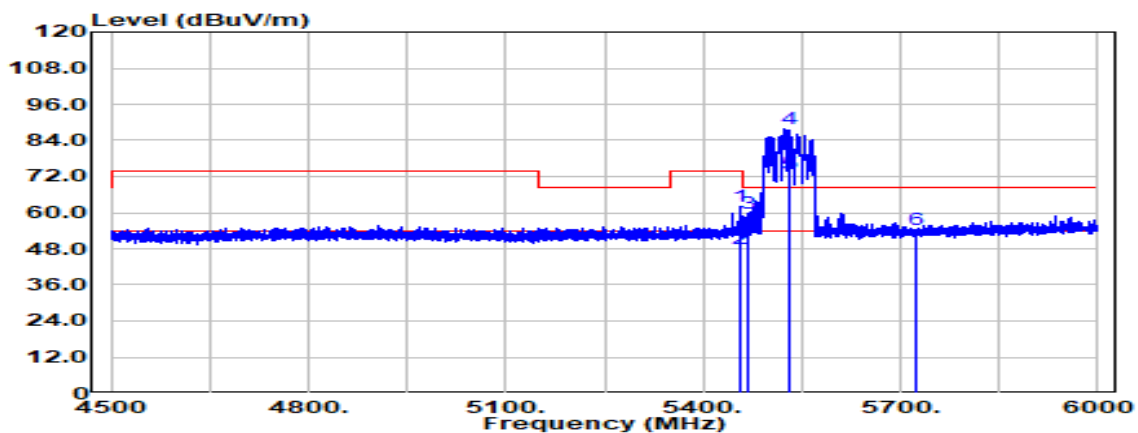


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.250	Peak	41.85	20.06	61.91	74.00	-12.09
5456.250	Average	27.82	20.06	47.88	54.00	-6.12
5466.563	Peak	39.58	20.05	59.63	68.20	-8.57
5530.000	Peak	67.85	20.03	87.87	--	--
5530.000	Average	52.91	20.03	72.93	--	--
5725.000	Peak	34.12	20.32	54.44	68.20	-13.76

Report No.: TMWK2201000141KR

Test Data for UNII-3


Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	21.6(°C) / 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

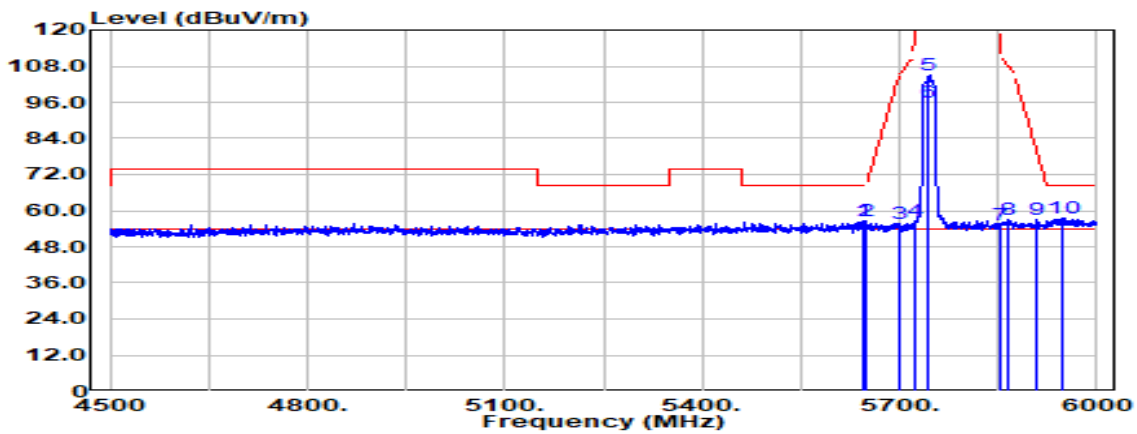

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5645.250	Peak	36.65	20.14	56.79	68.20	-11.41
5650.500	Peak	36.46	20.15	56.61	68.57	-11.96
5701.500	Peak	35.41	20.17	55.58	105.62	-50.04
5723.250	Peak	36.50	20.31	56.81	118.21	-61.40
5745.000	Peak	84.63	20.45	105.08	--	--
5745.000	Average	75.40	20.45	95.85	--	--
5853.000	Peak	34.62	20.74	55.37	115.36	-59.99
5864.250	Peak	36.29	20.79	57.08	108.21	-51.13
5909.250	Peak	36.06	20.99	57.05	79.82	-22.77
5949.000	Peak	36.17	21.16	57.33	68.20	-10.87


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	23.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 6, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

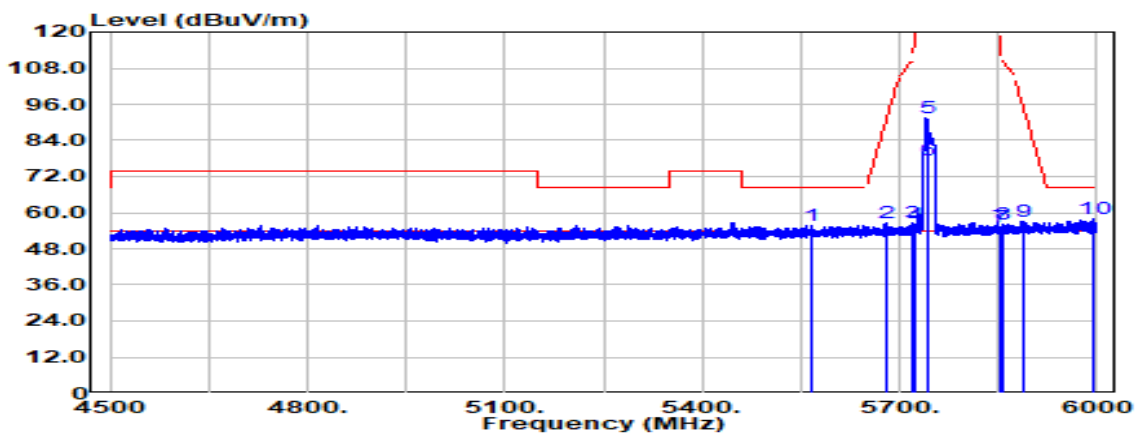

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5567.438	Peak	35.85	20.04	55.89	68.20	-12.31
5680.125	Peak	36.26	20.16	56.42	90.53	-34.11
5718.188	Peak	36.26	20.28	56.53	110.29	-53.76
5722.500	Peak	35.76	20.30	56.06	116.50	-60.44
5745.000	Peak	71.09	20.45	91.54	--	--
5745.000	Average	56.97	20.45	77.41	--	--
5851.500	Peak	34.72	20.74	55.46	118.78	-63.32
5856.750	Peak	35.24	20.76	56.00	110.31	-54.31
5886.750	Peak	36.36	20.89	57.26	96.48	-39.22
5993.625	Peak	36.81	21.17	57.98	68.20	-10.22

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	21.6(°C) / 52%RH
Test Item	Band Edge	Test Date	April 2, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

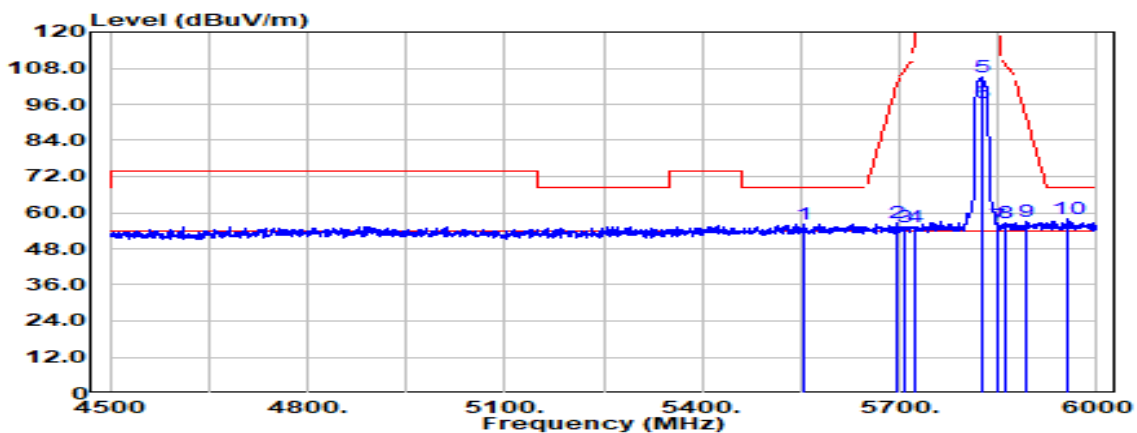

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5555.250	Peak	36.30	20.03	56.34	68.20	-11.86
5697.750	Peak	36.25	20.16	56.41	103.54	-47.13
5709.000	Peak	35.20	20.22	55.42	107.72	-52.30
5723.250	Peak	35.14	20.31	55.45	118.21	-62.76
5825.000	Peak	84.63	20.64	105.27	--	--
5825.000	Average	75.89	20.64	96.53	--	--
5850.750	Peak	35.00	20.73	55.73	120.49	-64.76
5862.750	Peak	35.85	20.79	56.64	108.63	-51.99
5893.500	Peak	35.97	20.92	56.90	91.47	-34.58
5957.250	Peak	36.82	21.16	57.99	68.20	-10.21


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	23.1(°C) / 57%RH
Test Item	Band Edge	Test Date	April 6, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5508.000	Peak	36.66	20.02	56.68	68.20	-11.52
5680.500	Peak	35.99	20.16	56.14	90.81	-34.66
5708.063	Peak	36.98	20.21	57.20	107.46	-50.26
5722.875	Peak	34.83	20.31	55.14	117.36	-62.22
5825.000	Peak	66.45	20.64	87.08	--	--
5825.000	Average	52.77	20.64	73.40	--	--
5853.375	Peak	34.85	20.74	55.59	114.50	-58.91
5861.813	Peak	35.87	20.78	56.65	108.89	-52.24
5922.375	Peak	36.10	21.04	57.14	70.13	-12.99
5999.250	Peak	35.94	21.17	57.11	68.20	-11.09

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	23.1(°C) / 57%RH
Test Item	Band Edge	Test Date	April 6, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

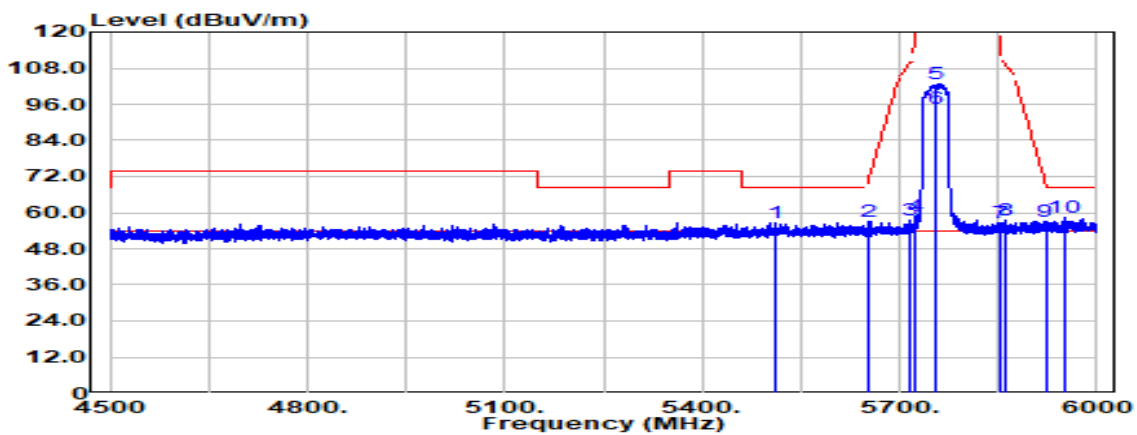

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5510.438	Peak	36.67	20.02	56.69	68.20	-11.51
5652.000	Peak	37.11	20.15	57.26	69.69	-12.43
5714.250	Peak	37.05	20.25	57.30	109.19	-51.89
5722.688	Peak	38.70	20.31	59.00	116.93	-57.93
5755.000	Peak	82.31	20.49	102.80	--	--
5755.000	Average	74.12	20.49	94.60	--	--
5853.000	Peak	36.08	20.74	56.83	115.36	-58.53
5862.375	Peak	36.62	20.78	57.41	108.73	-51.33
5922.000	Peak	35.99	21.04	57.03	70.41	-13.38
5949.563	Peak	37.23	21.16	58.39	68.20	-9.81

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5503.500	Peak	36.10	20.02	56.12	68.20	-12.08
5672.250	Peak	36.27	20.15	56.43	84.71	-28.28
5706.000	Peak	40.94	20.20	61.14	106.88	-45.75
5724.750	Peak	39.29	20.32	59.61	121.63	-62.02
5755.000	Peak	74.08	20.49	94.57	--	--
5755.000	Average	55.59	20.49	76.07	--	--
5850.750	Peak	34.82	20.73	55.55	120.49	-64.94
5865.000	Peak	36.00	20.80	56.80	108.00	-51.20
5913.000	Peak	35.87	21.00	56.87	77.05	-20.18
5986.500	Peak	37.05	21.17	58.22	68.20	-9.98

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	23.1(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 6, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

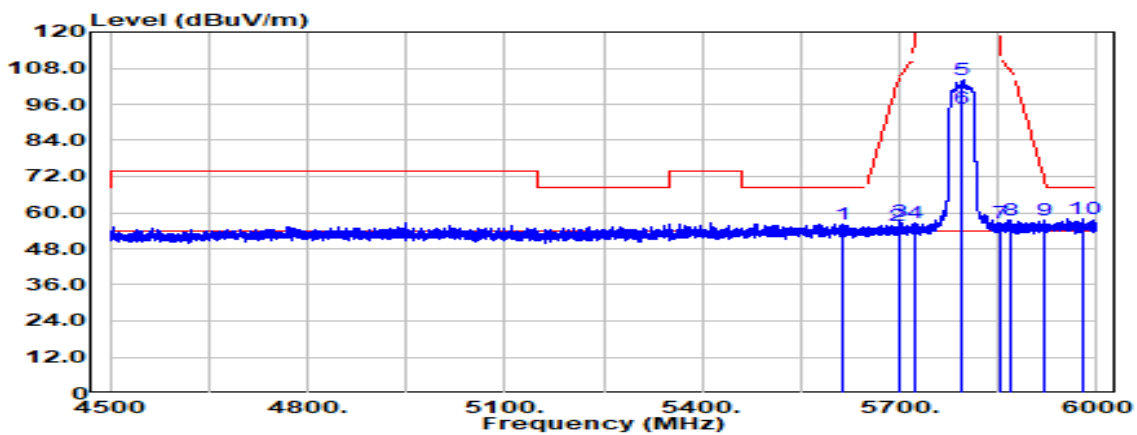

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5615.063	Peak	36.28	20.09	56.37	68.20	-11.83
5698.000	Peak	35.54	20.16	55.70	103.73	-48.02
5700.750	Peak	36.87	20.16	57.04	105.41	-48.37
5722.500	Peak	36.21	20.30	56.51	116.50	-59.99
5795.000	Peak	83.53	20.53	104.06	--	--
5795.000	Average	74.32	20.53	94.86	--	--
5852.250	Peak	35.92	20.74	56.66	117.07	-60.41
5868.188	Peak	36.86	20.81	57.67	107.11	-49.44
5918.250	Peak	36.65	21.03	57.68	73.18	-15.50
5977.313	Peak	36.98	21.17	58.14	68.20	-10.06

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

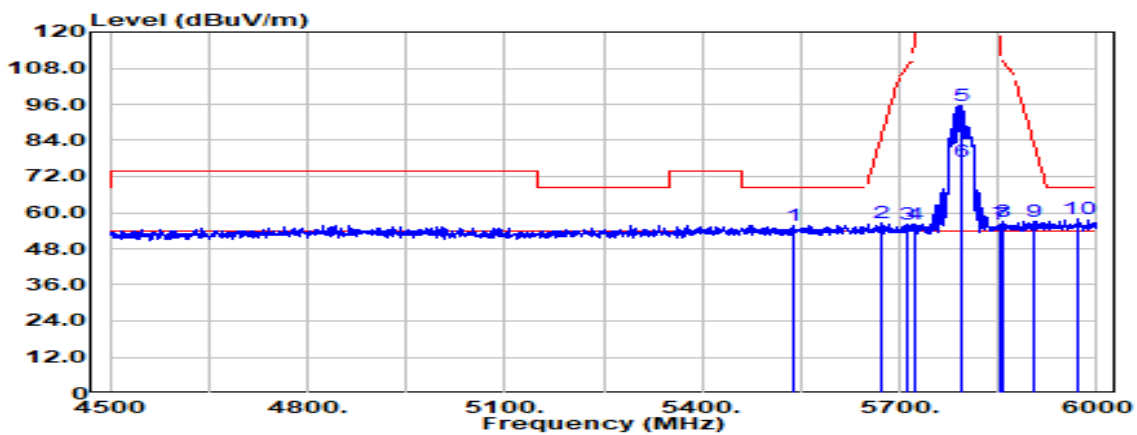

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5537.250	Peak	35.81	20.03	55.84	68.20	-12.36
5673.750	Peak	36.52	20.15	56.67	85.82	-29.14
5713.500	Peak	35.77	20.25	56.02	108.98	-52.97
5722.500	Peak	35.85	20.30	56.16	116.50	-60.34
5795.000	Peak	74.93	20.53	95.46	--	--
5795.000	Average	56.48	20.53	77.01	--	--
5853.000	Peak	35.33	20.74	56.07	115.36	-59.28
5856.750	Peak	36.20	20.76	56.96	110.31	-53.35
5905.500	Peak	36.07	20.97	57.04	82.59	-25.55
5971.500	Peak	36.79	21.16	57.96	68.20	-10.24

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

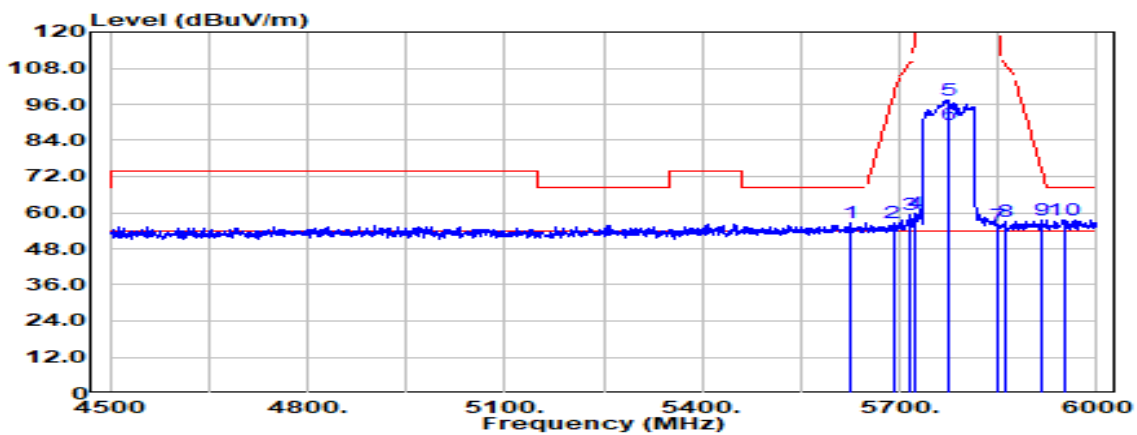

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.500	Peak	36.52	20.11	56.63	68.20	-11.57
5690.250	Peak	36.44	20.16	56.60	98.01	-41.41
5714.250	Peak	39.14	20.25	59.39	109.19	-49.81
5721.750	Peak	39.41	20.30	59.71	114.79	-55.09
5775.000	Peak	76.97	20.51	97.48	--	--
5775.000	Average	68.92	20.51	89.43	--	--
5850.750	Peak	35.09	20.73	55.83	120.49	-64.66
5861.250	Peak	36.19	20.78	56.97	109.05	-52.08
5915.250	Peak	36.39	21.01	57.40	75.39	-17.99
5949.750	Peak	36.36	21.16	57.52	68.20	-10.68

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

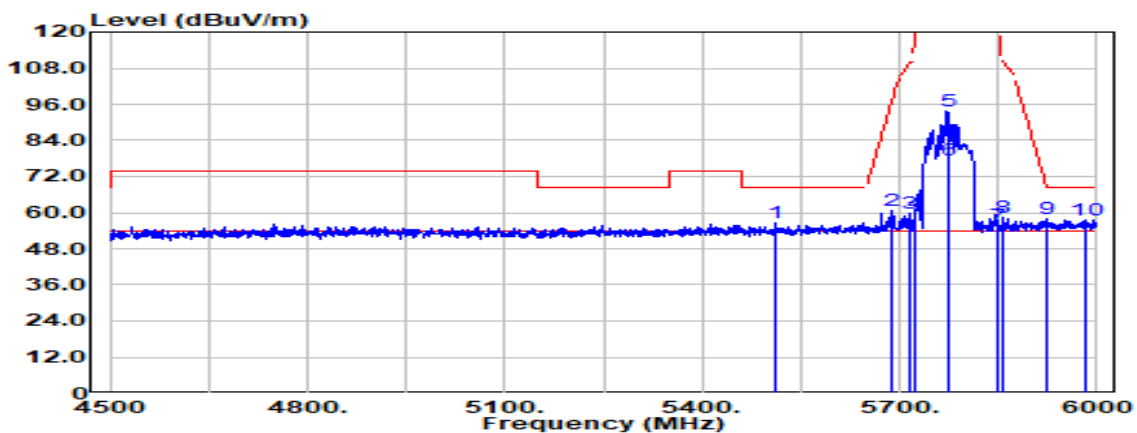

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5510.250	Peak	36.73	20.02	56.75	68.20	-11.45
5686.500	Peak	40.36	20.16	60.52	95.24	-34.72
5717.250	Peak	39.51	20.27	59.78	110.03	-50.25
5724.750	Peak	39.26	20.32	59.58	121.63	-62.05
5775.000	Peak	73.07	20.51	93.58	--	--
5775.000	Average	56.79	20.51	77.30	--	--
5850.750	Peak	35.01	20.73	55.74	120.49	-64.75
5858.250	Peak	37.60	20.77	58.37	109.89	-51.52
5923.500	Peak	37.06	21.05	58.11	69.31	-11.20
5982.750	Peak	36.56	21.17	57.73	68.20	-10.47


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

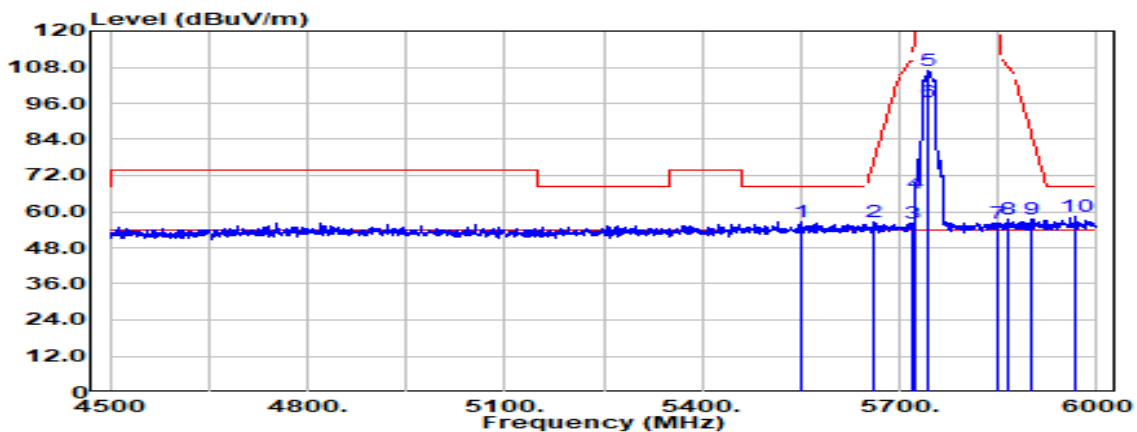

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5549.250	Peak	36.60	20.03	56.63	68.20	-11.57
5660.250	Peak	36.23	20.15	56.39	75.81	-19.42
5718.000	Peak	36.08	20.28	56.36	110.24	-53.88
5724.750	Peak	45.68	20.32	66.00	121.63	-55.63
5745.000	Peak	86.20	20.45	106.65	--	--
5745.000	Average	76.23	20.45	96.67	--	--
5850.750	Peak	35.48	20.73	56.22	120.49	-64.27
5866.500	Peak	36.65	20.80	57.45	107.58	-50.13
5899.500	Peak	36.52	20.95	57.47	87.03	-29.56
5968.500	Peak	37.08	21.16	58.24	68.20	-9.96


Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

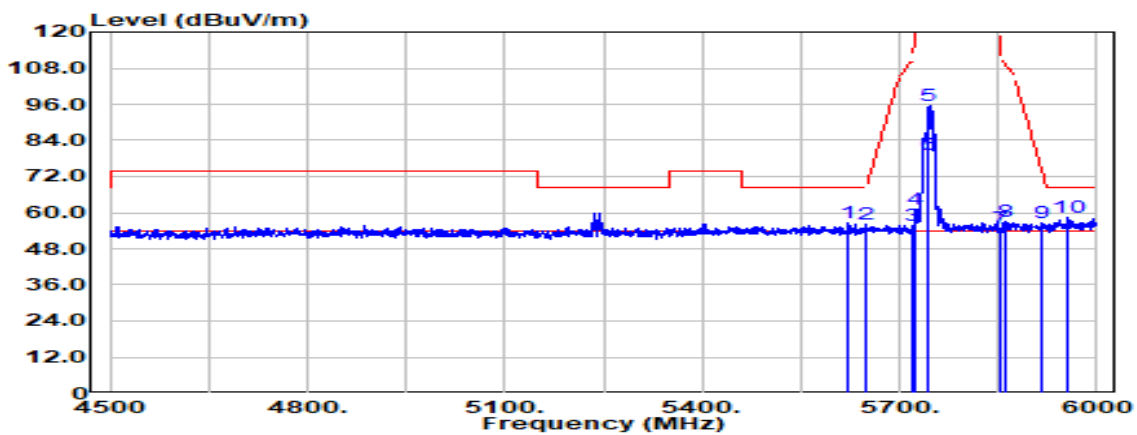

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5622.750	Peak	36.68	20.11	56.79	68.20	-11.41
5650.500	Peak	35.98	20.15	56.13	68.57	-12.44
5720.250	Peak	35.59	20.29	55.88	111.37	-55.49
5724.750	Peak	40.96	20.32	61.28	121.63	-60.35
5745.000	Peak	75.16	20.45	95.61	--	--
5745.000	Average	58.73	20.45	79.18	--	--
5851.500	Peak	33.86	20.74	54.59	118.78	-64.19
5859.750	Peak	36.22	20.77	56.99	109.47	-52.48
5917.500	Peak	35.74	21.02	56.76	73.73	-16.97
5957.250	Peak	37.24	21.16	58.40	68.20	-9.80

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

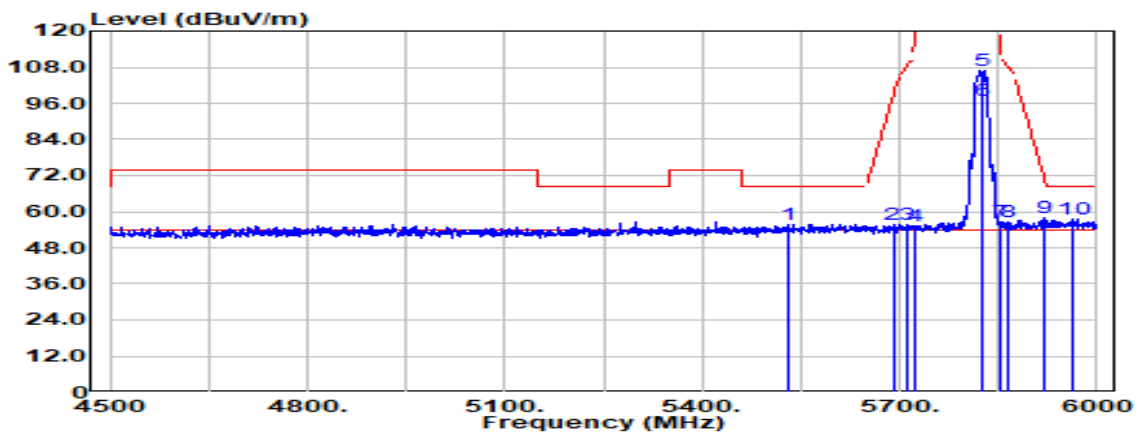

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.750	Peak	35.86	20.03	55.89	68.20	-12.31
5690.250	Peak	35.48	20.16	55.64	98.01	-42.37
5713.500	Peak	35.48	20.25	55.73	108.98	-53.25
5724.750	Peak	34.85	20.32	55.17	121.63	-66.46
5825.000	Peak	86.18	20.64	106.82	--	--
5825.000	Average	76.41	20.64	97.05	--	--
5851.500	Peak	36.04	20.74	56.78	118.78	-62.00
5865.750	Peak	36.02	20.80	56.82	107.79	-50.97
5920.500	Peak	36.79	21.04	57.82	71.52	-13.69
5961.750	Peak	36.49	21.16	57.65	68.20	-10.55

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5595.000	Peak	36.19	20.07	56.26	68.20	-11.94
5664.750	Peak	36.06	20.15	56.21	79.15	-22.94
5703.750	Peak	35.36	20.18	55.54	106.25	-50.71
5724.000	Peak	35.59	20.31	55.90	119.92	-64.02
5825.000	Peak	69.19	20.64	89.82	--	--
5825.000	Average	53.52	20.64	74.15	--	--
5852.250	Peak	34.48	20.74	55.22	117.07	-61.84
5865.000	Peak	35.77	20.80	56.56	108.00	-51.43
5894.250	Peak	36.02	20.92	56.95	90.92	-33.97
5987.250	Peak	36.77	21.17	57.94	68.20	-10.26

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	22.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

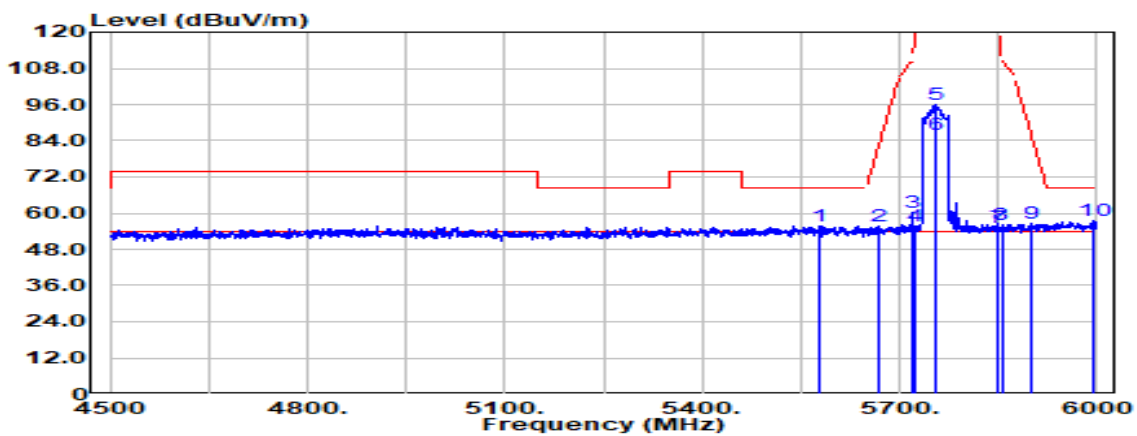

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5580.000	Peak	35.71	20.05	55.77	68.20	-12.43
5670.000	Peak	35.60	20.15	55.76	83.04	-27.28
5718.750	Peak	40.04	20.28	60.32	110.45	-50.13
5721.750	Peak	35.58	20.30	55.88	114.79	-58.91
5755.000	Peak	75.32	20.49	95.81	--	--
5755.000	Average	65.36	20.49	85.84	--	--
5850.750	Peak	34.50	20.73	55.23	120.49	-65.26
5855.250	Peak	35.55	20.75	56.30	110.73	-54.43
5898.750	Peak	35.61	20.94	56.55	87.59	-31.03
5996.250	Peak	36.52	21.17	57.69	68.20	-10.51

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5755MHz_	Temp/Hum	22.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

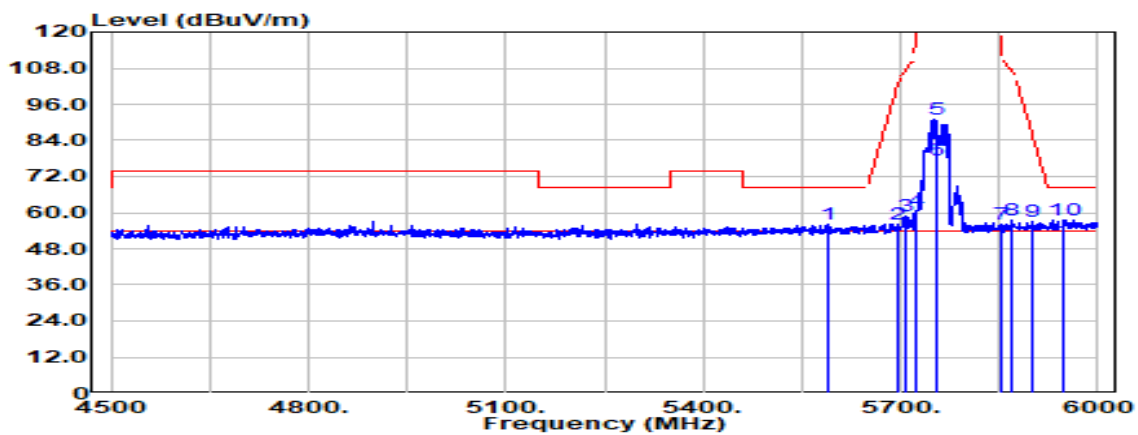

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5589.750	Peak	36.10	20.06	56.17	68.20	-12.03
5697.000	Peak	36.09	20.16	56.25	102.99	-46.74
5706.750	Peak	38.72	20.20	58.92	107.09	-48.17
5723.250	Peak	40.46	20.31	60.77	118.21	-57.44
5755.000	Peak	70.67	20.49	91.16	--	--
5755.000	Average	56.96	20.49	77.44	--	--
5851.500	Peak	35.36	20.74	56.10	118.78	-62.68
5870.250	Peak	36.57	20.82	57.39	106.53	-49.14
5900.250	Peak	35.96	20.95	56.91	86.48	-29.57
5946.750	Peak	36.40	21.15	57.55	68.20	-10.65

Report No.: TMWK2201000141KR


Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

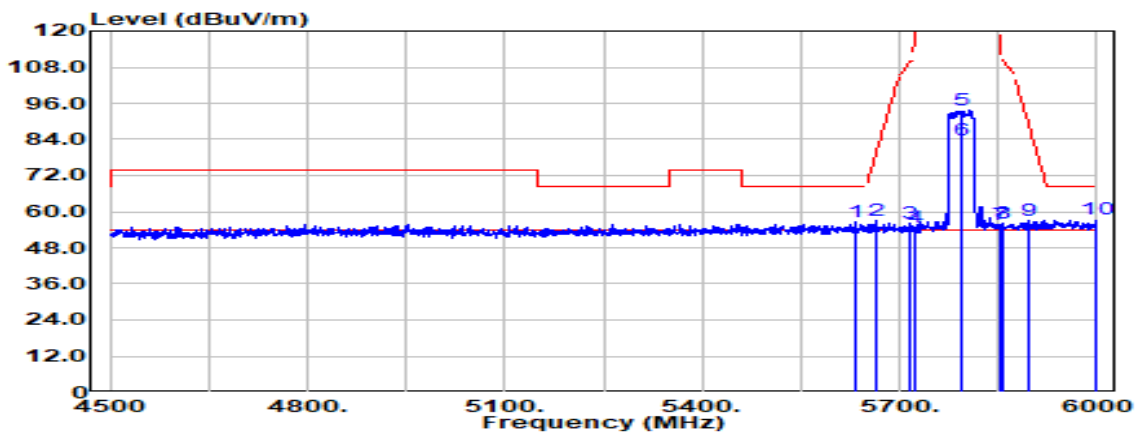

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5633.250	Peak	36.42	20.12	56.54	68.20	-11.66
5664.750	Peak	36.85	20.15	57.01	79.15	-22.14
5714.250	Peak	35.74	20.25	55.99	109.19	-53.20
5722.500	Peak	34.66	20.30	54.97	116.50	-61.54
5795.000	Peak	73.00	20.53	93.53	--	--
5795.000	Average	63.28	20.53	83.82	--	--
5853.750	Peak	35.13	20.75	55.88	113.65	-57.77
5856.000	Peak	35.43	20.76	56.19	110.52	-54.33
5898.000	Peak	35.99	20.94	56.93	88.14	-31.21
6000.000	Peak	36.36	21.17	57.53	68.20	-10.67

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5795MHz_	Temp/Hum	22.9(°C)/ 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

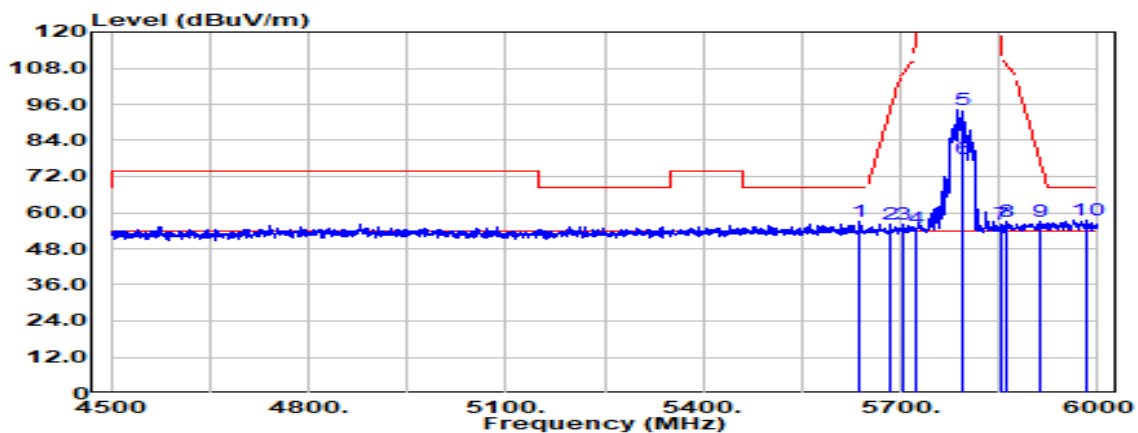

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5637.000	Peak	37.02	20.13	57.15	68.20	-11.05
5685.000	Peak	36.21	20.16	56.37	94.13	-37.77
5703.750	Peak	35.76	20.18	55.95	106.25	-50.30
5721.750	Peak	34.65	20.30	54.95	114.79	-59.84
5795.000	Peak	73.77	20.53	94.30	--	--
5795.000	Average	57.32	20.53	77.85	--	--
5853.750	Peak	35.49	20.75	56.24	113.65	-57.41
5861.250	Peak	36.23	20.78	57.01	109.05	-52.04
5913.000	Peak	36.03	21.00	57.03	77.05	-20.02
5983.500	Peak	36.38	21.17	57.54	68.20	-10.66


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	22.9(°C) / 58%RH
Test Item	Band Edge	Test Date	April 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5604.000	Peak	36.67	20.08	56.75	68.20	-11.45
5694.750	Peak	35.84	20.16	56.00	101.33	-45.33
5717.250	Peak	37.81	20.27	58.08	110.03	-51.95
5721.750	Peak	39.26	20.30	59.56	114.79	-55.23
5775.000	Peak	71.19	20.51	91.70	--	--
5775.000	Average	61.78	20.51	82.29	--	--
5853.750	Peak	34.13	20.75	54.88	113.65	-58.77
5855.250	Peak	34.95	20.75	55.70	110.73	-55.03
5907.000	Peak	35.65	20.98	56.63	81.48	-24.85
5988.000	Peak	36.27	21.17	57.44	68.20	-10.76

Test Mode	IEEE 802.11ax HE80 / 5775MHz_	Temp/Hum	21.1(°C)/ 51%RH
Test Item	Band Edge	Test Date	April 8, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

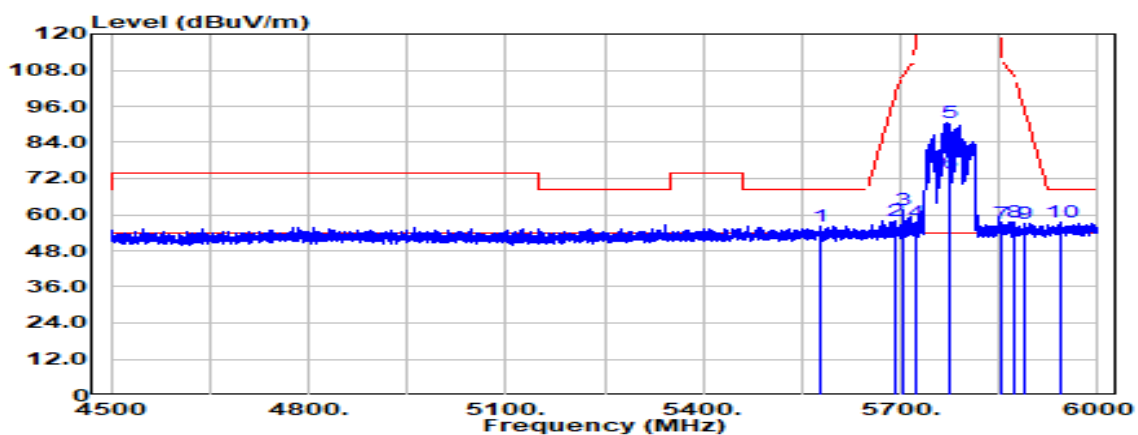

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5579.063	Peak	36.19	20.05	56.24	68.20	-11.96
5690.438	Peak	37.85	20.16	58.01	98.15	-40.14
5705.250	Peak	41.19	20.19	61.39	106.67	-45.29
5722.875	Peak	37.27	20.31	57.57	117.36	-59.78
5775.000	Peak	70.04	20.51	90.55	--	--
5775.000	Average	53.48	20.51	73.99	--	--
5851.500	Peak	36.54	20.74	57.27	118.78	-61.51
5873.625	Peak	36.66	20.83	57.50	105.58	-48.09
5889.188	Peak	36.17	20.90	57.08	94.67	-37.59
5943.938	Peak	36.40	21.13	57.54	68.20	-10.66


Report No.: TMWK2201000141KR

BFM OFF

Below 1G Test Data

Test Data for UNII-1

Test Mode	IEEE 802.11ac VHT80 / 5210MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

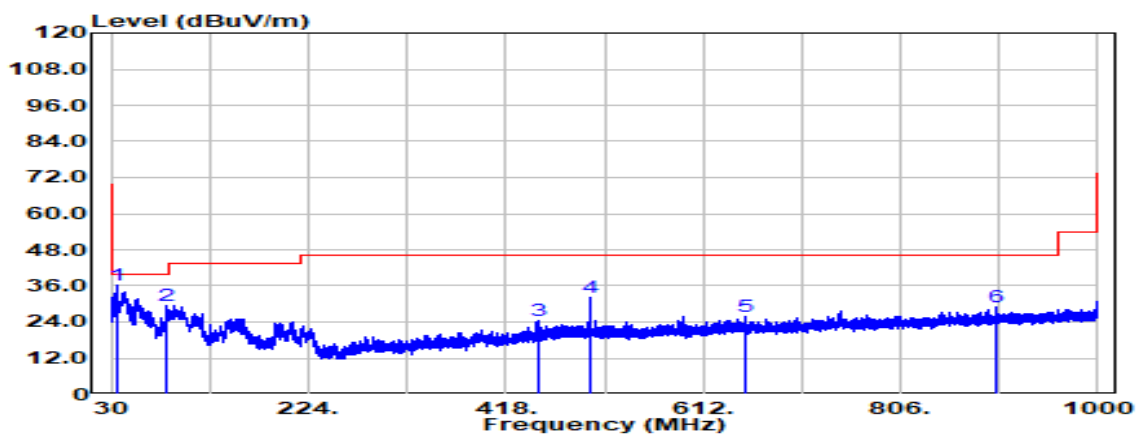


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
35.456	Peak	42.69	-6.54	36.15	40.00	-3.85
85.533	Peak	45.62	-16.17	29.45	40.00	-10.55
450.131	Peak	29.34	-4.78	24.56	46.00	-21.44
501.299	Peak	35.79	-3.60	32.20	46.00	-13.80
653.589	Peak	26.75	-0.79	25.96	46.00	-20.04
899.969	Peak	26.22	2.89	29.11	46.00	-16.89

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHz_	Temp/Hum	23.4(°C) / 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

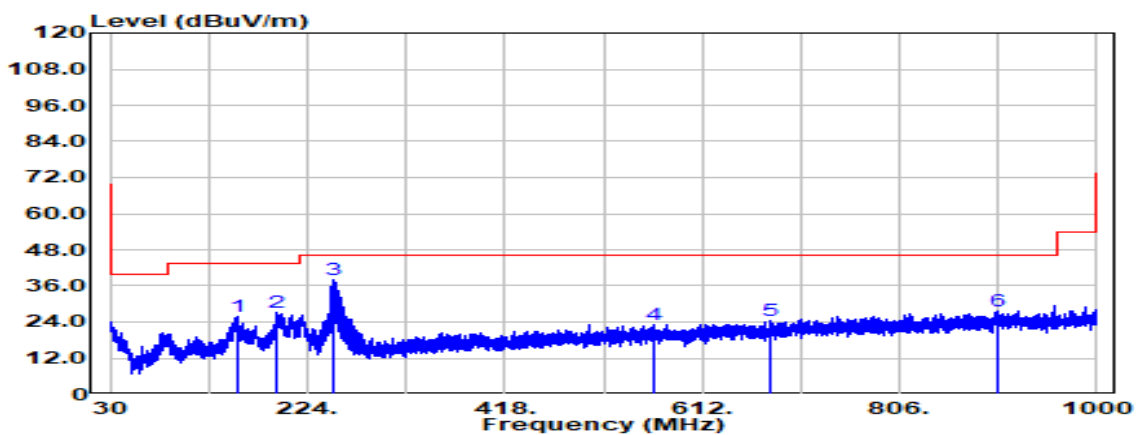


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
156.221	Peak	36.51	-10.76	25.74	43.50	-17.76
194.658	Peak	38.23	-10.84	27.39	43.50	-16.11
250.433	Peak	49.16	-10.96	38.20	46.00	-7.80
564.228	Peak	25.72	-2.51	23.21	46.00	-22.79
678.809	Peak	25.33	-0.68	24.65	46.00	-21.35
902.273	Peak	24.94	2.88	27.82	46.00	-18.18

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Data for UNII-2a

Test Mode	IEEE 802.11ax HE20 / 5260MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

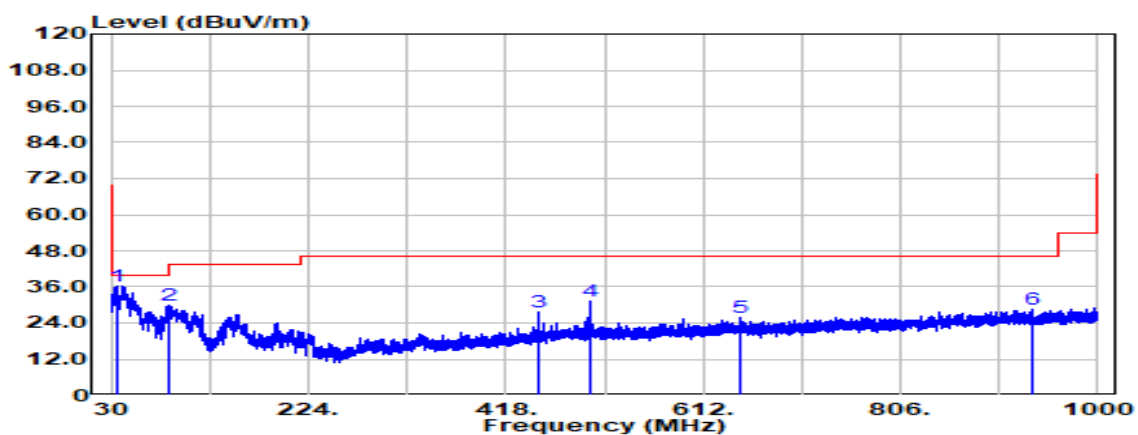


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
35.214	Peak	42.68	-6.32	36.36	40.00	-3.64
85.896	Peak	46.34	-16.24	30.11	40.00	-9.89
450.010	Peak	32.21	-4.78	27.43	46.00	-18.57
501.299	Peak	35.06	-3.60	31.47	46.00	-14.53
647.890	Peak	26.58	-0.81	25.77	46.00	-20.23
934.889	Peak	25.32	3.21	28.53	46.00	-17.47

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5260MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

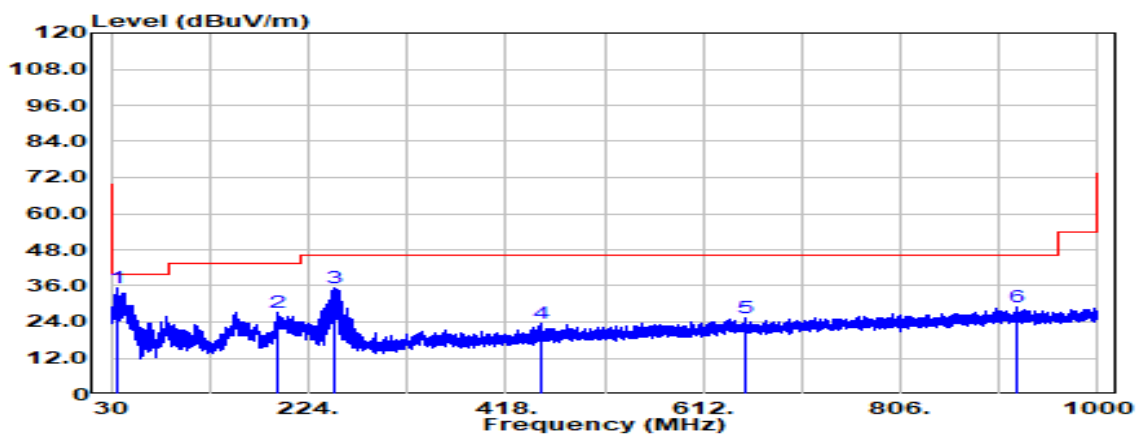


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
35.214	Peak	41.68	-6.32	35.36	40.00	-4.64
193.081	Peak	38.35	-11.07	27.28	43.50	-16.22
249.220	Peak	46.42	-10.96	35.46	46.00	-10.54
451.829	Peak	28.13	-4.69	23.44	46.00	-22.56
652.983	Peak	26.21	-0.80	25.41	46.00	-20.59
920.581	Peak	25.78	3.17	28.95	46.00	-17.05

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Data for UNII-2c

Test Mode	IEEE 802.11ax HE20 / 5500MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

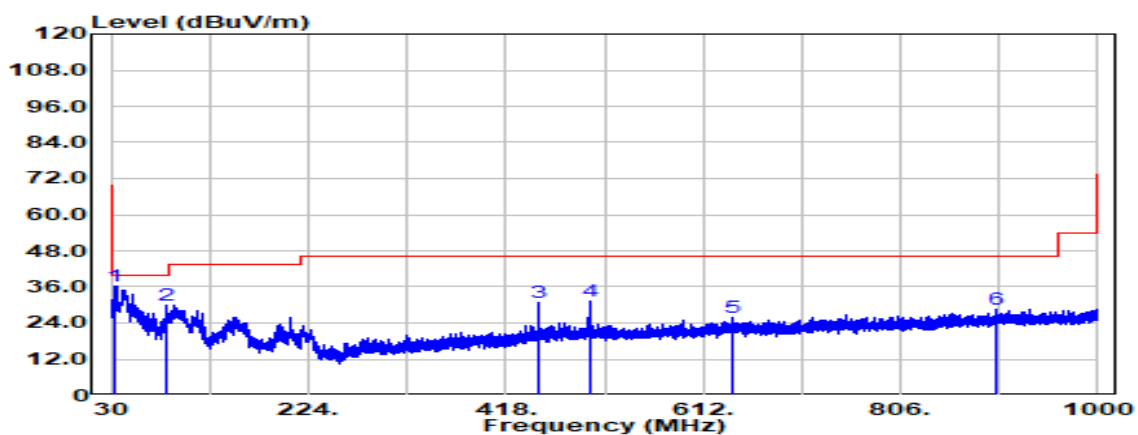


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
34.729	Peak	42.36	-5.91	36.45	40.00	-3.55
84.926	Peak	46.05	-16.07	29.98	40.00	-10.02
450.010	Peak	35.71	-4.78	30.93	46.00	-15.07
501.299	Peak	34.96	-3.60	31.37	46.00	-14.63
640.979	Peak	26.80	-0.80	26.01	46.00	-19.99
901.181	Peak	25.77	2.89	28.65	46.00	-17.35

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5500MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

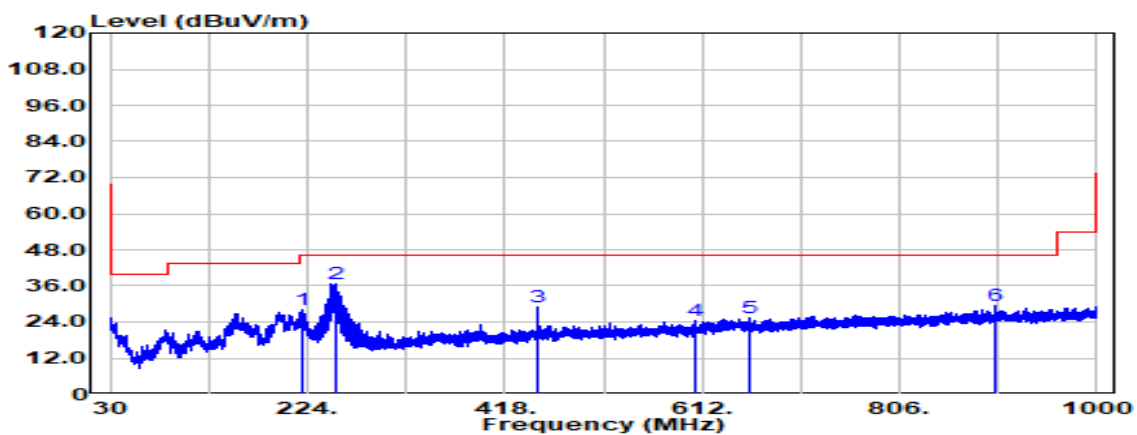


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
219.150	Peak	40.27	-12.01	28.25	46.00	-17.75
252.736	Peak	47.72	-10.89	36.83	46.00	-9.17
450.010	Peak	33.87	-4.78	29.08	46.00	-16.92
604.968	Peak	26.69	-2.21	24.48	46.00	-21.52
658.560	Peak	26.00	-0.85	25.15	46.00	-20.85
899.969	Peak	26.49	2.89	29.37	46.00	-16.63

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

Test Data for UNII-3

Test Mode	IEEE 802.11ax HE20 / 5745MHz_	Temp/Hum	23.4(°C)/ 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

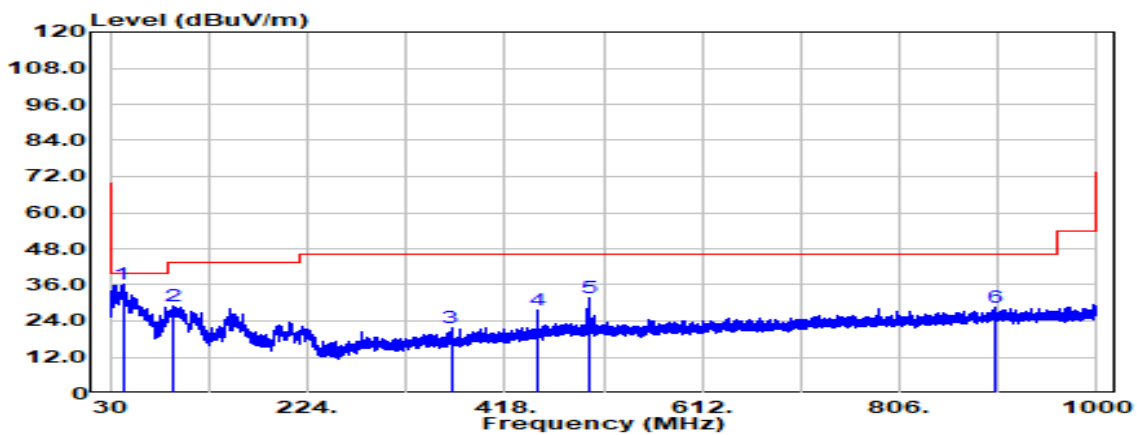


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
42.368	Peak	47.87	-11.58	36.29	40.00	-3.71
92.565	Peak	43.81	-15.05	28.76	43.50	-14.74
365.135	Peak	28.98	-7.29	21.69	46.00	-24.31
449.161	Peak	32.28	-4.78	27.51	46.00	-18.49
501.299	Peak	35.32	-3.60	31.72	46.00	-14.28
899.969	Peak	25.71	2.89	28.60	46.00	-17.40

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz_	Temp/Hum	23.4(°C) / 61%RH
Test Item	30MHz-1GHz	Test Date	March 3, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

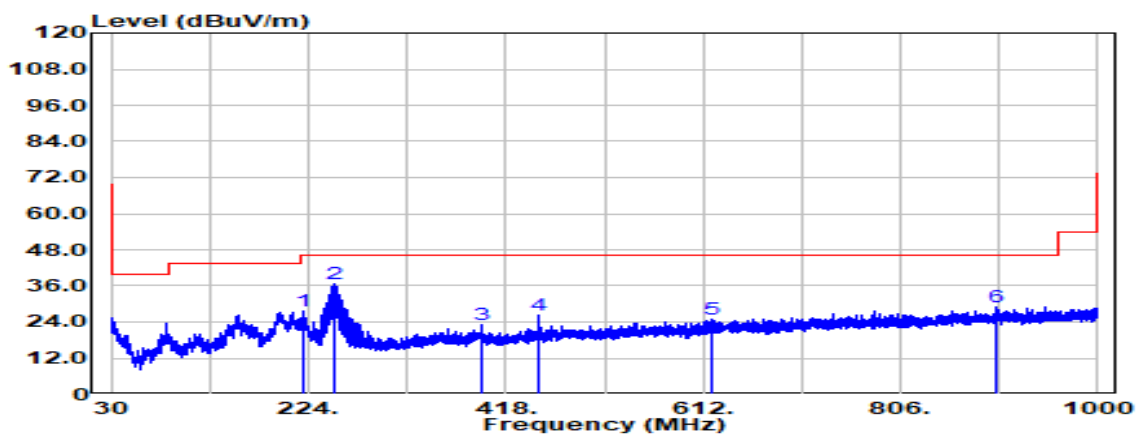

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
219.393	Peak	39.80	-12.01	27.79	46.00	-18.21
249.220	Peak	47.67	-10.96	36.72	46.00	-9.28
393.508	Peak	29.68	-6.47	23.22	46.00	-22.78
450.495	Peak	31.16	-4.76	26.40	46.00	-19.60
620.973	Peak	26.28	-1.40	24.89	46.00	-21.11
899.969	Peak	25.88	2.89	28.77	46.00	-17.23

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Report No.: TMWK2201000141KR

Above 1G

BFM OFF

Test Data for UNII-1

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

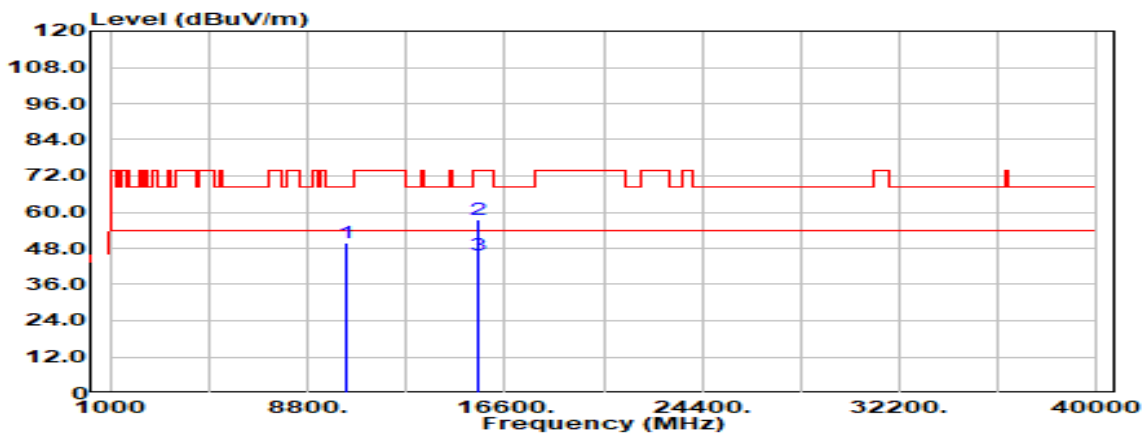


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.000	Peak	32.22	17.72	49.94	68.20	-18.26
15540.000	Peak	32.66	24.85	57.51	74.00	-16.49
15540.000	Average	21.03	24.85	45.88	54.00	-8.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

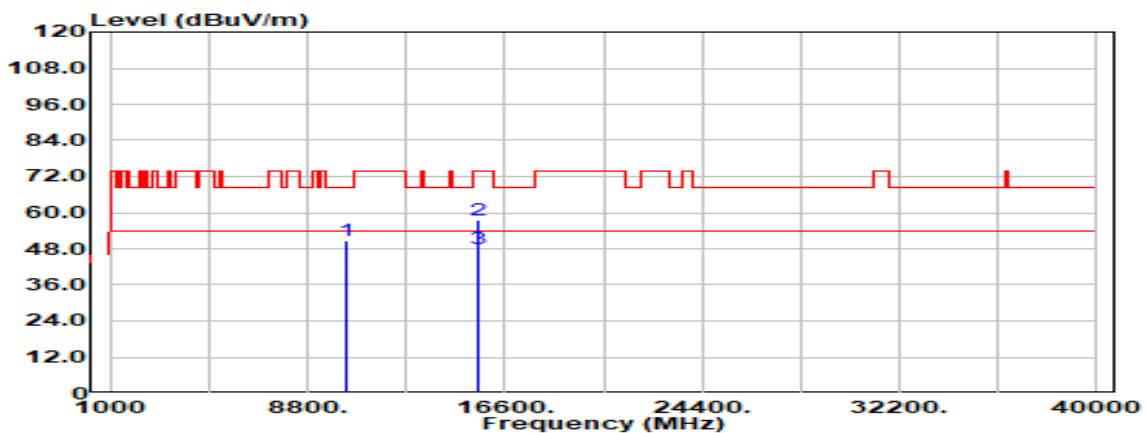


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	33.17	17.72	50.89	68.20	-17.31
15540.000	Peak	32.64	24.85	57.49	74.00	-16.51
15540.000	Average	23.08	24.85	47.93	54.00	-6.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonics	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

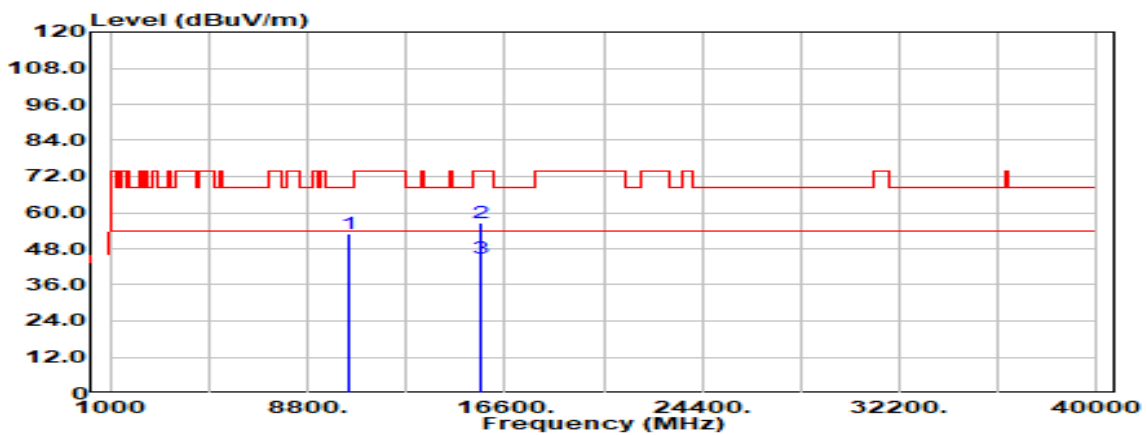


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.000	Peak	35.29	17.90	53.19	68.20	-15.01
15660.000	Peak	31.62	25.15	56.77	74.00	-17.23
15660.000	Average	19.73	25.15	44.88	54.00	-9.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

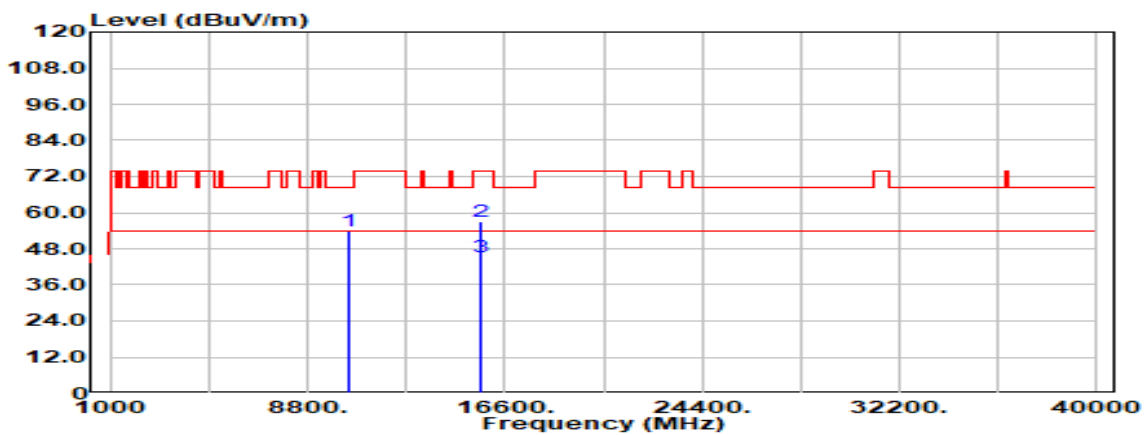


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.000	Peak	36.07	17.90	53.98	68.20	-14.22
15660.000	Peak	31.92	25.15	57.07	74.00	-16.93
15660.000	Average	20.31	25.15	45.46	54.00	-8.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

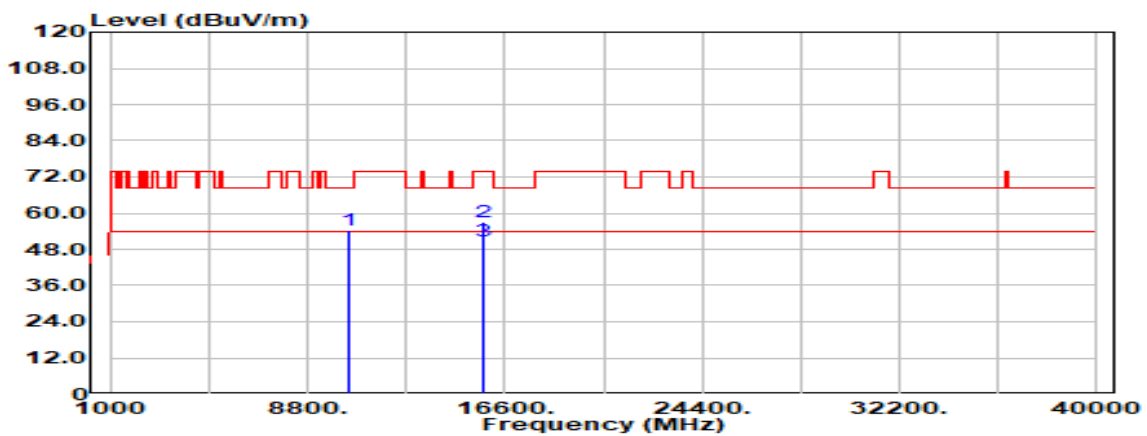


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	36.07	18.05	54.12	68.20	-14.08
15720.000	Peak	31.29	25.55	56.84	74.00	-17.16
15720.000	Average	25.05	25.55	50.60	54.00	-3.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

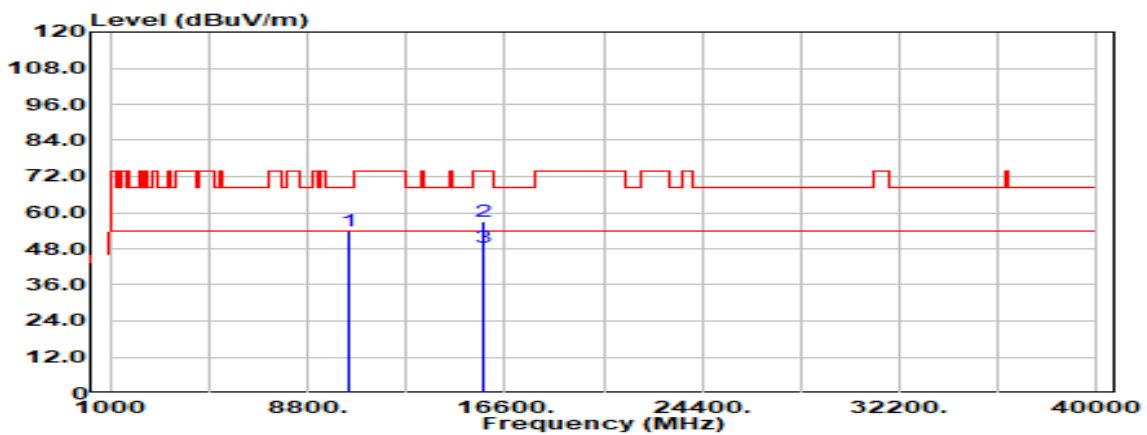


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.000	Peak	35.82	18.05	53.87	68.20	-14.33
15720.000	Peak	31.52	25.55	57.08	74.00	-16.92
15720.000	Average	23.03	25.55	48.58	54.00	-5.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5180MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

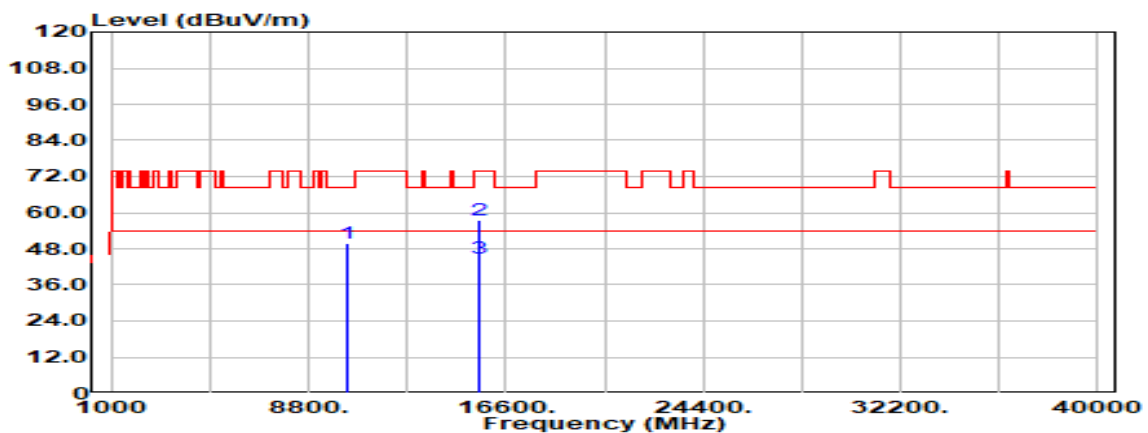


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	31.88	17.72	49.60	68.20	-18.60
15540.000	Peak	32.65	24.85	57.50	74.00	-16.50
15540.000	Average	20.21	24.85	45.06	54.00	-8.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5180MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

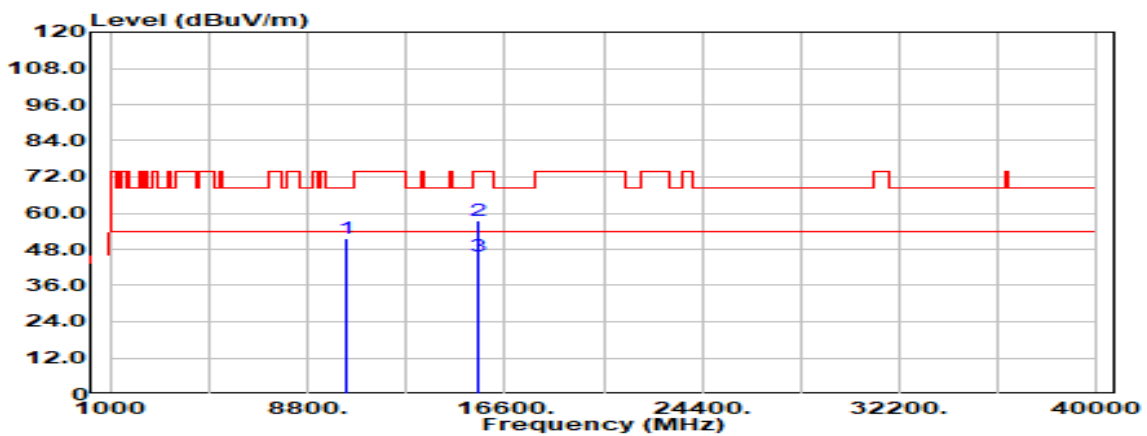


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	33.97	17.72	51.69	68.20	-16.51
15540.000	Peak	32.86	24.85	57.70	74.00	-16.30
15540.000	Average	20.88	24.85	45.73	54.00	-8.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5220MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

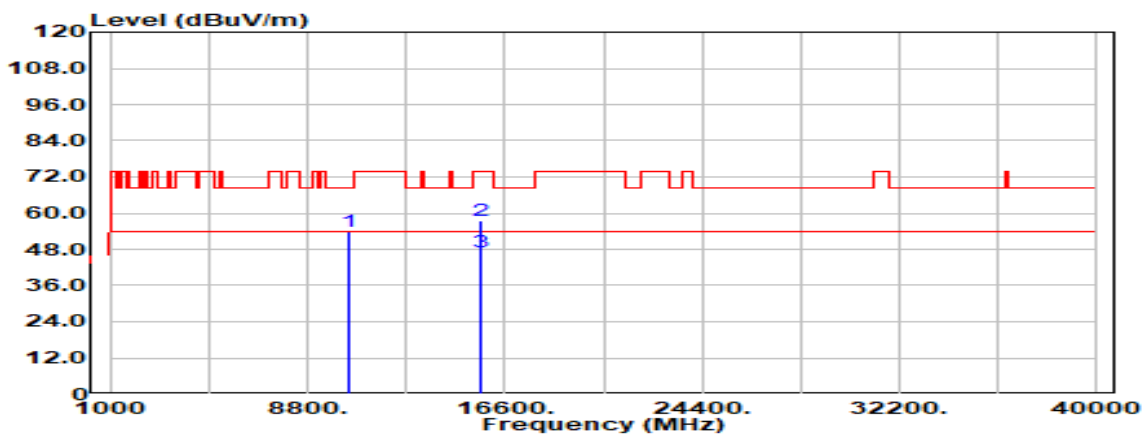


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.000	Peak	35.87	17.90	53.78	68.20	-14.42
15660.000	Peak	32.37	25.15	57.52	74.00	-16.48
15660.000	Average	21.85	25.15	47.00	54.00	-7.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5220MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

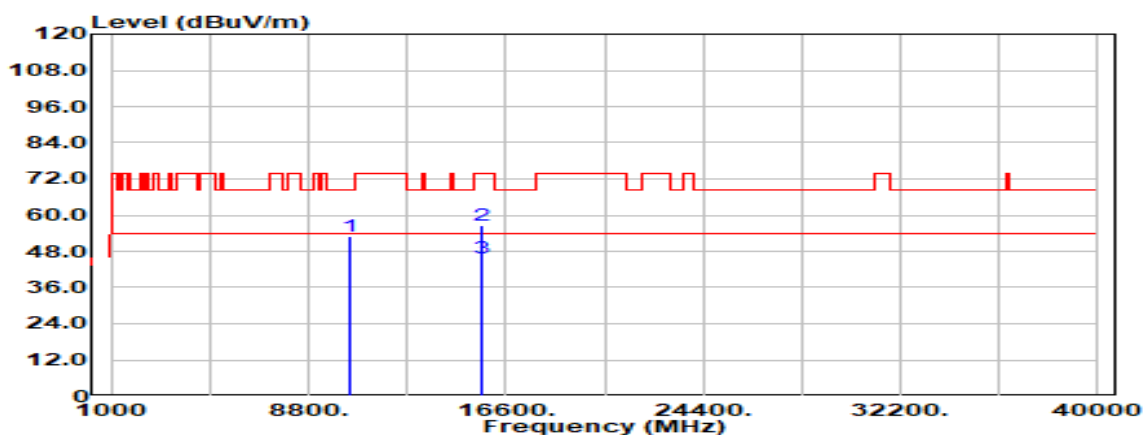


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.000	Peak	35.01	17.90	52.91	68.20	-15.29
15660.000	Peak	31.37	25.15	56.52	74.00	-17.48
15660.000	Average	20.38	25.15	45.53	54.00	-8.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5240MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

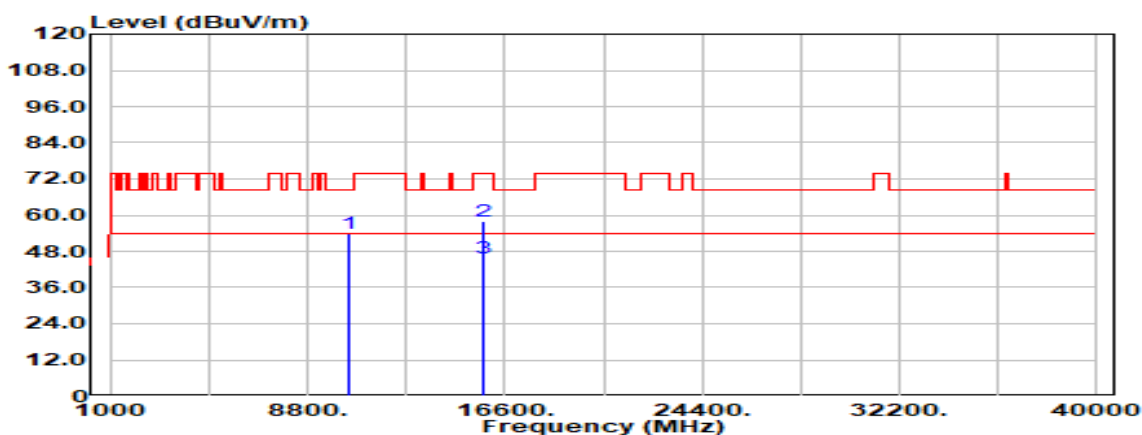


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.000	Peak	36.05	18.05	54.10	68.20	-14.10
15720.000	Peak	32.21	25.55	57.77	74.00	-16.23
15720.000	Average	20.15	25.55	45.70	54.00	-8.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5240MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

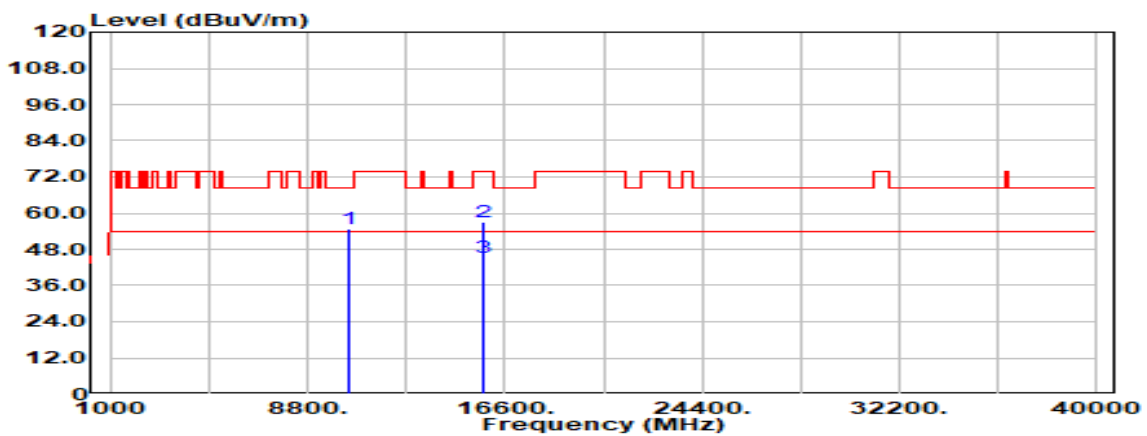


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.000	Peak	36.56	18.05	54.61	68.20	-13.59
15720.000	Peak	31.59	25.55	57.14	74.00	-16.86
15720.000	Average	19.85	25.55	45.40	54.00	-8.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5190MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

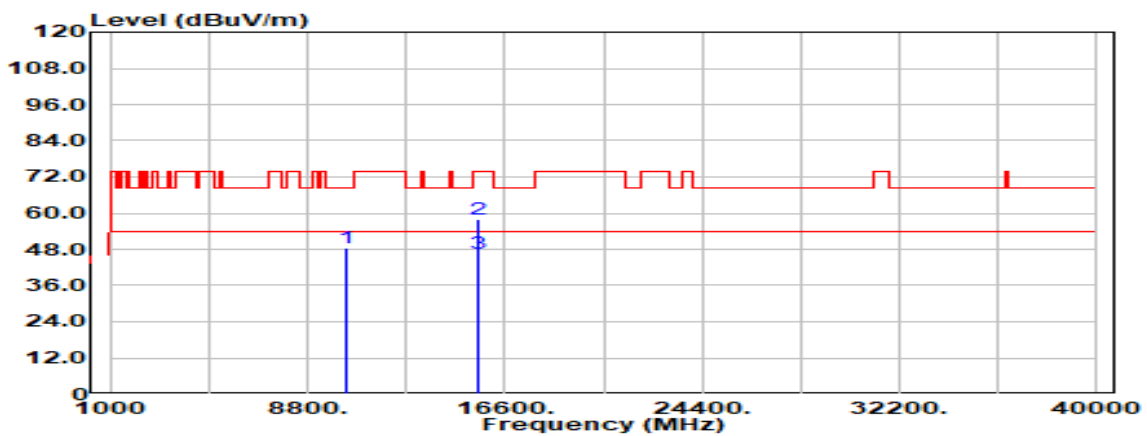


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	30.91	17.76	48.67	68.20	-19.53
15570.000	Peak	33.06	24.85	57.91	74.00	-16.09
15570.000	Average	21.59	24.85	46.44	54.00	-7.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5190MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

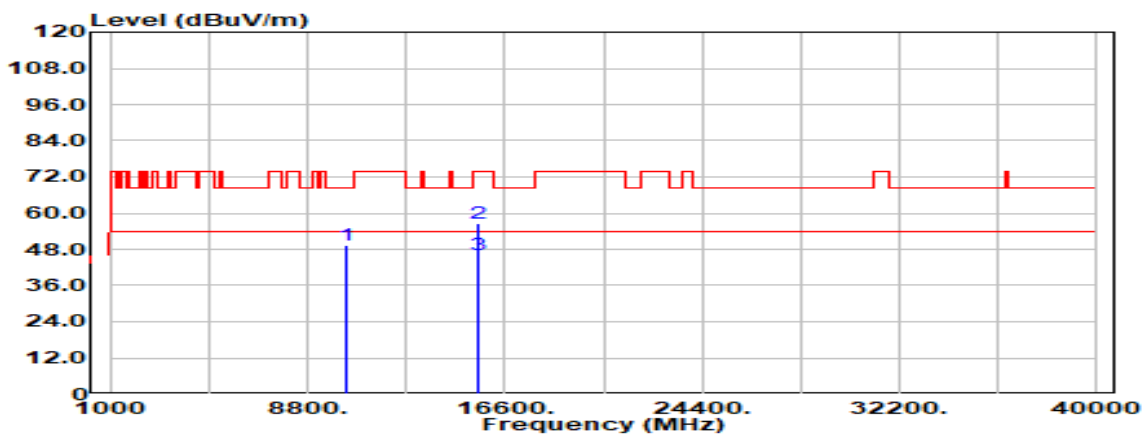


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	31.44	17.76	49.20	68.20	-19.00
15570.000	Peak	31.96	24.85	56.81	74.00	-17.19
15570.000	Average	21.48	24.85	46.33	54.00	-7.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5230MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

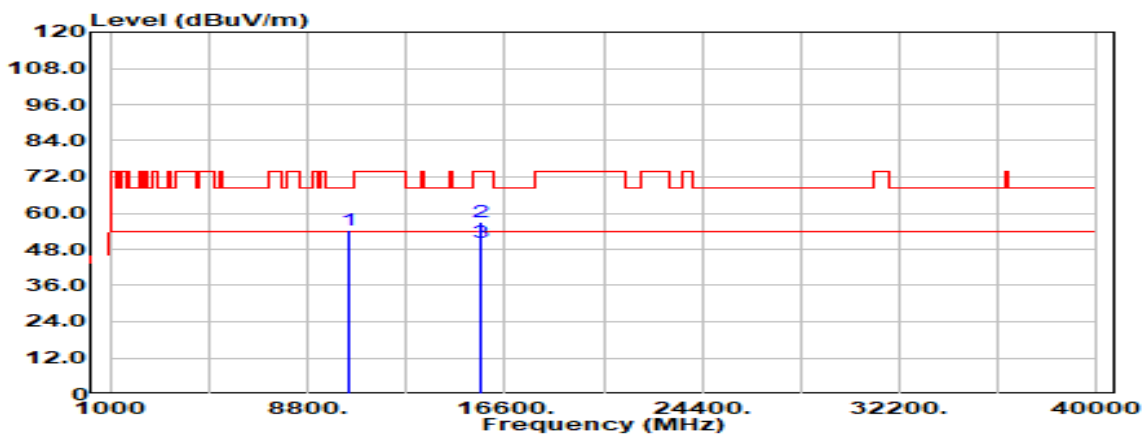


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10460.000	Peak	36.36	17.97	54.33	68.20	-13.87
15690.000	Peak	31.79	25.38	57.17	74.00	-16.83
15690.000	Average	24.68	25.38	50.06	54.00	-3.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5230MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

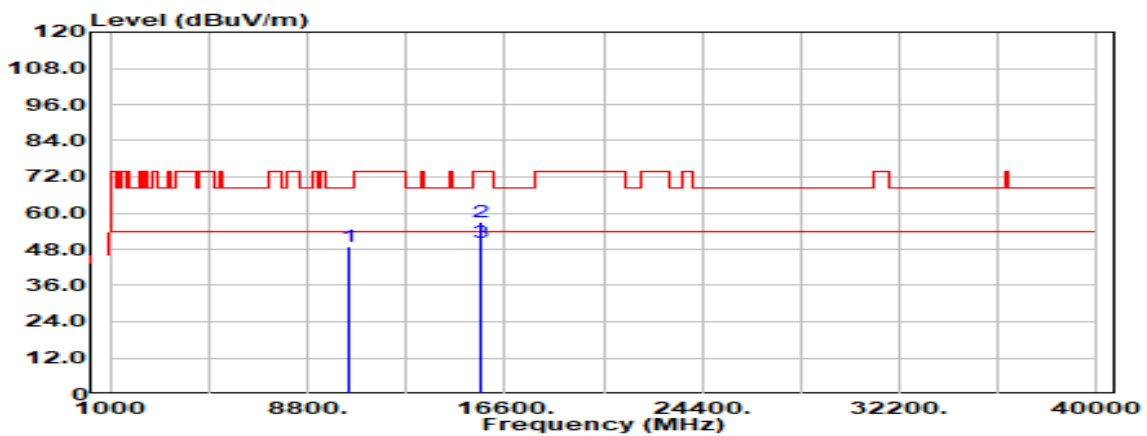


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	31.07	17.97	49.04	68.20	-19.16
15690.000	Peak	31.51	25.38	56.90	74.00	-17.10
15690.000	Average	24.67	25.38	50.05	54.00	-3.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

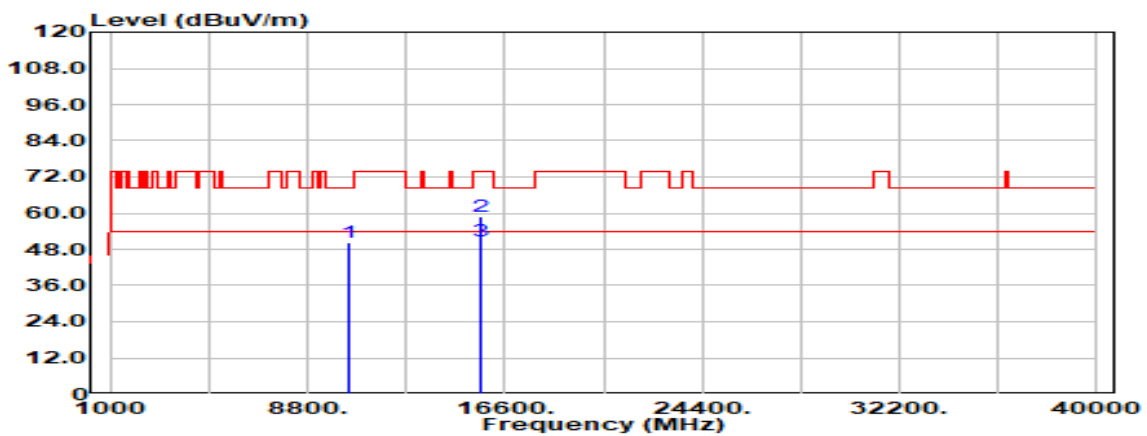


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10420.000	Peak	32.42	17.85	50.27	68.20	-17.93
15630.000	Peak	33.68	25.00	58.68	74.00	-15.32
15630.000	Average	25.84	25.00	50.84	54.00	-3.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

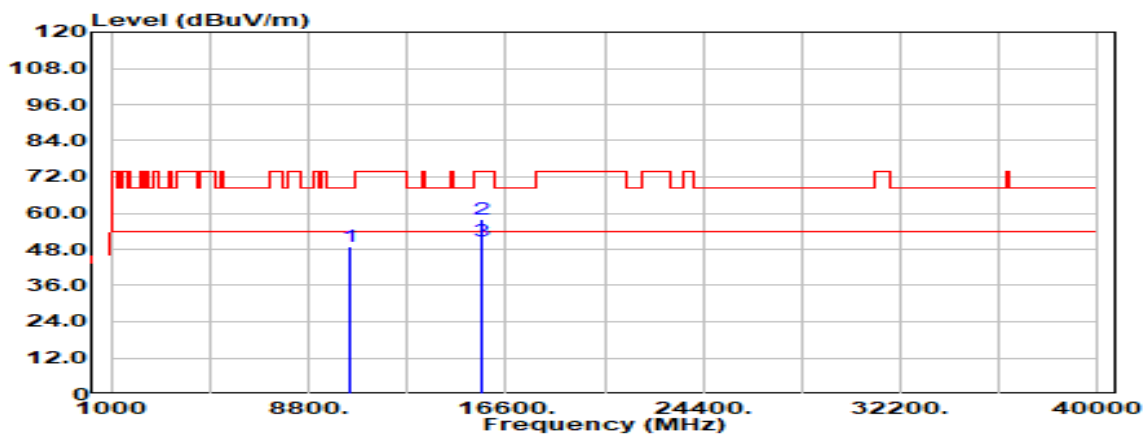


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	30.89	17.85	48.74	68.20	-19.46
15630.000	Peak	32.85	25.00	57.85	74.00	-16.15
15630.000	Average	25.72	25.00	50.72	54.00	-3.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5180MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

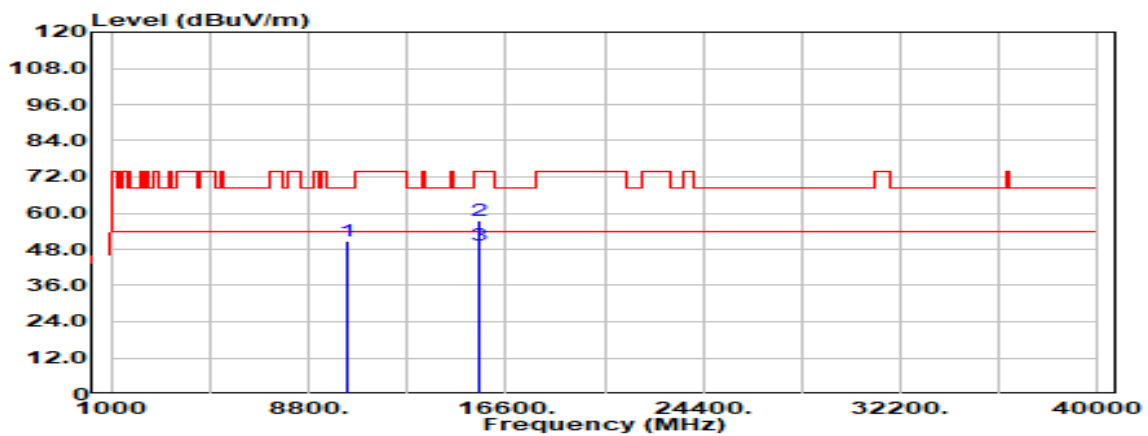


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	33.01	17.72	50.73	68.20	-17.47
15540.000	Peak	32.84	24.85	57.69	74.00	-16.31
15540.000	Average	24.30	24.85	49.15	54.00	-4.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5180MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

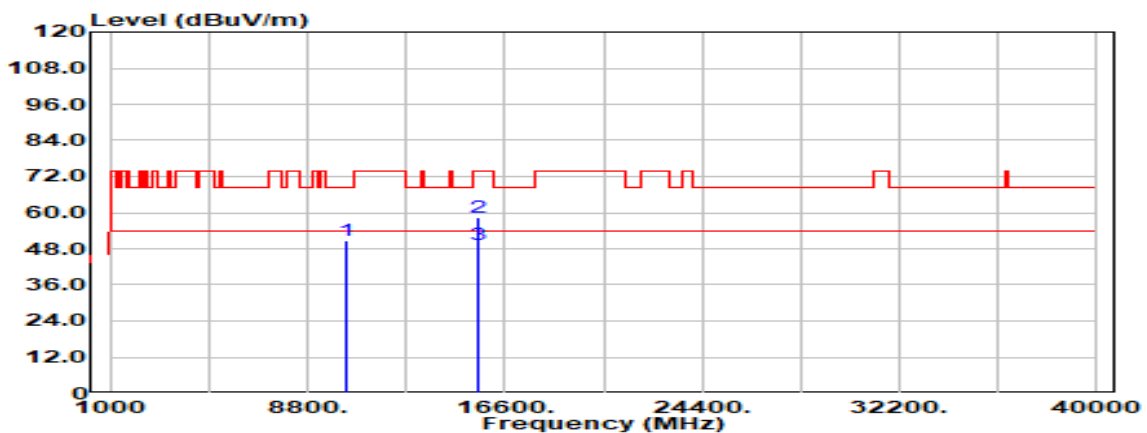


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.000	Peak	32.85	17.72	50.57	68.20	-17.63
15540.000	Peak	33.62	24.85	58.46	74.00	-15.54
15540.000	Average	24.43	24.85	49.28	54.00	-4.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5220MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

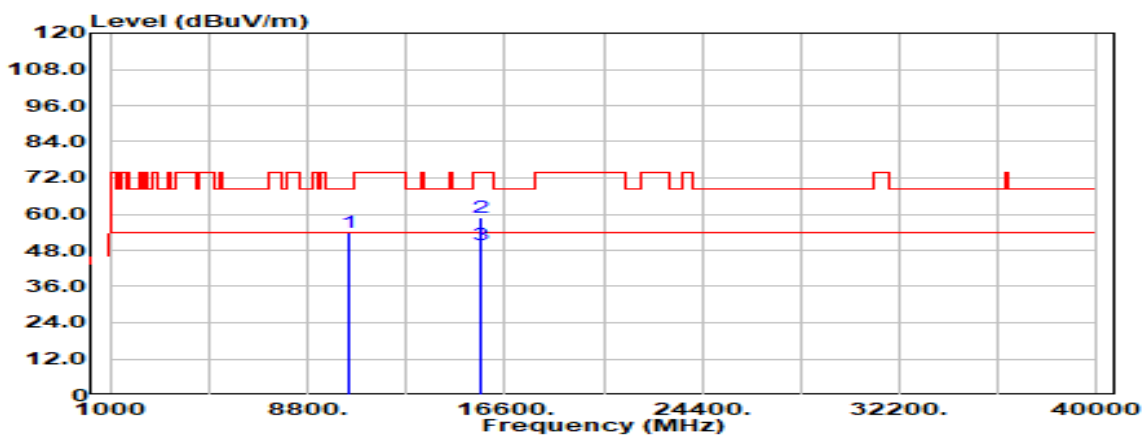


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	36.15	17.90	54.05	68.20	-14.15
15660.000	Peak	33.64	25.15	58.79	74.00	-15.21
15660.000	Average	24.52	25.15	49.67	54.00	-4.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5220MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

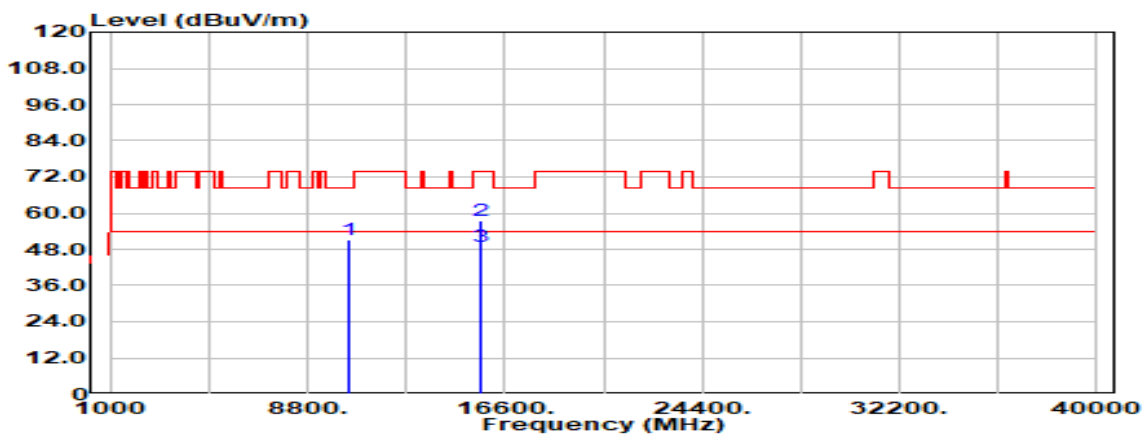


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.000	Peak	33.12	17.90	51.02	68.20	-17.18
15660.000	Peak	32.38	25.15	57.53	74.00	-16.47
15660.000	Average	23.78	25.15	48.93	54.00	-5.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5240MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

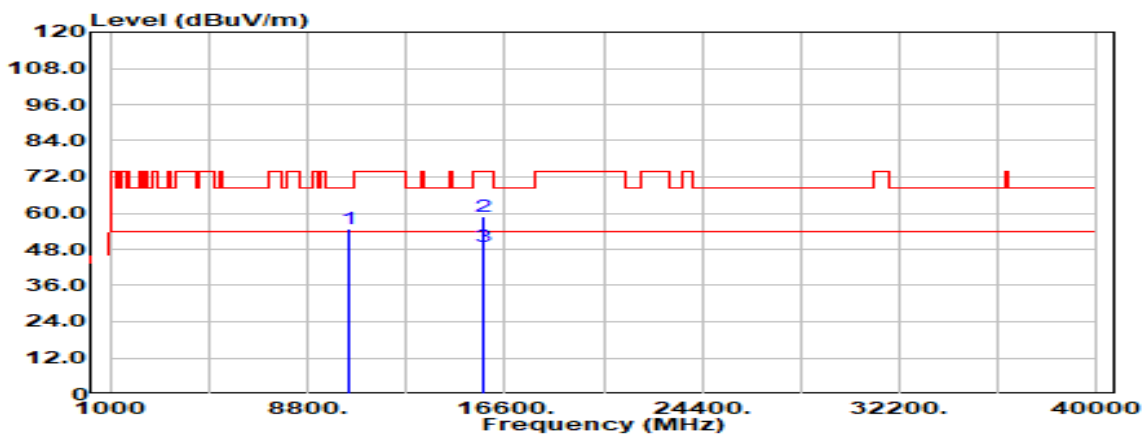


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10480.000	Peak	36.69	18.05	54.74	68.20	-13.46
15720.000	Peak	33.39	25.55	58.94	74.00	-15.06
15720.000	Average	23.52	25.55	49.07	54.00	-4.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5240MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

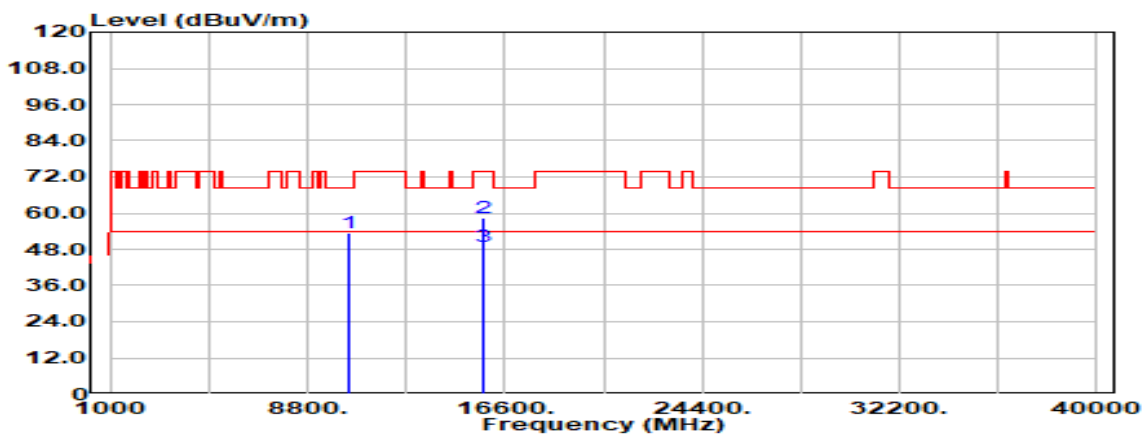


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10480.000	Peak	35.16	18.05	53.21	68.20	-14.99
15720.000	Peak	32.66	25.55	58.21	74.00	-15.79
15720.000	Average	23.45	25.55	49.00	54.00	-5.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

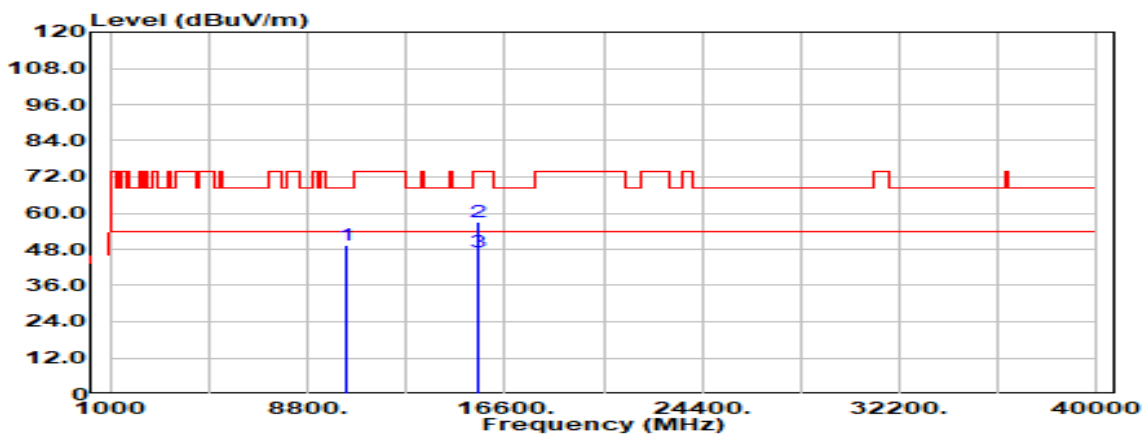


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10380.000	Peak	31.41	17.76	49.17	68.20	-19.03
15570.000	Peak	32.33	24.85	57.19	74.00	-16.81
15570.000	Average	22.32	24.85	47.17	54.00	-6.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5190MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

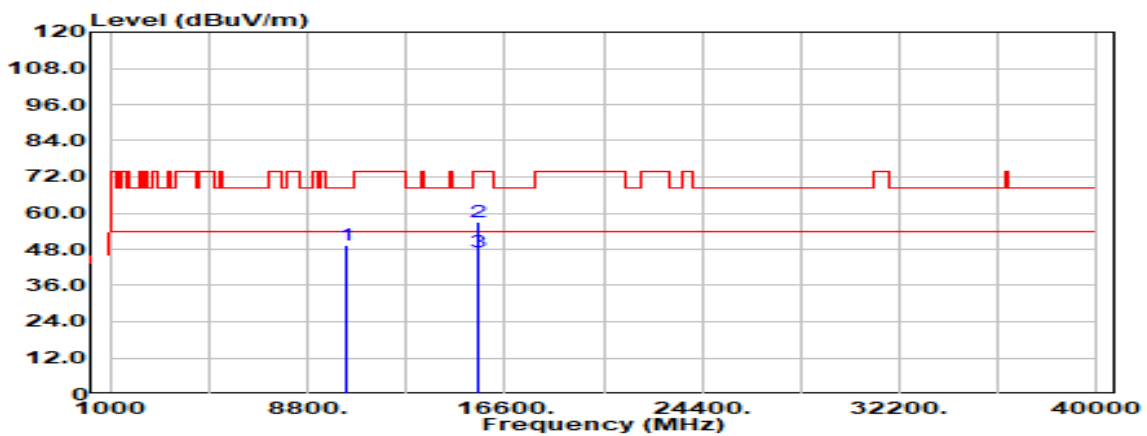


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.000	Peak	31.42	17.76	49.18	68.20	-19.02
15570.000	Peak	32.41	24.85	57.27	74.00	-16.73
15570.000	Average	22.36	24.85	47.21	54.00	-6.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5230MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

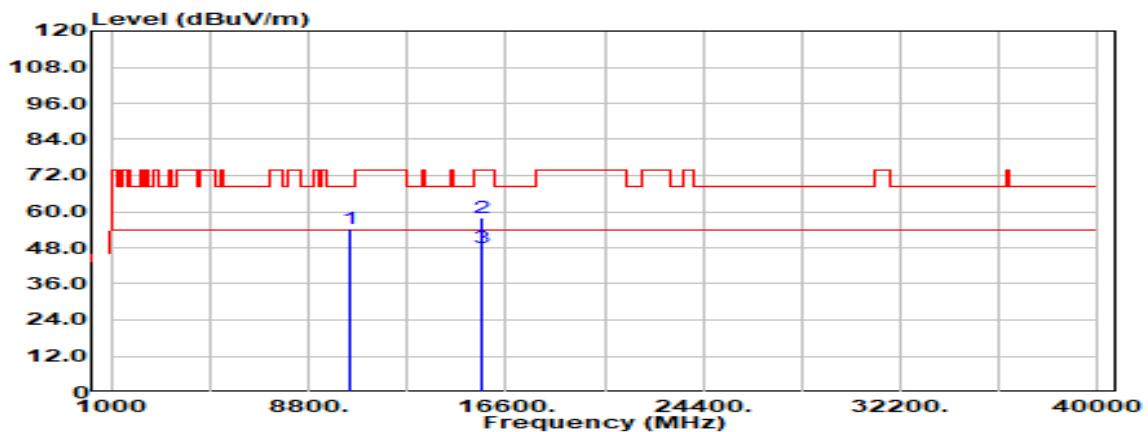


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.000	Peak	36.29	17.97	54.26	68.20	-13.94
15690.000	Peak	32.64	25.38	58.02	74.00	-15.98
15690.000	Average	22.53	25.38	47.91	54.00	-6.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5230MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

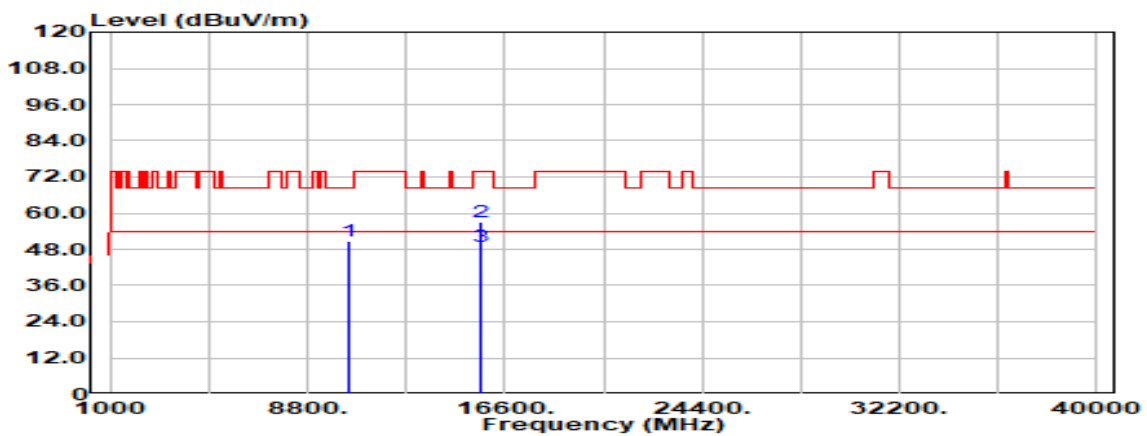


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10460.000	Peak	32.79	17.97	50.76	68.20	-17.44
15690.000	Peak	31.83	25.38	57.21	74.00	-16.79
15690.000	Average	23.72	25.38	49.10	54.00	-4.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5210MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

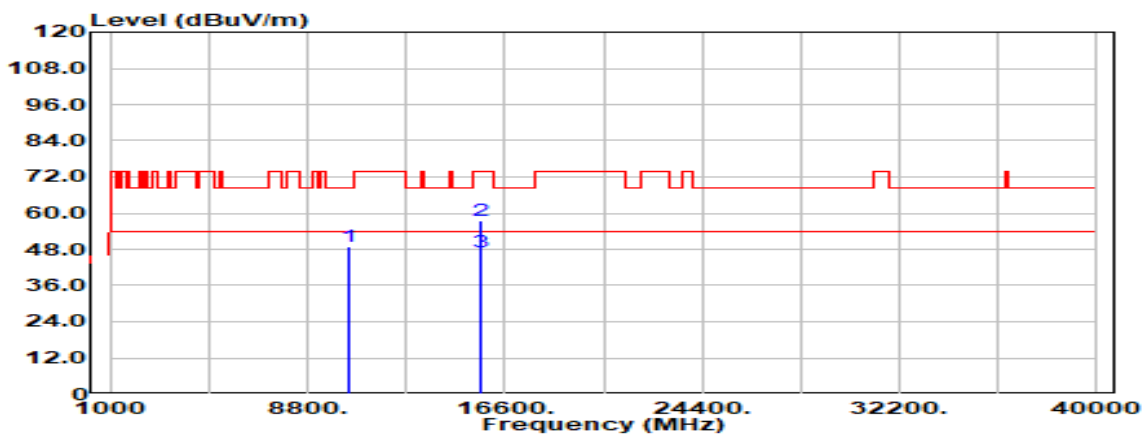


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	31.15	17.85	49.00	68.20	-19.20
15630.000	Peak	32.42	25.00	57.42	74.00	-16.58
15630.000	Average	22.20	25.00	47.20	54.00	-6.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5210MHz	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

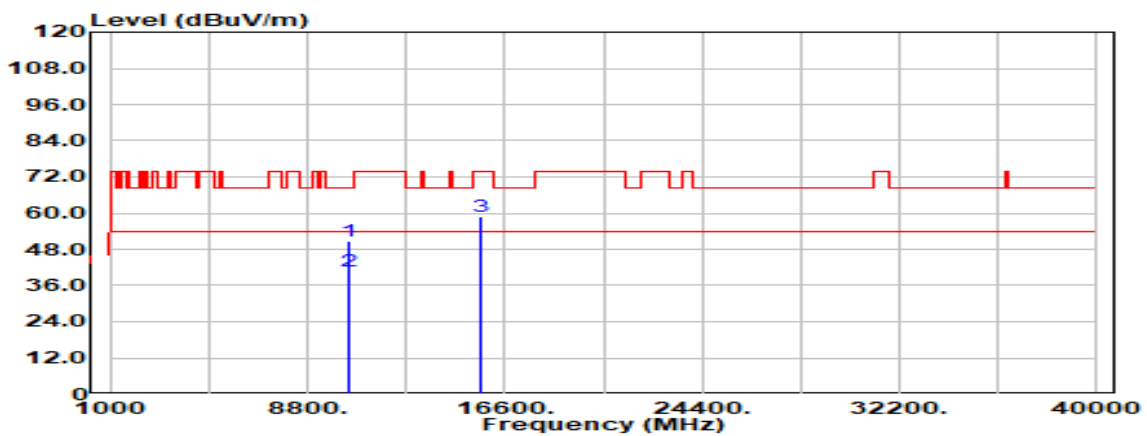


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.000	Peak	32.78	17.85	50.64	68.20	-17.56
10420.000	Average	22.93	17.85	40.78	54.00	-13.22
15630.000	Peak	33.68	25.00	58.68	74.00	-15.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

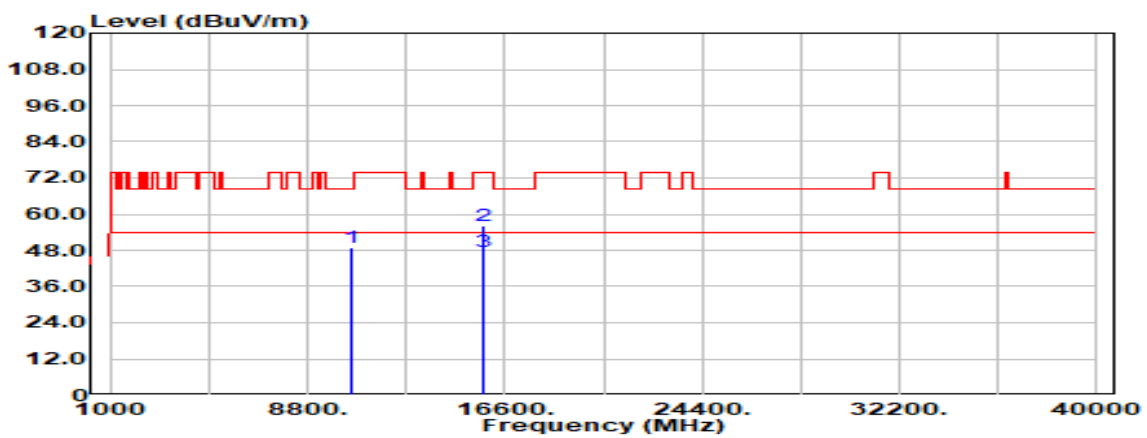


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	30.84	18.16	49.00	68.20	-19.20
15780.000	Peak	30.52	25.80	56.32	74.00	-17.68
15780.000	Average	21.58	25.80	47.38	54.00	-6.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

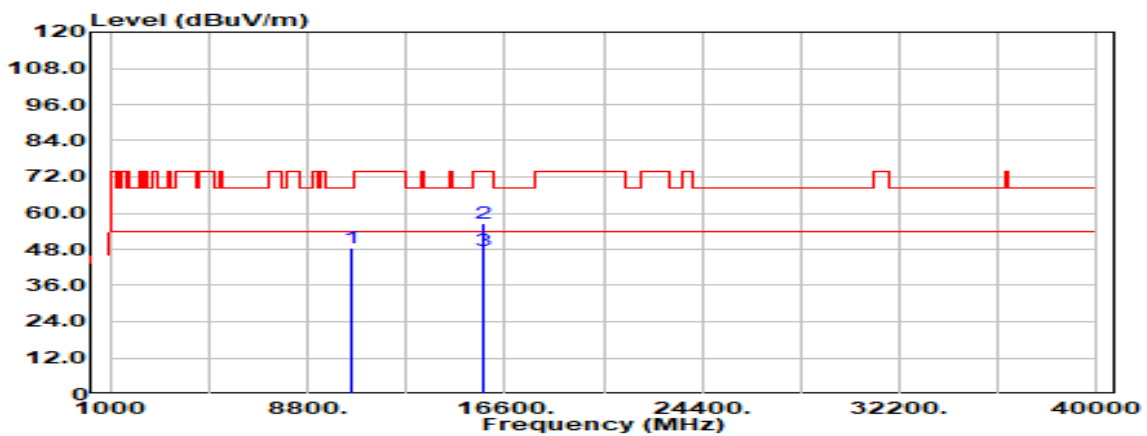


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	30.37	18.16	48.53	68.20	-19.67
15780.000	Peak	30.82	25.80	56.63	74.00	-17.37
15780.000	Average	21.80	25.80	47.60	54.00	-6.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonics	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

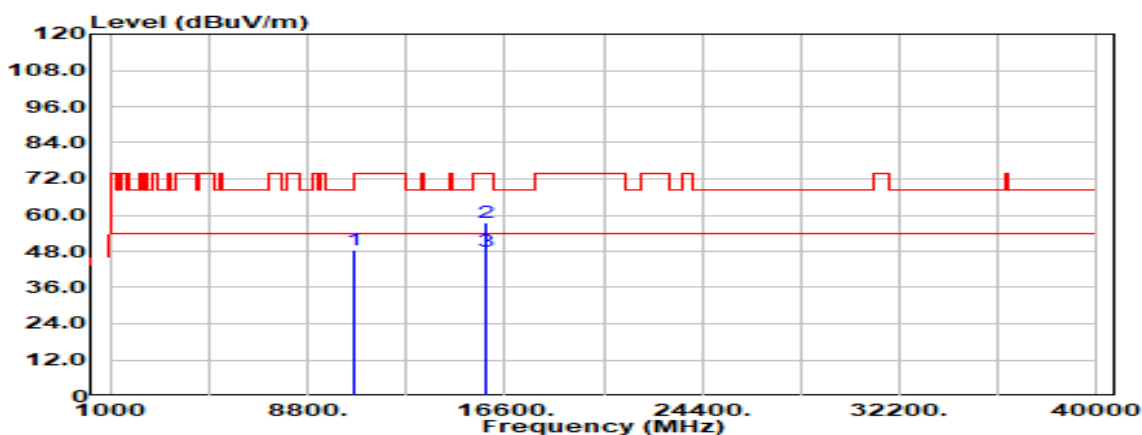


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10600.000	Peak	30.20	18.20	48.40	68.20	-19.80
15900.000	Peak	30.92	26.46	57.38	74.00	-16.62
15900.000	Average	21.65	26.46	48.11	54.00	-5.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

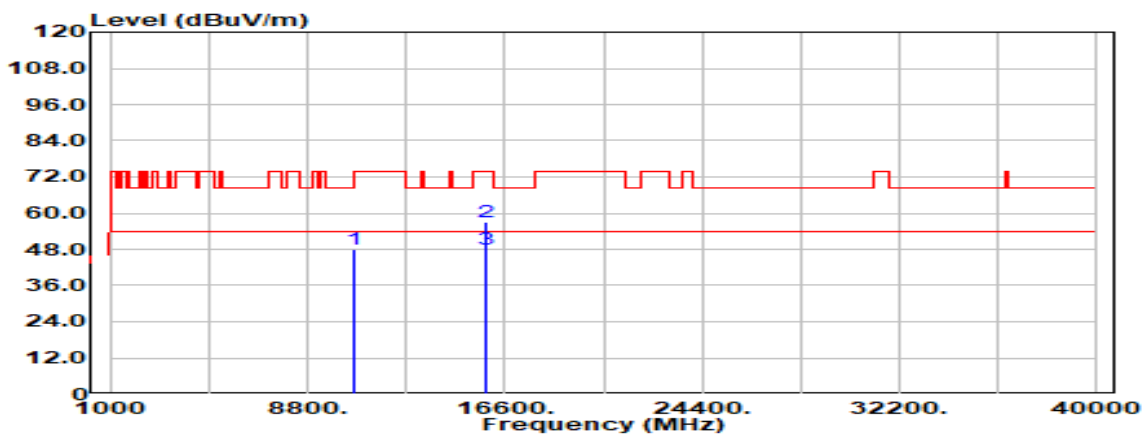


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10600.000	Peak	29.64	18.20	47.84	68.20	-20.36
15900.000	Peak	30.62	26.46	57.08	74.00	-16.92
15900.000	Average	21.62	26.46	48.08	54.00	-5.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

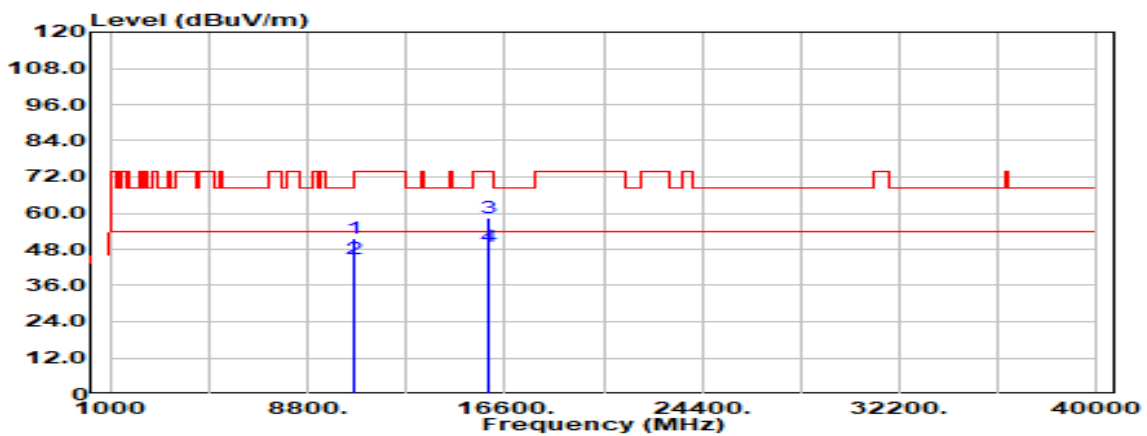


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	33.20	18.37	51.57	74.00	-22.43
10640.000	Average	26.53	18.37	44.90	54.00	-9.10
15960.000	Peak	31.47	26.84	58.32	74.00	-15.68
15960.000	Average	22.07	26.84	48.91	54.00	-5.09

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

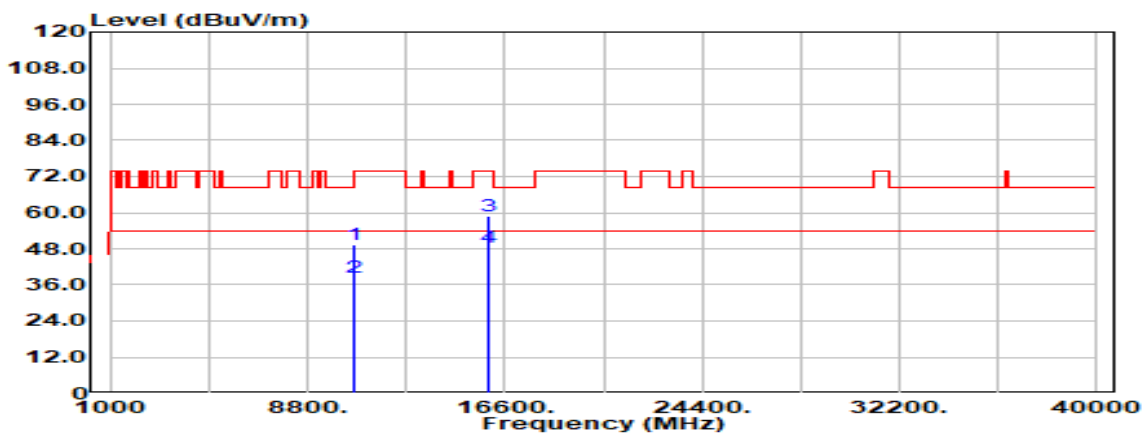


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	31.02	18.37	49.39	74.00	-24.61
10640.000	Average	19.96	18.37	38.33	54.00	-15.67
15960.000	Peak	32.16	26.84	59.00	74.00	-15.00
15960.000	Average	21.62	26.84	48.46	54.00	-5.54

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5260 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

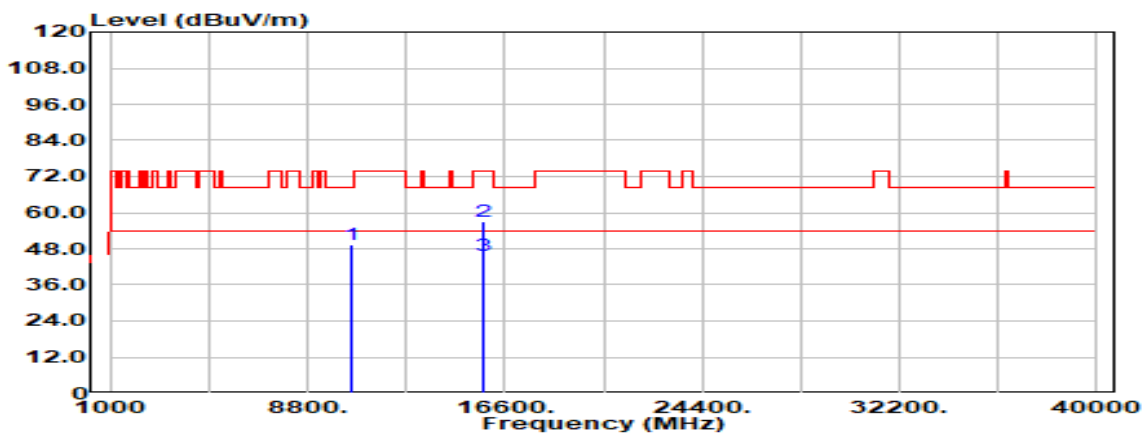


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10520.000	Peak	31.10	18.16	49.26	68.20	-18.94
15780.000	Peak	31.35	25.80	57.15	74.00	-16.85
15780.000	Average	19.96	25.80	45.76	54.00	-8.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5260 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

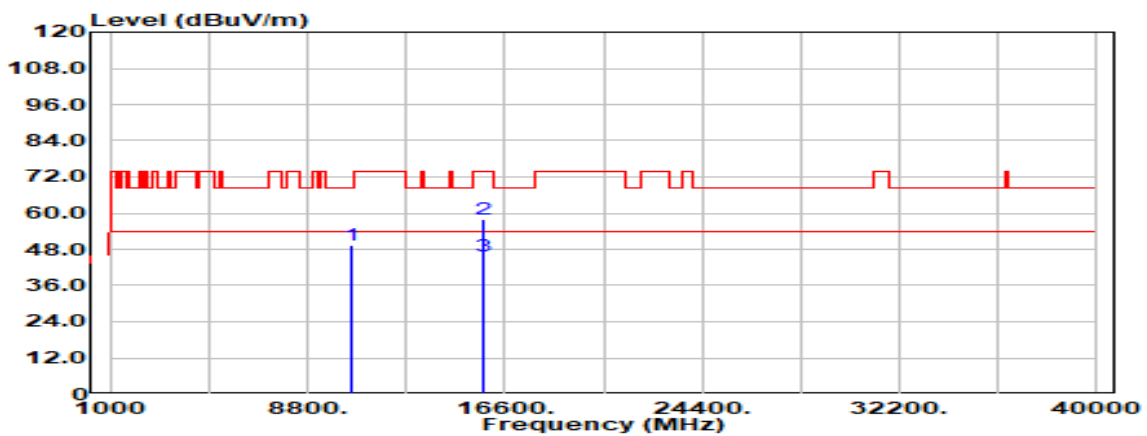


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10520.000	Peak	31.16	18.16	49.32	68.20	-18.88
15780.000	Peak	32.03	25.80	57.83	74.00	-16.17
15780.000	Average	20.15	25.80	45.95	54.00	-8.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5300MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

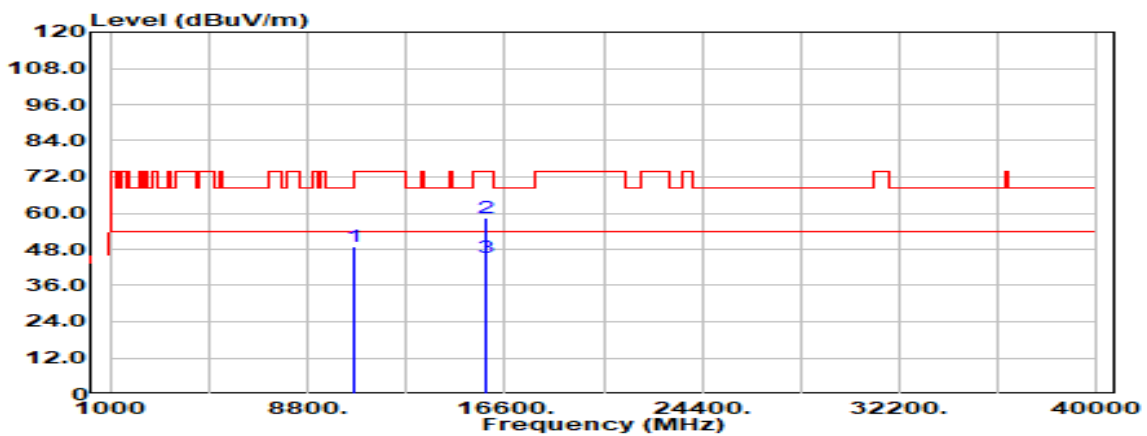


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10600.000	Peak	30.62	18.20	48.82	68.20	-19.38
15900.000	Peak	31.78	26.46	58.24	74.00	-15.76
15900.000	Average	18.89	26.46	45.35	54.00	-8.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5300MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

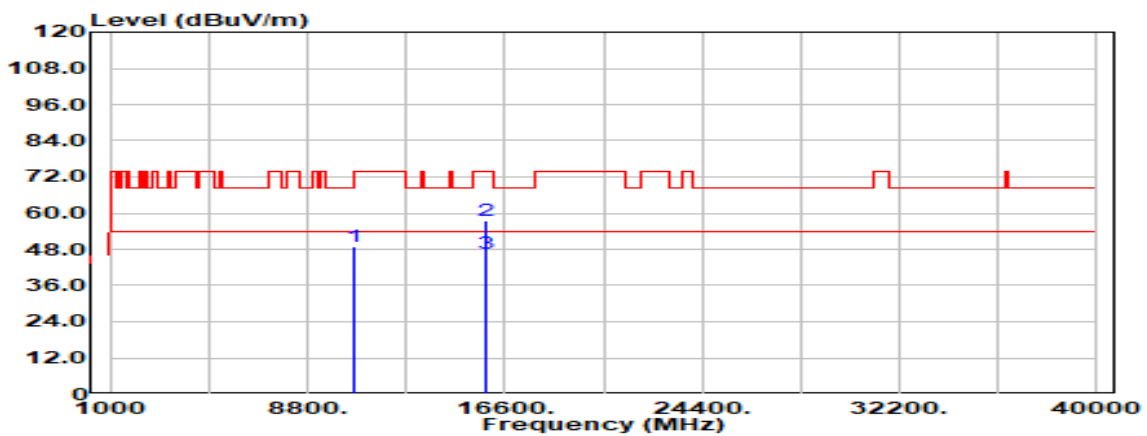

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10600.000	Peak	30.73	18.20	48.93	68.20	-19.27
15900.000	Peak	30.84	26.46	57.30	74.00	-16.70
15900.000	Average	20.14	26.46	46.60	54.00	-7.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.