


Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

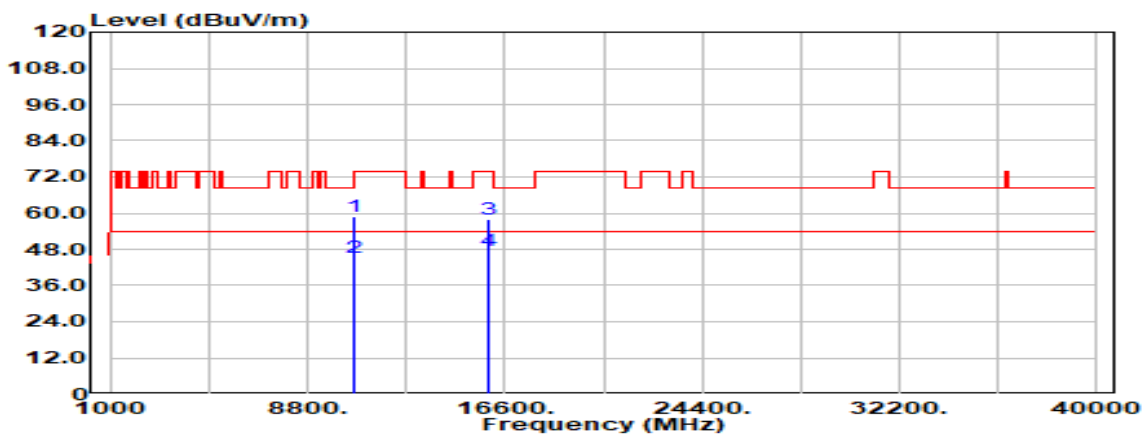


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	40.54	18.37	58.91	74.00	-15.09
10640.000	Average	27.10	18.37	45.47	54.00	-8.53
15960.000	Peak	31.34	26.84	58.18	74.00	-15.82
15960.000	Average	20.74	26.84	47.58	54.00	-6.42

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5320 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

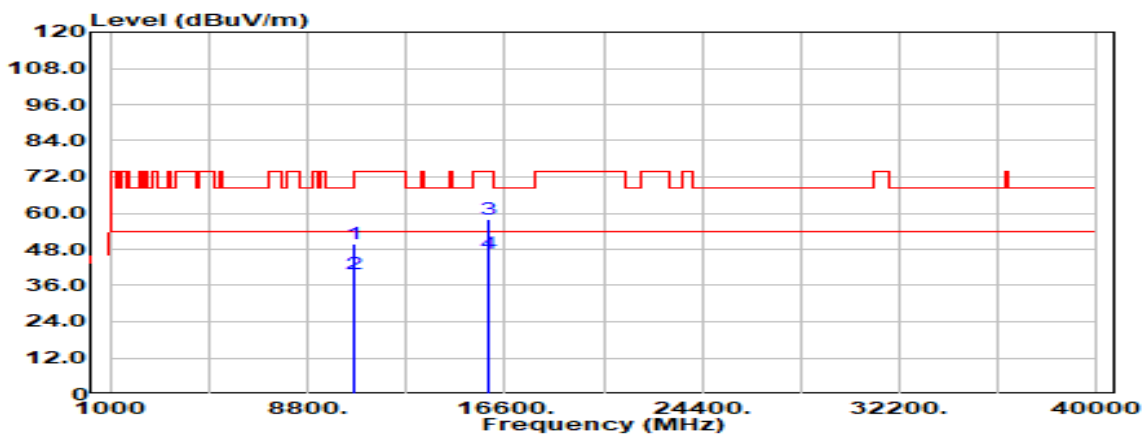


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	31.22	18.37	49.59	74.00	-24.41
10640.000	Average	21.32	18.37	39.69	54.00	-14.31
15960.000	Peak	31.13	26.84	57.97	74.00	-16.03
15960.000	Average	19.65	26.84	46.49	54.00	-7.51

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5270 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

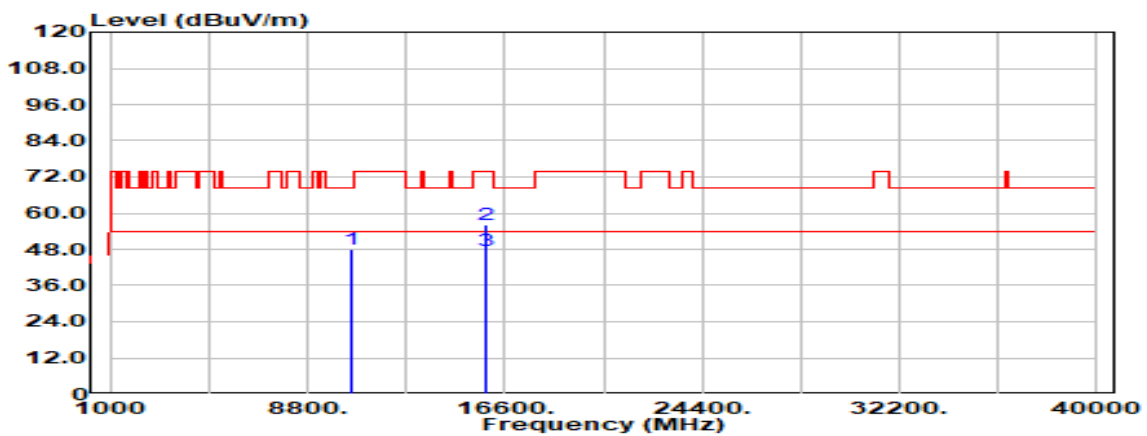


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10540.000	Peak	29.87	18.19	48.06	68.20	-20.14
15810.000	Peak	30.11	25.92	56.03	74.00	-17.97
15810.000	Average	21.72	25.92	47.64	54.00	-6.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5270 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

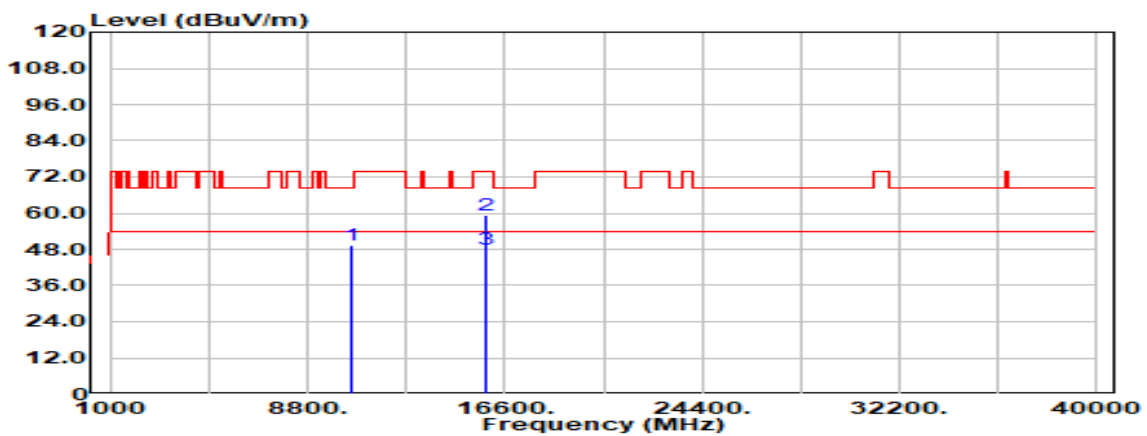


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10540.000	Peak	31.10	18.19	49.29	68.20	-18.91
15810.000	Peak	33.22	25.92	59.14	74.00	-14.86
15810.000	Average	22.24	25.92	48.16	54.00	-5.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

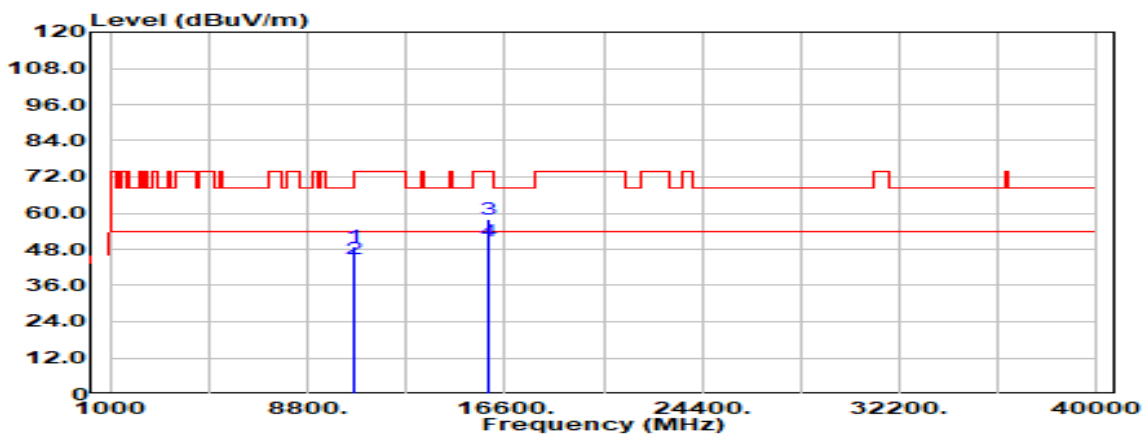


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	30.79	18.28	49.08	74.00	-24.92
10620.000	Average	26.37	18.28	44.65	54.00	-9.35
15930.000	Peak	31.26	26.63	57.90	74.00	-16.10
15930.000	Average	24.16	26.63	50.79	54.00	-3.21

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5310 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

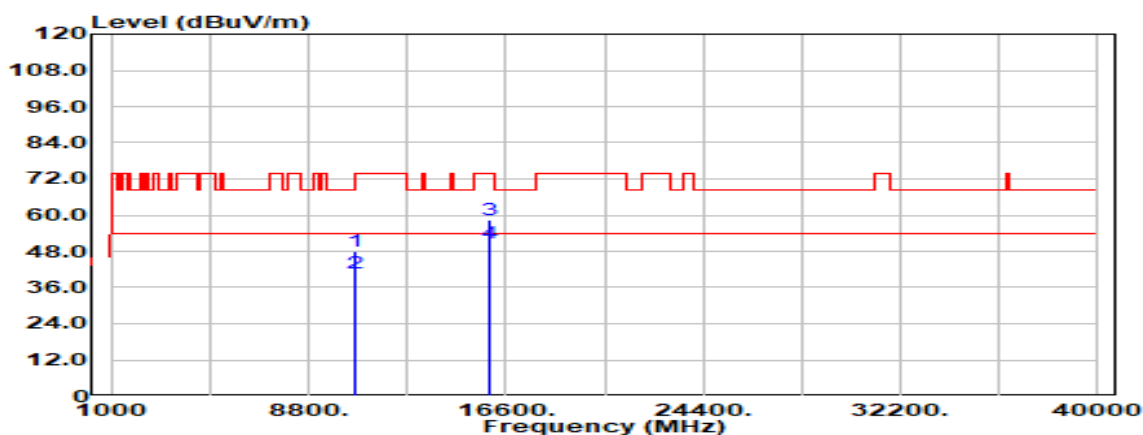


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	29.93	18.28	48.21	74.00	-25.79
10620.000	Average	22.57	18.28	40.85	54.00	-13.15
15930.000	Peak	31.81	26.63	58.44	74.00	-15.56
15930.000	Average	24.16	26.63	50.79	54.00	-3.21

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

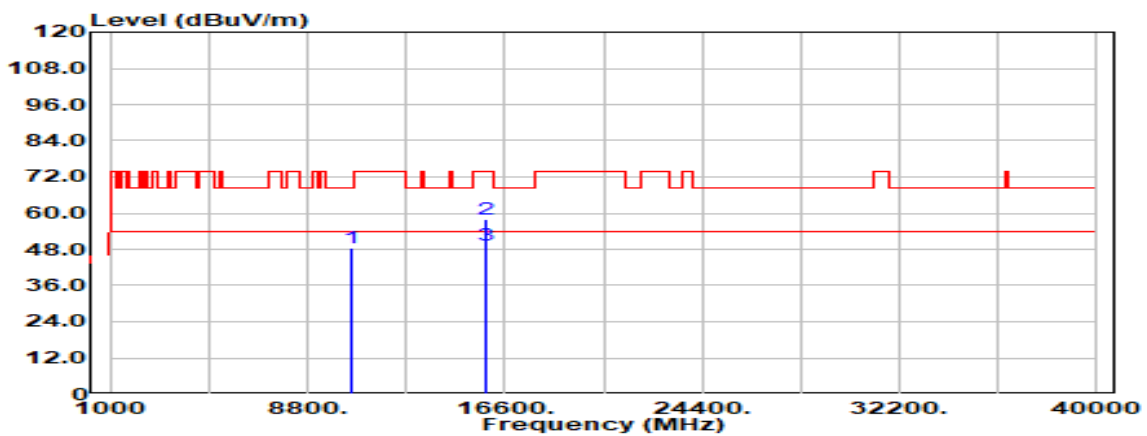


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10580.000	Peak	30.25	18.20	48.45	68.20	-19.75
15870.000	Peak	31.78	26.23	58.01	74.00	-15.99
15870.000	Average	23.17	26.23	49.40	54.00	-4.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

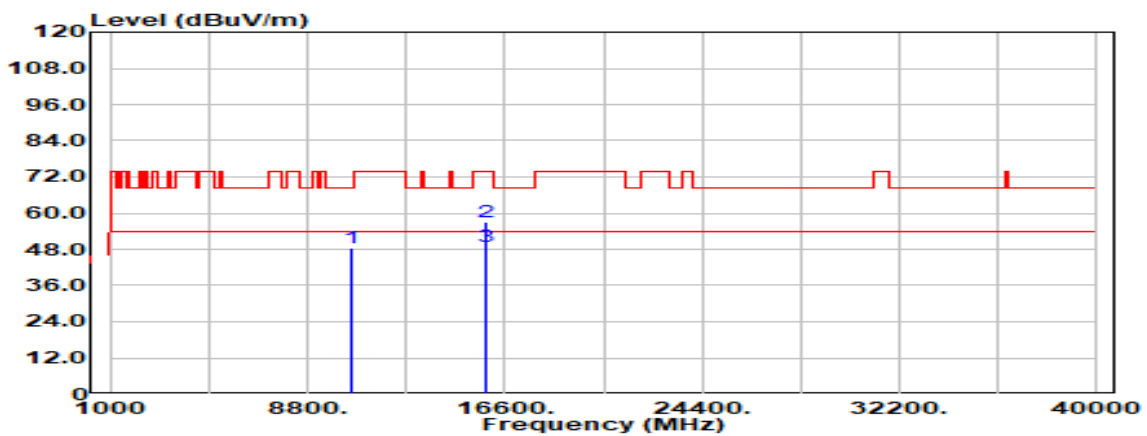


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10580.000	Peak	30.08	18.20	48.28	68.20	-19.92
15870.000	Peak	30.88	26.23	57.11	74.00	-16.89
15870.000	Average	22.79	26.23	49.02	54.00	-4.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

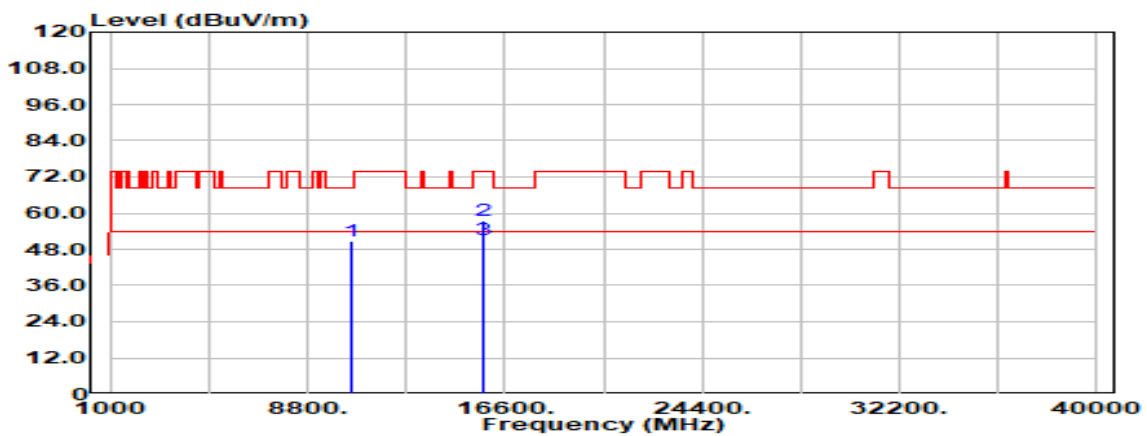


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.000	Peak	32.40	18.16	50.55	68.20	-17.65
15780.000	Peak	31.90	25.80	57.70	74.00	-16.30
15780.000	Average	25.43	25.80	51.23	54.00	-2.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

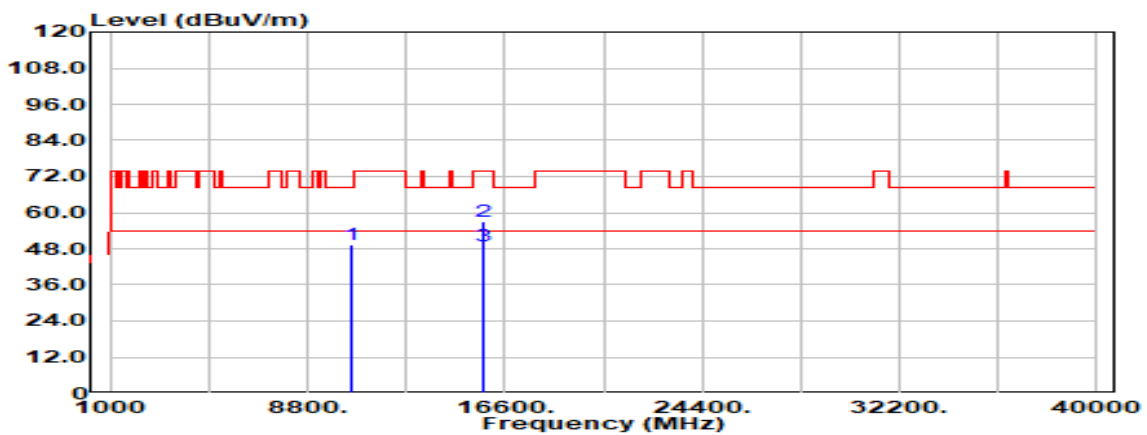


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10520.000	Peak	31.08	18.16	49.24	68.20	-18.96
15780.000	Peak	31.14	25.80	56.94	74.00	-17.06
15780.000	Average	23.25	25.80	49.05	54.00	-4.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

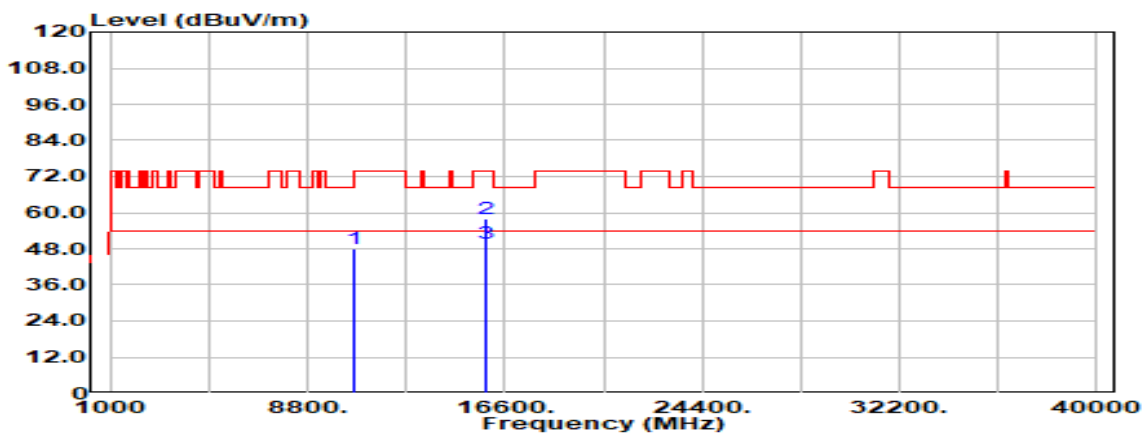


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10600.000	Peak	29.89	18.20	48.09	68.20	-20.11
15900.000	Peak	31.57	26.46	58.03	74.00	-15.97
15900.000	Average	23.43	26.46	49.89	54.00	-4.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

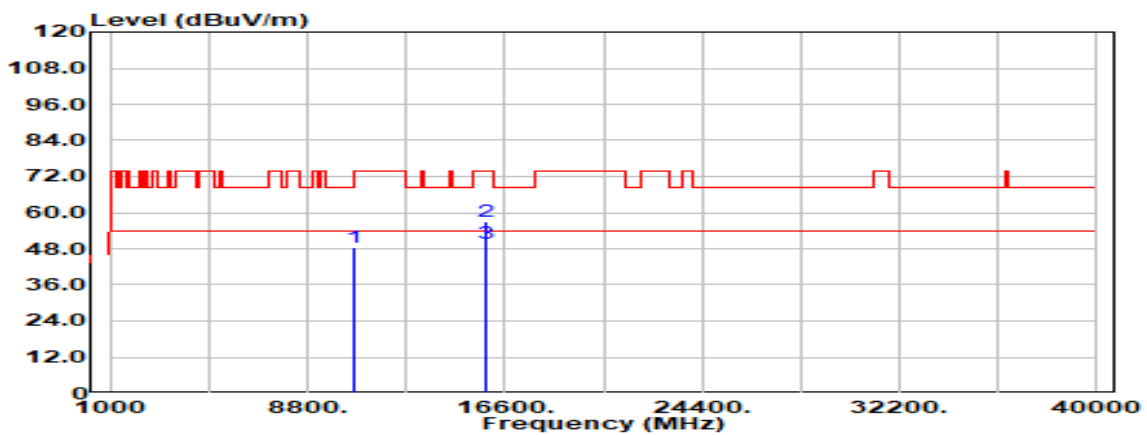


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.000	Peak	30.42	18.20	48.62	68.20	-19.58
15900.000	Peak	30.78	26.46	57.24	74.00	-16.76
15900.000	Average	23.39	26.46	49.85	54.00	-4.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

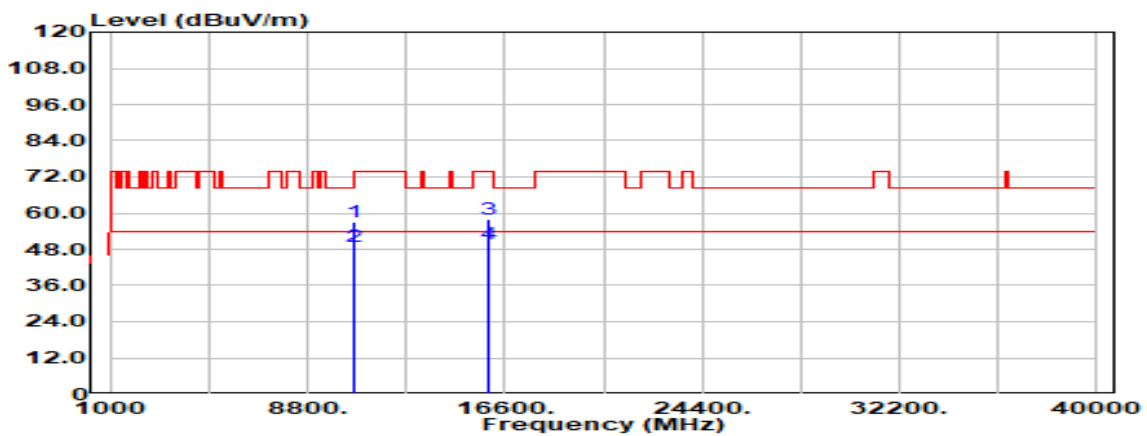


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	38.85	18.37	57.22	74.00	-16.78
10640.000	Average	30.43	18.37	48.80	54.00	-5.20
15960.000	Peak	31.02	26.84	57.87	74.00	-16.13
15960.000	Average	23.17	26.84	50.01	54.00	-3.99

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

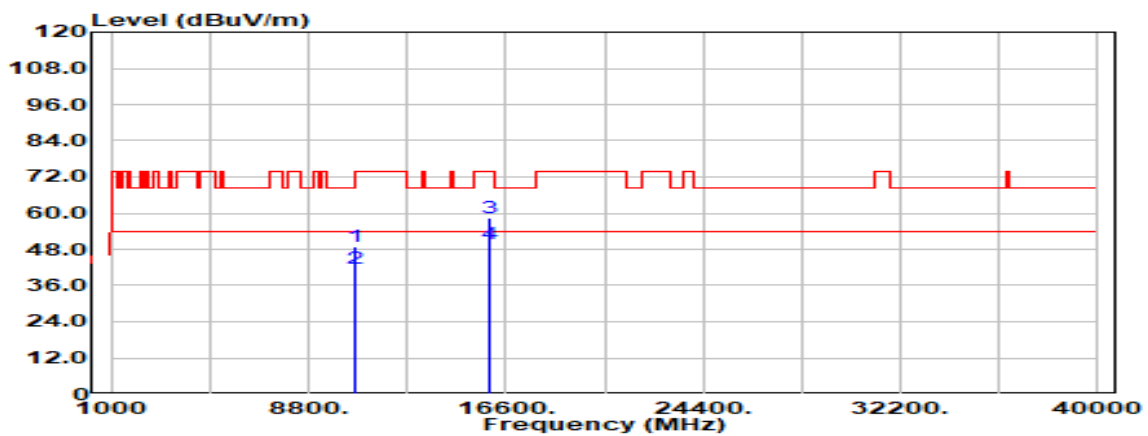


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.000	Peak	30.49	18.37	48.85	74.00	-25.15
10640.000	Average	23.13	18.37	41.50	54.00	-12.50
15960.000	Peak	31.56	26.84	58.40	74.00	-15.60
15960.000	Average	22.75	26.84	49.59	54.00	-4.41

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

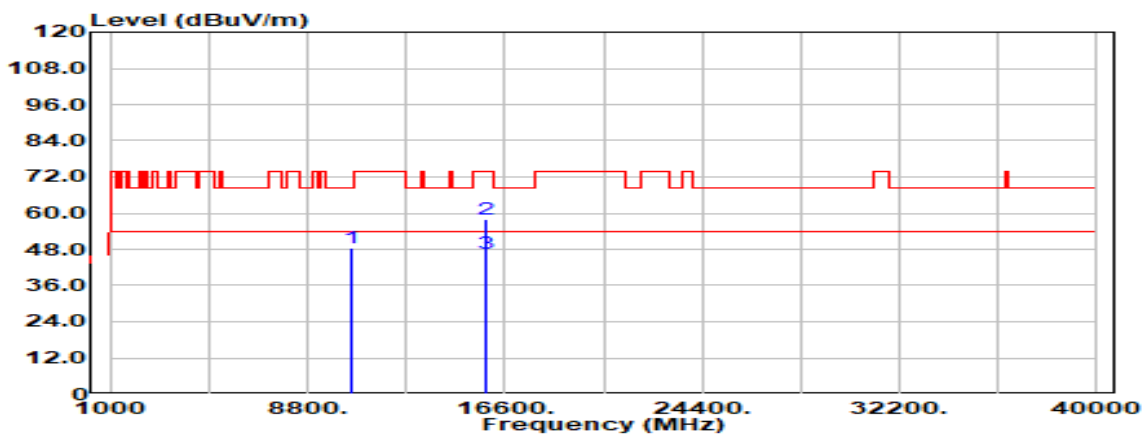


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	30.48	18.19	48.67	68.20	-19.53
15810.000	Peak	32.04	25.92	57.96	74.00	-16.04
15810.000	Average	20.92	25.92	46.84	54.00	-7.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

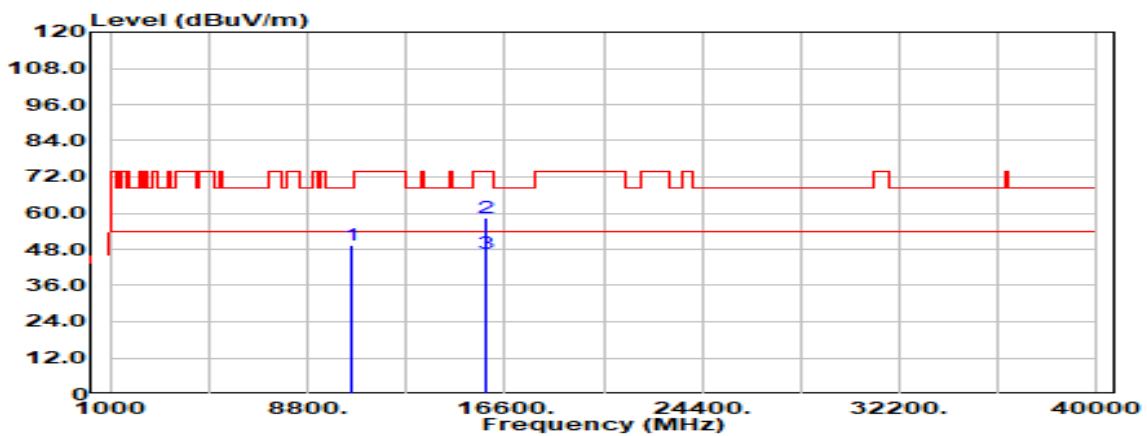


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.000	Peak	31.15	18.19	49.34	68.20	-18.86
15810.000	Peak	32.54	25.92	58.45	74.00	-15.55
15810.000	Average	20.60	25.92	46.52	54.00	-7.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

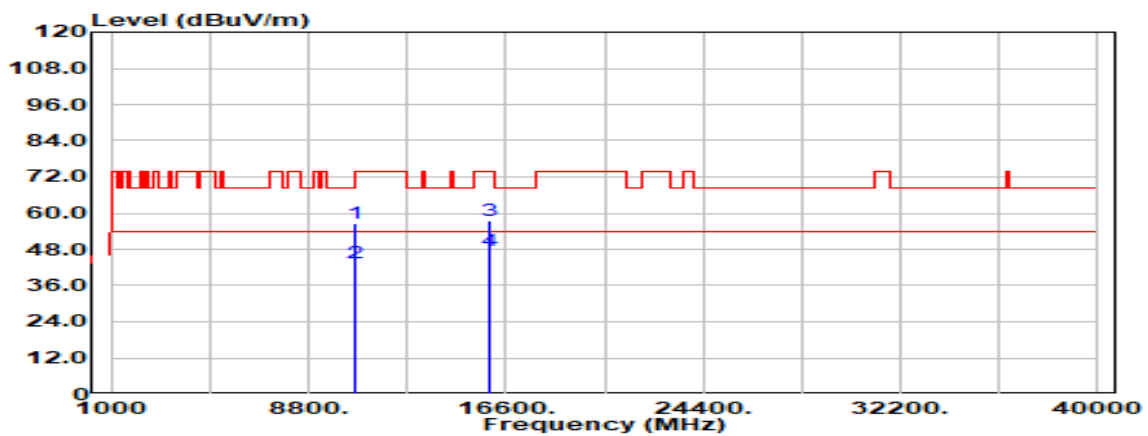


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	38.17	18.28	56.45	74.00	-17.55
10620.000	Average	25.08	18.28	43.36	54.00	-10.64
15930.000	Peak	31.08	26.63	57.72	74.00	-16.28
15930.000	Average	20.86	26.63	47.49	54.00	-6.51

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

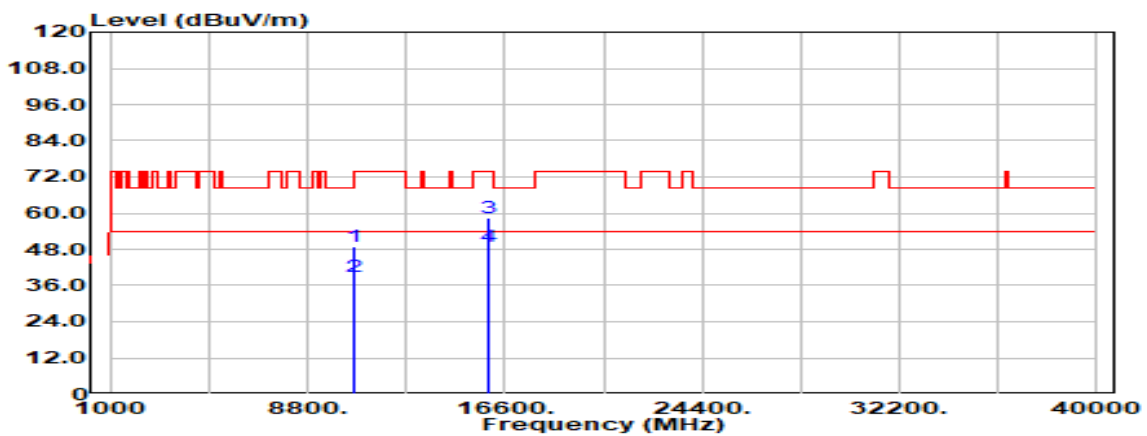


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.000	Peak	30.47	18.28	48.76	74.00	-25.24
10620.000	Average	20.45	18.28	38.73	54.00	-15.27
15930.000	Peak	31.83	26.63	58.46	74.00	-15.54
15930.000	Average	22.12	26.63	48.75	54.00	-5.25

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

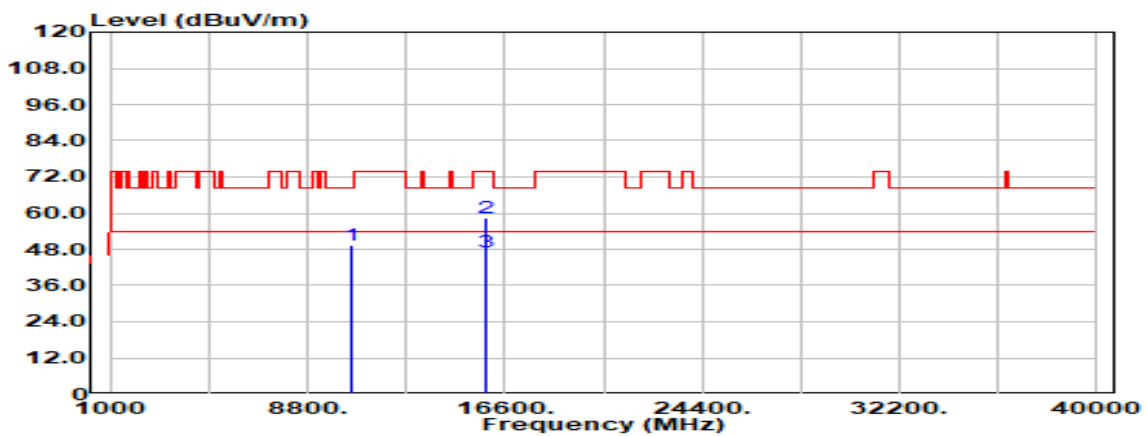


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10580.000	Peak	31.16	18.20	49.36	68.20	-18.84
15870.000	Peak	32.13	26.23	58.36	74.00	-15.64
15870.000	Average	21.08	26.23	47.31	54.00	-6.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

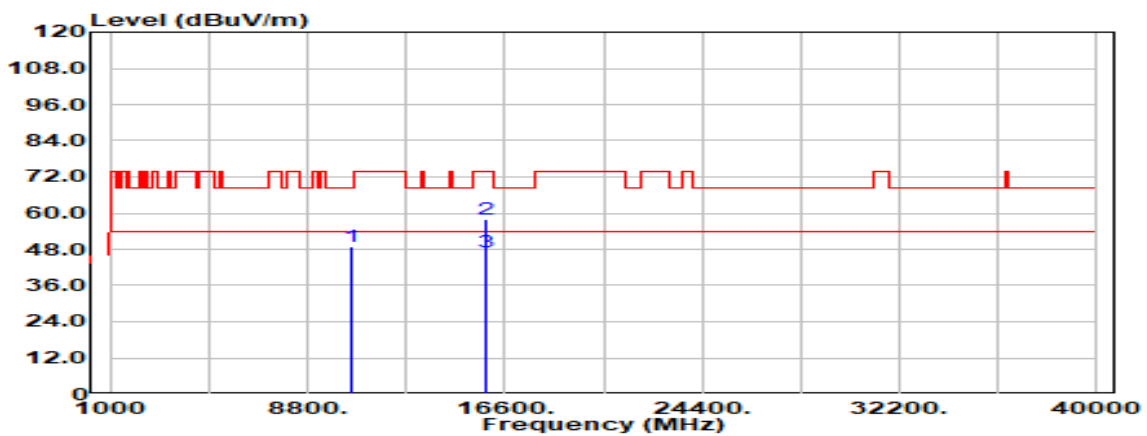


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.000	Peak	30.84	18.20	49.04	68.20	-19.16
15870.000	Peak	31.60	26.23	57.83	74.00	-16.17
15870.000	Average	21.05	26.23	47.28	54.00	-6.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

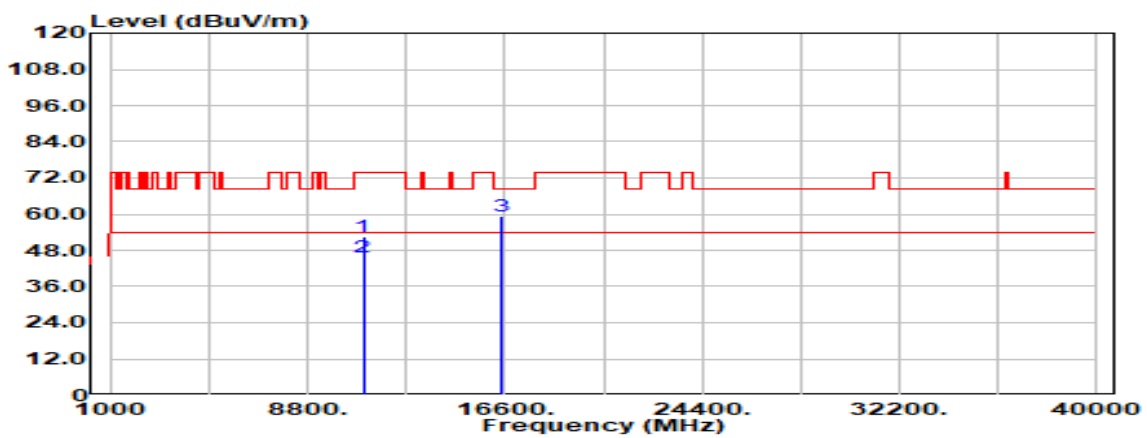


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	33.42	19.04	52.46	74.00	-21.54
11000.000	Average	26.65	19.04	45.69	54.00	-8.31
16500.000	Peak	30.51	29.02	59.53	68.20	-8.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

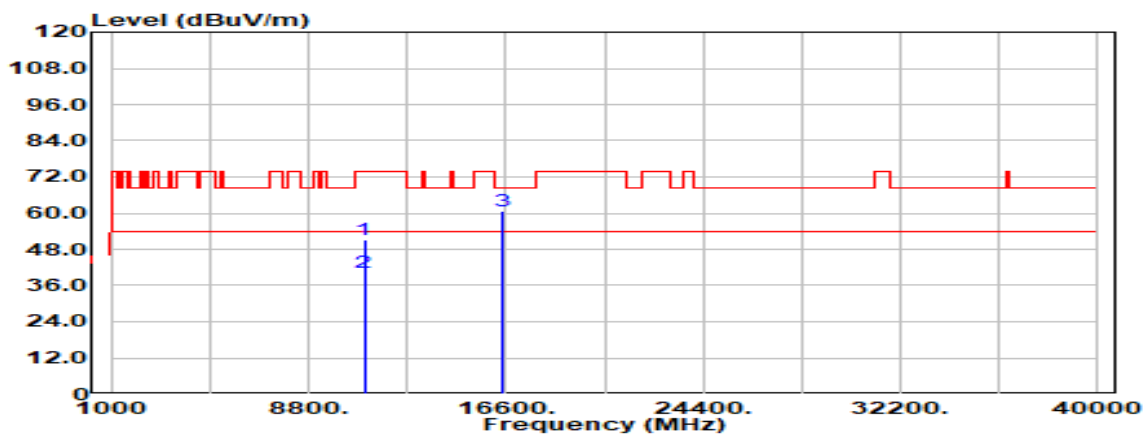


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	32.24	19.04	51.28	74.00	-22.72
11000.000	Average	21.14	19.04	40.18	54.00	-13.82
16500.000	Peak	31.69	29.02	60.71	68.20	-7.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonics	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

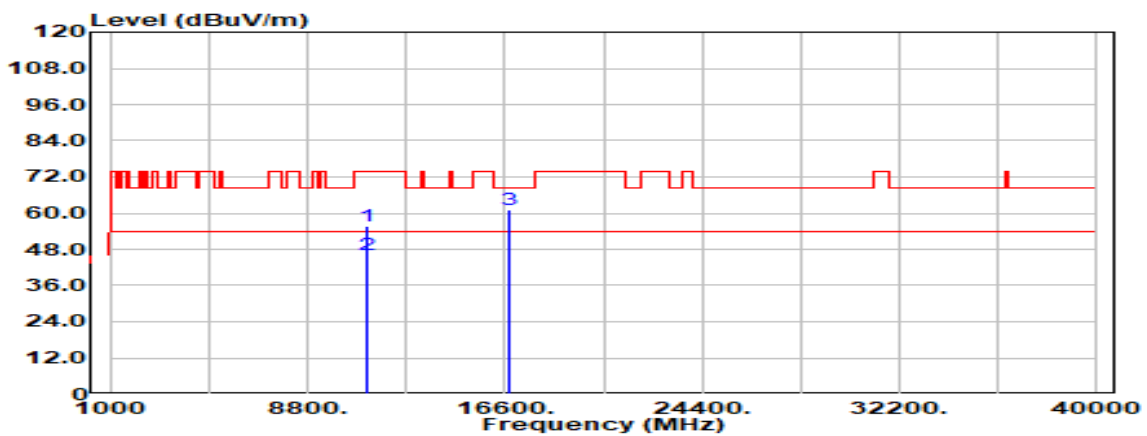


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11160.000	Peak	36.35	19.22	55.57	74.00	-18.43
11160.000	Average	27.10	19.22	46.32	54.00	-7.68
16740.000	Peak	31.07	30.21	61.28	68.20	-6.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

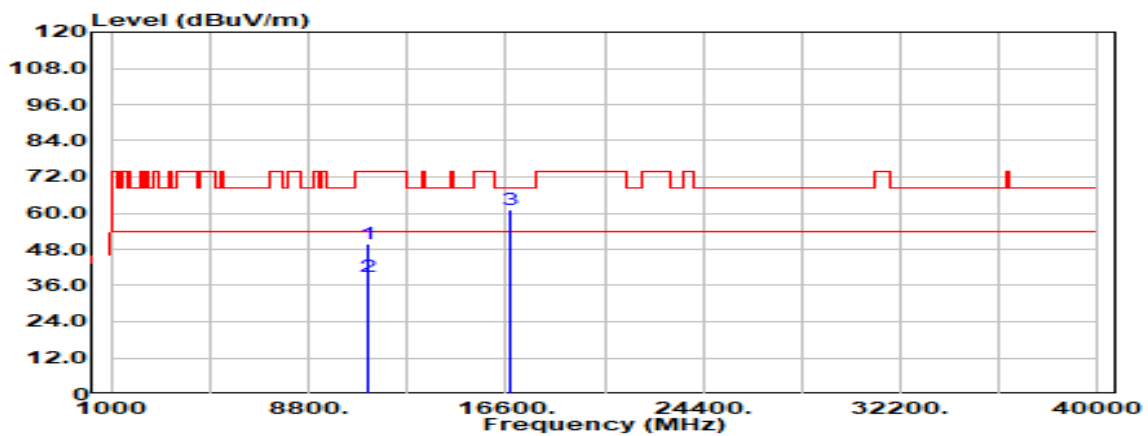


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	30.75	19.22	49.98	74.00	-24.02
11160.000	Average	19.85	19.22	39.07	54.00	-14.93
16740.000	Peak	31.01	30.21	61.22	68.20	-6.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

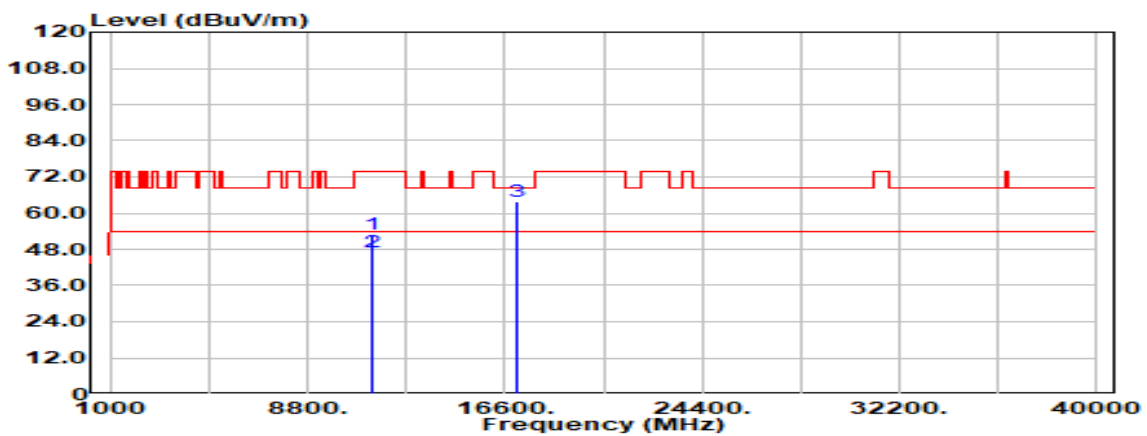


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	33.51	19.58	53.09	74.00	-20.91
11400.000	Average	27.60	19.58	47.18	54.00	-6.82
17100.000	Peak	32.53	31.23	63.76	68.20	-4.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

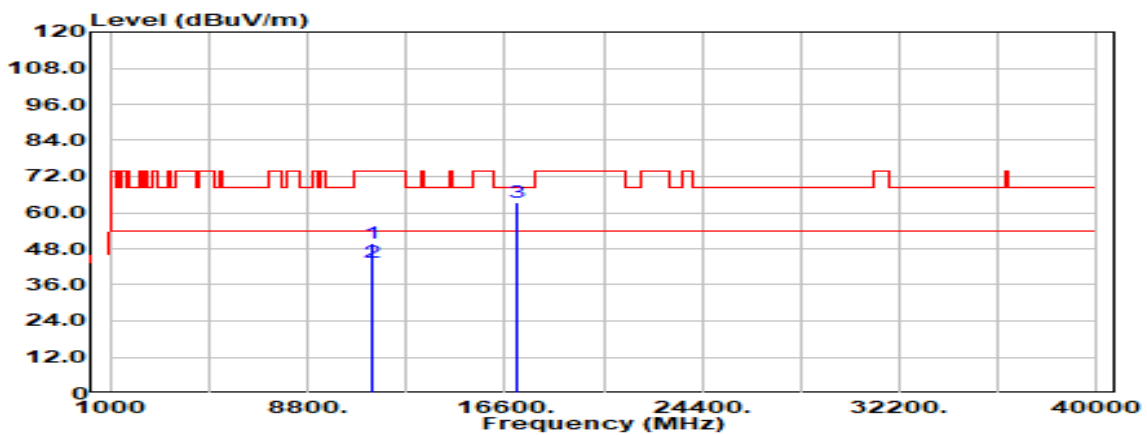


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11400.000	Peak	30.12	19.58	49.70	74.00	-24.30
11400.000	Average	23.94	19.58	43.52	54.00	-10.48
17100.000	Peak	32.03	31.23	63.26	68.20	-4.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

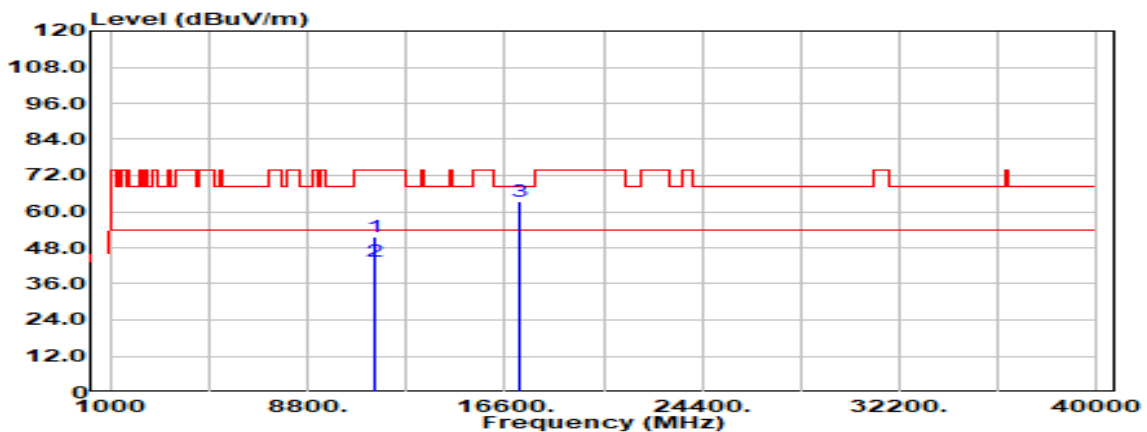


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11440.000	Peak	32.12	19.63	51.75	74.00	-22.25
11440.000	Average	24.00	19.63	43.63	54.00	-10.37
17160.000	Peak	32.76	30.57	63.33	68.20	-4.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

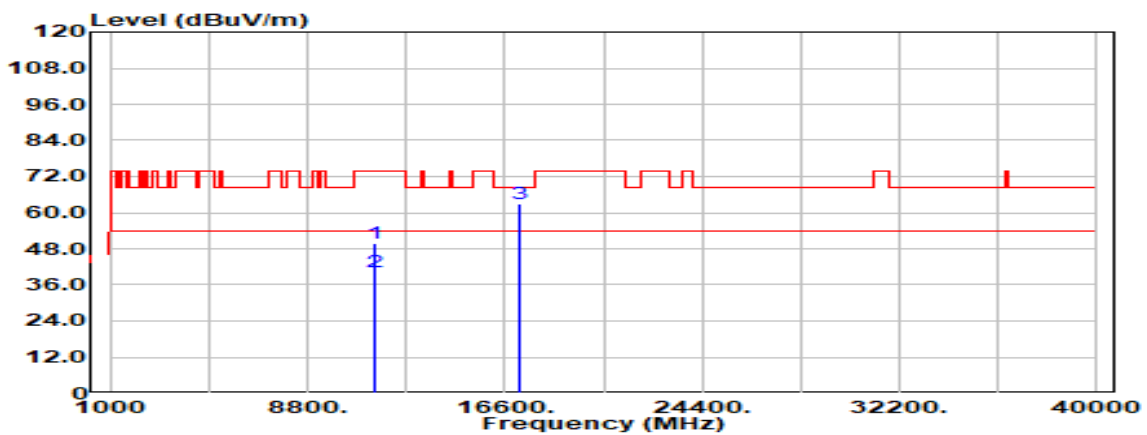


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	30.15	19.63	49.78	74.00	-24.22
11440.000	Average	20.58	19.63	40.21	54.00	-13.79
17160.000	Peak	32.47	30.57	63.04	68.20	-5.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

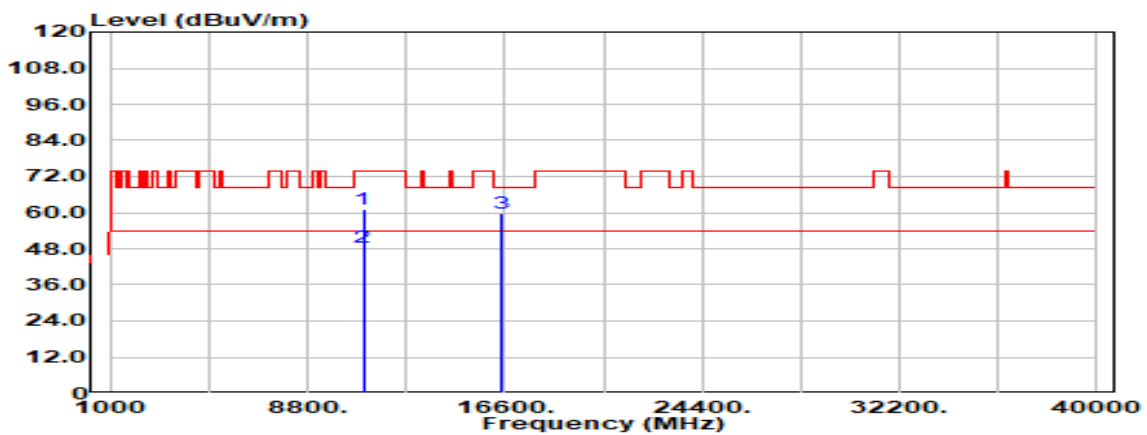


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11000.000	Peak	42.15	19.04	61.19	74.00	-12.81
11000.000	Average	29.47	19.04	48.51	54.00	-5.49
16500.000	Peak	30.55	29.02	59.57	68.20	-8.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5500 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

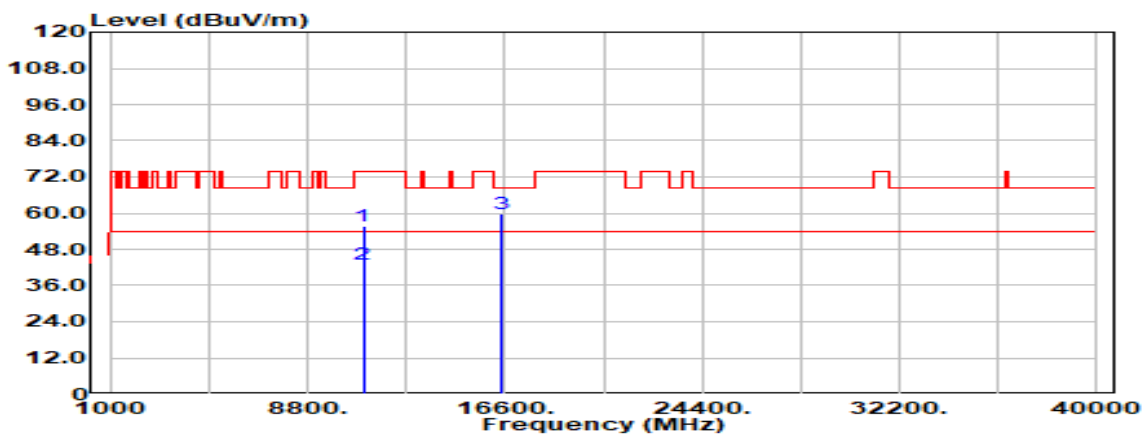


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	36.44	19.04	55.48	74.00	-18.52
11000.000	Average	23.78	19.04	42.82	54.00	-11.18
16500.000	Peak	30.91	29.02	59.93	68.20	-8.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5580 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

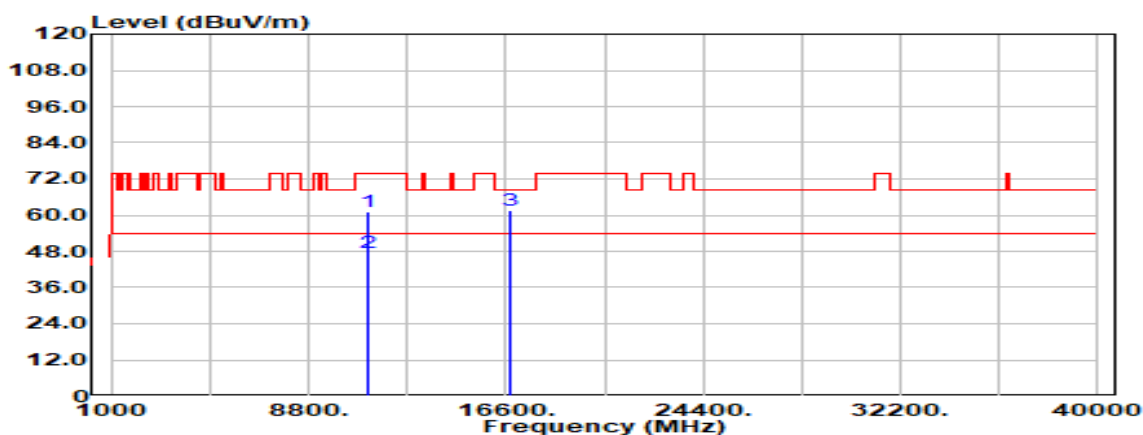


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	41.71	19.22	60.93	74.00	-13.07
11160.000	Average	28.26	19.22	47.48	54.00	-6.52
16740.000	Peak	31.15	30.21	61.37	68.20	-6.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5580 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

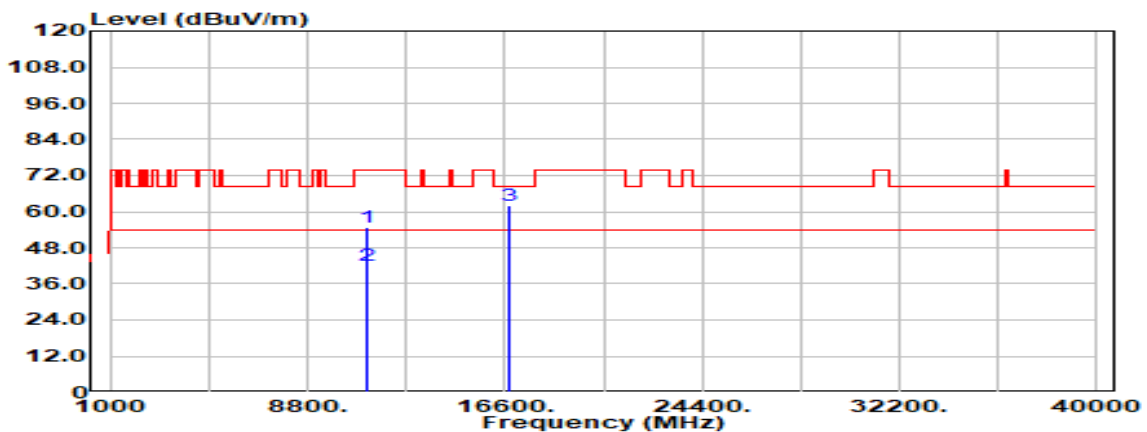


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	35.64	19.22	54.86	74.00	-19.14
11160.000	Average	22.89	19.22	42.11	54.00	-11.89
16740.000	Peak	31.85	30.21	62.06	68.20	-6.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

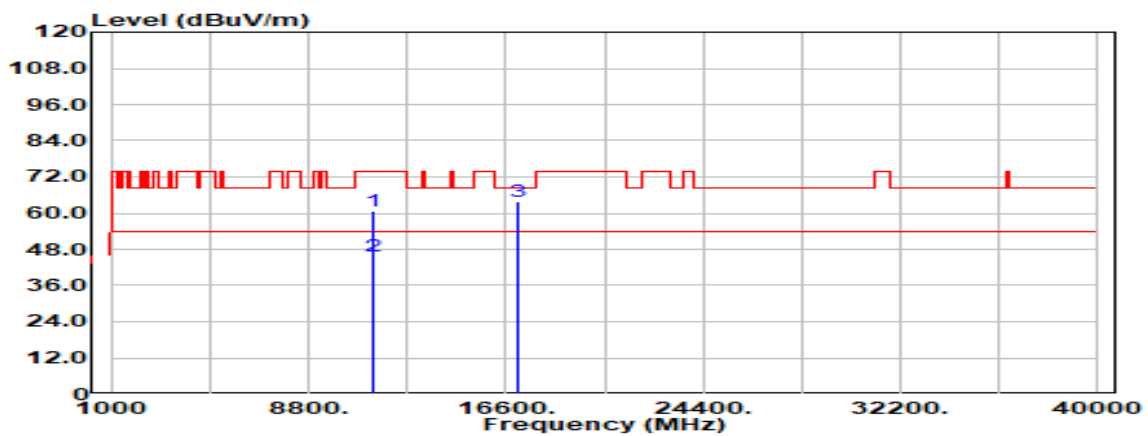


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	41.16	19.58	60.74	74.00	-13.26
11400.000	Average	26.27	19.58	45.85	54.00	-8.15
17100.000	Peak	32.46	31.23	63.69	68.20	-4.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5700 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

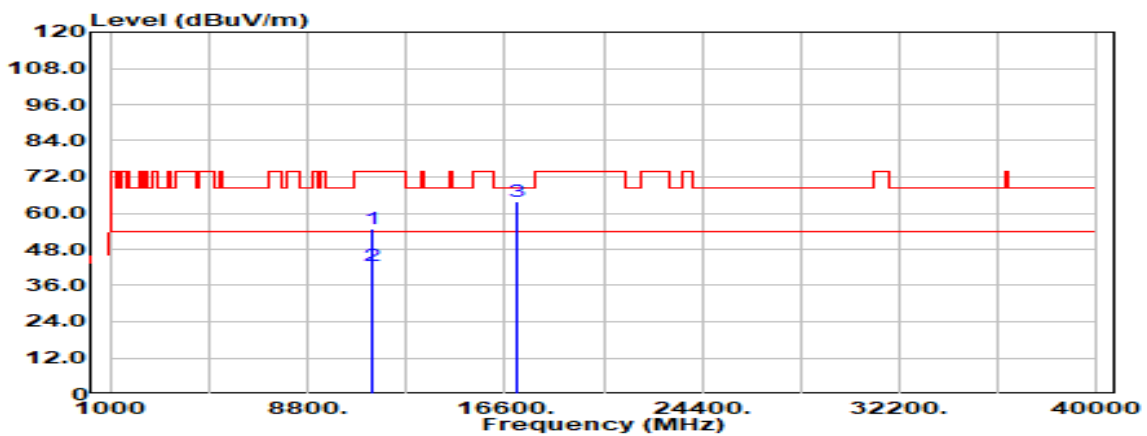


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	35.21	19.58	54.79	74.00	-19.21
11400.000	Average	23.16	19.58	42.74	54.00	-11.26
17100.000	Peak	32.59	31.23	63.82	68.20	-4.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5720 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

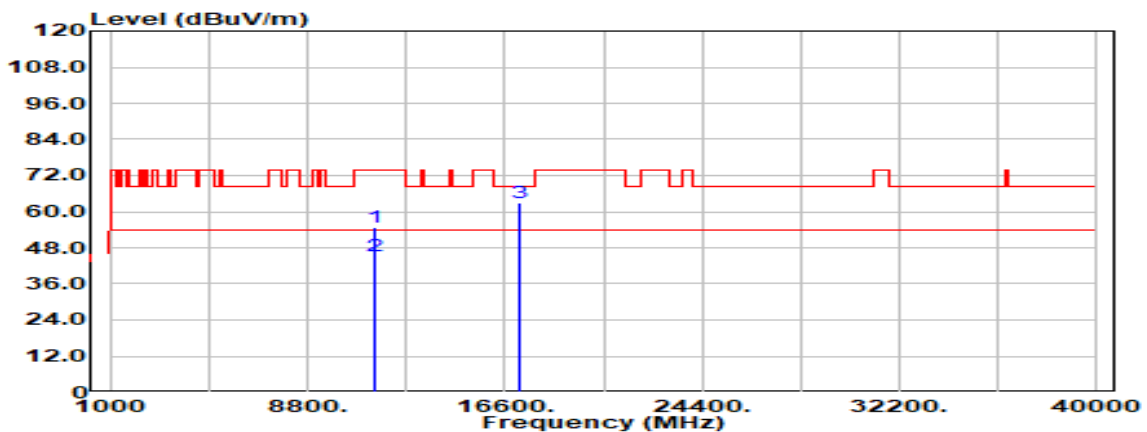


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	35.15	19.63	54.78	74.00	-19.22
11440.000	Average	25.45	19.63	45.08	54.00	-8.92
17160.000	Peak	32.17	30.57	62.74	68.20	-5.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5720 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

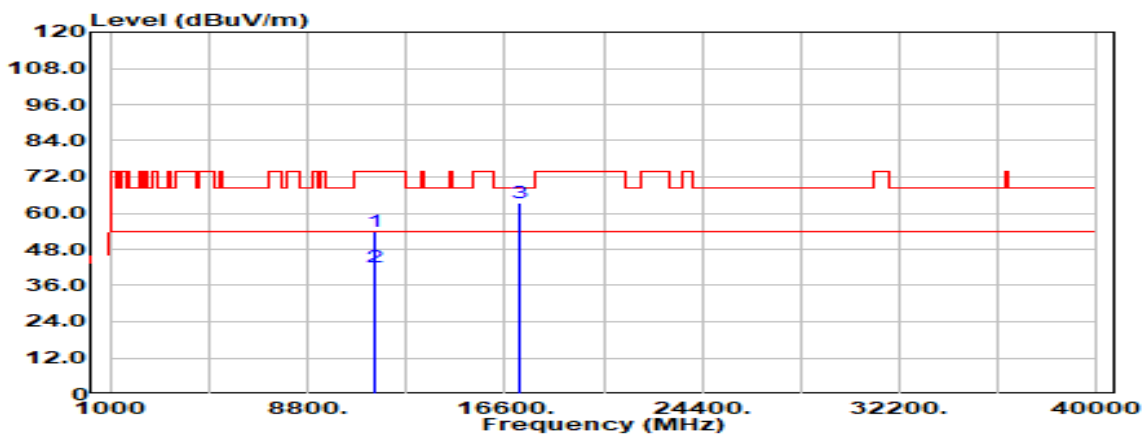


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11440.000	Peak	34.20	19.63	53.83	74.00	-20.17
11440.000	Average	22.30	19.63	41.93	54.00	-12.07
17160.000	Peak	32.72	30.57	63.29	68.20	-4.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

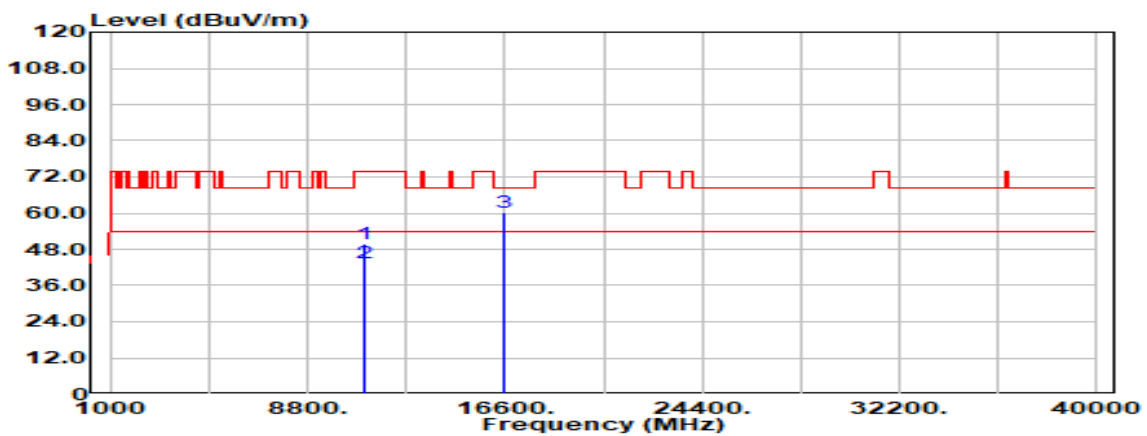


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	30.99	19.00	49.99	74.00	-24.01
11020.000	Average	24.35	19.00	43.35	54.00	-10.65
16530.000	Peak	31.27	28.97	60.24	68.20	-7.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5510 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

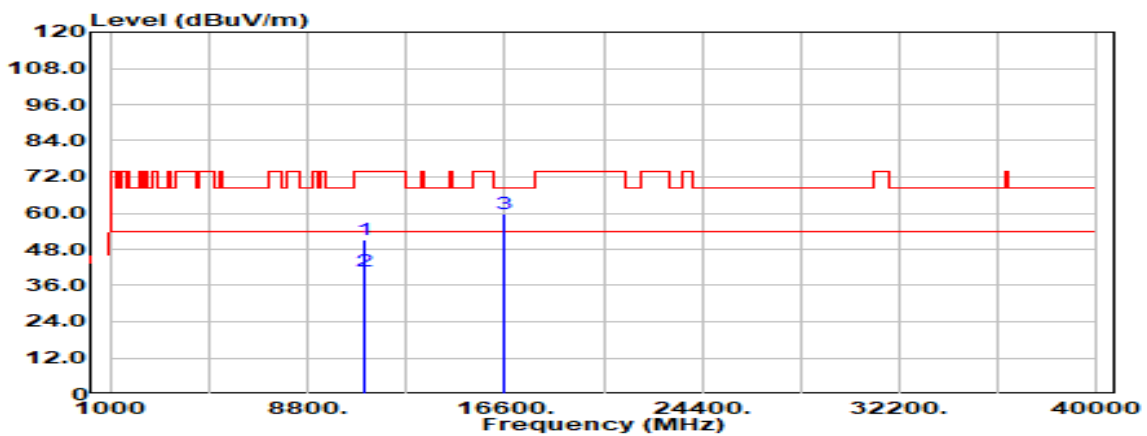


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	32.01	19.00	51.01	74.00	-22.99
11020.000	Average	21.66	19.00	40.66	54.00	-13.34
16530.000	Peak	30.78	28.97	59.75	68.20	-8.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5550 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

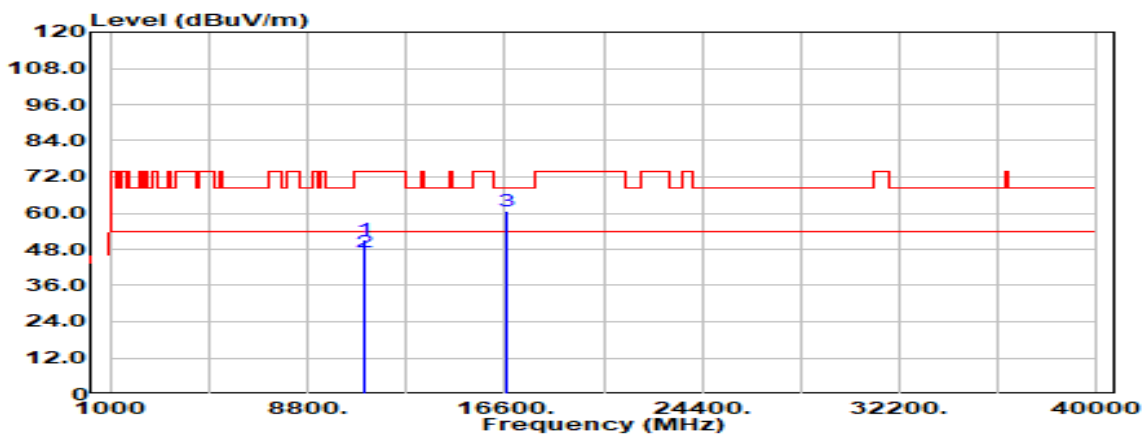


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	31.85	19.11	50.96	74.00	-23.04
11100.000	Average	27.86	19.11	46.97	54.00	-7.03
16650.000	Peak	31.48	29.28	60.76	68.20	-7.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5550 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

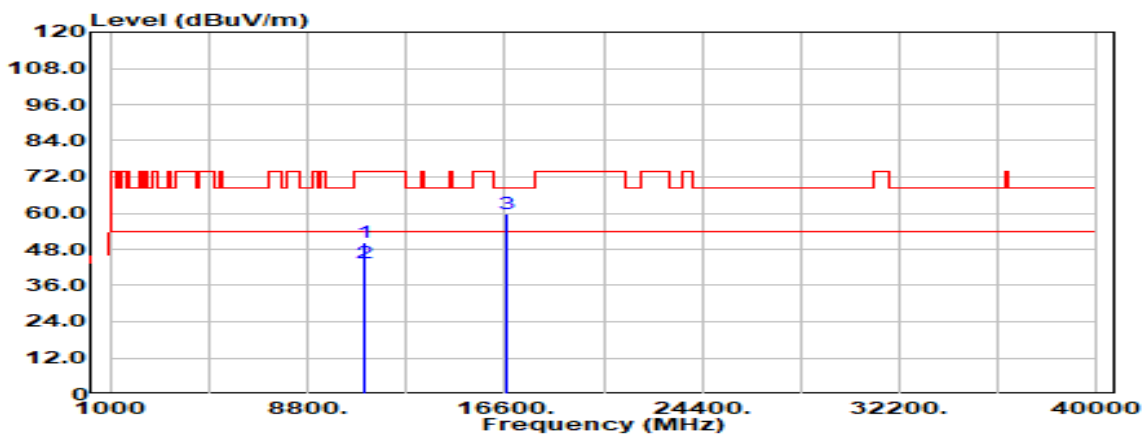


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11100.000	Peak	31.19	19.11	50.30	74.00	-23.70
11100.000	Average	24.41	19.11	43.52	54.00	-10.48
16650.000	Peak	30.33	29.28	59.61	68.20	-8.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

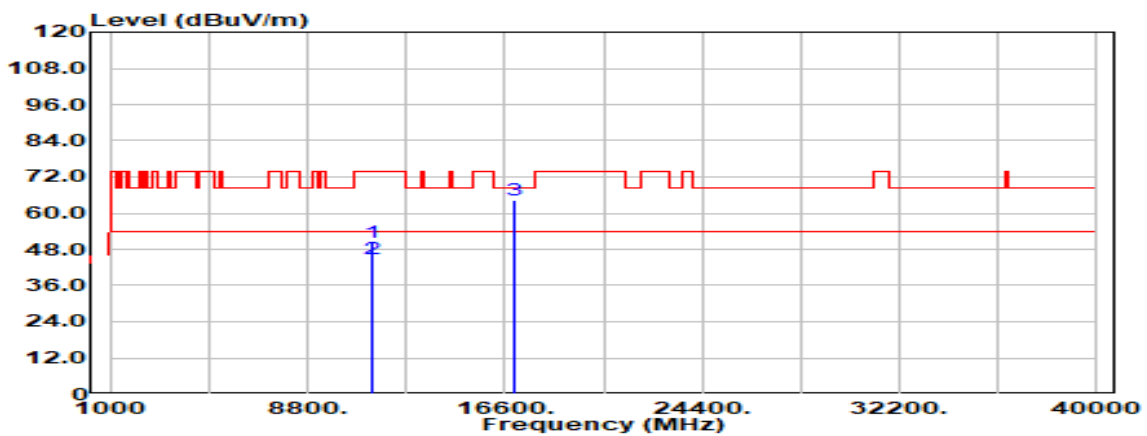


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.000	Peak	30.78	19.44	50.21	74.00	-23.79
11340.000	Average	25.26	19.44	44.70	54.00	-9.30
17010.000	Peak	32.82	31.48	64.29	68.20	-3.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5670 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

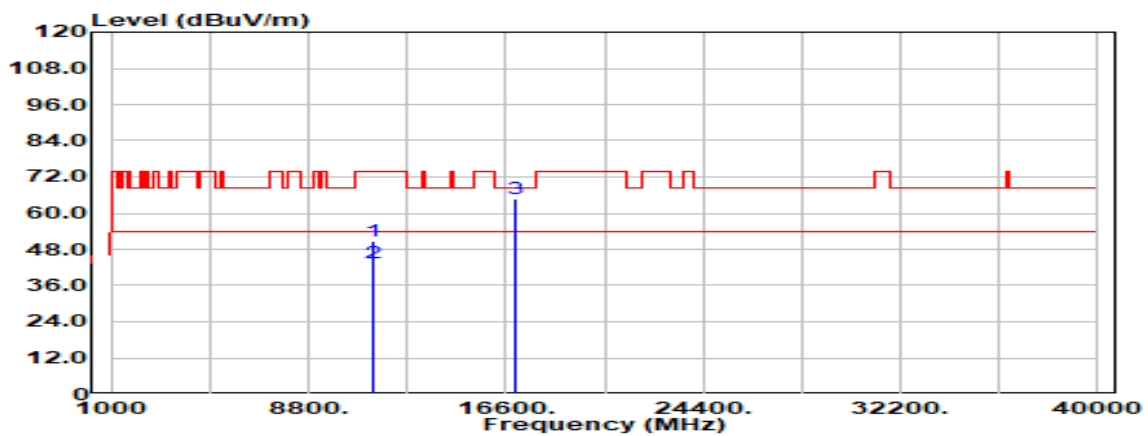


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11340.000	Peak	31.33	19.44	50.77	74.00	-23.23
11340.000	Average	24.17	19.44	43.61	54.00	-10.39
17010.000	Peak	33.27	31.48	64.75	68.20	-3.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5710 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

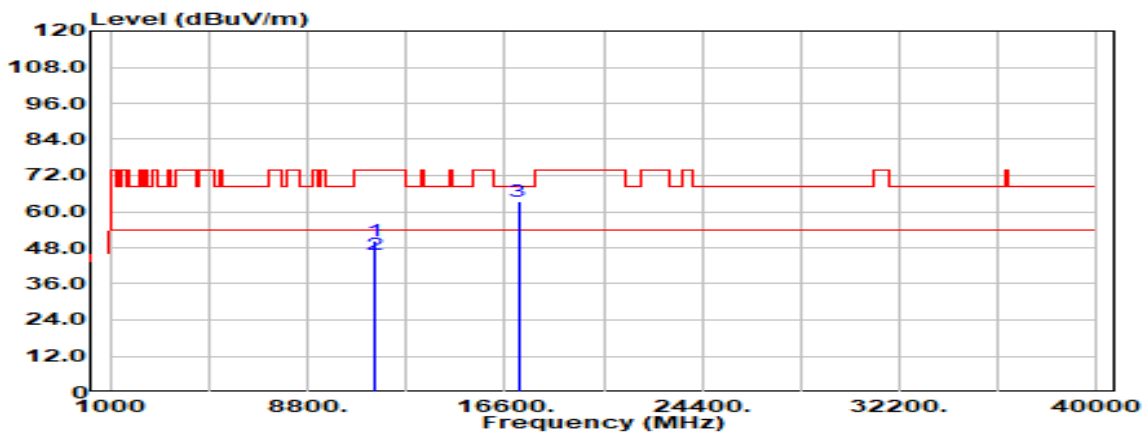


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11420.000	Peak	30.55	19.60	50.16	74.00	-23.84
11420.000	Average	26.19	19.60	45.79	54.00	-8.21
17130.000	Peak	32.46	30.88	63.33	68.20	-4.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT40 / 5710 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

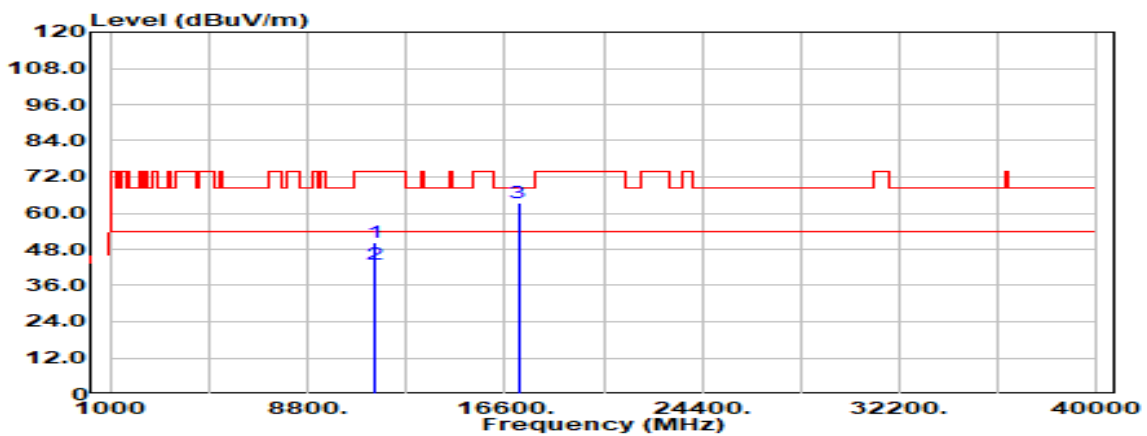


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	30.54	19.60	50.14	74.00	-23.86
11420.000	Average	23.47	19.60	43.07	54.00	-10.93
17130.000	Peak	32.60	30.88	63.47	68.20	-4.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

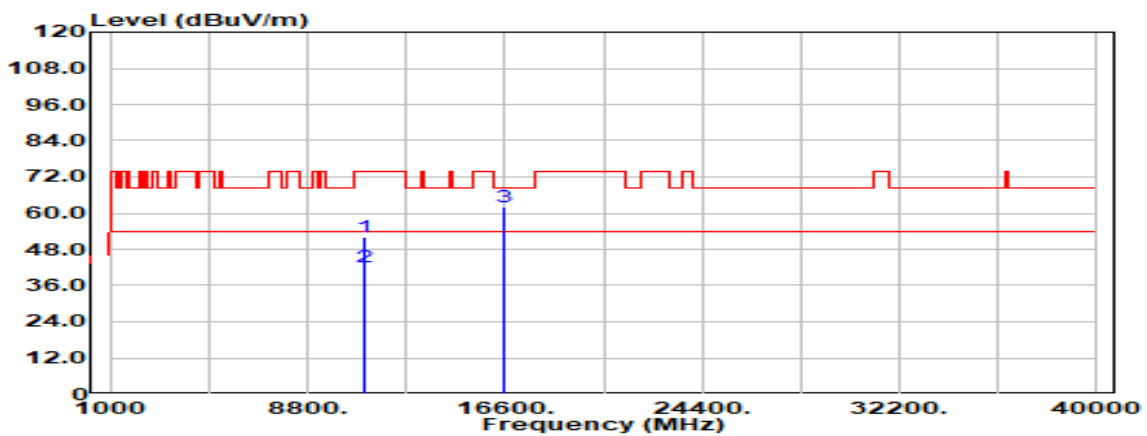


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11060.000	Peak	33.17	18.97	52.14	74.00	-21.86
11060.000	Average	23.34	18.97	42.31	54.00	-11.69
16590.000	Peak	32.96	28.94	61.90	68.20	-6.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

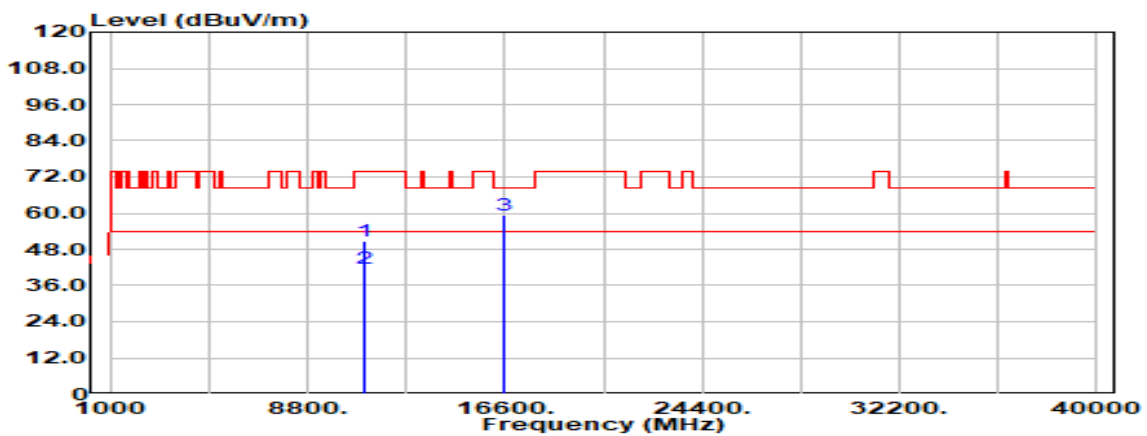


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11060.000	Peak	31.84	18.97	50.82	74.00	-23.18
11060.000	Average	22.47	18.97	41.44	54.00	-12.56
16590.000	Peak	30.52	28.94	59.46	68.20	-8.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

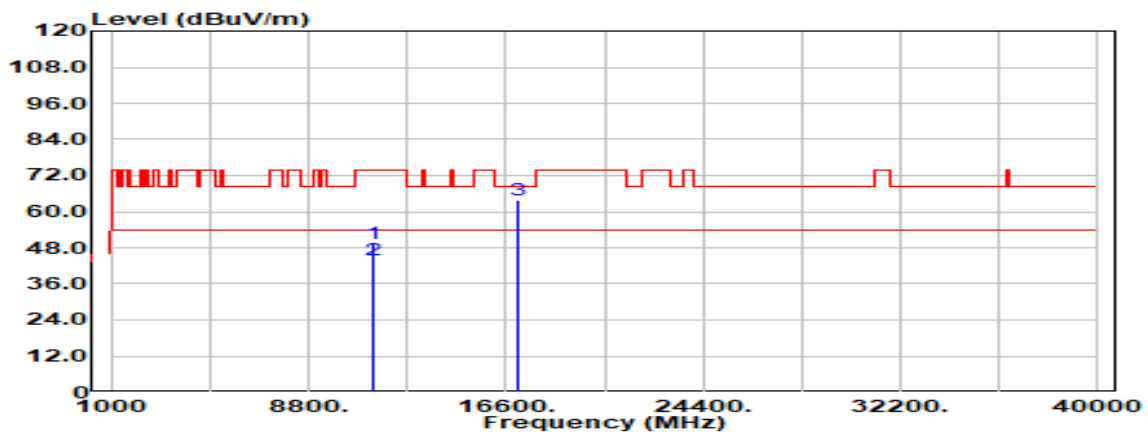


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11380.000	Peak	29.81	19.53	49.34	74.00	-24.66
11380.000	Average	24.29	19.53	43.82	54.00	-10.18
17070.000	Peak	32.37	31.30	63.66	68.20	-4.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

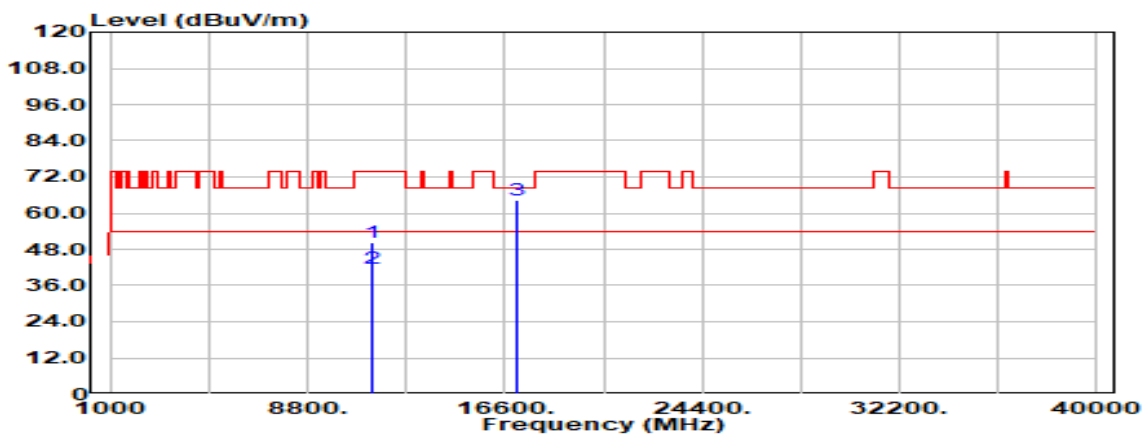


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	30.58	19.53	50.11	74.00	-23.89
11380.000	Average	22.23	19.53	41.76	54.00	-12.24
17070.000	Peak	32.87	31.30	64.17	68.20	-4.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

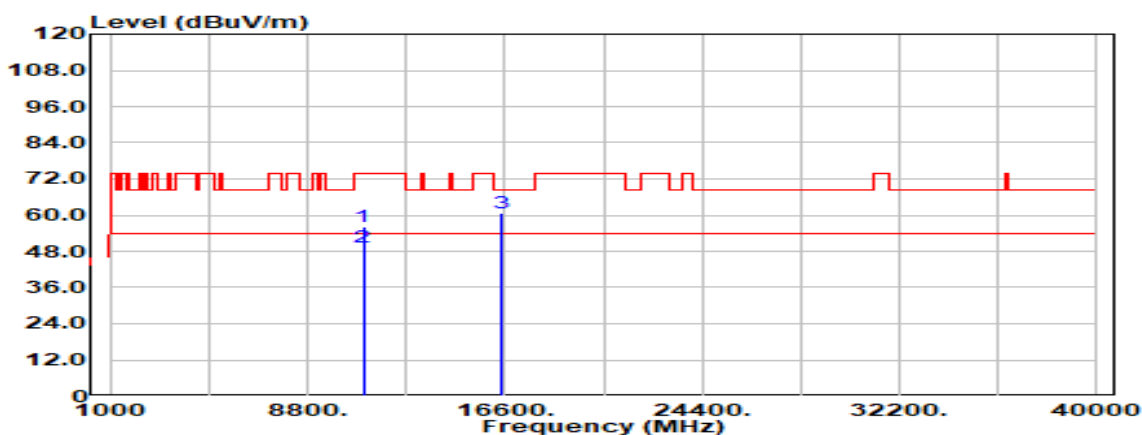


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	36.98	19.04	56.02	74.00	-17.98
11000.000	Average	30.36	19.04	49.40	54.00	-4.60
16500.000	Peak	31.53	29.02	60.55	68.20	-7.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

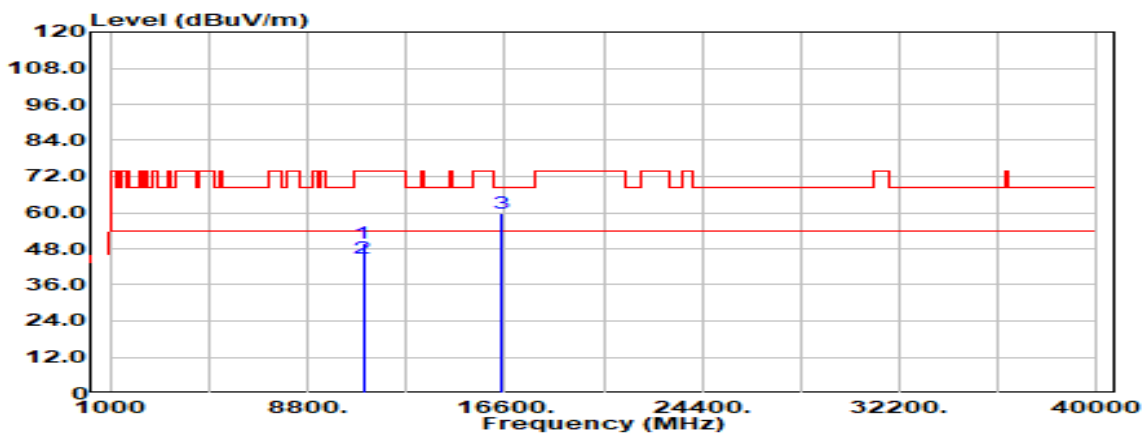


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.000	Peak	30.83	19.04	49.87	74.00	-24.13
11000.000	Average	25.68	19.04	44.72	54.00	-9.28
16500.000	Peak	30.75	29.02	59.77	68.20	-8.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

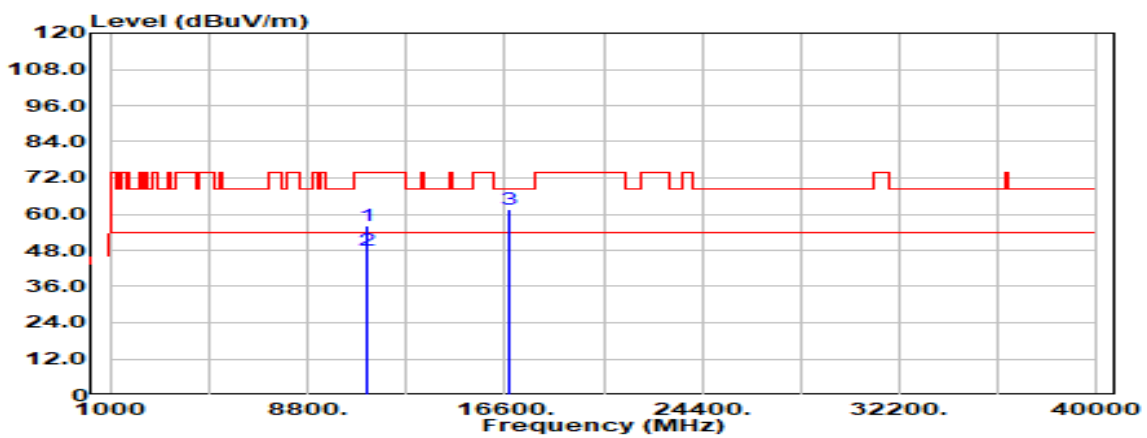


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	36.76	19.22	55.98	74.00	-18.02
11160.000	Average	28.83	19.22	48.05	54.00	-5.95
16740.000	Peak	31.34	30.21	61.55	68.20	-6.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

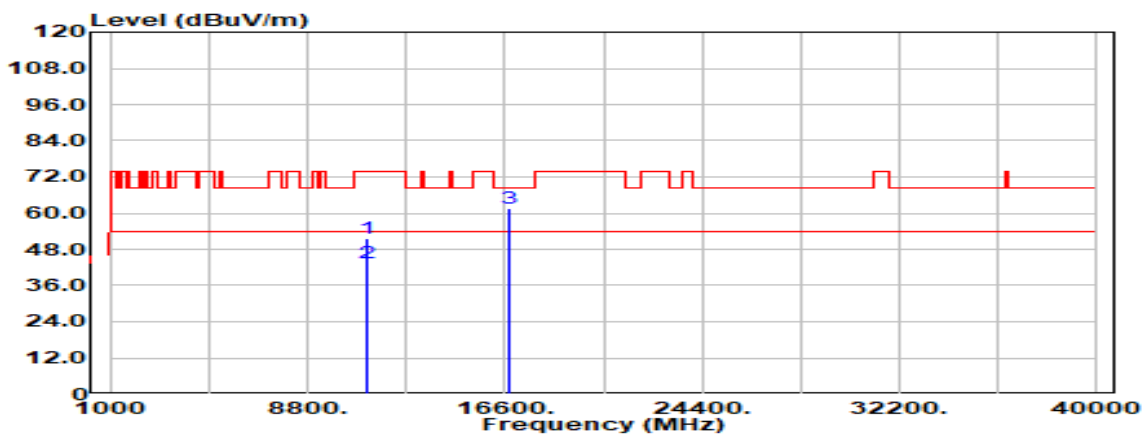


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.000	Peak	32.47	19.22	51.70	74.00	-22.30
11160.000	Average	24.36	19.22	43.58	54.00	-10.42
16740.000	Peak	31.17	30.21	61.38	68.20	-6.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

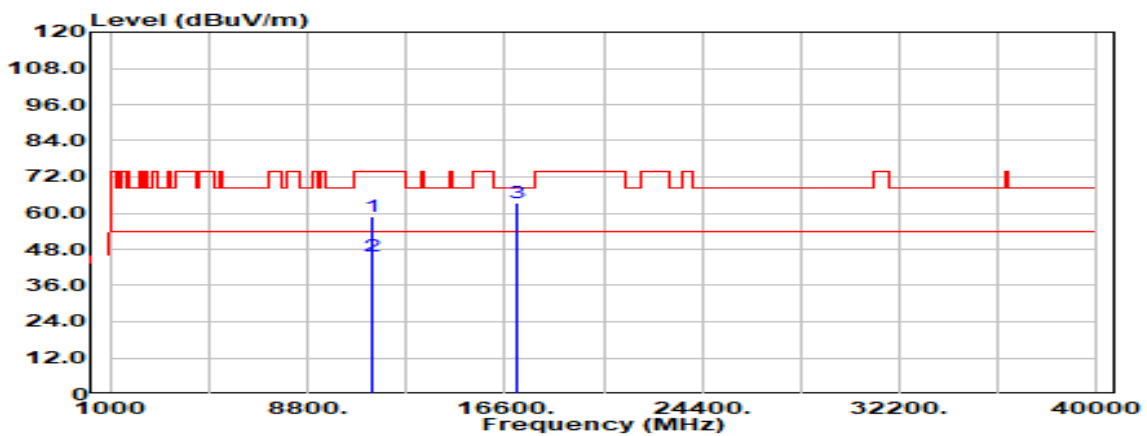


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	39.38	19.58	58.96	74.00	-15.04
11400.000	Average	26.32	19.58	45.90	54.00	-8.10
17100.000	Peak	32.18	31.23	63.41	68.20	-4.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

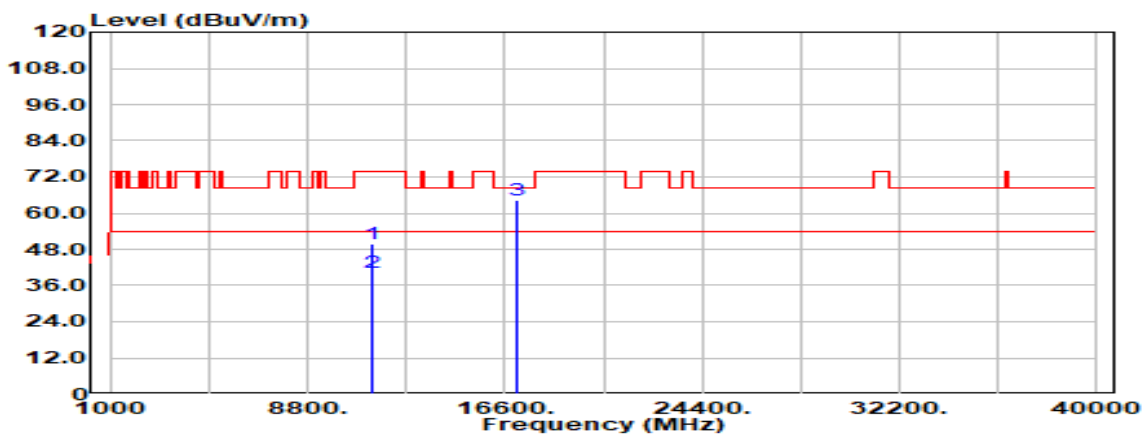


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.000	Peak	30.28	19.58	49.86	74.00	-24.14
11400.000	Average	20.78	19.58	40.36	54.00	-13.64
17100.000	Peak	32.93	31.23	64.16	68.20	-4.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5720 MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

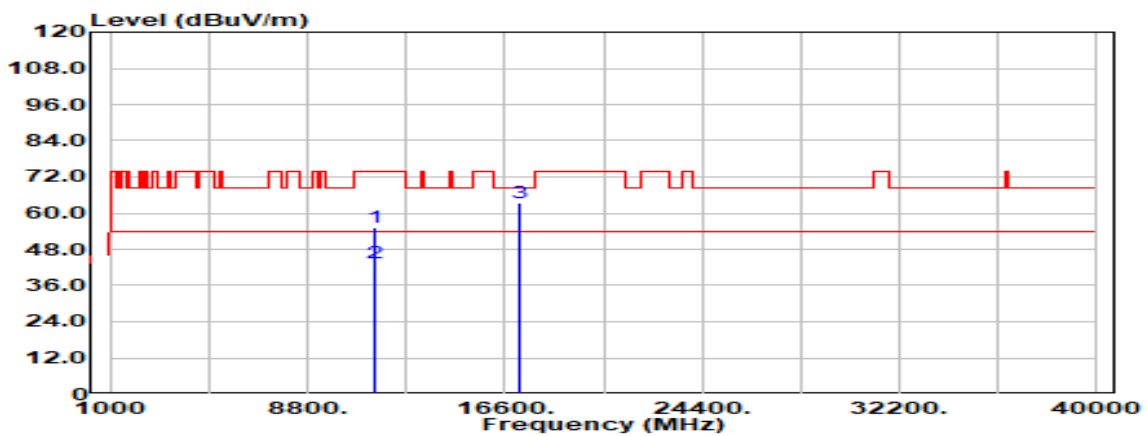


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	35.80	19.63	55.43	74.00	-18.57
11440.000	Average	24.01	19.63	43.64	54.00	-10.36
17160.000	Peak	32.94	30.57	63.51	68.20	-4.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5720 MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

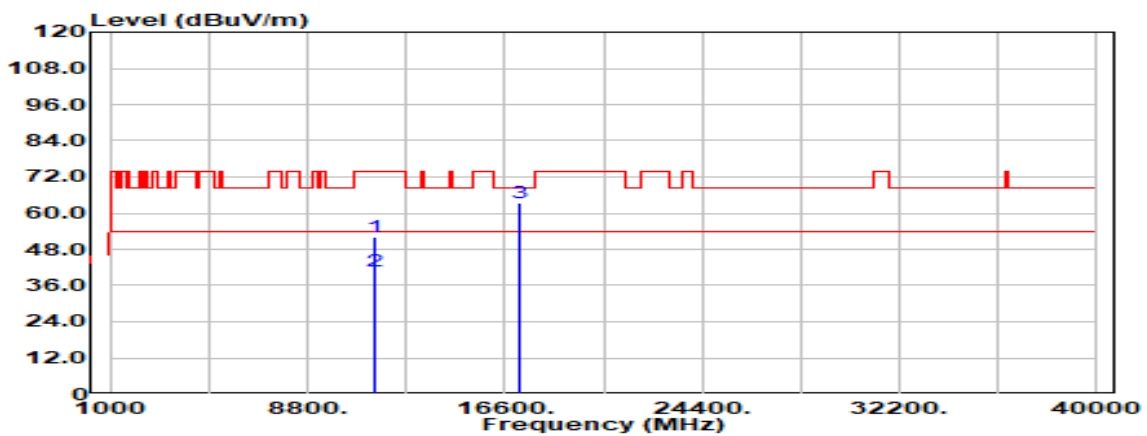


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11440.000	Peak	32.35	19.63	51.98	74.00	-22.02
11440.000	Average	21.26	19.63	40.89	54.00	-13.11
17160.000	Peak	33.01	30.57	63.58	68.20	-4.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

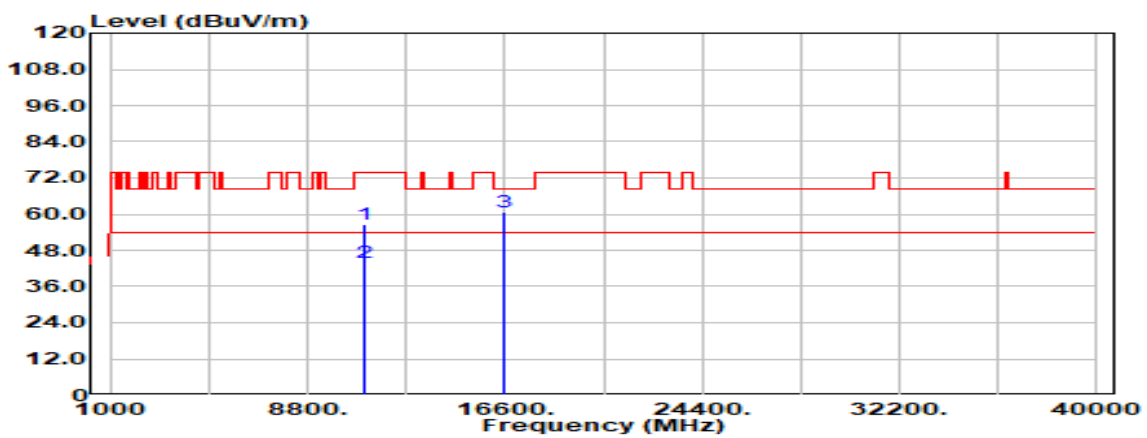


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.000	Peak	37.70	19.00	56.70	74.00	-17.30
11020.000	Average	25.01	19.00	44.01	54.00	-9.99
16530.000	Peak	31.66	28.97	60.62	68.20	-7.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

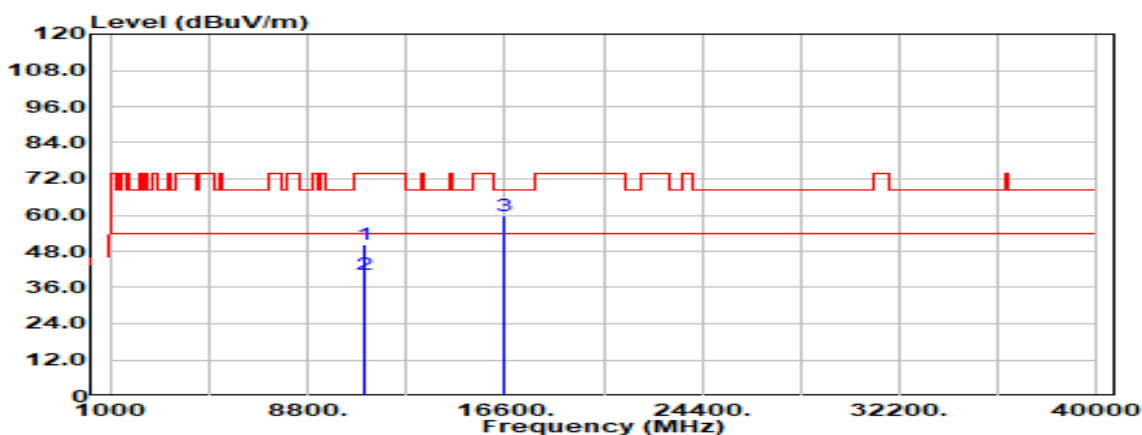


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11020.000	Peak	31.27	19.00	50.27	74.00	-23.73
11020.000	Average	21.28	19.00	40.28	54.00	-13.72
16530.000	Peak	30.77	28.97	59.74	68.20	-8.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

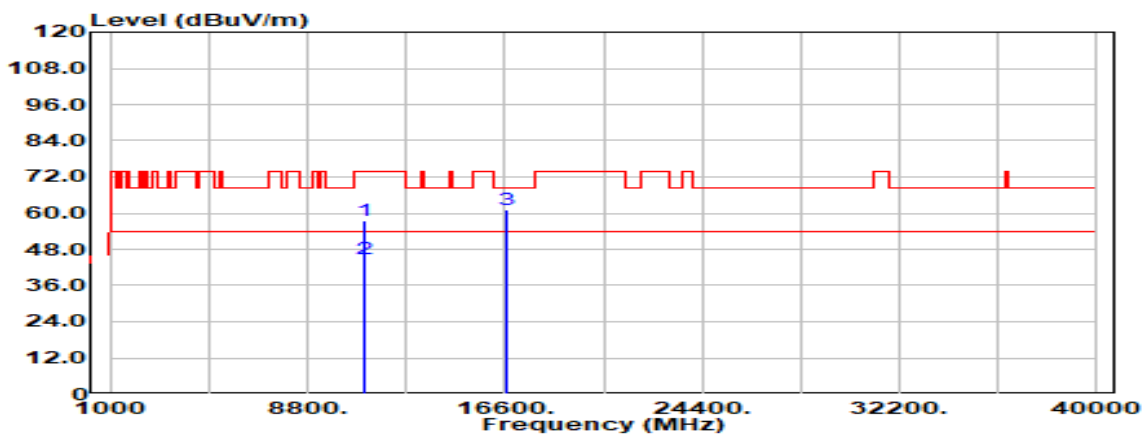


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	38.52	19.11	57.63	74.00	-16.37
11100.000	Average	25.70	19.11	44.81	54.00	-9.19
16650.000	Peak	31.98	29.28	61.26	68.20	-6.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

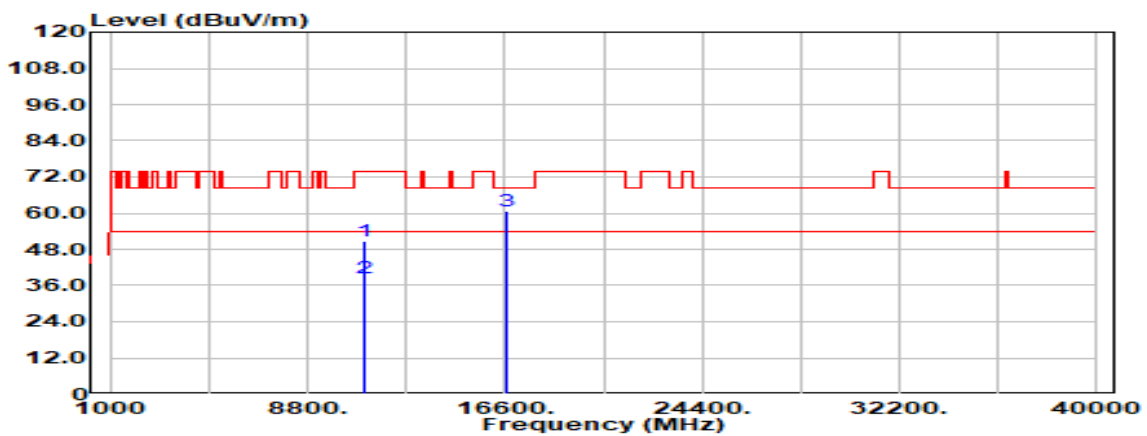


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.000	Peak	31.74	19.11	50.85	74.00	-23.15
11100.000	Average	19.56	19.11	38.67	54.00	-15.33
16650.000	Peak	31.50	29.28	60.78	68.20	-7.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

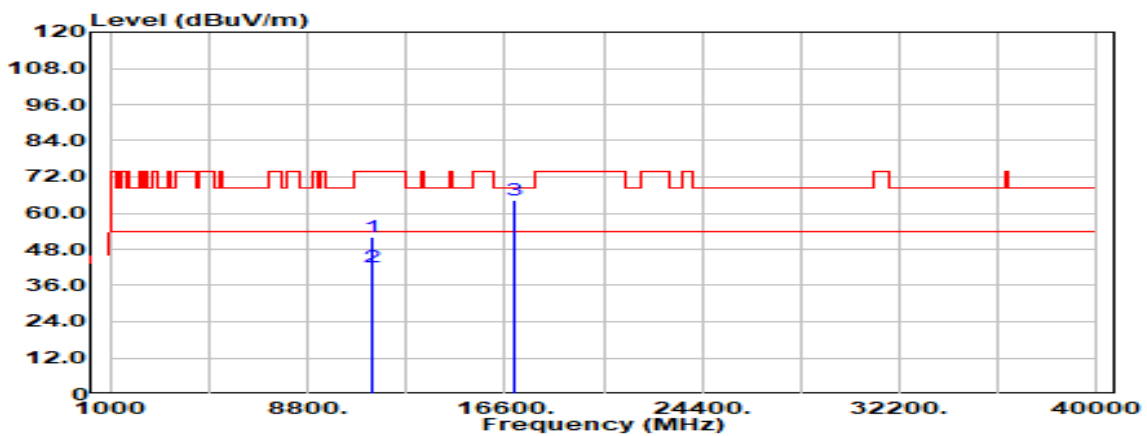


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.000	Peak	32.68	19.44	52.12	74.00	-21.88
11340.000	Average	22.49	19.44	41.93	54.00	-12.07
17010.000	Peak	32.74	31.48	64.22	68.20	-3.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

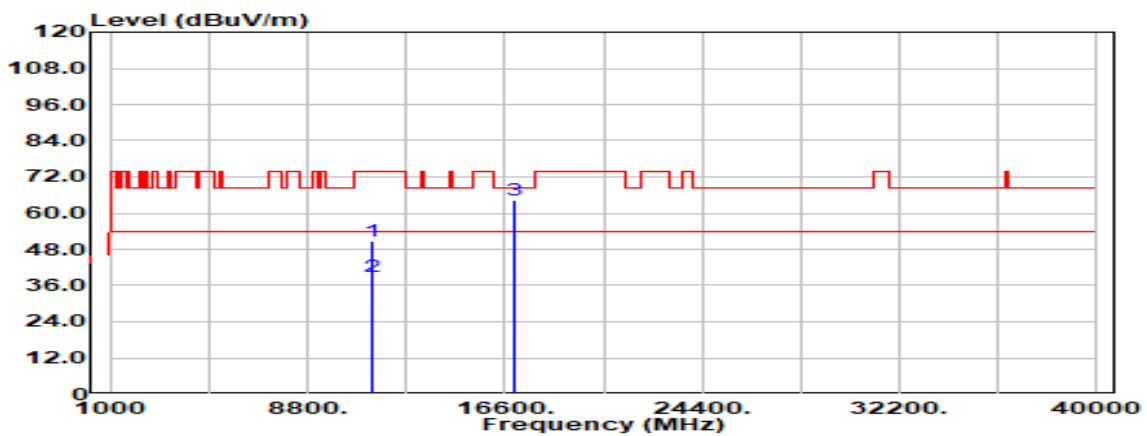


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11340.000	Peak	31.24	19.44	50.68	74.00	-23.32
11340.000	Average	19.68	19.44	39.12	54.00	-14.88
17010.000	Peak	32.88	31.48	64.36	68.20	-3.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5710 MHz_	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

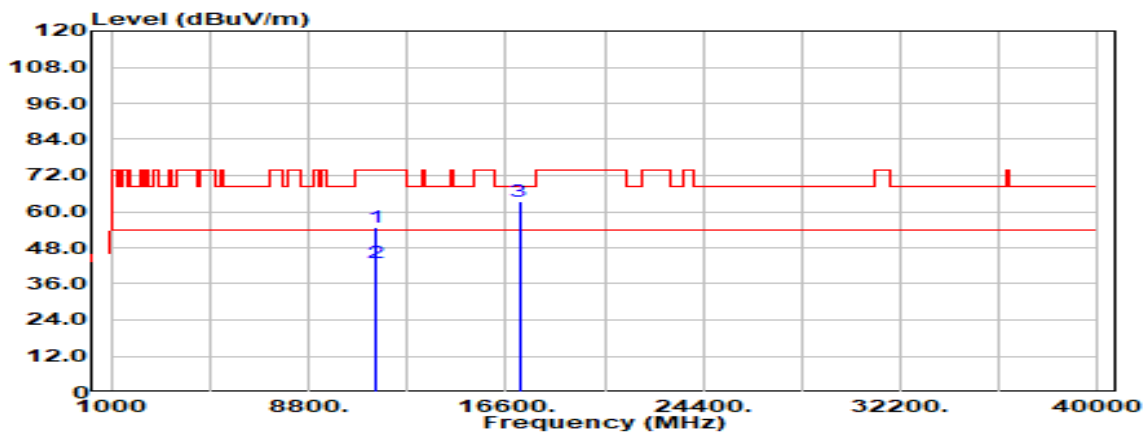


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	35.13	19.60	54.73	74.00	-19.27
11420.000	Average	23.23	19.60	42.83	54.00	-11.17
17130.000	Peak	32.60	30.88	63.47	68.20	-4.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE40 / 5710 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

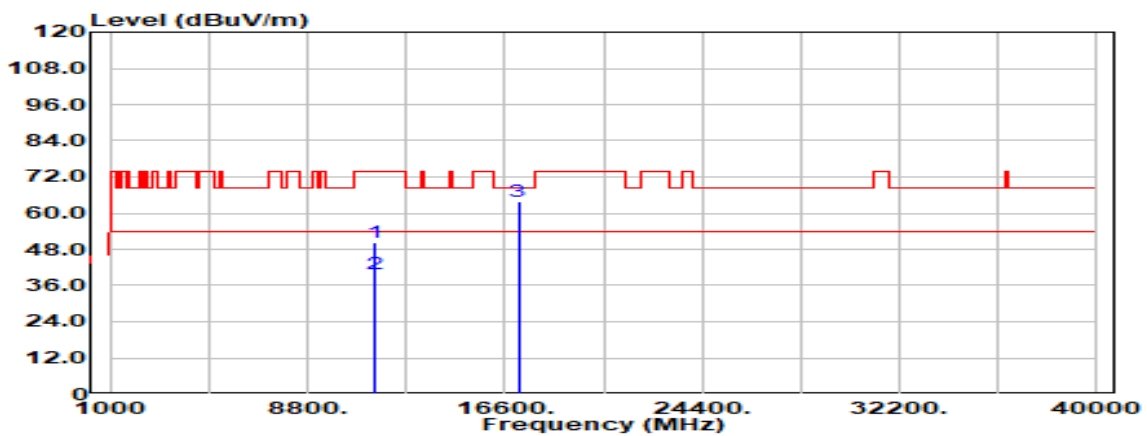


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11420.000	Peak	30.59	19.60	50.19	74.00	-23.81
11420.000	Average	20.22	19.60	39.82	54.00	-14.18
17130.000	Peak	32.77	30.88	63.64	68.20	-4.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

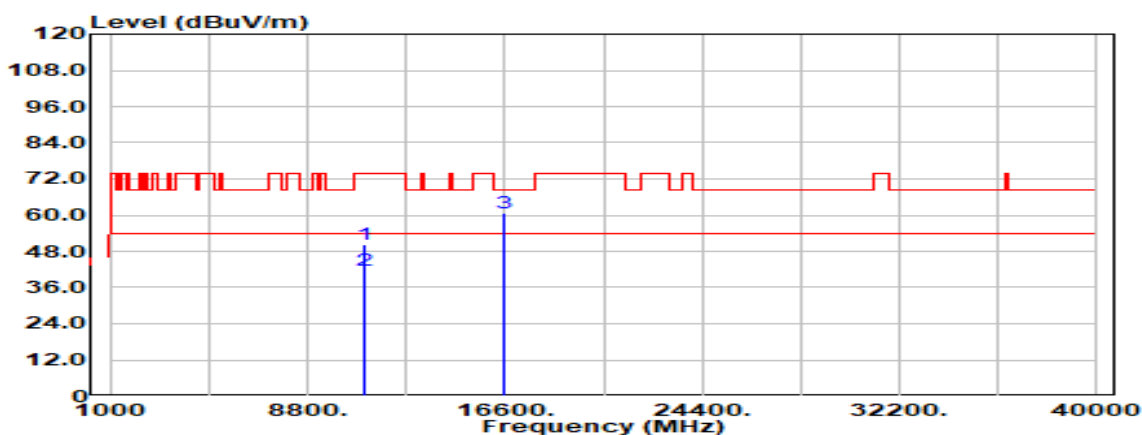


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	31.09	18.97	50.06	74.00	-23.94
11060.000	Average	22.50	18.97	41.47	54.00	-12.53
16590.000	Peak	31.75	28.94	60.69	68.20	-7.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

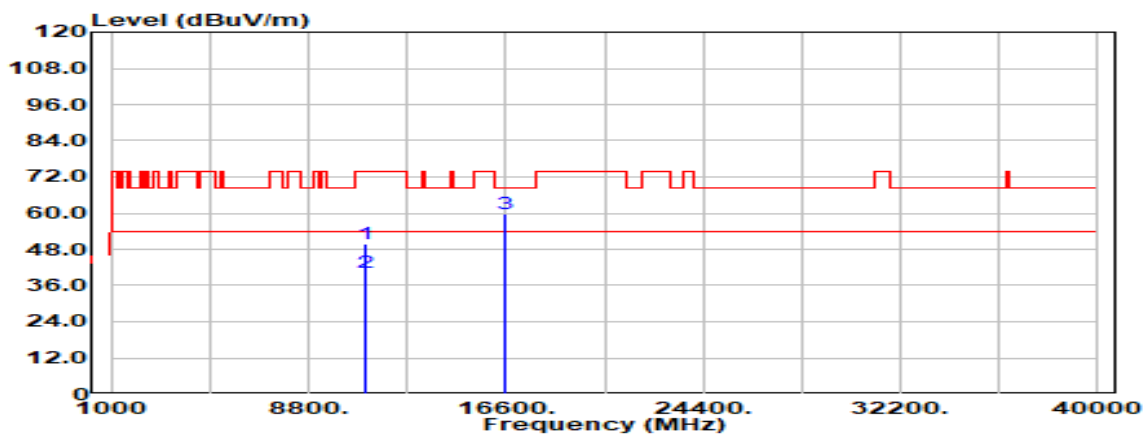


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.000	Peak	30.81	18.97	49.78	74.00	-24.22
11060.000	Average	21.42	18.97	40.39	54.00	-13.61
16590.000	Peak	30.66	28.94	59.60	68.20	-8.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5690 MHz	Temp/Hum	21.3(°C)/ 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

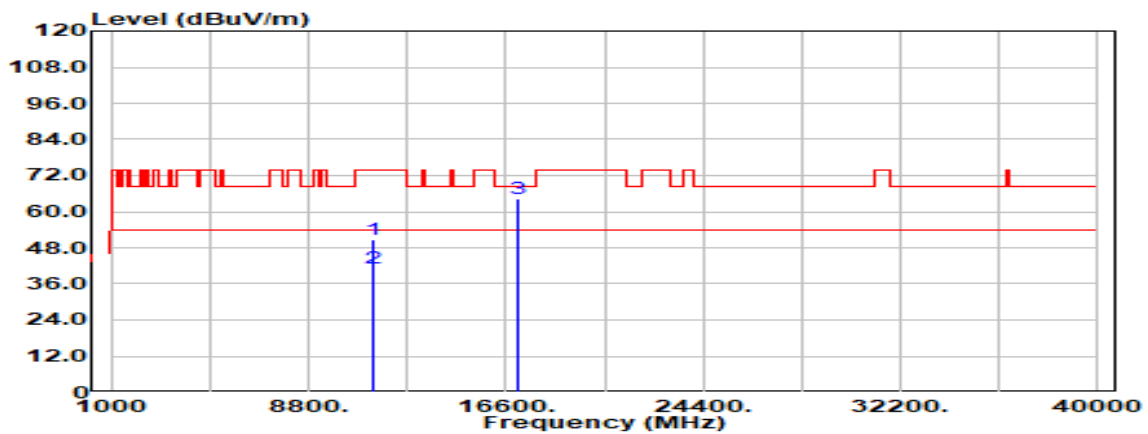


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11380.000	Peak	31.28	19.53	50.81	74.00	-23.19
11380.000	Average	21.47	19.53	41.00	54.00	-13.00
17070.000	Peak	33.02	31.30	64.31	68.20	-3.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE80 / 5690 MHz	Temp/Hum	21.3(°C) / 59%RH
Test Item	Harmonic	Test Date	March 1, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

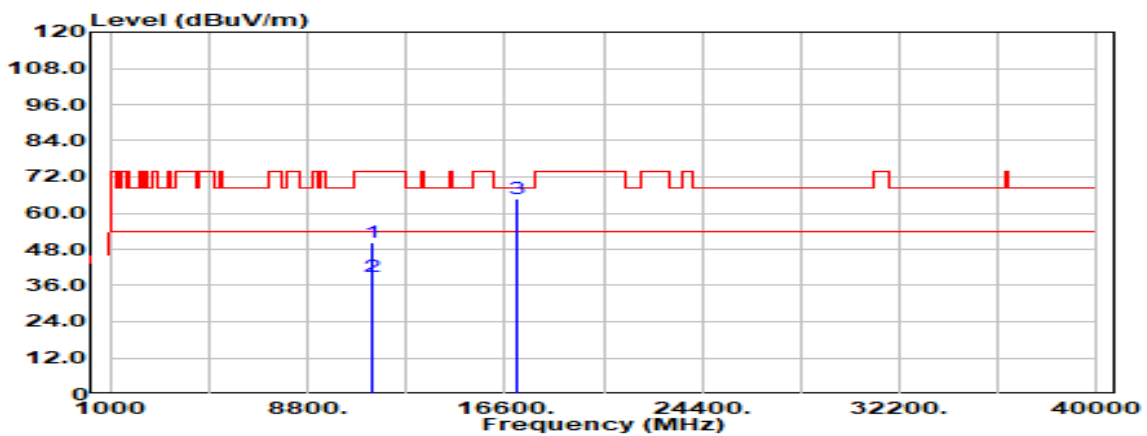


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11380.000	Peak	30.68	19.53	50.21	74.00	-23.79
11380.000	Average	19.42	19.53	38.95	54.00	-15.05
17070.000	Peak	33.50	31.30	64.80	68.20	-3.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.6(°C)/ 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

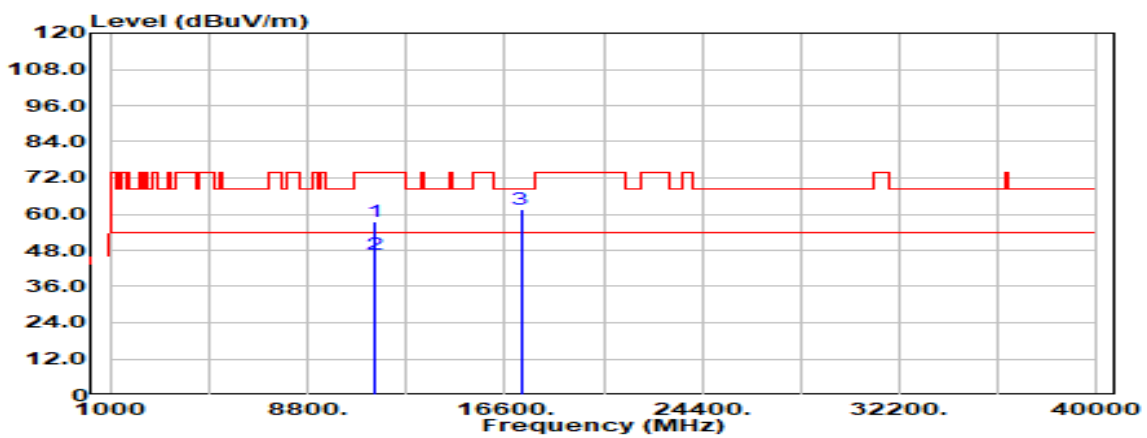


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	38.00	19.70	57.70	74.00	-16.30
11490.000	Average	27.16	19.70	46.86	54.00	-7.14
17235.000	Peak	31.50	30.01	61.51	68.20	-6.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

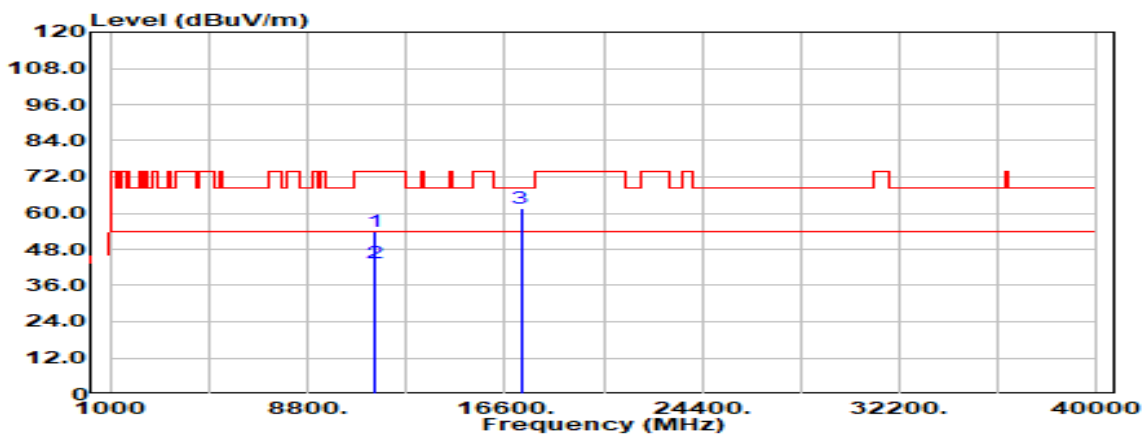


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	34.03	19.70	53.73	74.00	-20.27
11490.000	Average	23.88	19.70	43.58	54.00	-10.42
17235.000	Peak	31.37	30.01	61.38	68.20	-6.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

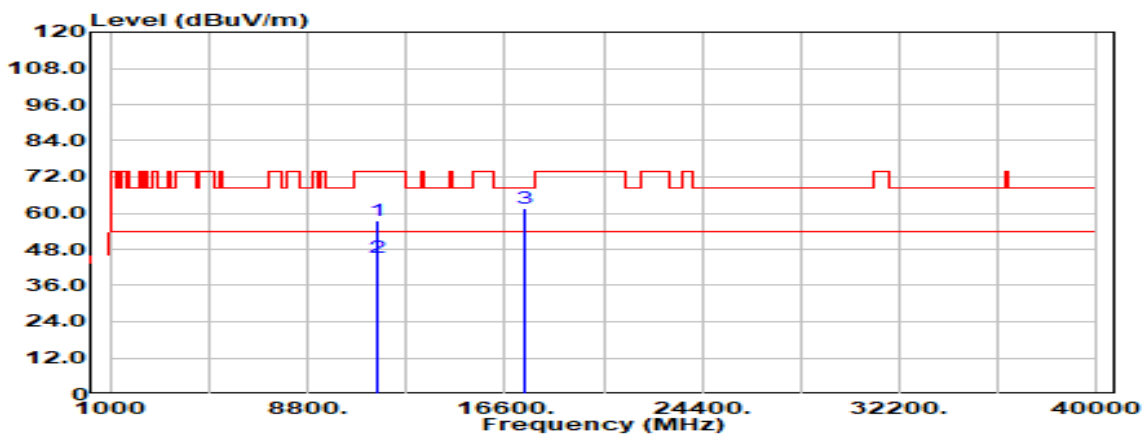


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	37.47	19.83	57.30	74.00	-16.70
11570.000	Average	25.40	19.83	45.23	54.00	-8.77
17355.000	Peak	32.29	29.33	61.62	68.20	-6.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

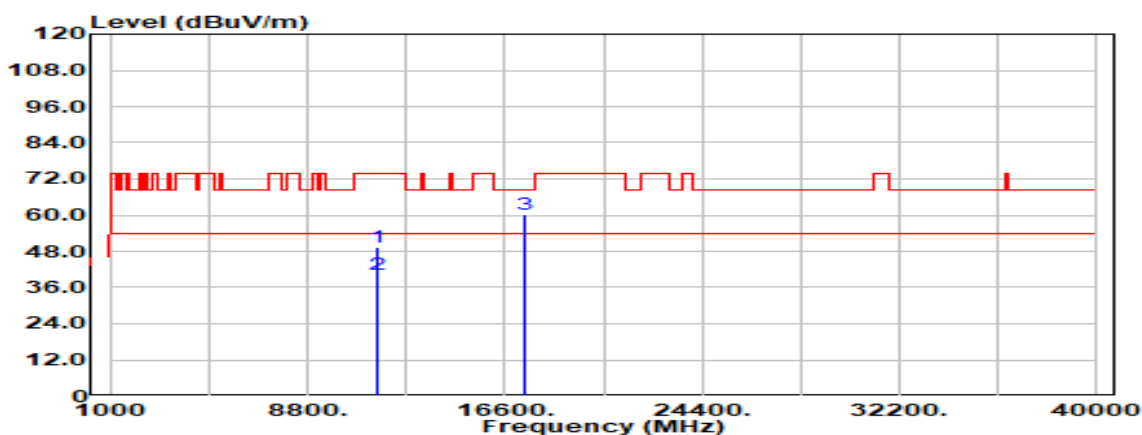


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	29.50	19.83	49.33	74.00	-24.67
11570.000	Average	20.55	19.83	40.38	54.00	-13.62
17355.000	Peak	30.71	29.33	60.04	68.20	-8.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

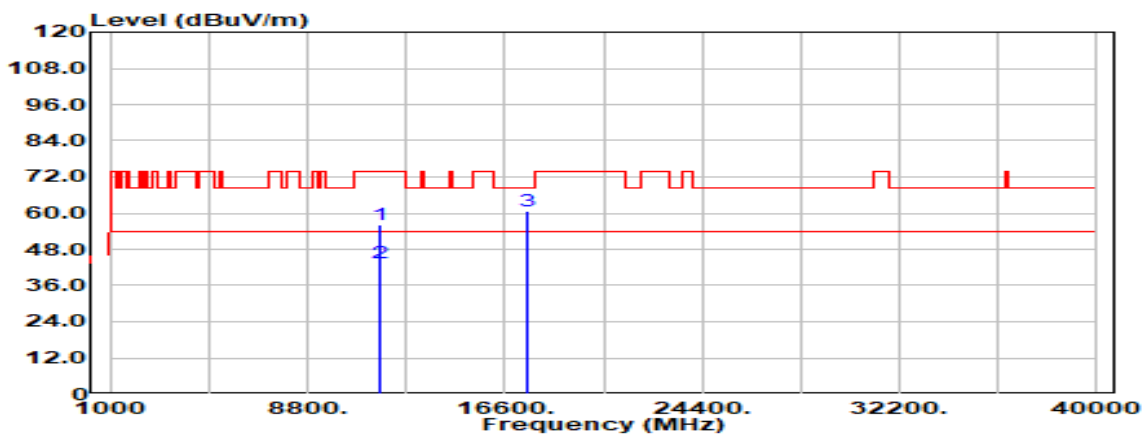


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	36.23	19.90	56.13	74.00	-17.87
11650.000	Average	23.48	19.90	43.38	54.00	-10.62
17475.000	Peak	31.73	29.11	60.84	68.20	-7.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

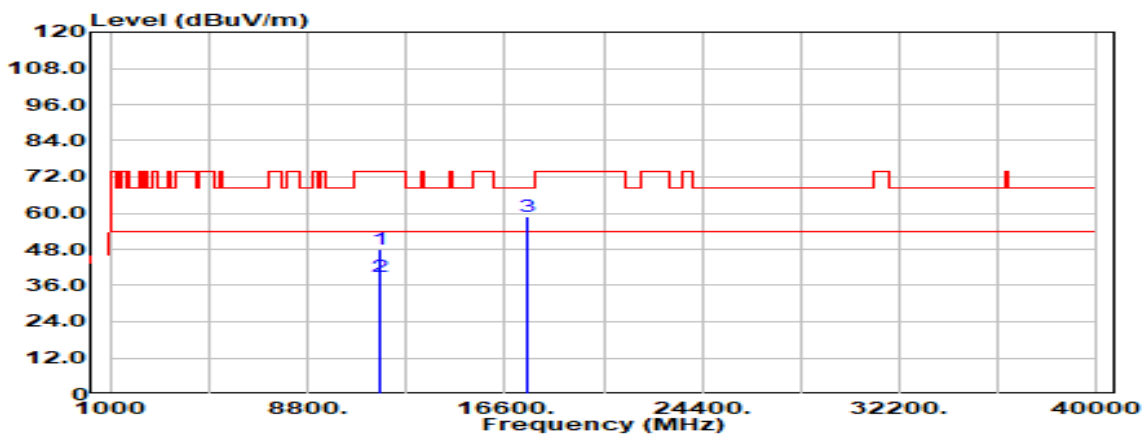


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	27.99	19.90	47.89	74.00	-26.11
11650.000	Average	18.92	19.90	38.82	54.00	-15.18
17475.000	Peak	29.94	29.11	59.04	68.20	-9.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

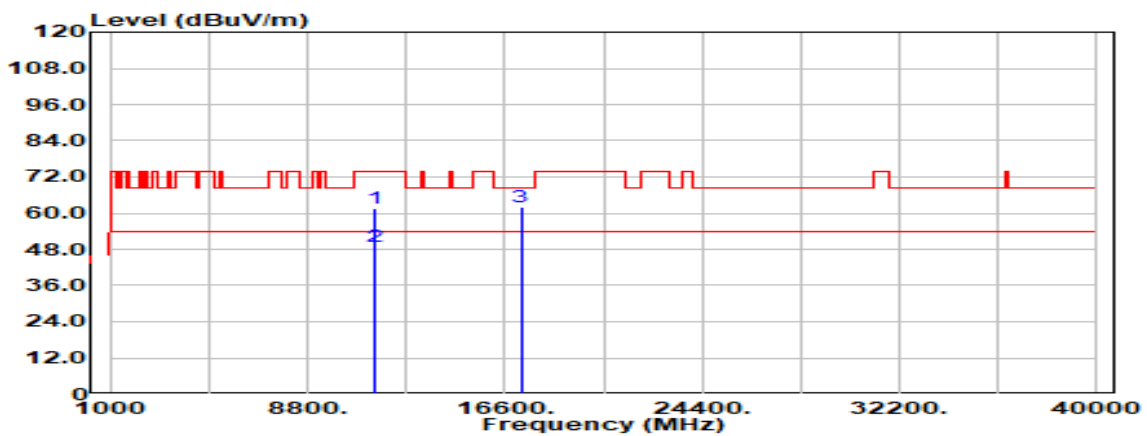


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	41.76	19.70	61.46	74.00	-12.54
11490.000	Average	29.09	19.70	48.79	54.00	-5.21
17235.000	Peak	32.03	30.01	62.04	68.20	-6.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5745 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

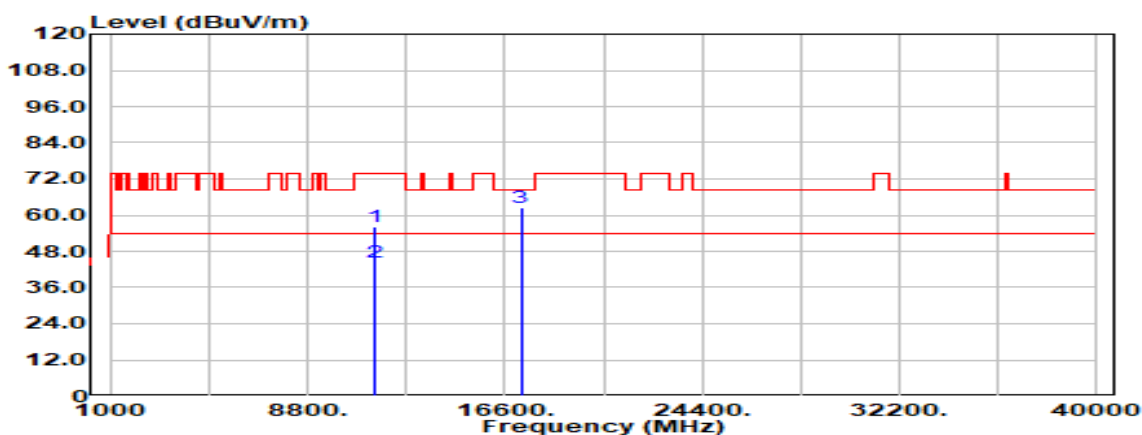


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	36.41	19.70	56.11	74.00	-17.89
11490.000	Average	24.56	19.70	44.26	54.00	-9.74
17235.000	Peak	32.31	30.01	62.32	68.20	-5.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5785 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

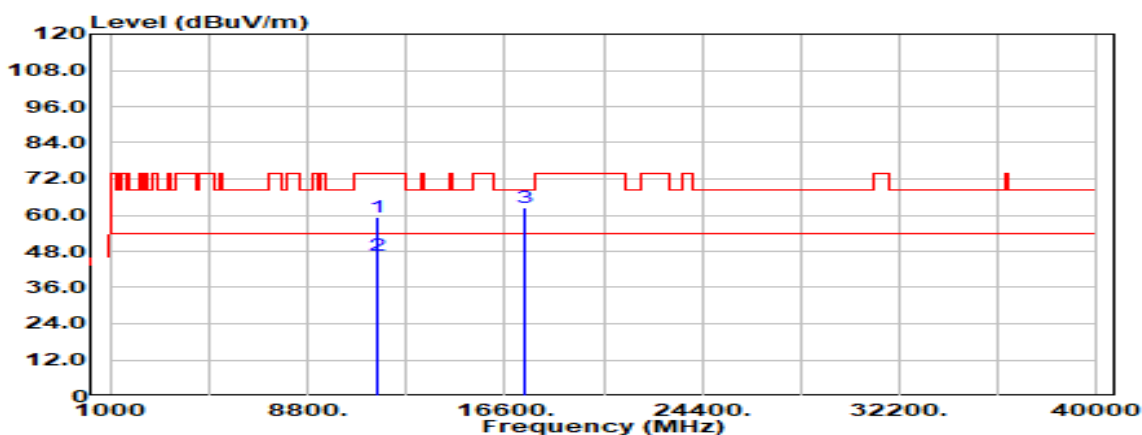


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	39.55	19.83	59.38	74.00	-14.62
11570.000	Average	26.92	19.83	46.75	54.00	-7.25
17355.000	Peak	32.94	29.33	62.27	68.20	-5.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5785 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

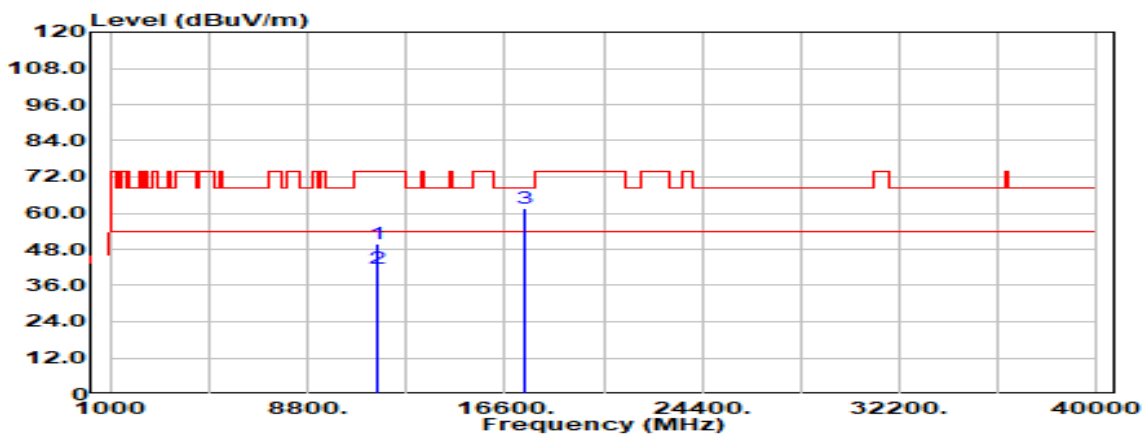


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	29.88	19.83	49.71	74.00	-24.29
11570.000	Average	21.93	19.83	41.76	54.00	-12.24
17355.000	Peak	32.21	29.33	61.54	68.20	-6.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

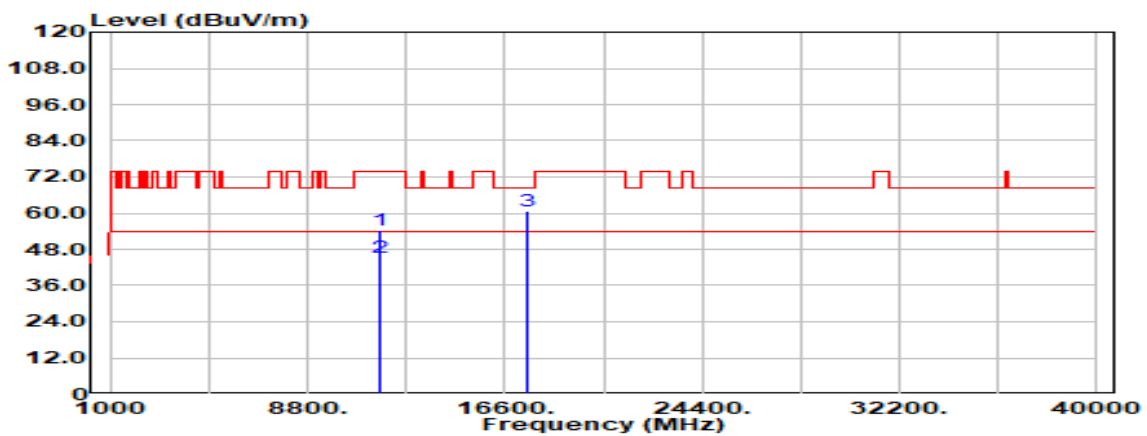


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	34.47	19.90	54.37	74.00	-19.63
11650.000	Average	25.24	19.90	45.14	54.00	-8.86
17475.000	Peak	31.57	29.11	60.67	68.20	-7.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT20 / 5825 MHz	Temp/Hum	19.6(°C) / 67%RH
Test Item	Harmonic	Test Date	February 25, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

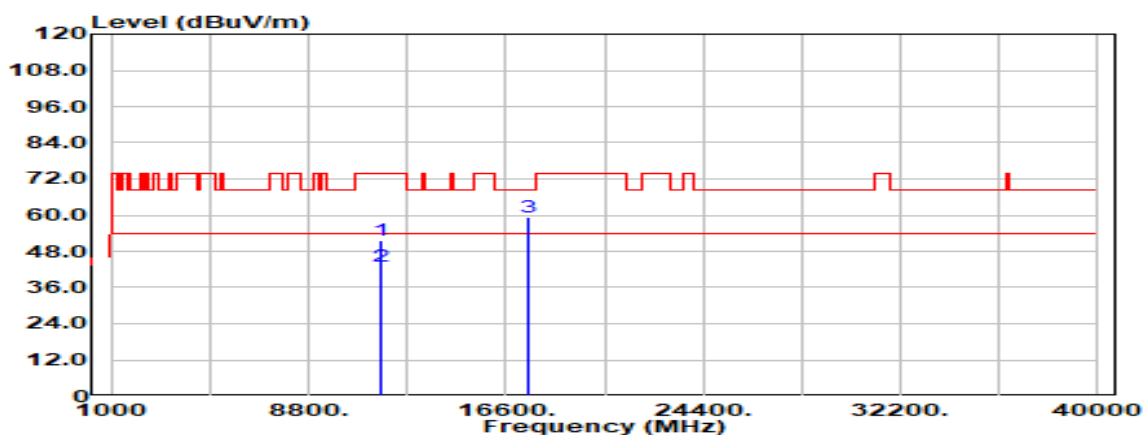


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.000	Peak	31.85	19.90	51.75	74.00	-22.25
11650.000	Average	23.15	19.90	43.05	54.00	-10.95
17475.000	Peak	30.42	29.11	59.52	68.20	-8.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

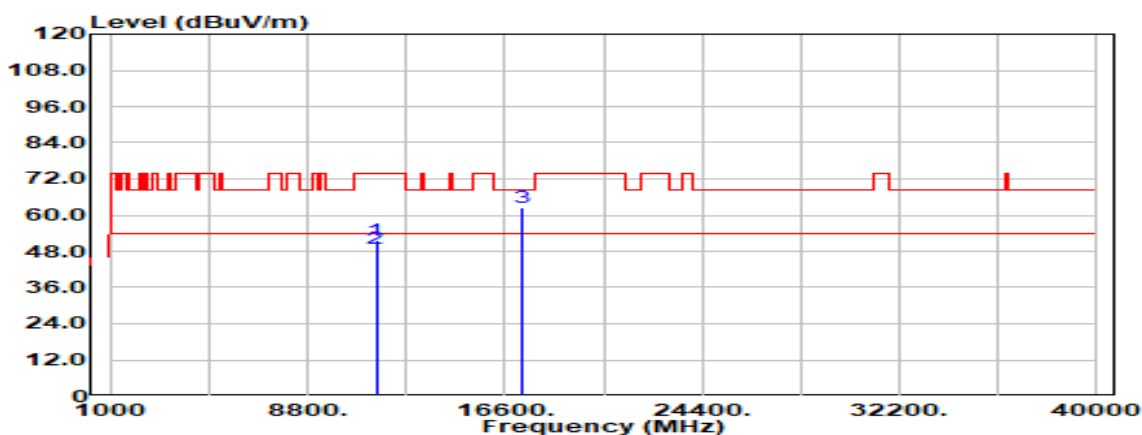


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.000	Peak	31.68	19.73	51.40	74.00	-22.60
11510.000	Average	29.33	19.73	49.06	54.00	-4.94
17265.000	Peak	32.82	29.80	62.62	68.20	-5.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5755 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

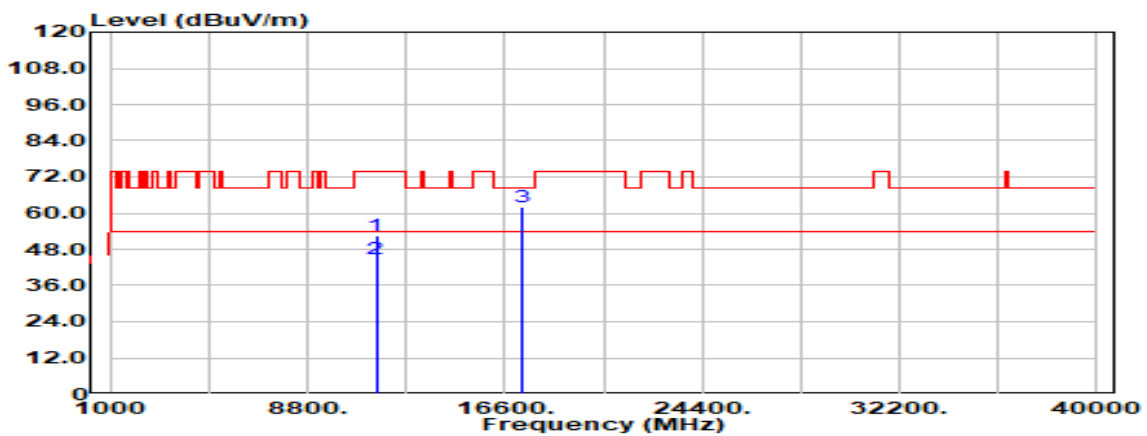


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.000	Peak	32.69	19.73	52.42	74.00	-21.58
11510.000	Average	24.98	19.73	44.71	54.00	-9.29
17265.000	Peak	32.36	29.80	62.16	68.20	-6.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

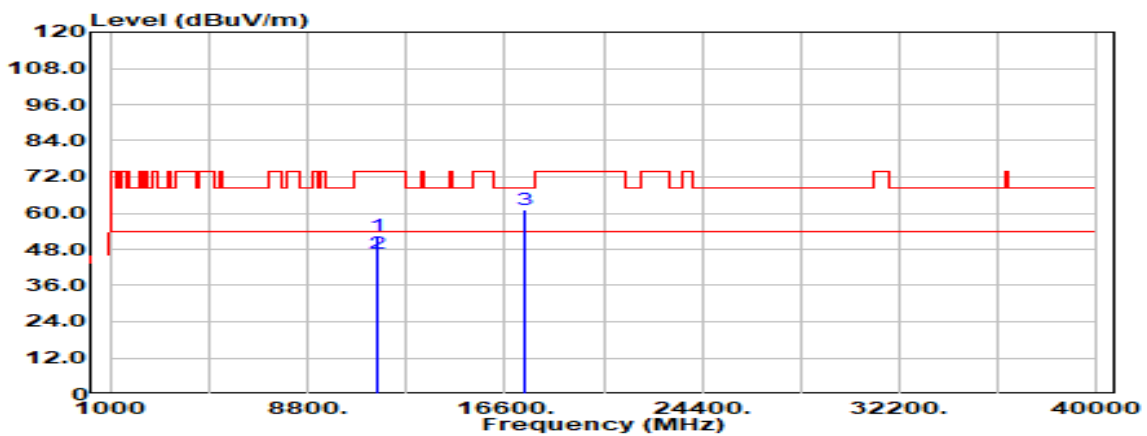


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.000	Peak	32.67	19.86	52.53	74.00	-21.47
11590.000	Average	26.84	19.86	46.70	54.00	-7.30
17385.000	Peak	31.68	29.24	60.92	68.20	-7.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT40 / 5795 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

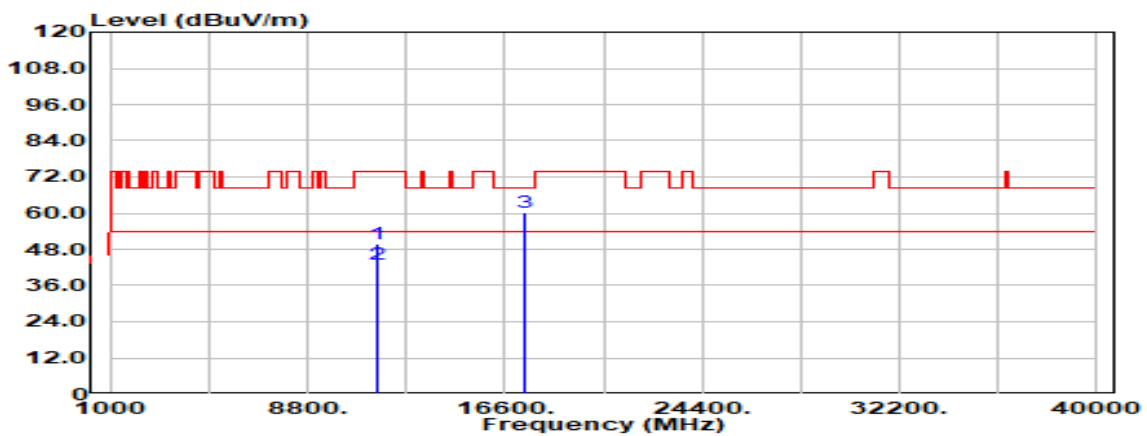


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11590.000	Peak	29.94	19.86	49.81	74.00	-24.19
11590.000	Average	23.37	19.86	43.23	54.00	-10.77
17385.000	Peak	31.01	29.24	60.24	68.20	-7.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	20.4(°C) / 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

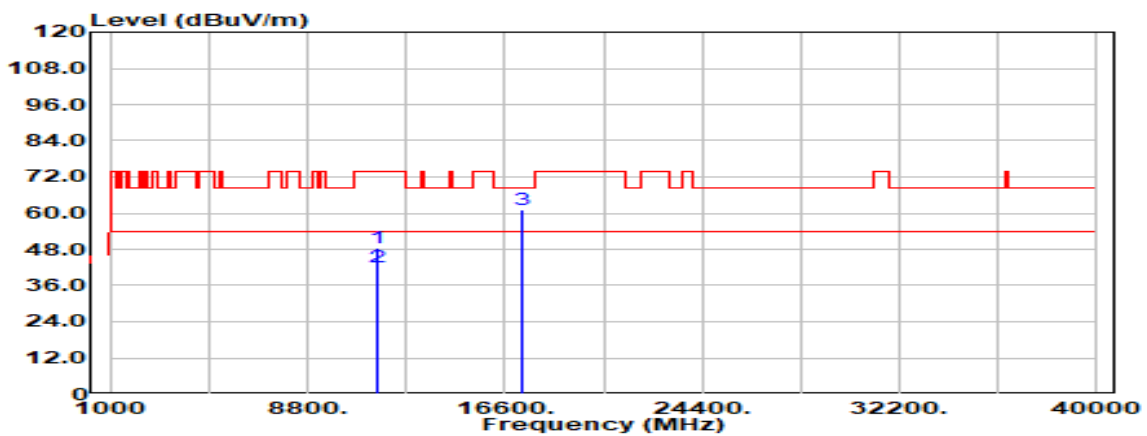


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.000	Peak	28.62	19.80	48.42	74.00	-25.58
11550.000	Average	22.51	19.80	42.31	54.00	-11.69
17325.000	Peak	31.44	29.48	60.91	68.20	-7.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

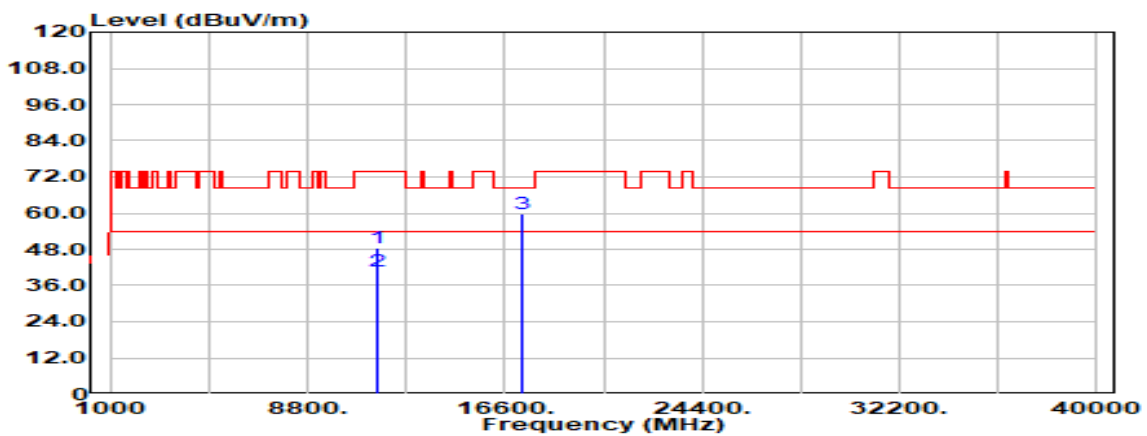


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.000	Peak	28.85	19.80	48.65	74.00	-25.35
11550.000	Average	20.93	19.80	40.73	54.00	-13.27
17325.000	Peak	30.41	29.48	59.88	68.20	-8.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

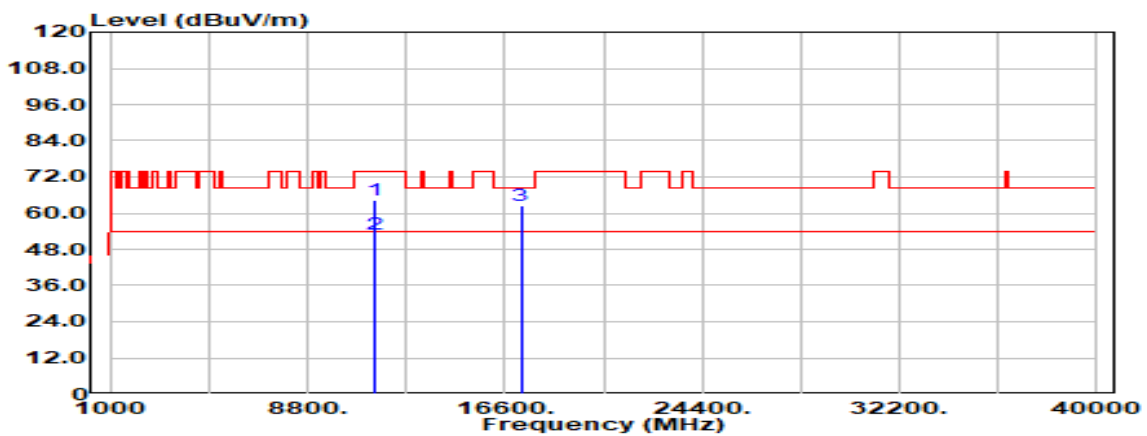


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11490.000	Peak	44.45	19.70	64.15	74.00	-9.85
11490.000	Average	33.16	19.70	52.86	54.00	-1.14
17235.000	Peak	32.50	30.01	62.51	68.20	-5.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5745MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

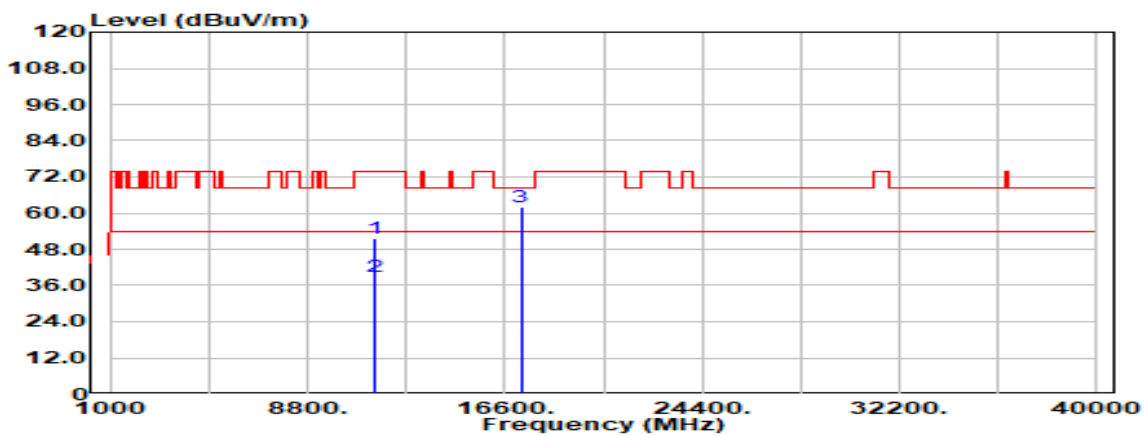


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.000	Peak	31.82	19.70	51.51	74.00	-22.49
11490.000	Average	19.35	19.70	39.05	54.00	-14.95
17235.000	Peak	32.12	30.01	62.13	68.20	-6.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5785MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

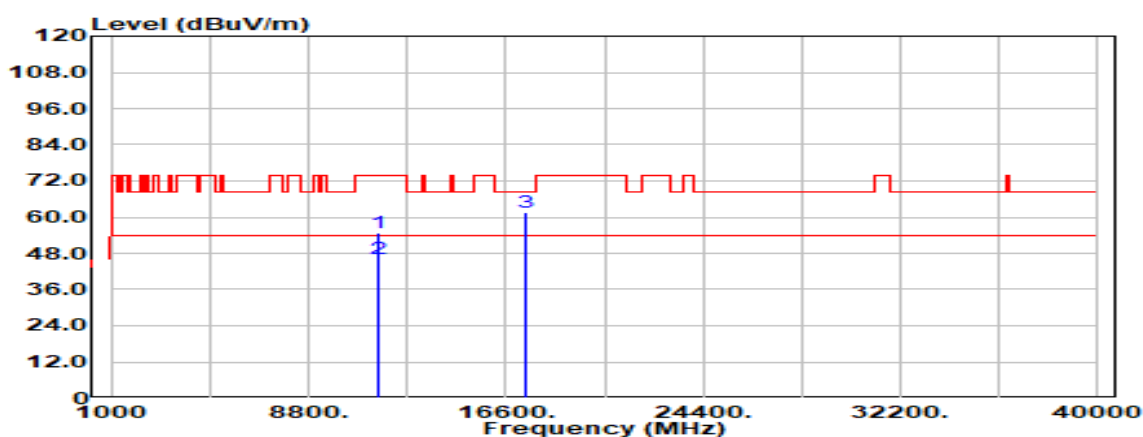


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11570.000	Peak	34.94	19.83	54.77	74.00	-19.23
11570.000	Average	26.31	19.83	46.14	54.00	-7.86
17355.000	Peak	32.46	29.33	61.79	68.20	-6.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5785MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

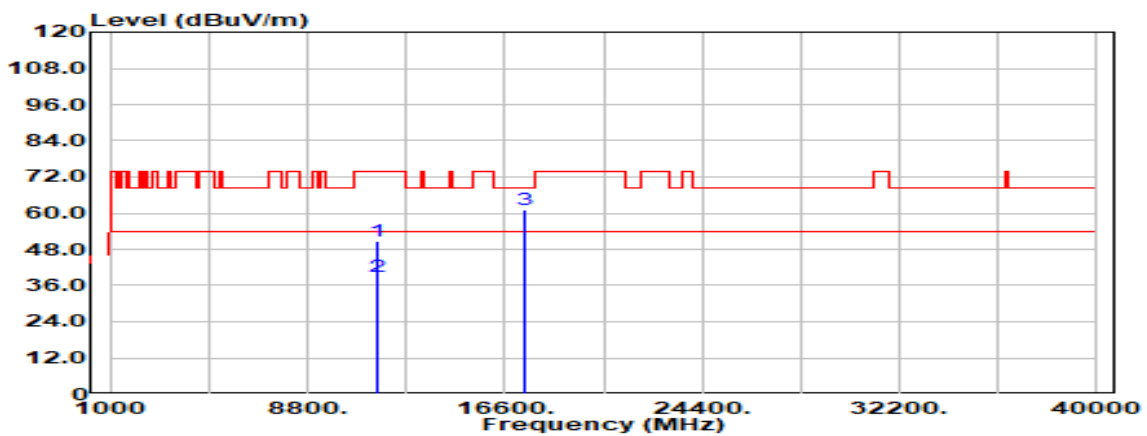


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.000	Peak	30.79	19.83	50.63	74.00	-23.37
11570.000	Average	19.23	19.83	39.06	54.00	-14.94
17355.000	Peak	31.63	29.33	60.96	68.20	-7.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

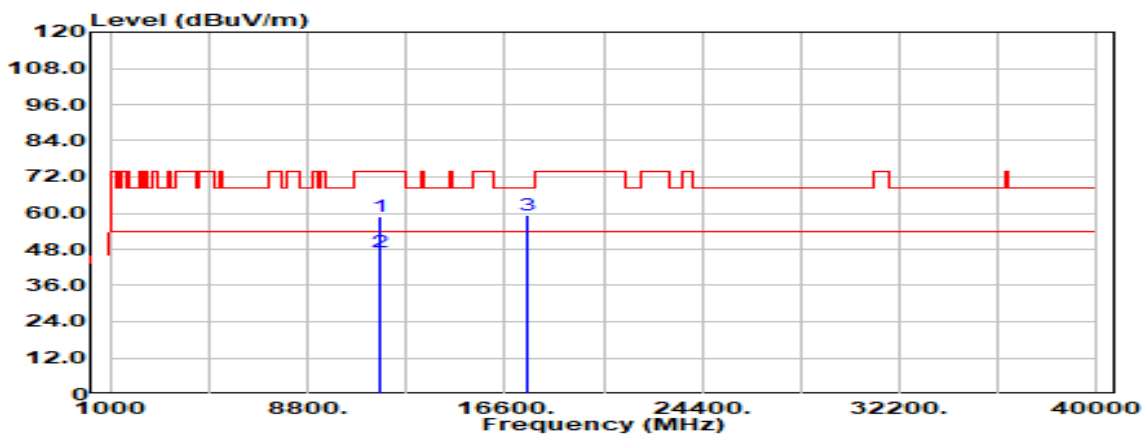


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11650.000	Peak	38.82	19.90	58.72	74.00	-15.28
11650.000	Average	26.97	19.90	46.87	54.00	-7.13
17475.000	Peak	30.37	29.11	59.47	68.20	-8.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000141KR

Test Mode	IEEE 802.11ax HE20 / 5825MHz_	Temp/Hum	20.4(°C)/ 62%RH
Test Item	Harmonic	Test Date	February 26, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

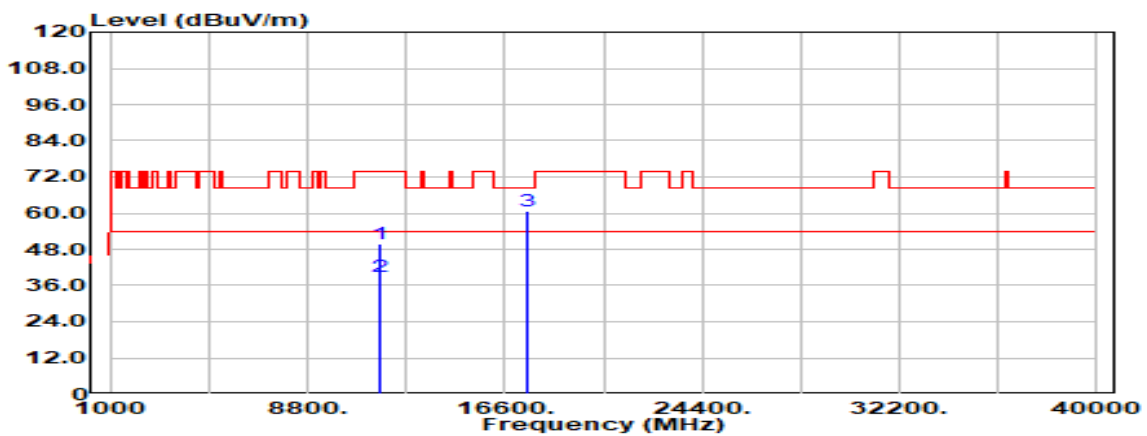

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11650.000	Peak	30.07	19.90	49.97	74.00	-24.03
11650.000	Average	19.18	19.90	39.08	54.00	-14.92
17475.000	Peak	31.48	29.11	60.59	68.20	-7.61
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.