

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart F § 15.517

Equipment : **Wireless USB 4-Port Hub**
Model No. : **DUB-2240**
Brand Name : **D-Link**
Applicant : **D-Link Corporation**
No. 289, Shinhu 3rd Rd., Neihu District, Taipei City 114,
Taiwan, R.O.C.
Manufacturer : **Alpha Networks Inc.**
No. 8, Li-shing 7th Rd., Science-based Industrial Park,
Hsinchu, Taiwan, R.O.C.
FCC ID : **KA2UB2240B1**
Test Freq. Range : 3100 ~ 10600MHz
Received Date : May 28, 2007
Final Test Date : Jun. 27, 2007
Filing Type : **New Application**

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart F**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

ILAC MRA

SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT	2
2. GENERAL INFORMATION.....	3
2.1. Product Details	3
2.2. Accessories	3
2.3. Table for Carrier Frequencies	3
2.4. Table for Test Modes	3
2.5. Table for Testing Locations	4
2.6. Table for Supporting Units.....	4
2.7. Table for Parameters of Test Software Setting	4
2.8. Test Configurations	5
3. TEST RESULT	7
3.1. AC Power Line Conducted Emissions Measurement.....	7
3.2. Operational Limitations.....	12
3.3. UWB Bandwidth Measurement	13
3.4. Radiated Emissions Measurement.....	18
3.5. Radiated Emissions in GPS Bands Measurement.....	46
3.6. Peak Emissions within a 50 MHz Bandwidth Measurement	50
3.7. Antenna Requirements.....	54
4. LIST OF MEASURING EQUIPMENTS	55
5. TEST LOCATION.....	56
6. TAF CERTIFICATE OF ACCREDITATION	57
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. PHOTOGRAPHS OF EUT.	B1 ~ B8

History of This Test Report

Original Issue Date: Jun. 27, 2007

Report No.: FR753113

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart F § 15.517

Equipment : **Wireless USB 4-Port Hub**
Model No. : **DUB-2240**
Brand Name : **D-Link**
Applicant : **D-Link Corporation**
No. 289, Shinhu 3rd Rd., Neihu District, Taipei City 114,
Taiwan, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on **May 28, 2007** would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart F				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	17.79 dB
3.2	15.517(a)	Operational Limitations	Complies	-
3.3	15.517(b)	UWB Bandwidth	Complies	-
3.4	15.517(c)/15.209	Radiated Emissions	Complies	1.60 dB
3.5	15.517(d)	Radiated Emissions in GPS Bands	Complies	2.90 dB
3.5	15.517(e)	Peak Emissions within a 50 MHz Bandwidth	Complies	0.94 dB
3.7	15.517(f)	Labeling Requirements	Complies	-
3.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.3\text{dB}$	Confidence levels of 95%
UWB Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.8\text{dB}$	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions / in GPS Bands (1GHz~18GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Temperature	$\pm 0.7^{\circ}\text{C}$	Confidence levels of 95%
Humidity	$\pm 3.2\%$	Confidence levels of 95%
DC / AC Power Source	$\pm 1.4\%$	Confidence levels of 95%

2. GENERAL INFORMATION

2.1. Product Details

Items	Description
Power Type	Power Adapter
Modulation	Multi-band OFDM (QPSK / DCM)
Operation Frequency Range	3168 ~ 4752 MHz
10 dB Bandwidth	510.92 MHz
RF Output Rating	-14.91 dBm (EIRP) @ RBW:10MHz
Carrier Frequencies	Please refer to section 2.3
Antenna	Integral Antenna (Without antenna connector)

2.2. Accessories

Power	Brand	Model	Rating
Adapter 1	AMIGO	AMS3-0503000FU	Input: 100-240V, 50/60Hz, 0.5A Output: 5V, 3A

2.3. Table for Carrier Frequencies

Band Group	BAND_ID (nb)	Lower Frequency (MHz)	Center Frequency (MHz)	Upper Frequency (MHz)
1	1	3168	3432	3696
	2	3696	3960	4224
	3	4224	4488	4752

2.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	BAND_ID (nb)	Data Rate	Remark
AC Power Line Conducted Emissions	Normal Link	All Band	TFC 1, 558 Mbps	-
UWB Bandwidth	CTX	All Band	TFC 1, 558 Mbps	-
Radiated Emissions 9kHz~960MHz	CTX	All Band	TFC 1, 558 Mbps	-
Radiated Emissions above 960MHz	CTX	All Band	TFC 1, 558 Mbps	-
Peak Emissions within a 50 MHz Bandwidth	CTX	All Band	TFC 1, 558 Mbps	-

Note:

1. CTX=continuously transmitting; All Band: EUT simultaneously transmitted in band_ID 1, 2, 3.
2. Investigation has been done on all data rates for searching the worst cases. Then, EUT set for TFC 1 and 558Mbps be worst case.

2.5. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 5 for Test Site Address.

2.6. Table for Supporting Units

Test Items	Support Unit	Brand	Model	FCC ID
AC Conduction	iPod Nano	Apple	A1199	DoC
	Notebook	DELL	D505	DoC
	Printer	EPSON	LQ300+	DoC
	Modem	ACEEX	DM1414	IFAXDM1414
	Wireless USB Adapter	Alpha	DUB-1210	KA2UB1210B1
Radiation	Notebook	DELL	D505	DoC

2.7. Table for Parameters of Test Software Setting

For Radiated test Software:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware on the final end product.

UWB

Test Software Version	WiQuest_tool		
BAND_ID(nb)	1	2	3
UWB	Default	Default	Default

For AC Conducted test Software:

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

Turn on the power of all equipment.

The NB reads the test program from the hard disk drive and runs it.

The NB sends "H" messages to the panel, and the panel displays "H" patterns on the screen.

The NB sends "H" messages to the printer, then the printer prints them on the paper.


The NB sends "H" messages to the modem.

The NB sends "H" messages to the external Hard Disk, and the Hard Disk reads and writes the message.


Repeat the steps from c to f.

2.8. Test Configurations

2.8.1. Radiation Emissions Test Configuration

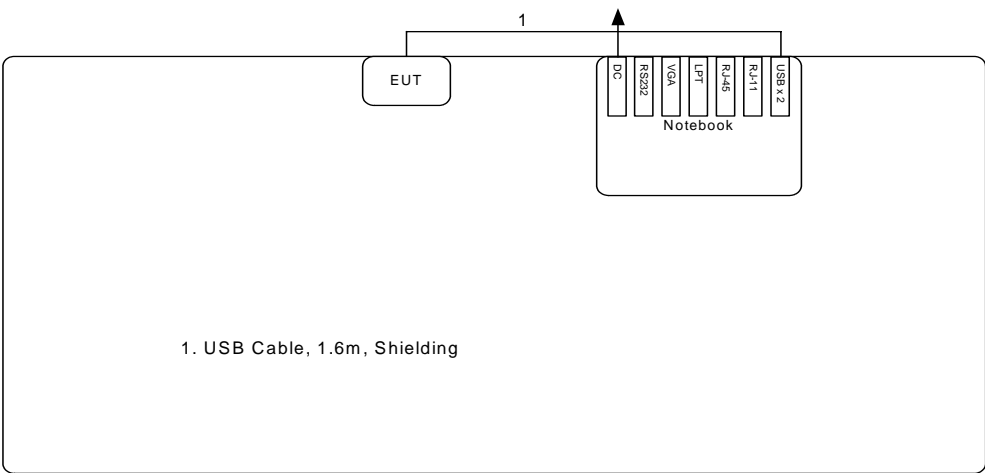

2.8.2. AC Power Line Conduction Emissions Test Configuration

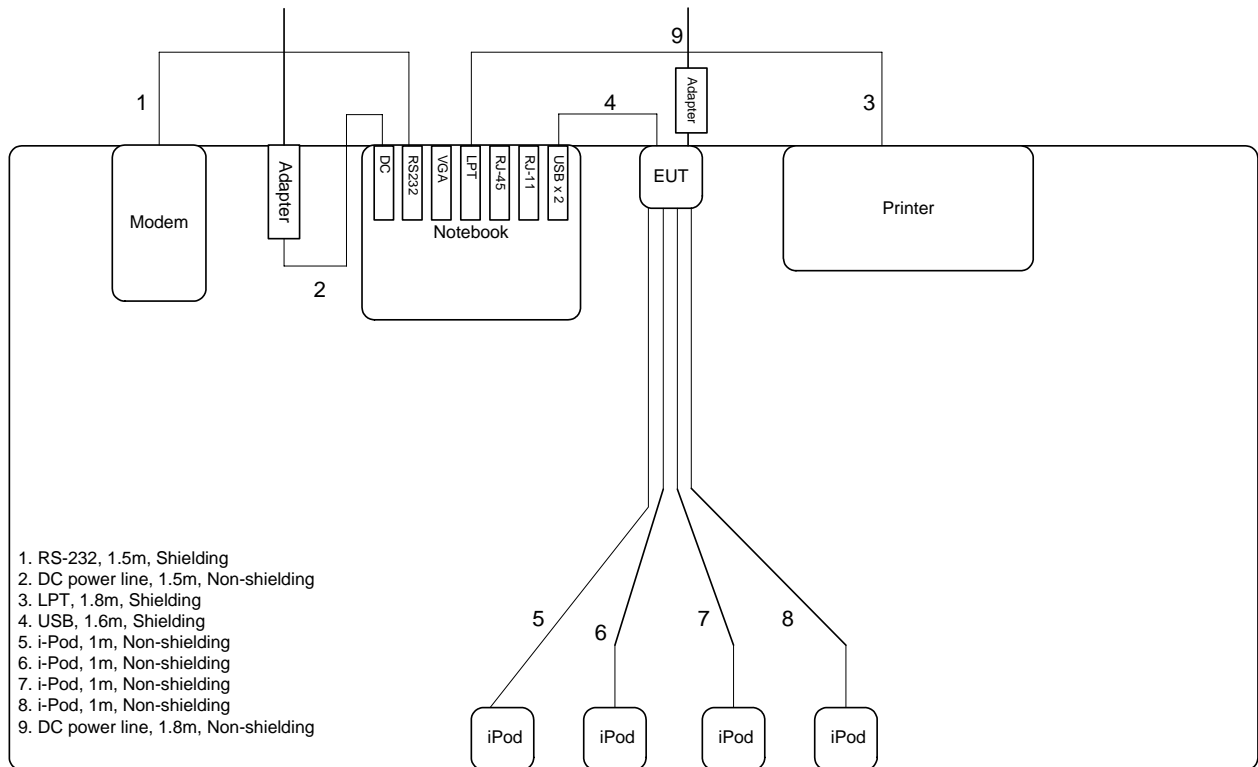

3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting


Please refer to equipments list in section 4 of this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 0.8 meter from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4. Test Setup Layout

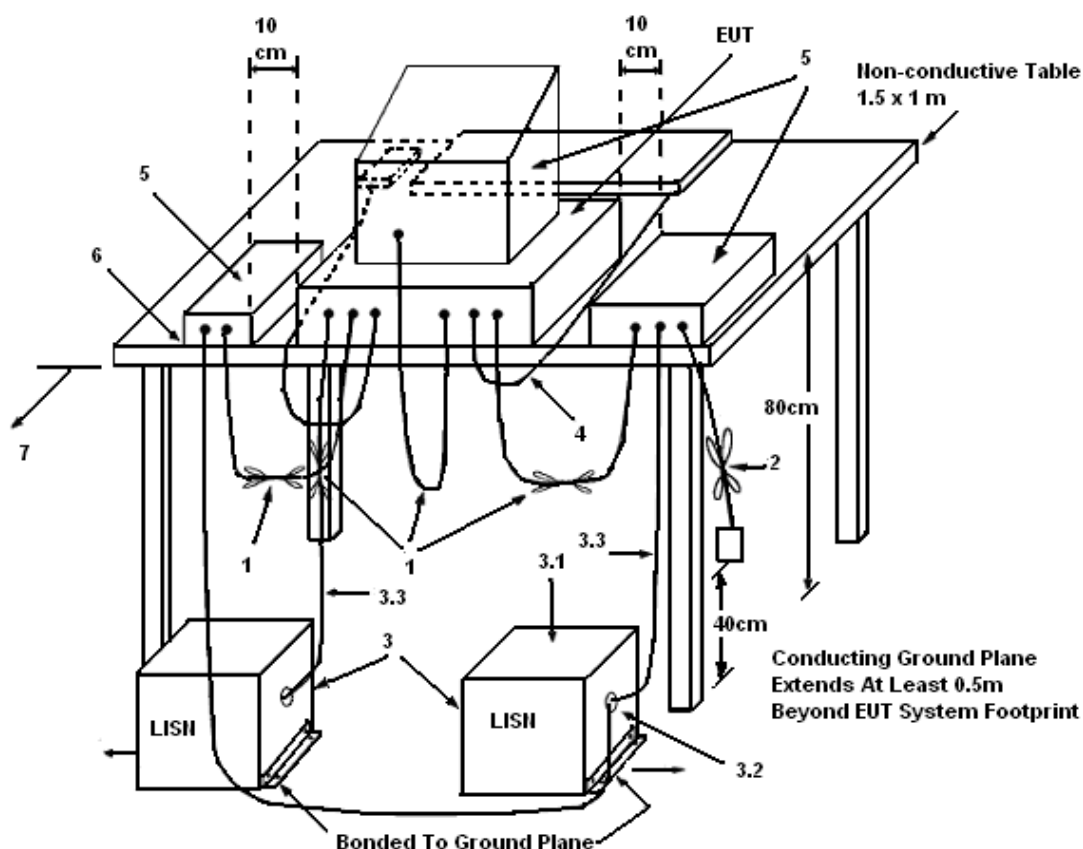

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5. Test Deviation


There is no deviation with the original standard.

3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


3.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	27 °C	Humidity	44 %
Test Engineer	Ted	Phase	Line
Configuration	Normal Link		

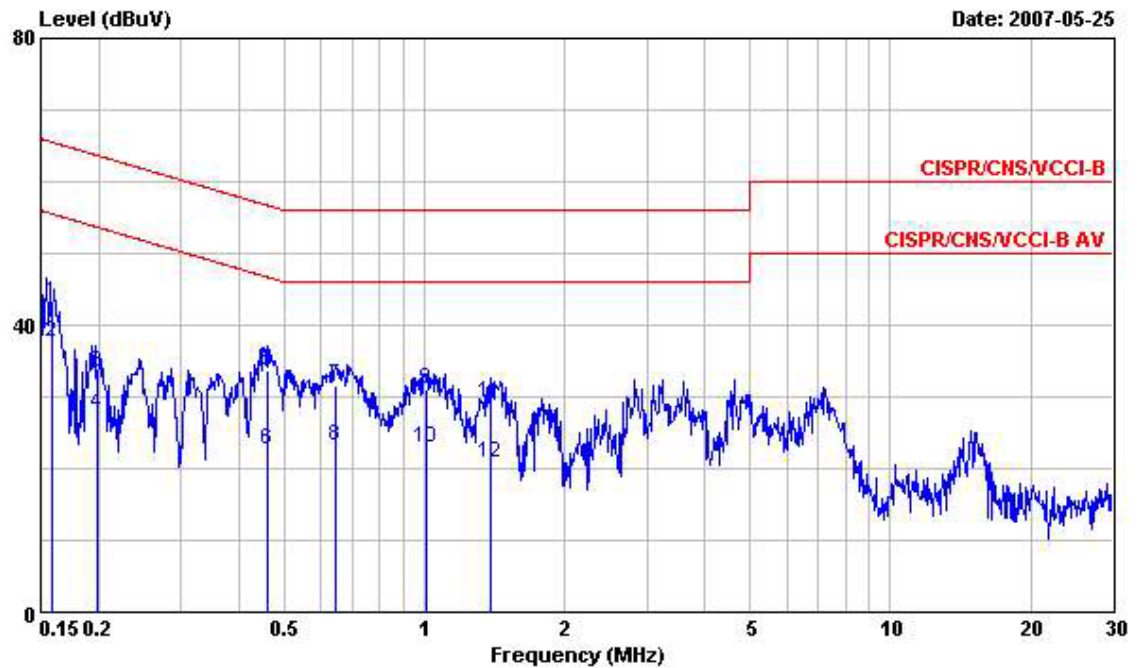

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1583570	43.05	-22.50	65.55	42.81	0.10	0.14	QP
2	0.1583570	37.76	-17.79	55.55	37.52	0.10	0.14	Average
3	0.1985380	33.46	-30.21	63.67	33.22	0.10	0.14	QP
4	0.1985380	27.59	-26.08	53.67	27.35	0.10	0.14	Average
5	0.4612220	33.73	-22.94	56.67	32.94	0.10	0.69	QP
6	0.4612220	22.72	-23.95	46.67	21.93	0.10	0.69	Average
7	0.6474040	31.56	-24.44	56.00	30.88	0.10	0.58	QP
8	0.6474040	23.18	-22.82	46.00	22.50	0.10	0.58	Average
9	1.010	31.03	-24.97	56.00	30.49	0.10	0.44	QP
10	1.010	22.95	-23.05	46.00	22.41	0.10	0.44	Average
11	1.390	29.25	-26.75	56.00	28.71	0.10	0.44	QP
12	1.390	20.90	-25.10	46.00	20.36	0.10	0.44	Average

Temperature	27 °C	Humidity	44 %
Test Engineer	Ted Chiu	Phase	Neutral
Configuration	Normal Link		

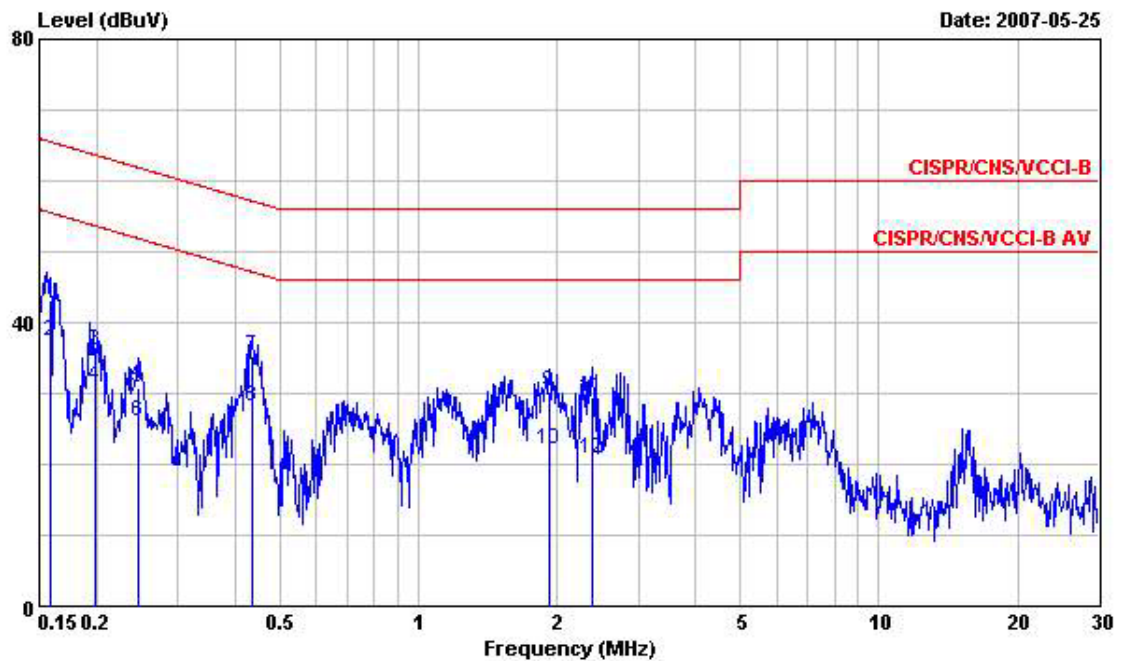

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1587180	43.25	-22.28	65.53	43.01	0.10	0.14	QP
2	0.1587180	37.45	-18.08	55.53	37.21	0.10	0.14	Average
3	0.1986980	36.02	-27.64	63.66	35.78	0.10	0.14	QP
4	0.1986980	30.98	-22.68	53.66	30.74	0.10	0.14	Average
5	0.2455440	30.90	-31.01	61.91	30.48	0.10	0.32	QP
6	0.2455440	26.16	-25.75	51.91	25.74	0.10	0.32	Average
7	0.4363890	35.21	-21.92	57.13	34.41	0.10	0.70	QP
8	0.4363890	28.21	-18.92	47.13	27.41	0.10	0.70	Average
9	1.930	30.15	-25.85	56.00	29.62	0.10	0.43	QP
10	1.930	22.15	-23.85	46.00	21.62	0.10	0.43	Average
11	2.380	29.43	-26.57	56.00	28.91	0.12	0.40	QP
12	2.380	20.85	-25.15	46.00	20.33	0.12	0.40	Average

Note:

Level = Read Level + LISN Factor + Cable Loss

3.2. Operational Limitations

3.2.1. Test Result of Operation Restriction

Operation Restriction	Informed the applicant	Not applicable	User Manual Informed	Passed
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart F 15.517(a)				
(1) Indoor UWB devices & Fixed indoor infrastructure				
Must be capable of operation only indoors. The necessity to operate with a fixed indoor infrastructure. [A transmitter that had been connected to the AC power lines and operates solely through the AC mains. Or The device under test operates solely through USB port of a PC. It is not intended to operate from any other power source and be considered sufficient to demonstrate a fixed indoor infrastructure]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(2) Emissions from equipment				
The emissions from equipment operated shall not be intentionally directed outside of the building in which the equipment is located, such as through a window or a doorway, to perform an outside function, such as the detection of persons about to enter a building. [The applicant has been informed of this requirement.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(3) Outdoor mounted antennas				
The use of outdoor mounted antennas, e.g., antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited. [The applicant has been informed of this requirement and instruct the caution in user manual.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(4) Field disturbance sensors install				
Field disturbance sensors installed inside of metal or underground storage tanks are considered to operate indoors provided the emissions are directed towards the ground. [Not applicable for this client.]	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(5) A communications system shall transmit only				
A communications system shall transmit only when the intentional radiator is sending information to an associated receiver. [The applicant has been informed of this requirement and is clearly stated on the users manual.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

3.3. UWB Bandwidth Measurement

3.3.1. Limit

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

Center frequency. The center frequency, f_c , equals $(f_H + f_L)/2$.

Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L)/(f_H + f_L)$.

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

3.3.2. Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer.


Parameter	Setting
RBW / VBW	10 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. Test Procedures

7. The EUT was placed on the top of the turntable that is non-conductive materials (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
8. The horn receiving antenna was varied between 1 meter and 4 meters , 1 meter step above ground while maintaining bore sight alignment to find the maximum emissions field strength of both horizontal and vertical polarization.
9. For maximum emission amplitude, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M . Next, the points that are 10dB or more below the highest radiated emission were observed in a search from f_M in both the lower and higher frequency direction in the measured frequency EIRP graph, they are denoted as f_L and f_H , respectively. The UWB bandwidth is the difference between f_L and f_H .

10. The individual UWB bandwidths were measured for each BAND_ID (n_b) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.

3.3.4. Test Setup Layout

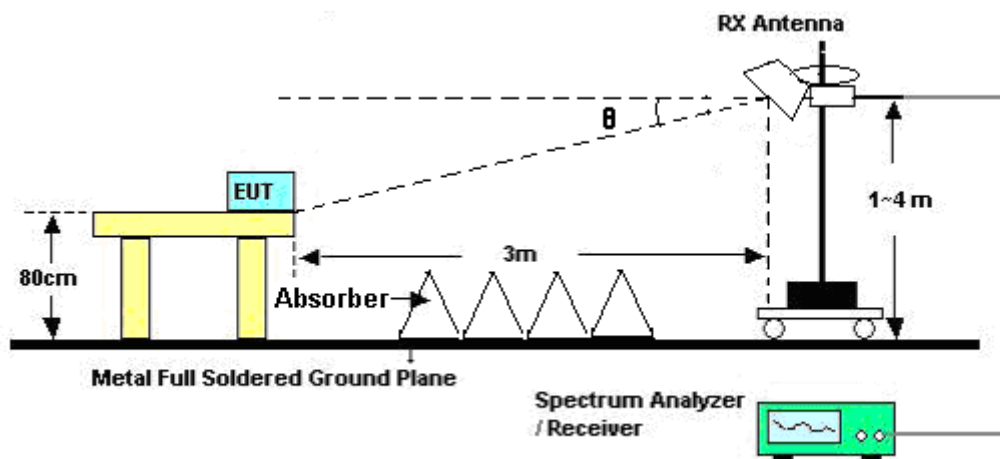

Note: The Horn Antenna maintaining bore sight alignment.

$$\theta = \tan^{-1} \left(\frac{\text{The Antenna's Height} - \text{The Table's Height}}{\text{The Test Distance}} \right)$$

3.3.5. Test Deviation


There is no deviation with the original standard.

3.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode, and TFC 1 and data rate is 558Mbps.

3.3.7. Test Result of UWB Bandwidth

UWB Bandwidth on BAND_ID (nb) 1

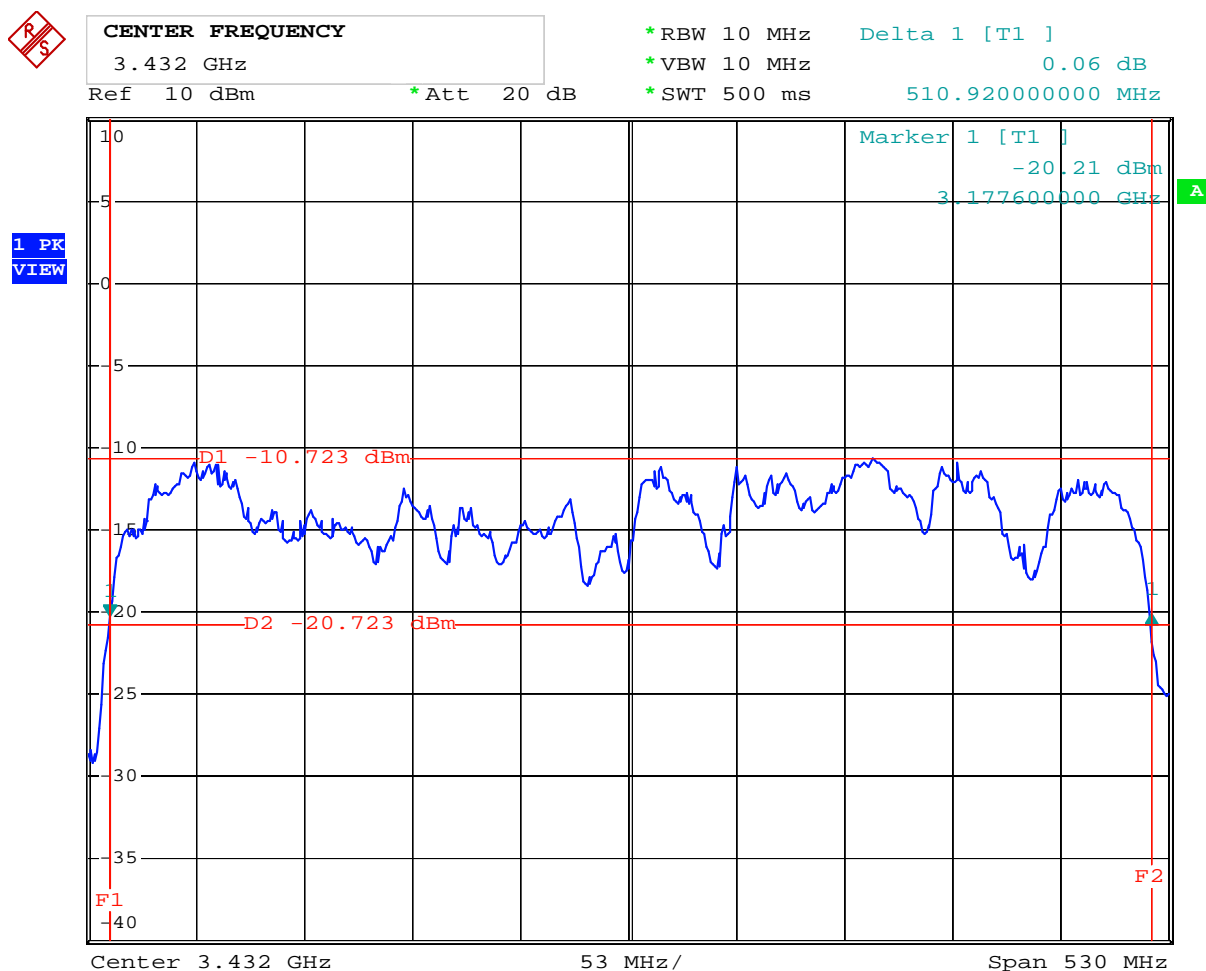

Date: 27.JUN.2007 17:01:12

UWB BW = 510.92 MHz; F_L = 3177.60 MHz; F_H = 3688.52 MHz; F_C = 3433.06 MHz

Note:

1. Test Distance: 3m
2. Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
3. There are the absorber on ground plane between the antenna tower and turntable.

UWB Bandwidth on BAND_ID (nb) 2



CENTER FREQUENCY

3.96 GHz

Ref 10 dBm

*Att 20 dB

*RBW 10 MHz


Delta 1 [T1]

*VBW 10 MHz

-0.18 dB

*SWT 500 ms

507.74000000 MHz

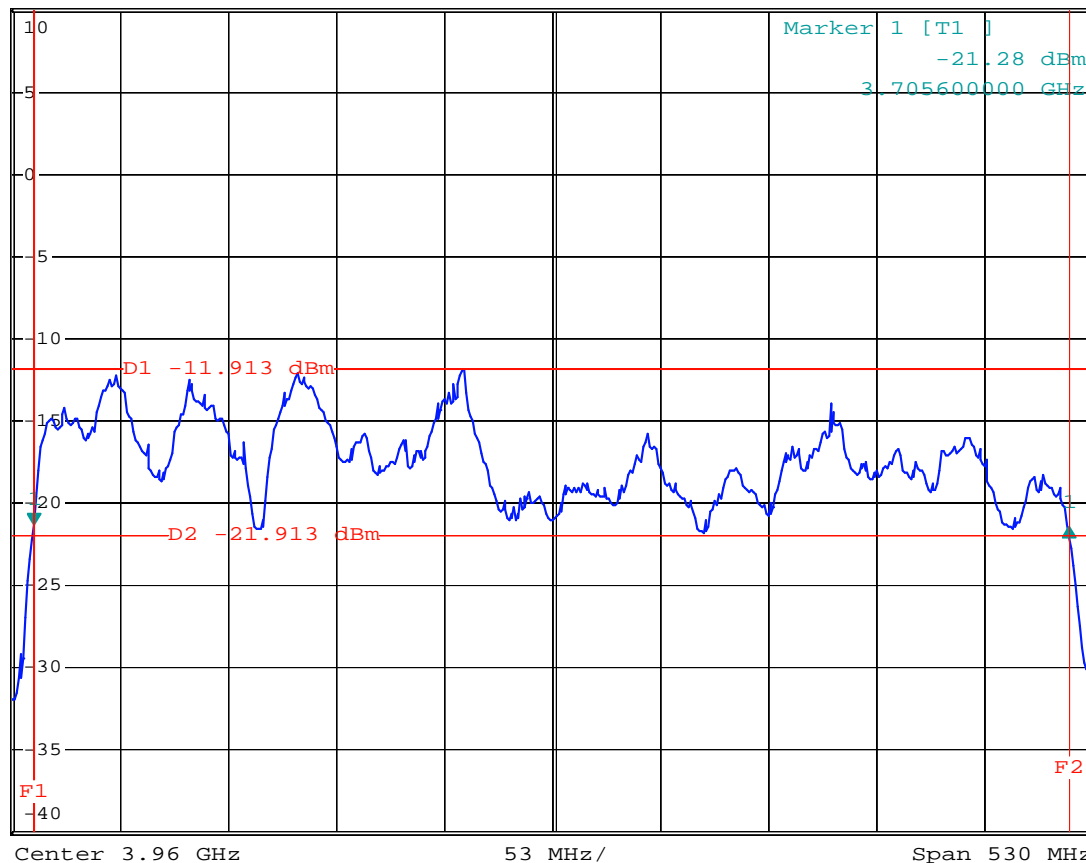1 PK
VIEW


Date: 27.JUN.2007 19:13:54

UWB BW = 507.74 MHz; $F_L = 3705.60$ MHz; $F_H = 4213.34$ MHz; $F_C = 3959.47$ MHz

Note:

1. Test Distance: 3m
2. Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
3. There are the absorber on ground plane between the antenna tower and turntable.

UWB Bandwidth on BAND_ID (nb) 3

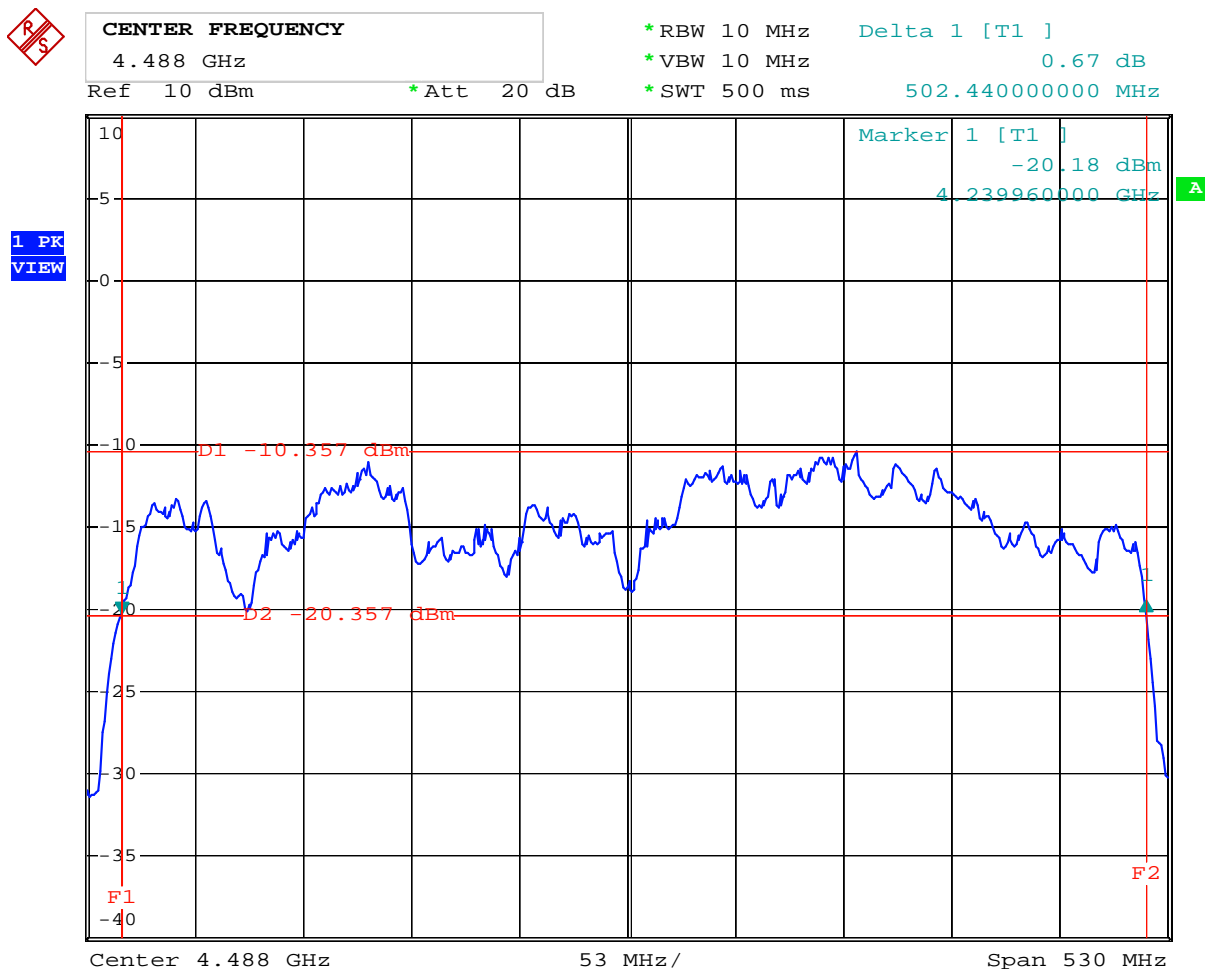

Date: 27.JUN.2007 17:52:17

UWB BW = 502.44 MHz; $F_L = 4239.96$ MHz; $F_H = 4742.40$ MHz; $F_C = 4491.18$ MHz

Note:

1. Test Distance: 3m
2. Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
3. There are the absorber on ground plane between the antenna tower and turntable.

3.4. Radiated Emissions Measurement

3.4.1. Limit

1. The radiated emissions at or below 960 MHz from a device shall not exceed the emission levels in section 15.209(a) limit below.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3

2. The radiated emissions above 960 MHz from a device shall not exceed the emission levels in section 15.517(c) limit below.

Freq. (MHz)	EIRP (dBm)
960-1610	-75.3
1610-1990	-53.3
1990-3100	-51.3
3100-10600	-41.3
10600 above	-51.3

3. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

4. For 47 CFR Section 15.521(c): Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in Section 15.3(k) of this chapter, e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of Part 15 of this chapter.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
above 960	500	3

3.4.2. Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	0 dB
Start Frequency	960 MHz
Stop Frequency	10th carrier harmonic or 40 GHz
RBW / VBW	47 CFR Section 15.517(c): 1MHz / 3MHz for RMS, 1 msec averaging time were used for these measurement frequencies. 47 CFR Section 15.521(c): (47 CFR Section 15.209 (a)) 1MHz/1MHz for peak; 1MHz/10Hz for Average. (in accordance with ANSI C63.4)

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

3.4.3. Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed equal or less than 3 meters far away from the turntable, shorter measurement distances may be used to improve the measurement systems noise floor.
- Extrapolation factor when test distance other than 3m. (in accordance with 47 CFR 15.31 (f) (1))
 - From 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].
 - From 3m to 0.5m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [0.5m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [15.56 dB].
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between 1 meter and 4 meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- The measurements made over the frequency range from 9 kHz to 960 MHz were maximized using an EMI receiver with peak detector capabilities. If the emissions level of the EUT in peak mode was 3 dB


lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 960MHz.

7. Measurements above 960MHz were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 1 MHz and VBW of 3 MHz, and a 1 msec averaging time were used for these measurements.
8. The spectrum between 9 kHz and 960MHz contained no intentional radiation and lies below the limits. The spectrum from 960MHz to 18GHz contained intentional UWB signals between 3100 MHz and 10600 MHz and lie below the limits. No other emissions above 10600 MHz were detected. The maximum frequency tested was 40 GHz.
9. Per 47 CFR, Part 15, Subpart F, §15.521(c) (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.
10. Additional measurements in the 960 MHz to 40 GHz range were performed to determine the nature of all unintentional emissions in this span. Conducted antenna port measurement and terminated antenna port measurement were done in the 960 MHz to 8 GHz range show that all noise peaks have the same frequency and polarization and are determined to be emission from the digital circuit and are not radiated from the antenna.

3.4.4. Test Setup Layout


For radiated emissions below 30MHz

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission


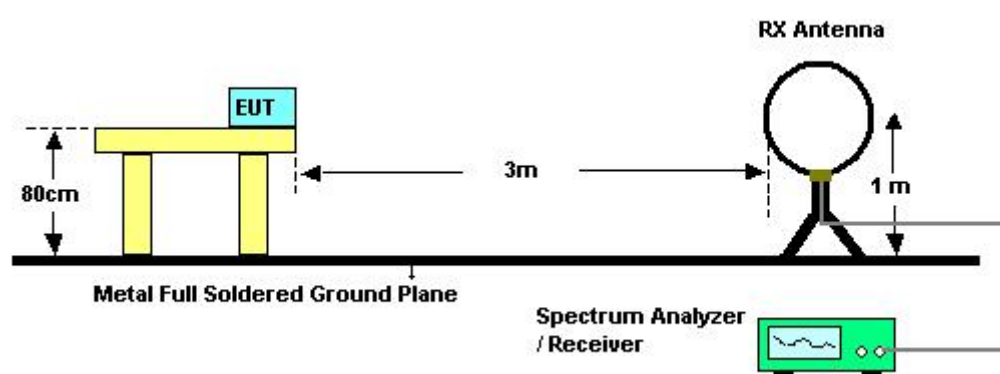




For radiated emissions from 30MHz~1GHz

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission

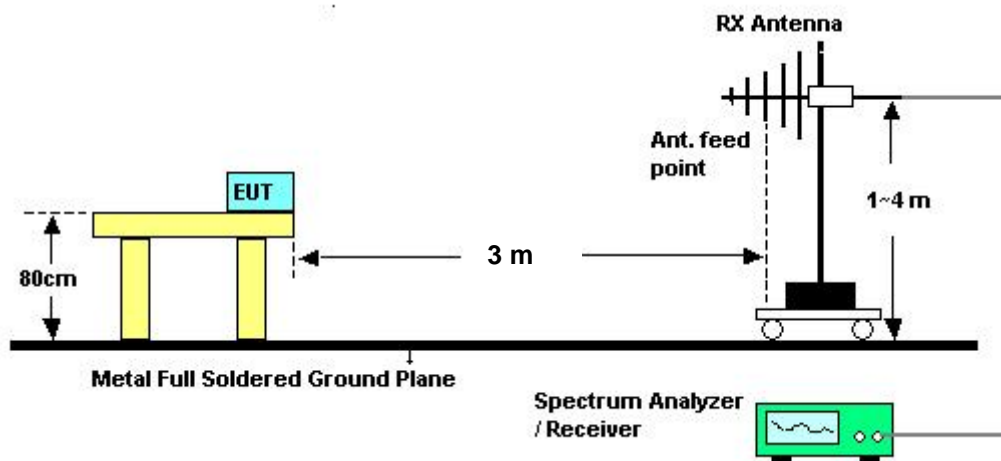**For radiated emissions 1GHz**

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission

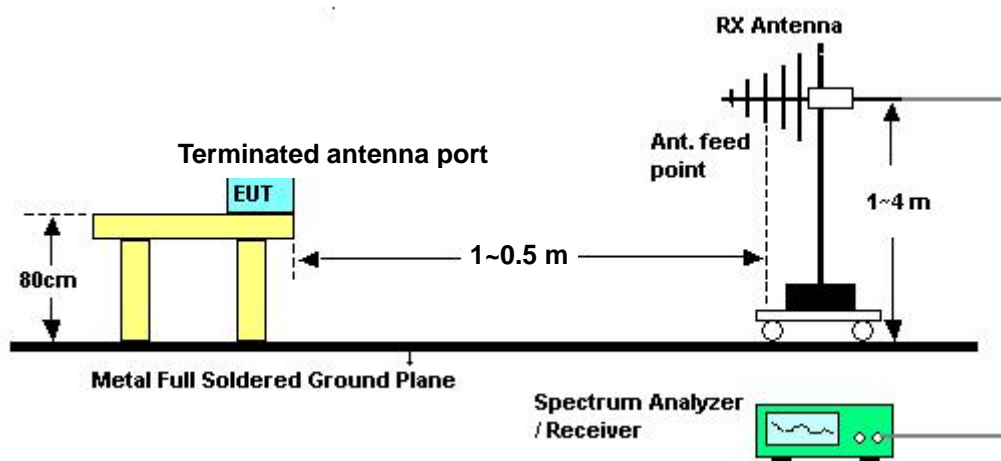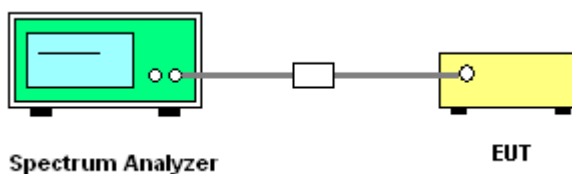**For conducted emissions above 960MHz (Conducted antenna port measurement)**

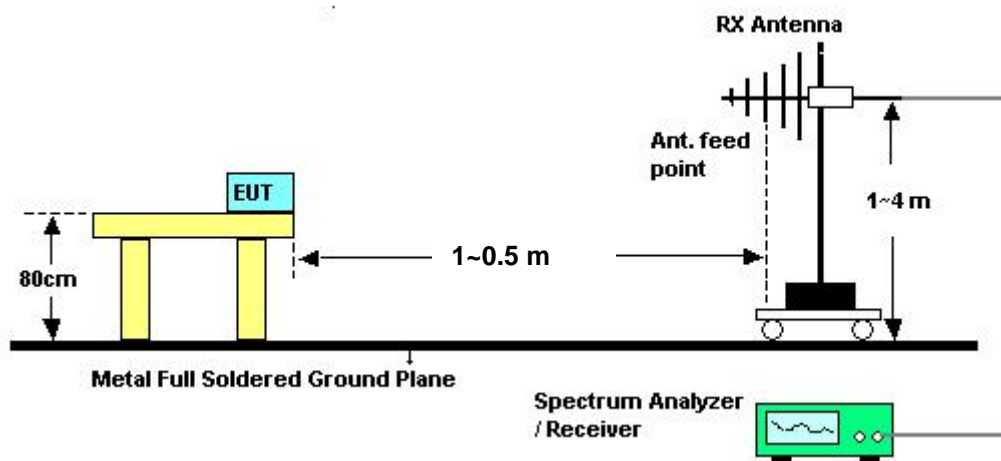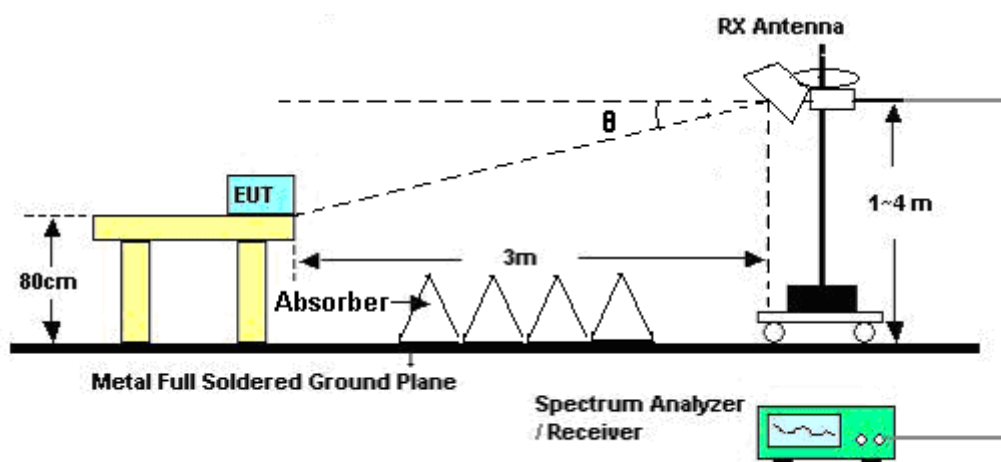For radiated emissions above 1GHz*Investigated emissions from UWB transmission***For radiated emissions from 3GHz to 5GHz***Investigated emissions from UWB transmission*

Note: The Horn Antenna maintaining bore sight alignment.

$$\theta = \tan^{-1} \left(\frac{\text{The Antenna's Height} - \text{The Table's Height}}{\text{The Test Distance}} \right)$$

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode, and TFC 1 and data rate is 558Mbps.

3.4.7. Results of Radiated Emissions***Radiated Emissions (9kHz~30MHz)***


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB) (in accordance with 47 CFR 15.31 (f) (2));

Limit line = specific limits (dBuV) + distance extrapolation factor.

Radiated Emissions (30MHz~960MHz)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

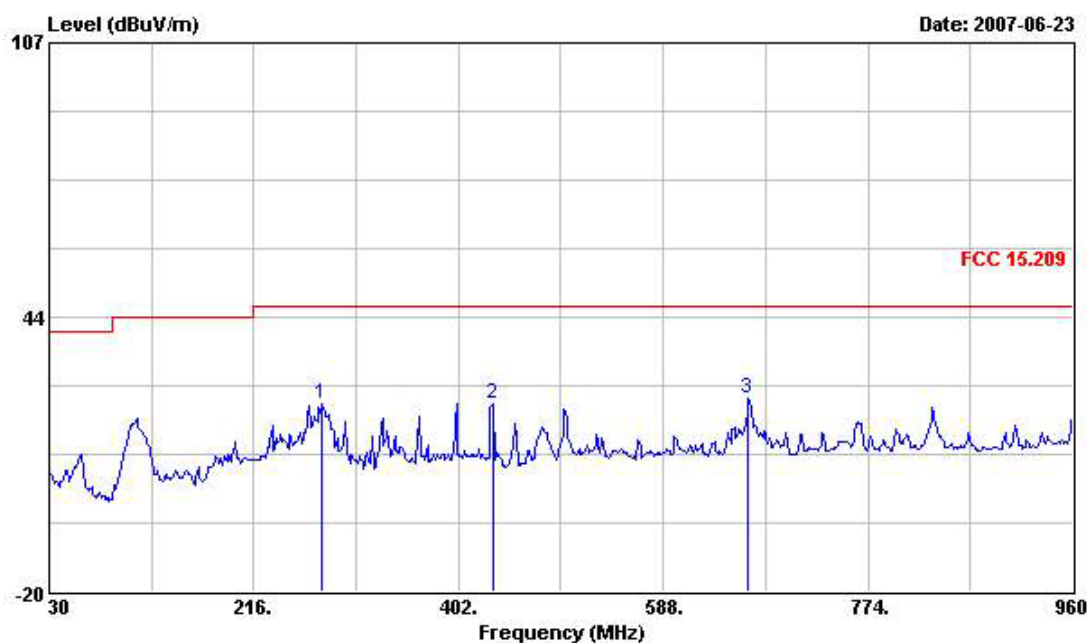Test Distance: 3m**Horizontal**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	278.310	23.25	-22.75	46.00	34.52	13.27	3.84	28.38		143	0
2	433.620	23.65	-22.35	46.00	31.09	17.06	4.43	28.92		100	254
3 @	665.190	24.65	-21.35	46.00	29.44	19.73	5.28	29.80		119	100


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Distance: 3m

Vertical

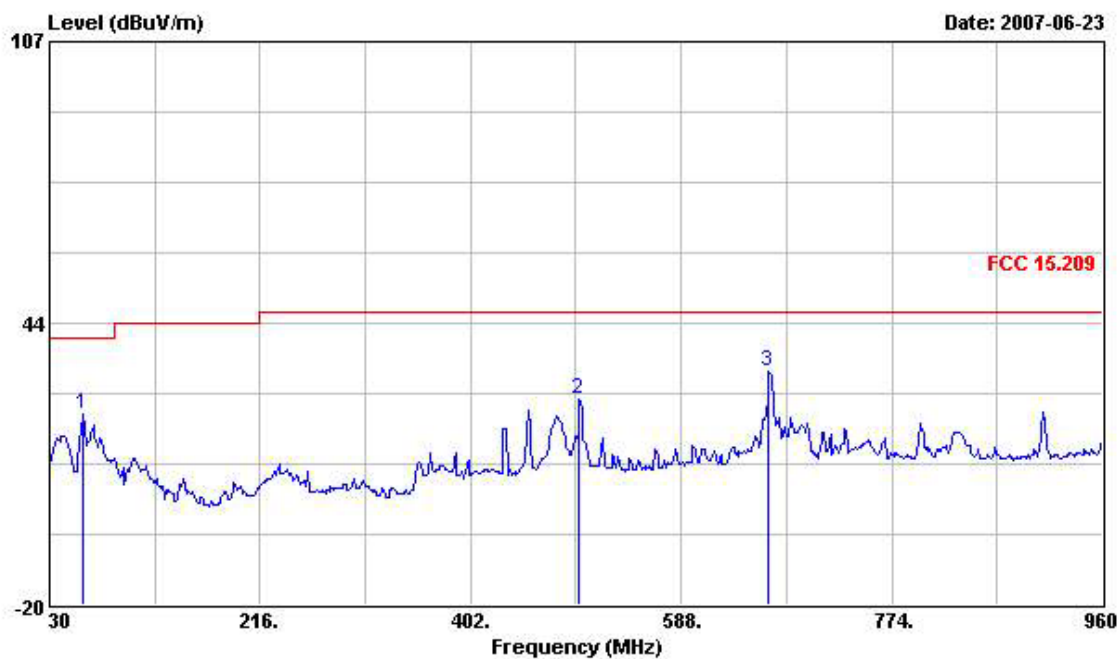

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	58.830	23.22	-16.78	40.00	42.04	6.52	2.39	27.73		103	270
2	497.790	26.20	-19.80	46.00	32.81	18.08	4.42	29.11		150	0
3 @	665.190	32.45	-13.55	46.00	37.24	19.73	5.28	29.80		122	196


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Radiated Emissions (960MHz~1GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

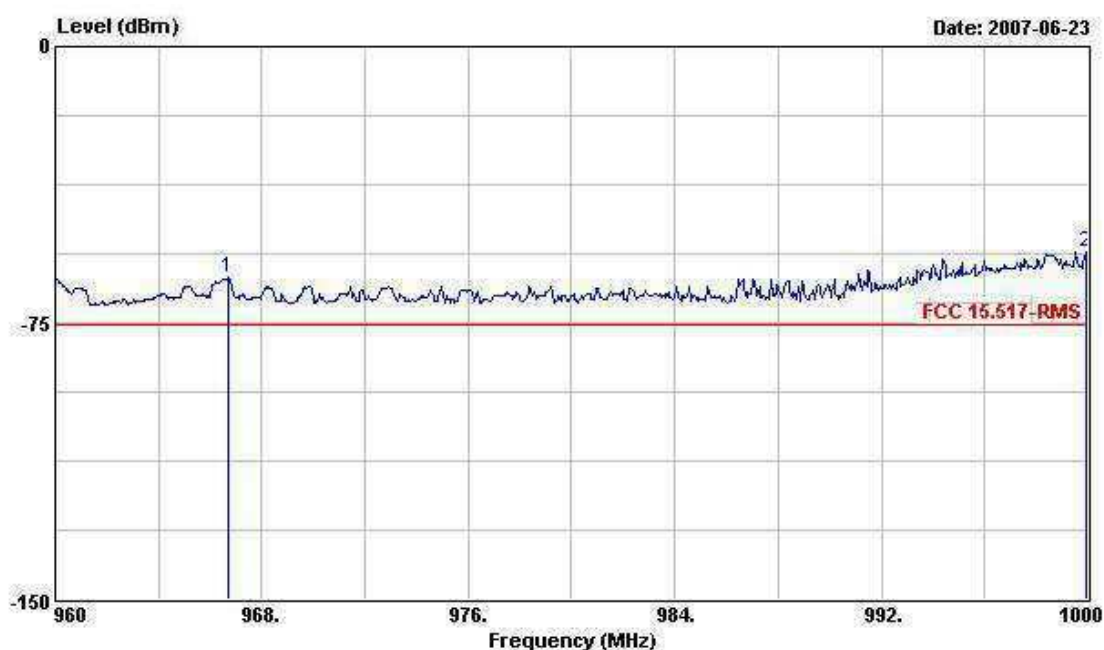
Test Distance: 3m**Horizontal**

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBm	dBm	dB/m	dB	dB	cm	deg
1 #	966.680	-62.82	12.48	-75.30	-60.99	21.18	6.52	29.53	113	39
2 @	999.920	-55.73	19.57	-75.30	-53.72	20.88	6.44	29.33	104	40

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 3m

Vertical

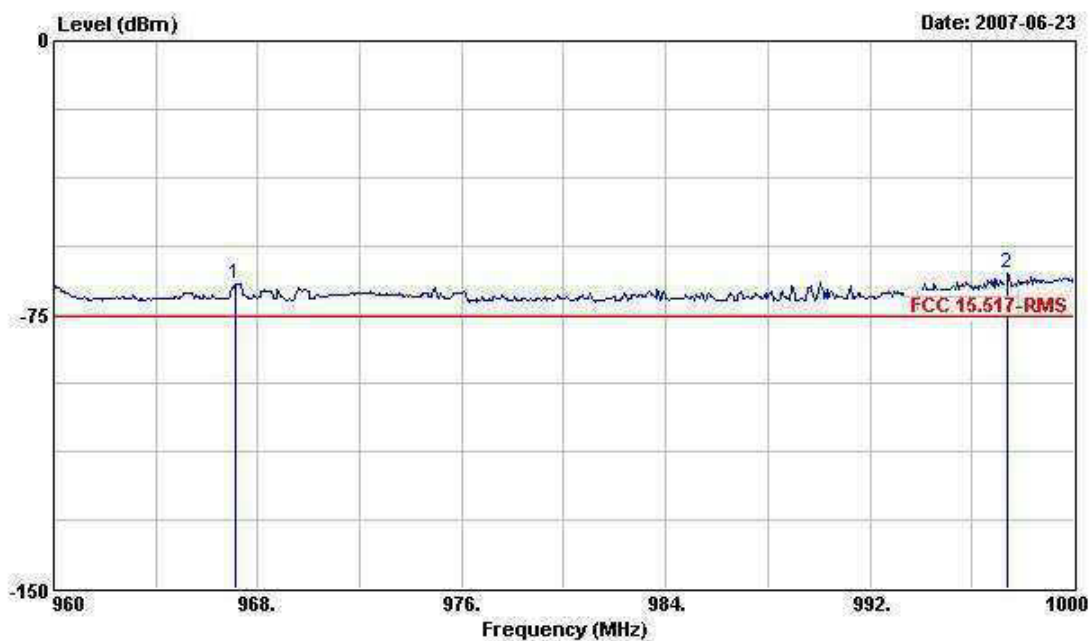


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBm	dBm	dB/m	dB	dB	cm	deg
1 #	967.160	-66.48	8.82	-75.30	-64.65	21.18	6.52	29.53	100	33
2 @	997.400	-63.60	11.70	-75.30	-61.63	20.91	6.48	29.35	100	207

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions with terminated antenna port (960MHz~1GHz)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

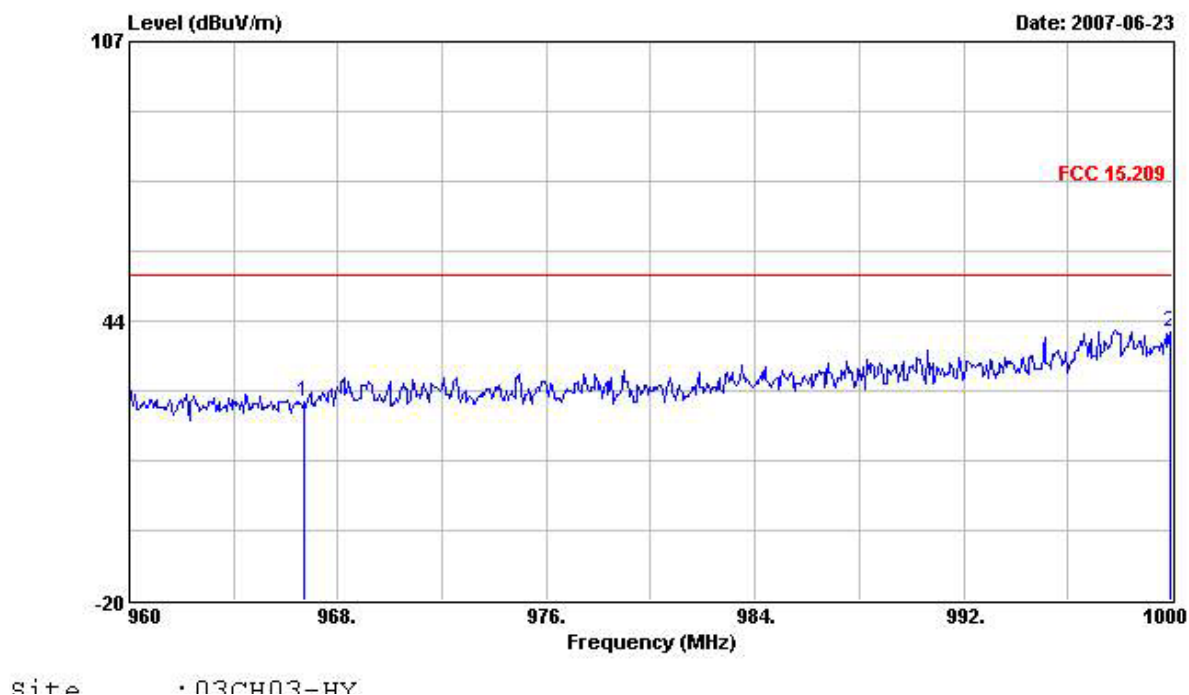
Test Distance: 3m**Horizontal**

	Freq	Level	Over Limit	Limit Line	readantenna Level	antenna Factor	cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	966.680	25.15	-28.85	54.00	26.98	21.18	6.52	29.53	Peak	111	38
2 @	999.920	41.06	-12.94	54.00	43.07	20.88	6.44	29.33		102	43

Note: For digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 3m

Vertical

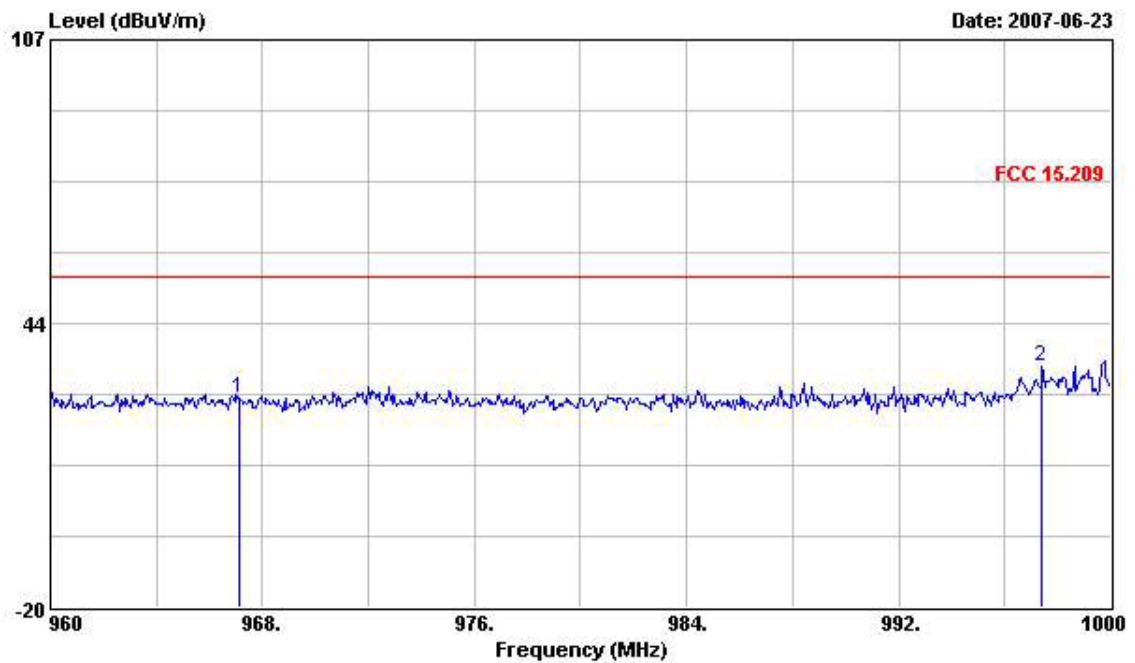


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	967.160	26.69	-27.31	54.00	28.52	21.18	6.52	29.53	176	36
2 @	997.400	33.89	-20.11	54.00	35.86	20.91	6.48	29.35	154	203

Note: For digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Conducted Antenna Port Emissions (960MHz~1GHz)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

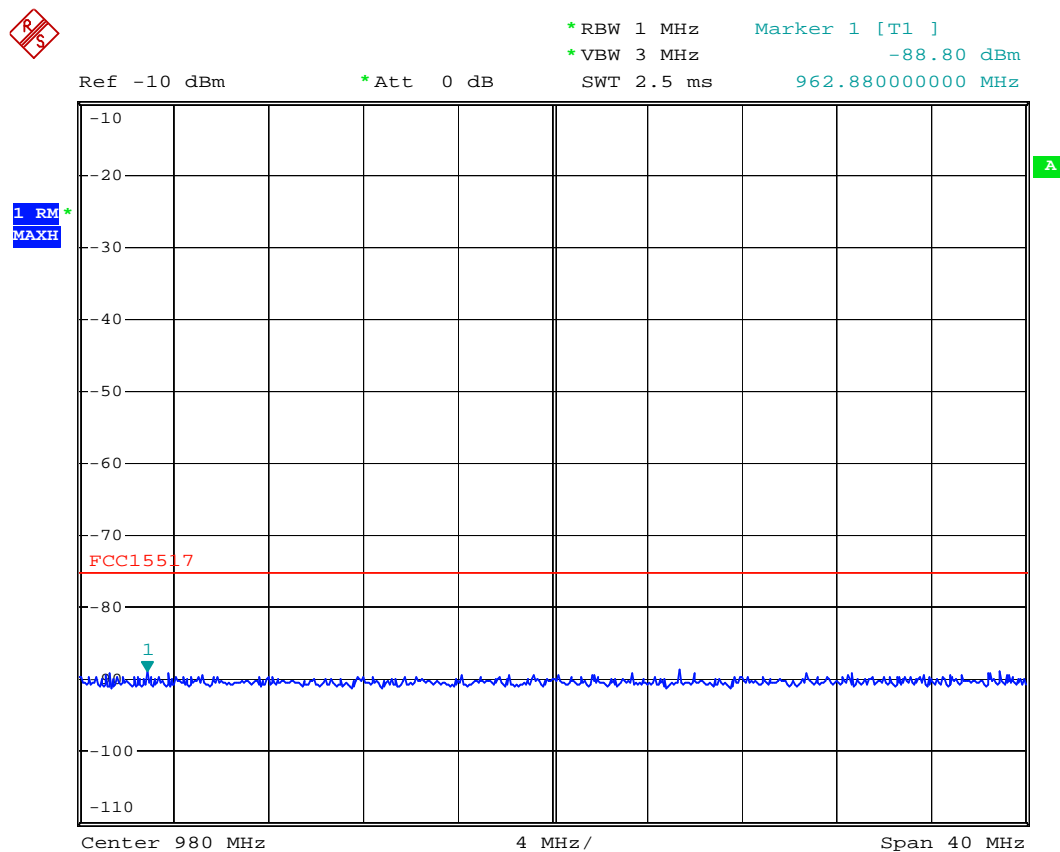


Date: 27.JUN.2007 04:44:49

Note: Conducted antenna port measurements made with 1MHz RBW/3MHz VBW (RMS detector) at 50 ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (3GHz~5GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

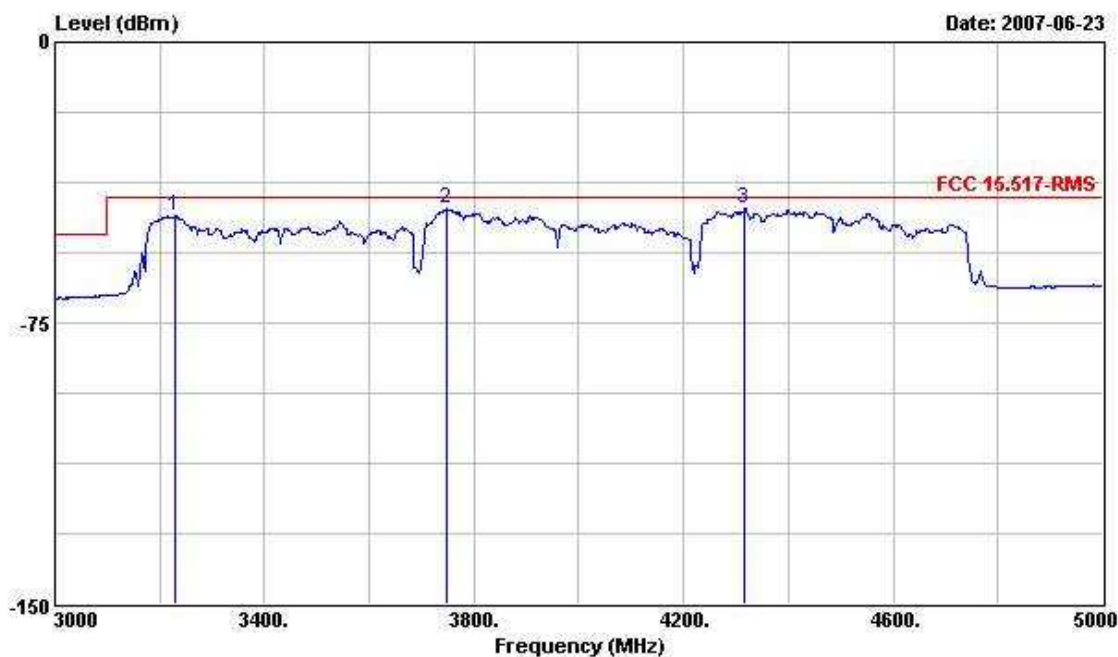Test Distance: 3m**Horizontal**


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		cm	deg
1	3230.000	-46.30	-5.00	-41.30	-19.96	2.99	3.38	32.71		300	219
2 @	3748.000	-44.49	-3.19	-41.30	-19.90	4.20	3.82	32.62		300	164
3	4316.000	-44.53	-3.23	-41.30	-21.36	5.15	4.18	32.50		300	115

Note:

- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements.
- Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
- There are the absorber on ground plane between the antenna tower and turntable.

Test Distance: 3m

Vertical

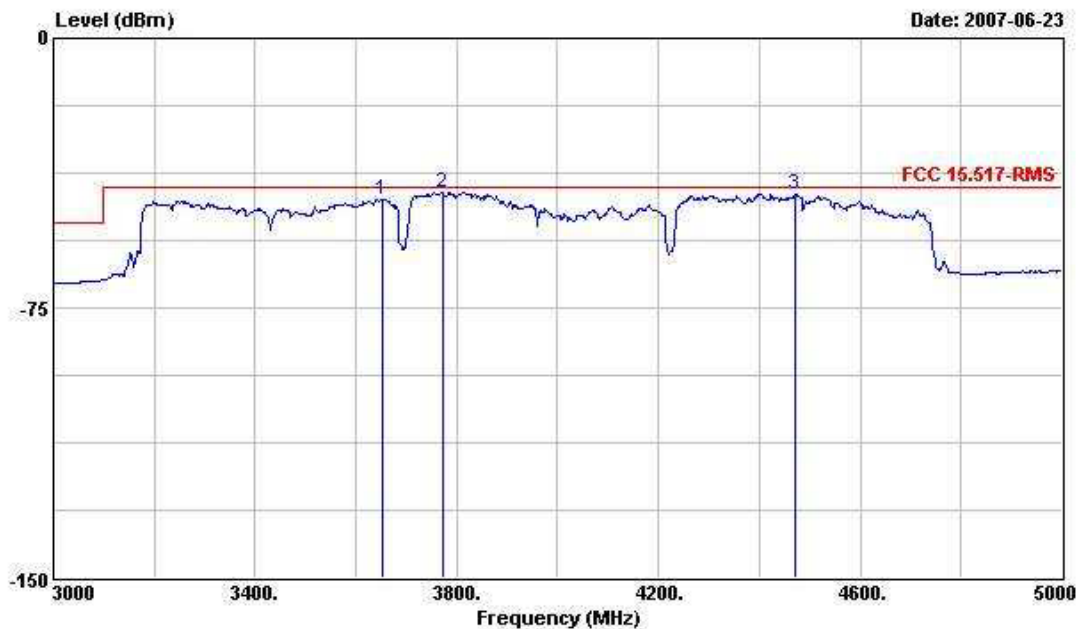


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	cm	deg
1	3230.000	-44.50	-3.20	-41.30	-18.16	2.99	3.38	32.71	300	208
2 @	3772.000	-42.90	-1.60	-41.30	-18.36	4.20	3.87	32.61	200	203
3	4470.000	-43.23	-1.93	-41.30	-20.55	5.60	4.20	32.48	200	308

Note:

1. Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements.
2. Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
3. There are the absorber on ground plane between the antenna tower and turntable.

Radiated Emissions (1GHz~8GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

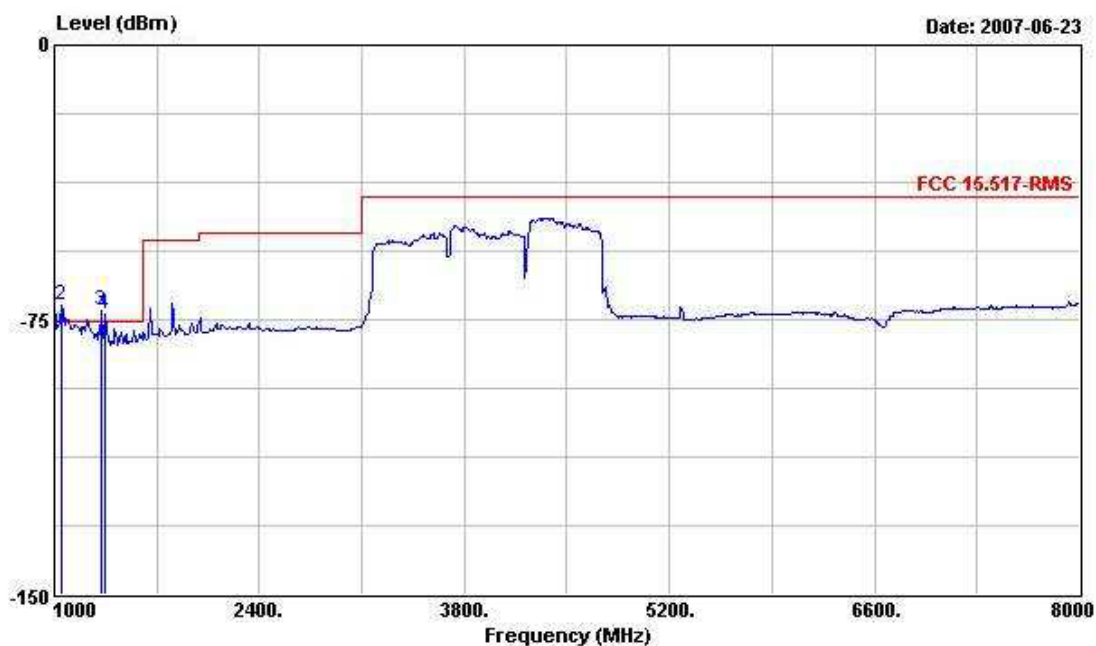
Test Distance: 1m**Horizontal**

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBm	dBm	dB/m	dB	dB	cm	deg
1 #	1000.000	-71.82	3.48	-75.30	-38.81	-1.30	1.77	33.48	133	332
2 @	1049.000	-70.97	4.33	-75.30	-37.99	-1.31	1.77	33.44	142	143
3 #	1322.000	-72.37	2.93	-75.30	-39.55	-1.37	1.79	33.24	155	294
4 #	1350.000	-73.46	1.84	-75.30	-40.66	-1.37	1.79	33.22	167	276

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3, 4) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

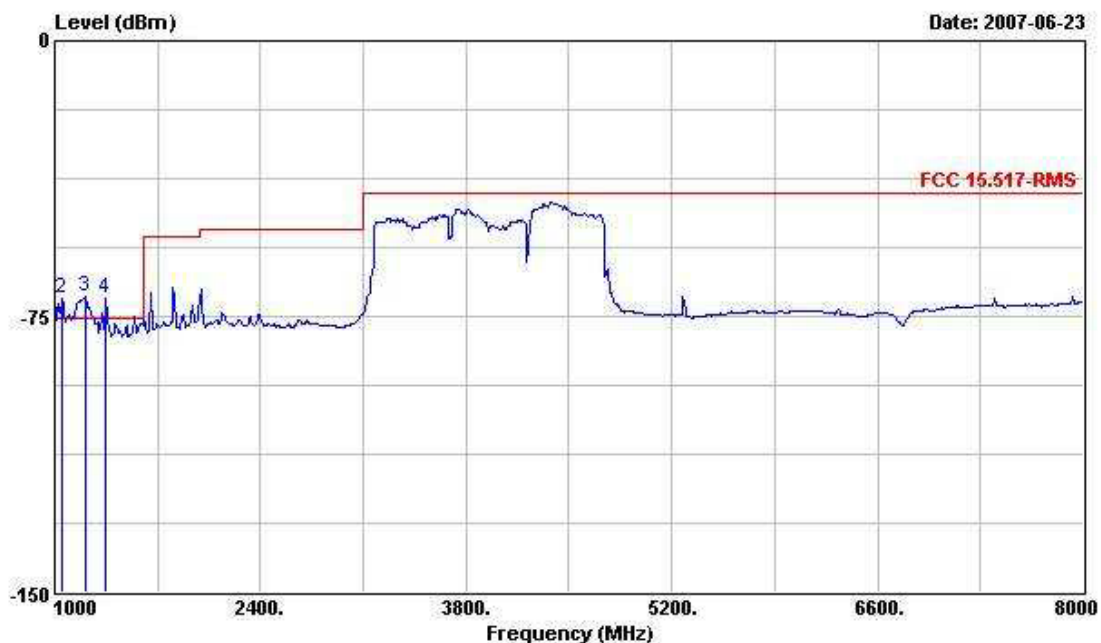


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Gain	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		cm	deg
1 #	1000.000	-70.92	4.38	-75.30	-37.91	-1.30	1.77	33.48		145	240
2 #	1049.000	-70.00	5.30	-75.30	-37.02	-1.31	1.77	33.44		167	263
3 @	1210.000	-69.68	5.62	-75.30	-36.79	-1.34	1.78	33.33		114	283
4 #	1350.000	-69.97	5.33	-75.30	-37.17	-1.37	1.79	33.22		103	327

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3, 4) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions with terminated antenna port (1GHz~8GHz)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

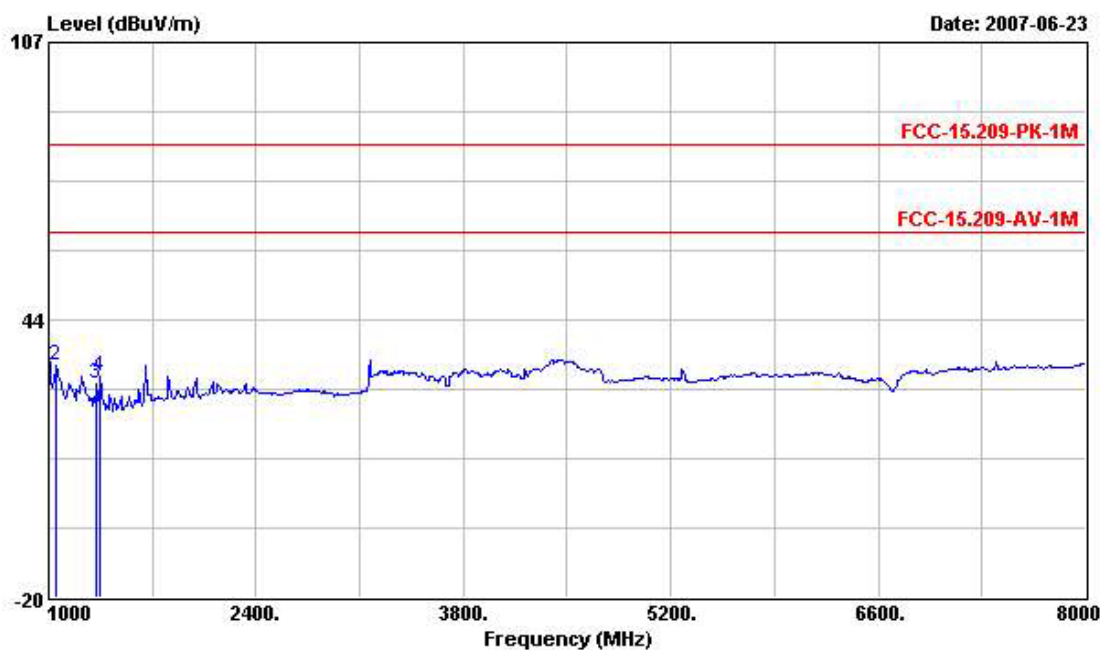Test Distance: 1m**Horizontal**


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	1000.000	35.68	-47.86	83.54	68.69	-1.30	1.77	33.48		176	334
2	1049.000	33.05	-50.49	83.54	66.03	-1.31	1.77	33.44		156	145
3	1322.000	28.89	-54.65	83.54	61.71	-1.37	1.79	33.24		172	296
4	1350.000	30.35	-53.19	83.54	63.15	-1.37	1.79	33.22		167	277

Note:

- Above 1 GHz shall be extrapolated to the specified distance using an extrapolation factor of 9.54dB from 3m to 1m.
- Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

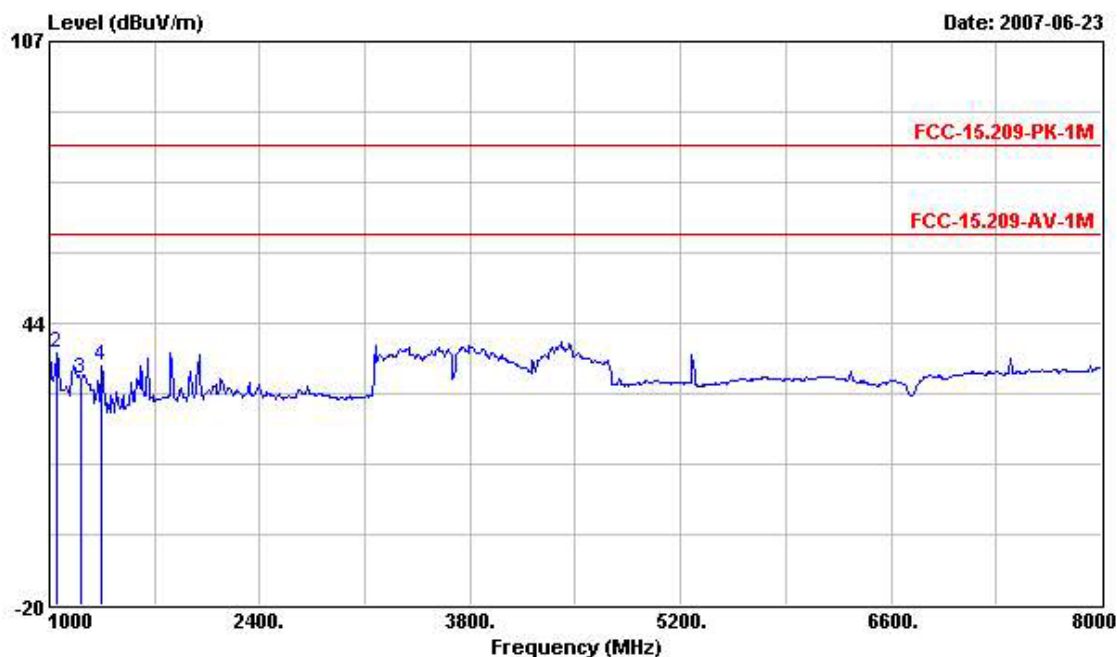


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	1000.000	36.05	-47.49	83.54	69.06	-1.30	1.77	33.48	134	244
2 @	1049.000	36.96	-46.58	83.54	69.94	-1.31	1.77	33.44	166	263
3	1210.000	31.12	-52.42	83.54	64.01	-1.34	1.78	33.33	112	284
4	1350.000	33.89	-49.65	83.54	66.69	-1.37	1.79	33.22	108	323

Note:

1. Above 1 GHz shall be extrapolated to the specified distance using an extrapolation factor of 9.54dB from 3m to 1m.
2. Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Conducted Antenna Port Emissions (1GHz~8GHz)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

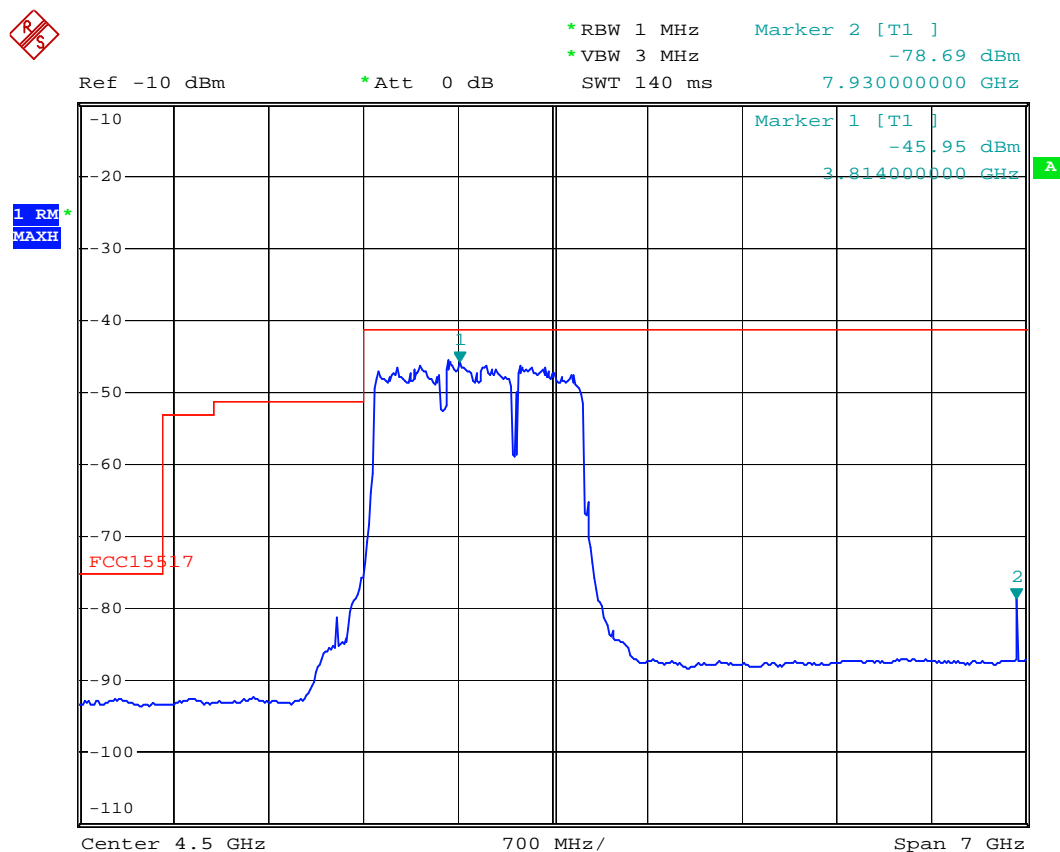


Date: 23.JUN.2007 15:58:53

Note:

Conducted antenna port measurements made with 1MHz RBW/3MHz VBW (RMS detector) at 50 ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (8GHz~12GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

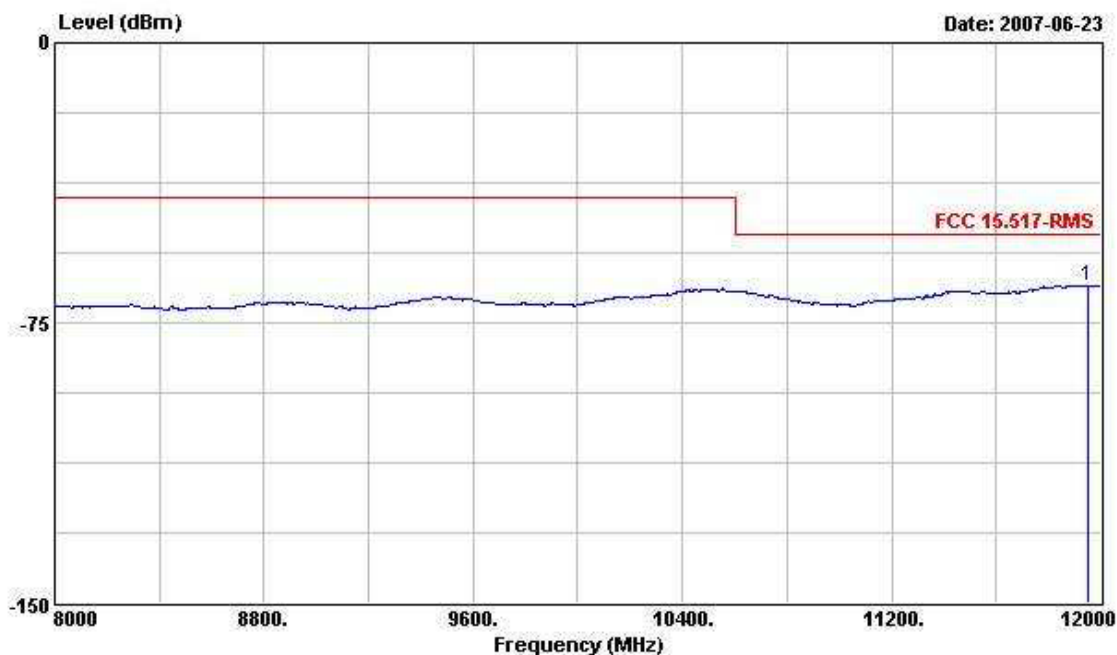
Test Distance: 1m**Horizontal**

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
		dBm	dB	dBm	dBm	dB/m	dB	dB	cm	deg
1	11948.000	-64.94	-13.64	-51.30	-55.99	13.72	9.50	32.17	109	265

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

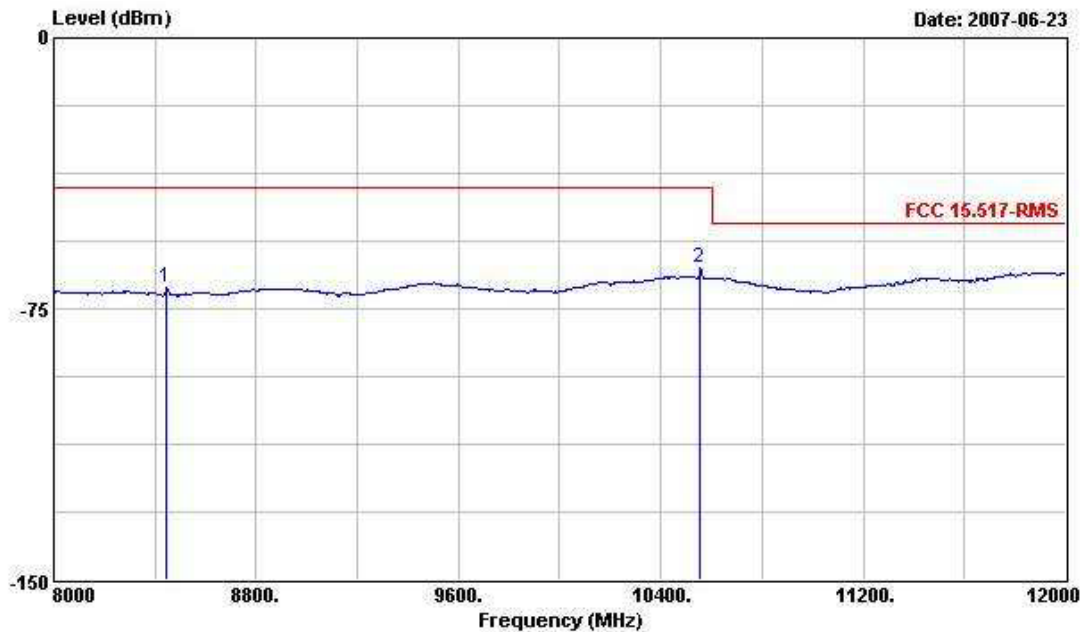


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	cm	deg
1	8444.000	-69.29	-27.99	-41.30	-54.32	11.02	6.24	32.23	105	225
2 @	10556.000	-63.65	-22.35	-41.30	-53.25	14.36	7.53	32.29	113	163

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (12GHz~18GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

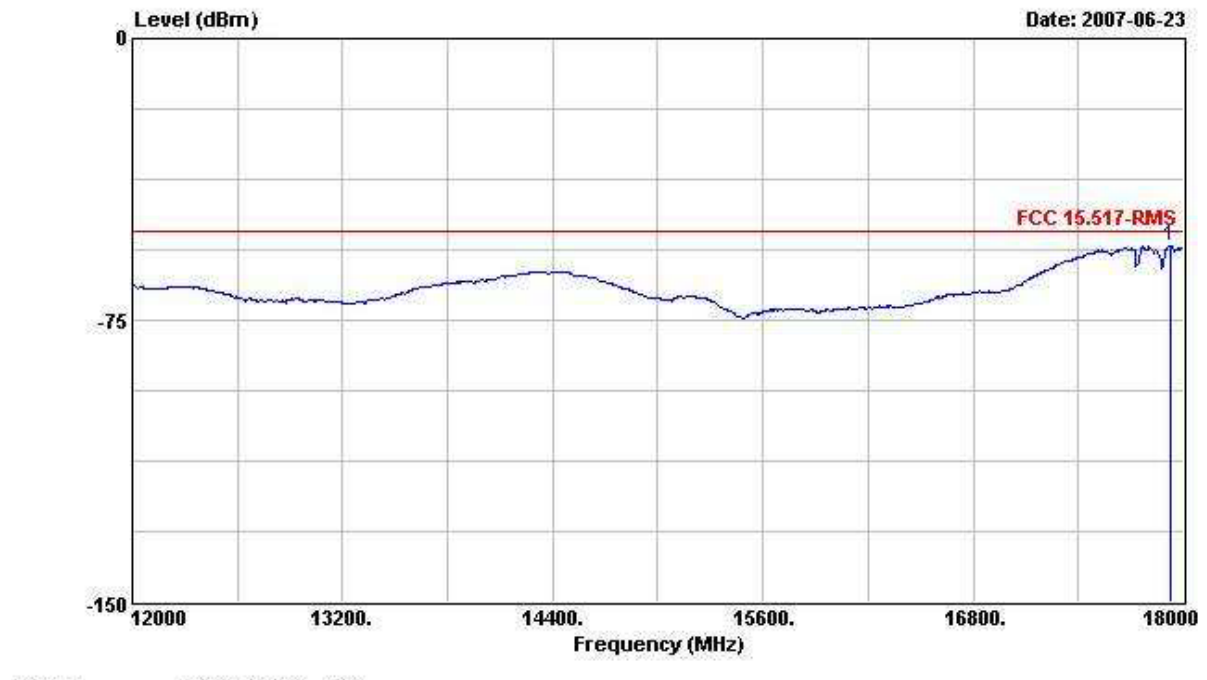
Test Distance: 1m**Horizontal**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		cm	deg
1 @	17922.000	-55.17	-3.87	-51.30	-59.82	27.92	8.58	31.86		122	131

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

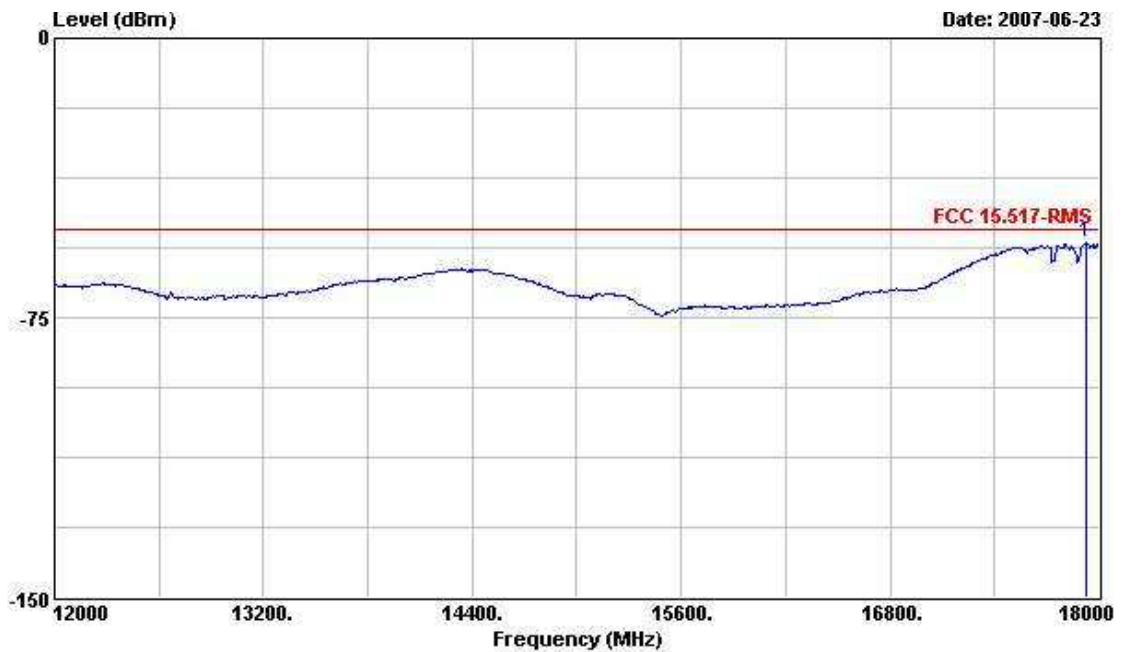


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBm	dBm	dB/m	dB	dB	cm	deg
1 @	17922.000	-54.91	-3.61	-51.30	-59.56	27.92	8.58	31.86	147	124

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (18GHz~26.5GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

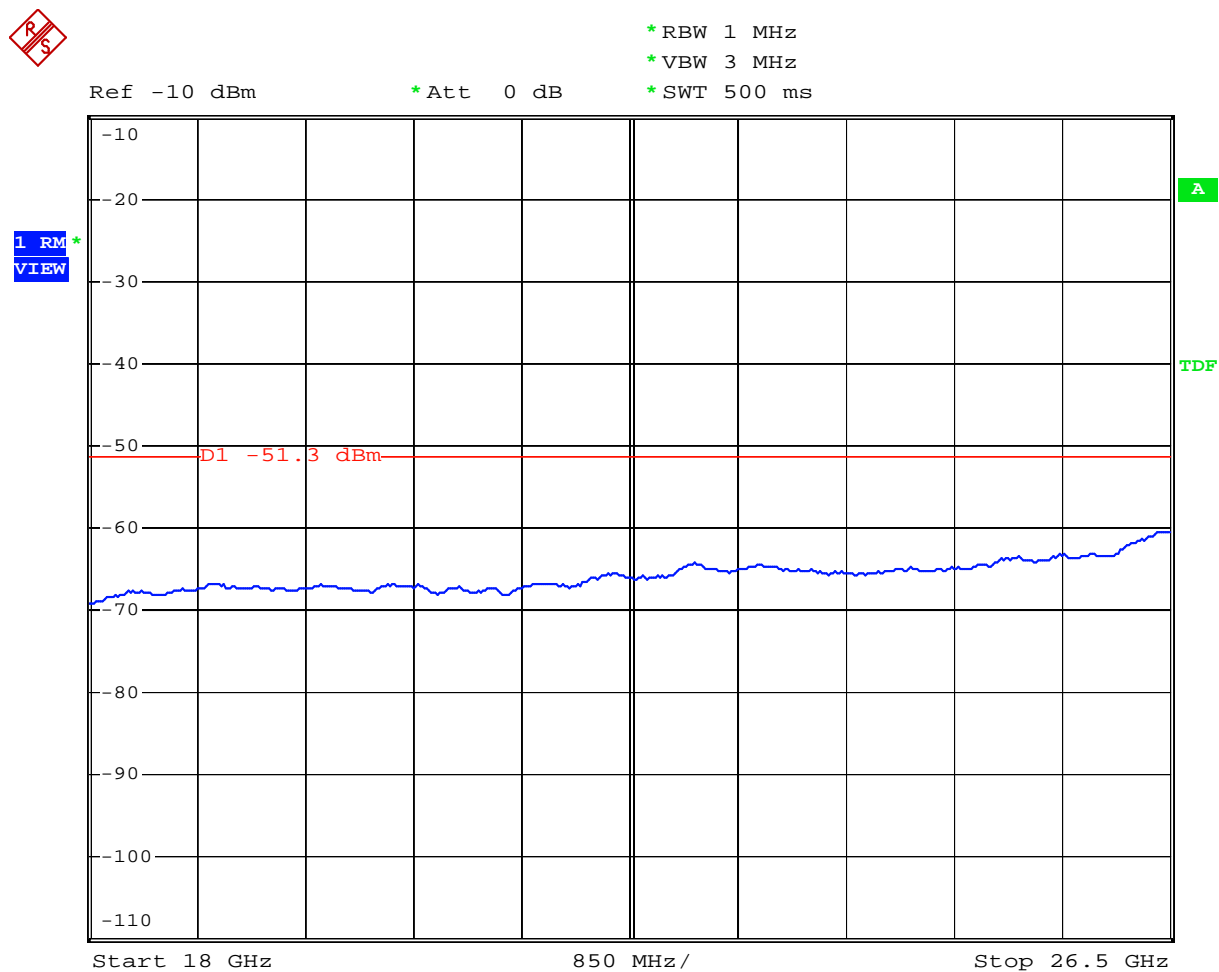
Test Distance: 0.5m**Horizontal**

Date: 24.JUN.2007 02:16:26

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 0.5m

Vertical

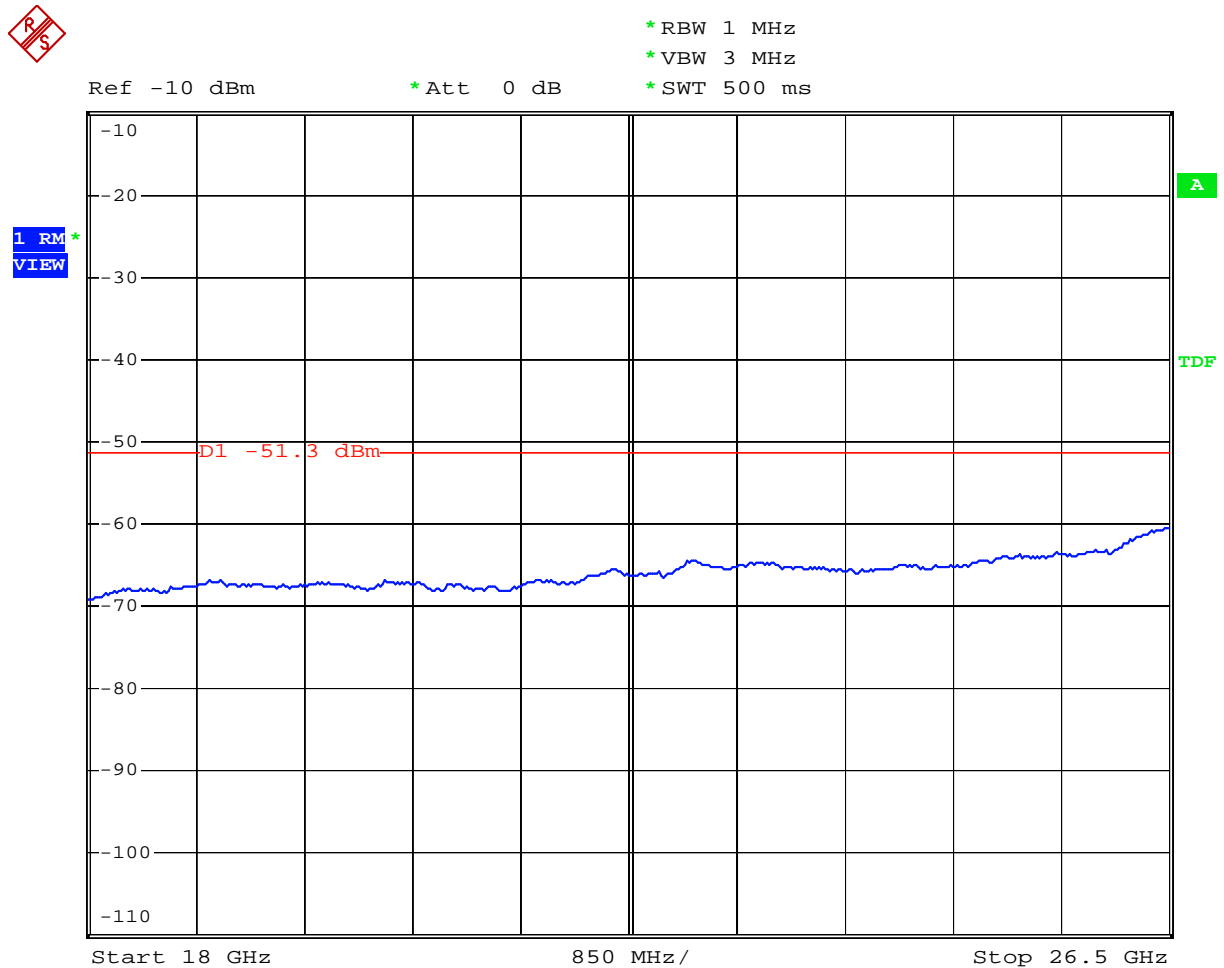


Date: 24.JUN.2007 02:15:19

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (26.5GHz~40GHz Emissions)

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

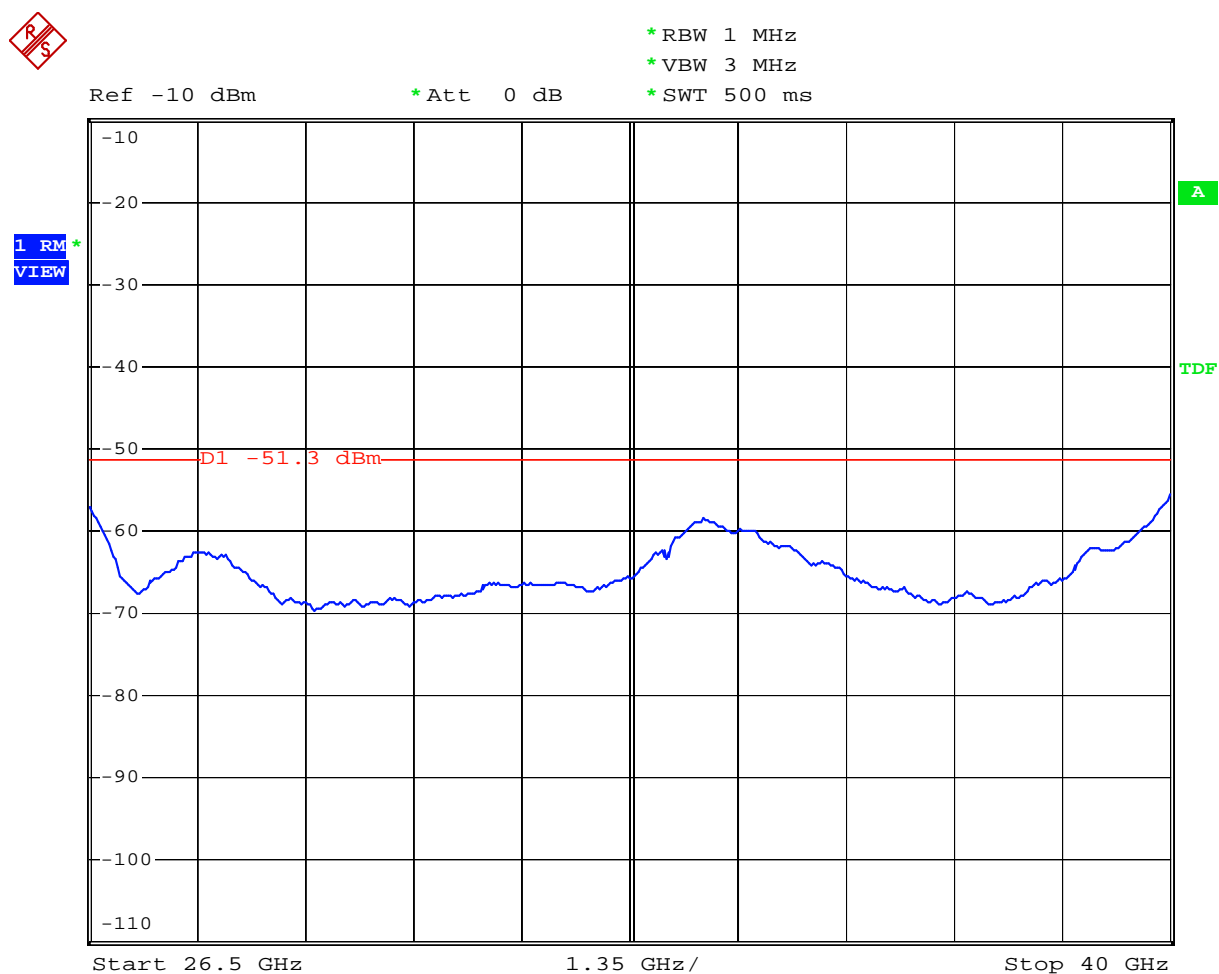Test Distance: 0.5m**Horizontal**

Date: 24.JUN.2007 02:18:43


Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 0.5m

Vertical



Ref -10 dBm * Att 0 dB * RBW 1 MHz
* VBW 3 MHz
* SWT 500 ms

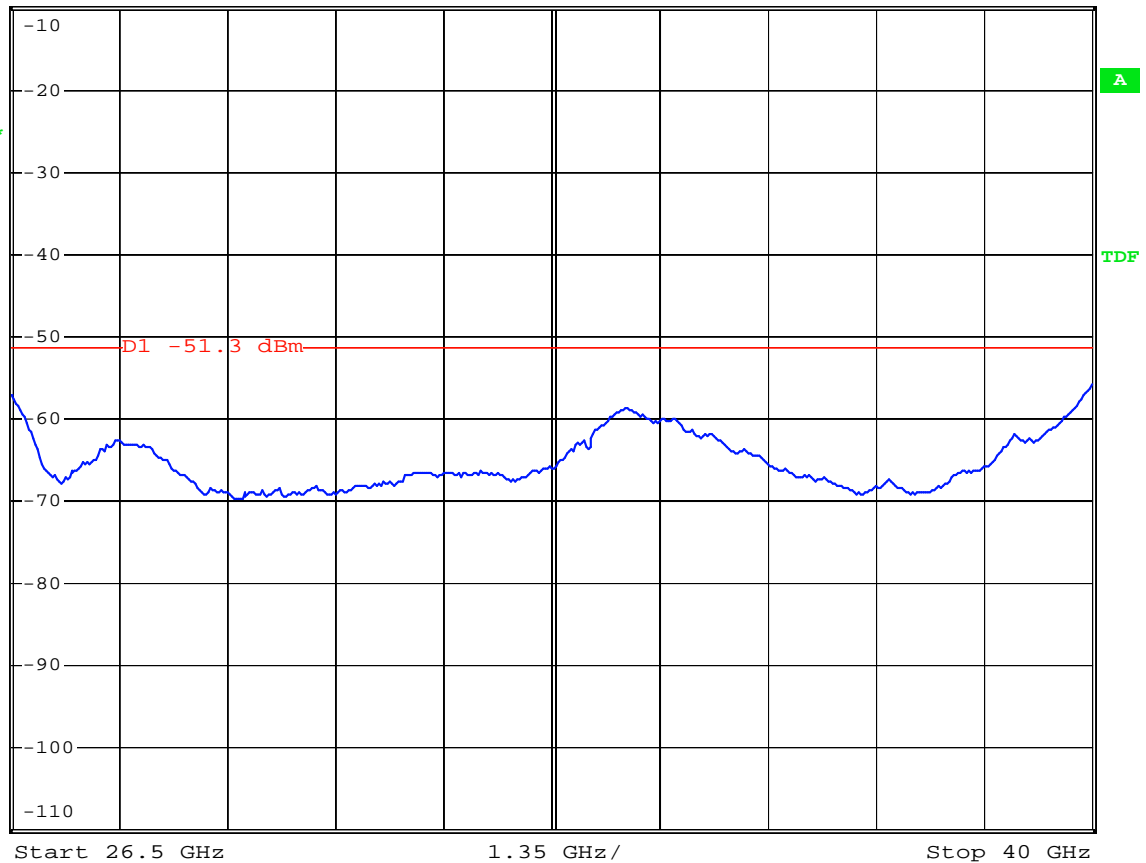1 RM
VIEW

Date: 24.JUN.2007 02:18:16

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

3.5. Radiated Emissions in GPS Bands Measurement

3.5.1. Limit

In addition to the radiated emission limits specified in the table in paragraph 3.5.1 of this report, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz.

Freq. (MHz)	EIRP (dBm)
1164-1240	-85.3
1559-1610	-85.3

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

Note 2: Extrapolation factor when test distance other than 3m. (in accordance with 47 CFR 15.31 (f) (2))

2.1. Form 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

2.2. From 3m to 0.5m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [0.5m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [15.56 dB].

3.5.2. Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	0 dB
RBW / VBW	47 CFR Section 15.517(d) 10 kHz / 1kHz for RMS for Average, 1 msec averaging time were used for these measurement frequencies. 47 CFR Section 15.521(c) (47 CFR Section 15.209 (a)) 1MHz/1MHz for peak, 1MHz/10Hz for Average. (in accordance with ANSI C63.4)

3.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meter far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between 1 meter and 4 meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

5. Measurements frequencies were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 10 kHz and VBW of 10 kHz, and a 1 msec averaging time were used for these measurements.
6. Per 47 CFR, Part 15, Subpart F, §15.521(c) (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.

3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode, and TFC 1 and data rate is 558Mbps.


3.5.7. Results for Radiated Emissions in GPS Bands

Radiated Emissions (1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz) GPS Bands

Temperature	24 °C	Humidity	54 %
Test Engineer	Sam	Configurations	All Band

Test Distance: 1m

Horizontal

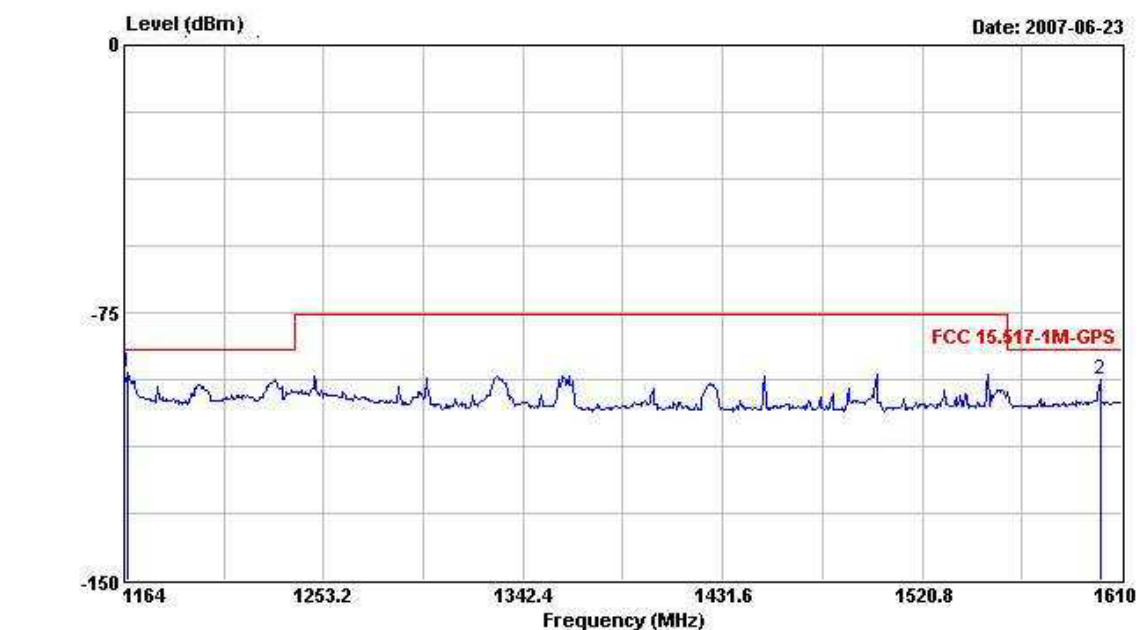


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		cm	deg
1 @	1165.340	-91.99	-6.69	-85.30	-59.07	-1.33	1.78	33.37		100	225
2	1600.190	-93.86	-8.56	-85.30	-62.37	-0.74	2.25	33.00		100	352

Note: Measurements made with 10kHz RBW/10kHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

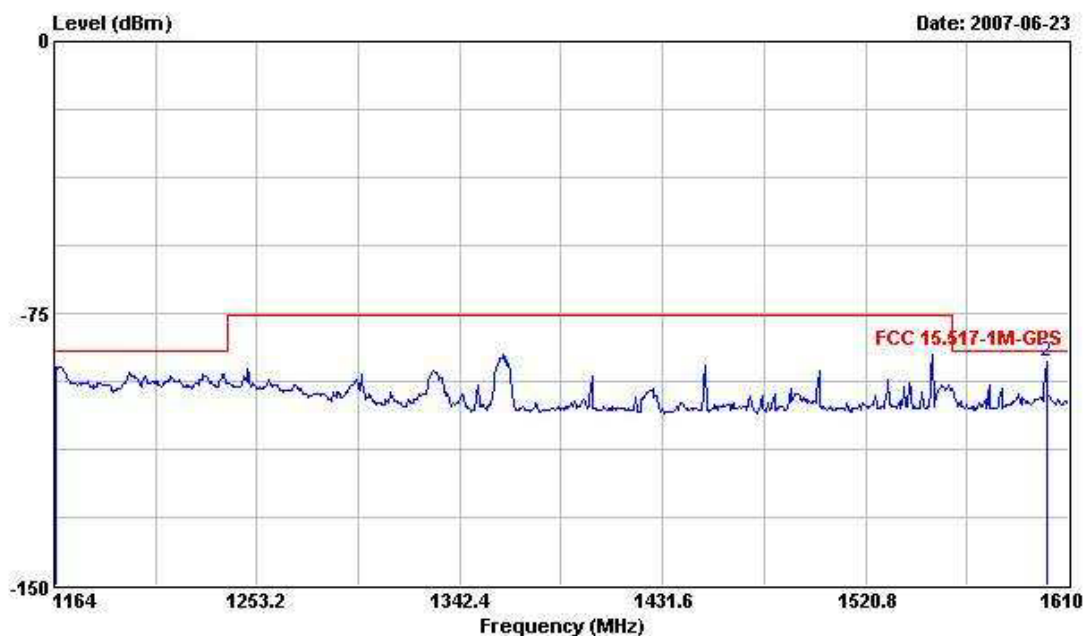

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		cm	deg
1	1164.890	-89.61	-4.31	-85.30	-56.69	-1.33	1.78	33.37		100	172
2 @	1600.190	-88.20	-2.90	-85.30	-56.71	-0.74	2.25	33.00		100	28

Note: Measurements made with 10kHz RBW/10kHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements.

3.6. Peak Emissions within a 50 MHz Bandwidth Measurement

3.6.1. Limit

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, EIRP limit has to be adjusted by the resolution bandwidth ratio of $20\log(\text{RBW}/50)$ dB, where RBW is the resolution bandwidth used for the measurement expressed in MHz. In addition, This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

Peak EIRP limit dBm (RB / VB : 50MHz)	Peak EIRP limit dBm (RB / VB: 10MHz)
0	-13.97

3.6.2. Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Sweep Time	Auto
RBW / VBW	10MHz / 10MHz for Peak

3.6.3. Test Procedures

1. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. The horn receiving antenna was varied between 1 meter and 4 meters, 1 meter step above ground while maintaining bore sight alignment to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum peak emission amplitude, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M .
4. The individual UWB bandwidths were measured for each BAND_ID (n_b) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.

5. A spectrum analyzer was used for the final measurement utilizing a peak detector at the frequency with the largest amplitude. The prescribed resolution bandwidth of 50 MHz was not supported by the spectrum analyzer. However, when a peak measurement is required, The resolution bandwidth for this measurement was set to 10 MHz, and the measurement was centered on the frequency at which the highest radiated emission occurred, f_M . The video bandwidth was 10 MHz.

3.6.4. Test Setup Layout

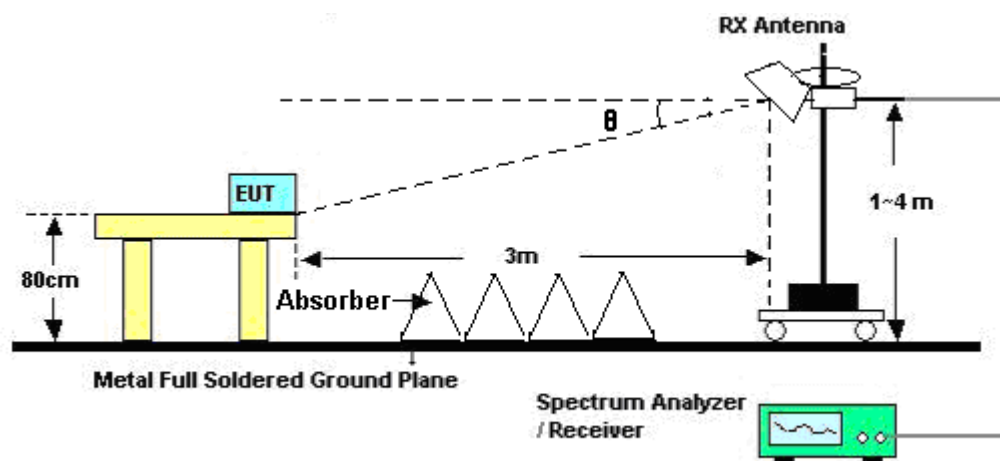

Note: The Horn Antenna maintaining bore sight alignment.

$$\theta = \tan^{-1} \left(\frac{\text{The Antenna's Height} - \text{The Table's Height}}{\text{The Test Distance}} \right)$$

3.6.5. Test Deviation

There is no deviation with the original standard.


3.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode, and TFC 1 and data rate is 558Mbps.

3.6.7. Test Result of Peak Emissions within a 50 MHz Bandwidth

Temperature	24 °C	Humidity	54 %
Test Engineer	Vic	Configurations	All Band

Vertical

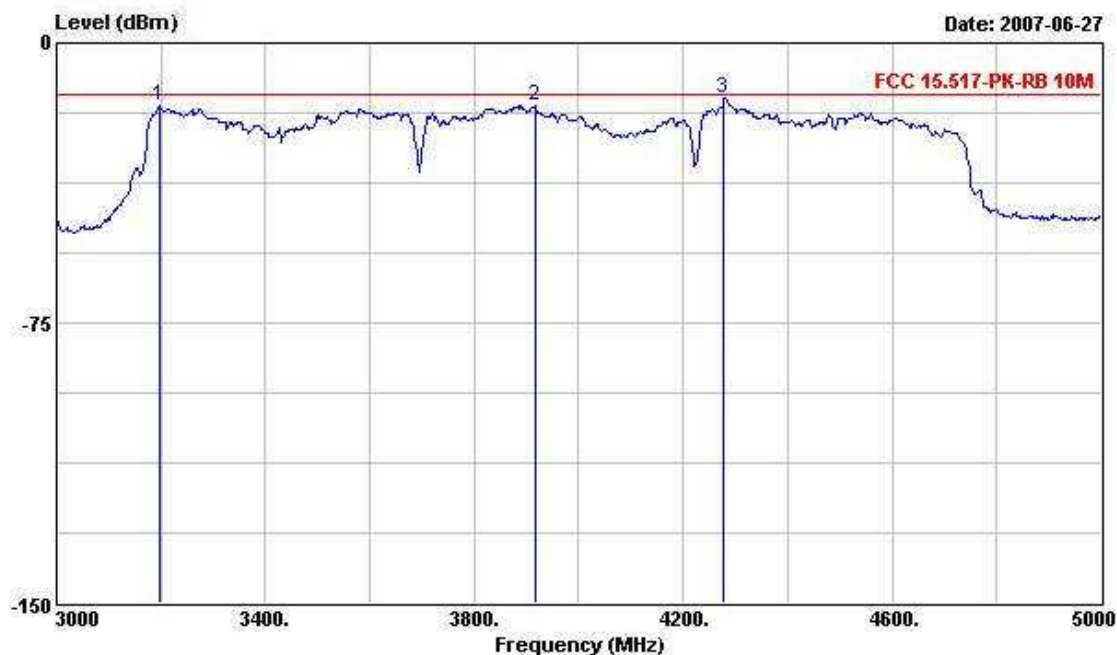

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBm	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBm	dBm	dB/m	dB	dB	cm	deg
1	3196.000	-16.85	-2.88	-13.97	9.67	2.83	3.35	32.71	200	309
2	3916.000	-16.83	-2.86	-13.97	7.49	4.20	4.05	32.57	200	128
3 @	4278.000	-14.91	-0.94	-13.97	8.37	5.05	4.18	32.51	200	312

Note:

1. Test distance: 3m, both vertical and horizontal polarization has been investigated, and vertical is the worse case.
2. Antenna height 1 to 4 meters, 1 meter steps, bore sighted to EUT.
3. There are the absorber on ground plane between the antenna tower and turntable.

3.6.8. Labeling and Instruction Manual Requirements

UWB systems operating under the provisions of this section shall bear the following or similar statement in a conspicuous location on the device or in the instruction manual supplied with the device.

"This equipment may only be operated indoors. Operation outdoors is in violation of 47 U.S.C. 301 and could subject the operator to serious legal penalties."

In addition to the above requirements, a UWB device subject to certification shall be labeled as followed in a conspicuous location on the device:

"This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

(1) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified directly above this section is required to be affixed only to the main control unit.

(2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

The users' manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3.7. Antenna Requirements

3.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.7.2. Antenna Connector Construction

Please refer to section 2.1 in this test report, No external antenna connector complied with the requirements.

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100359	9kHz – 2.75GHz	Mar. 01, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 21, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 4, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02326	1 GHz - 26.5 GHz	Dec 18, 2006	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

“**” Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION


Certificate No. : LI190-070110
財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection : Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.