



FCC TEST REPORT (15.247)

REPORT NO.: RF120702E04

MODEL NO.: DWA-182

FCC ID: KA2WA182A1

RECEIVED: July 02, 2012

TESTED: July 03 to 17, 2012

ISSUED: July 31, 2012

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
3.4 DESCRIPTION OF SUPPORT UNITS	17
3.5 CONFIGURATION OF SYSTEM UNDER TEST	18
4. TEST TYPES AND RESULTS (FOR 2.4GHZ, 2.400 ~ 2.4835GHZ BAND).....	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
4.2.2 TEST INSTRUMENTS.....	25
4.2.3 TEST PROCEDURES	27
4.2.4 DEVIATION FROM TEST STANDARD	27
4.2.5 TEST SETUP	28
4.2.6 EUT OPERATING CONDITIONS	28
4.2.7 TEST RESULTS	29
4.3 6DB BANDWIDTH MEASUREMENT	42
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	42
4.3.2 TEST INSTRUMENTS.....	42
4.3.3 TEST PROCEDURE.....	42
4.3.4 DEVIATION FROM TEST STANDARD	42
4.3.5 TEST SETUP	42
4.3.6 EUT OPERATING CONDITIONS	42
4.3.7 TEST RESULTS	43
4.4 CONDUCTED OUTPUT POWER.....	44
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.4.2 INSTRUMENTS.....	44
4.4.3 TEST PROCEDURES	44
4.4.4 DEVIATION FROM TEST STANDARD	44
4.4.5 TEST SETUP	45
4.4.6 EUT OPERATING CONDITIONS	45
4.4.7 TEST RESULTS	46
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	47
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2 TEST INSTRUMENTS.....	47
4.5.3 TEST PROCEDURE.....	47
4.5.4 DEVIATION FROM TEST STANDARD	47
4.5.5 TEST SETUP	47



A D T

4.5.6	EUT OPERATING CONDITION.....	47
4.5.7	TEST RESULTS.....	48
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	50
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	50
4.6.2	TEST INSTRUMENTS.....	50
4.6.3	TEST PROCEDURE.....	50
4.6.4	DEVIATION FROM TEST STANDARD.....	51
4.6.5	TEST SETUP.....	51
4.6.6	EUT OPERATING CONDITION.....	51
4.6.7	TEST RESULTS.....	51
5.	TEST TYPES AND RESULTS (FOR 5GHZ, 5.725~5.850GHZ BAND).....	56
5.1	CONDUCTED EMISSION MEASUREMENT.....	56
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	56
5.1.2	TEST INSTRUMENTS.....	56
5.1.3	TEST PROCEDURES.....	57
5.1.4	DEVIATION FROM TEST STANDARD.....	57
5.1.5	TEST SETUP.....	58
5.1.6	EUT OPERATING CONDITIONS.....	58
5.1.7	TEST RESULTS.....	59
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	61
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	61
5.2.2	TEST INSTRUMENTS.....	62
5.2.3	TEST PROCEDURES.....	64
5.2.4	DEVIATION FROM TEST STANDARD.....	64
5.2.5	TEST SETUP.....	65
5.2.6	EUT OPERATING CONDITIONS.....	65
5.2.7	TEST RESULTS.....	66
5.3	6DB BANDWIDTH MEASUREMENT.....	76
5.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT.....	76
5.3.2	TEST INSTRUMENTS.....	76
5.3.3	TEST PROCEDURE.....	76
5.3.4	DEVIATION FROM TEST STANDARD.....	76
5.3.5	TEST SETUP.....	76
5.3.6	EUT OPERATING CONDITIONS.....	76
5.3.7	TEST RESULTS.....	77
5.4	CONDUCTED OUTPUT POWER.....	78
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	78
5.4.2	INSTRUMENTS.....	78
5.4.3	TEST PROCEDURES.....	78
5.4.4	DEVIATION FROM TEST STANDARD.....	78
5.4.5	TEST SETUP.....	79
5.4.6	EUT OPERATING CONDITIONS.....	79
5.4.7	TEST RESULTS.....	80
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	81
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	81
5.5.2	TEST INSTRUMENTS.....	81
5.5.3	TEST PROCEDURE.....	81
5.5.4	DEVIATION FROM TEST STANDARD.....	81
5.5.5	TEST SETUP.....	81
5.5.6	EUT OPERATING CONDITION.....	82
5.5.7	TEST RESULTS.....	83
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	84



A D T

5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	84
5.6.2	TEST INSTRUMENTS.....	84
5.6.3	TEST PROCEDURE.....	84
5.6.4	DEVIATION FROM TEST STANDARD.....	85
5.6.5	TEST SETUP	85
5.6.6	EUT OPERATING CONDITION.....	85
5.6.7	TEST RESULTS	85
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	89
7.	INFORMATION ON THE TESTING LABORATORIES	90
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	91



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120702E04	Original release	July 31, 2012



1. CERTIFICATION

PRODUCT: Wireless 802.11ac Dual Band USB Adapter
BRAND NAME: D-Link
MODEL NO.: DWA-182
TEST SAMPLE: MASS-PRODUCTION
APPLICANT: D-Link Corporation
TESTED: July 03 to 17, 2012
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: DWA-182) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Phoenix Huang, **DATE:** July 31, 2012
(Phoenix Huang, Specialist)

APPROVED BY : May Chen, **DATE:** July 31, 2012
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2412~2462MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.37dB at 0.46641MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.3dB at 4874.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

For 5GHz, 5725~5850MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.10dB at 0.47031MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.0dB at 5133.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE:

1. The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2.400 ~ 2.4835GHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.69 dB
Radiated emissions (1GHz -6GHz)	3.56 dB
Radiated emissions (6GHz -18GHz)	4.10 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless 802.11ac Dual Band USB Adapter
MODEL NO.	DWA-182
POWER SUPPLY	DC 5V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only.
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
OPERATING FREQUENCY	For 15.407 802.11a/n/ac: 5.18 ~ 5.24GHz
	For 15.247 802.11b/g/n: 2.412 ~ 2.462GHz 802.11a/n/ac: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)



MAXIMUM OUTPUT POWER	For 15.407 802.11a: 27.704mW 802.11n (HT20): 29.654mW 802.11n (HT40): 41.889mW 802.11ac (VHT80): 44.141mW For 15.247 (2.4GHz) 802.11b: 231.953mW 802.11g: 362.384Mw 802.11n (HT20): 416.968mW 802.11n (HT40): 423.892mW For 15.247 (5GHz) 802.11a: 457.241mW 802.11n (HT20): 441.117mW 802.11n (HT40): 564.326mW 802.11ac (VHT80): 648.742mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	USB cradle (shielded, 1m)
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a 2.4GHz & 5GHz WLAN device.
2. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Manufacture	Model name	Antenna Gain Gain (dBi)		Antenna Type	Connector
			2.4GHz	5GHz		
Chain (0)	Alpha Networks Inc.	NA	2.50	Band 1: -0.65 Band 2: 3.45 Band 3: 3.59 Band 4: 3.17	Printed	NA
Chain (1)	Alpha Networks Inc.	NA	2.55	Band 1: 1.32 Band 2: 3.78 Band 3: 3.99 Band 4: 3.49	Printed	NA

3. The EUT incorporates a MIMO function.

MODULATION MODE	TX/RX FUNCTION
802.11b	2Tx/2Rx
802.11g	2Tx/2Rx
802.11a	2Tx/2Rx
802.11n (HT20)	2Tx/2Rx
802.11n (HT40)	2Tx/2Rx
802.11ac (VHT20)	2Tx/2Rx
802.11ac (VHT40)	2Tx/2Rx
802.11ac (VHT80)	2Tx/2Rx

Note: The modulation and bandwidth are similar for 11n mode for 20MHz (40MHz) and 11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

4. 2.4GHz and 5GHz technology cannot transmit at same time.

5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

6. When the EUT operating in 802.11ac, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 9.

7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

Two channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

One channel is provided for 802.11ac (VHT80):

CHANNEL	FREQUENCY
155	5775 MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	-	-	-	With USB cradle
2	-	-	√	√	√	Without USB cradle

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane** (for below 1GHz) and **X-plane** (for above 1GHz).

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
802.11a	149 to 165	165	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
802.11a	149 to 165	165	OFDM	BPSK	6



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	58.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	58.5



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	58.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	24deg. C, 65%RH	120Vac, 60Hz	Bear Lee
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
RE ³ 1G	20deg. C, 62%RH	120Vac, 60Hz	Amos Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
558074 D01 DTS Meas Guidance v01
ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	iPod shuffle (for other test)	Apple	MC749TA/A	CC4DMFJUDFD M	NA
	iPod nano (for conducted test)	Apple	A1137	6U6078FMUPR	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB cable, 1m, shielded
2	USB cable, 0.1m (for other test)
	USB cable, 1m (for conducted)


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST


For Conducted test:

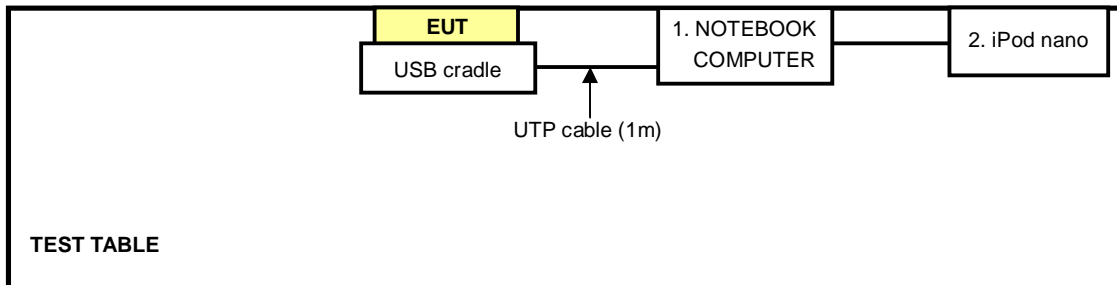

For Radiated (below 1GHz) test:

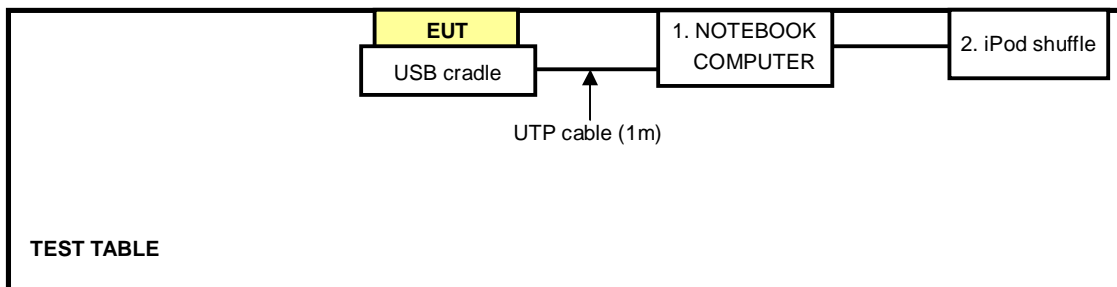

For Other test:

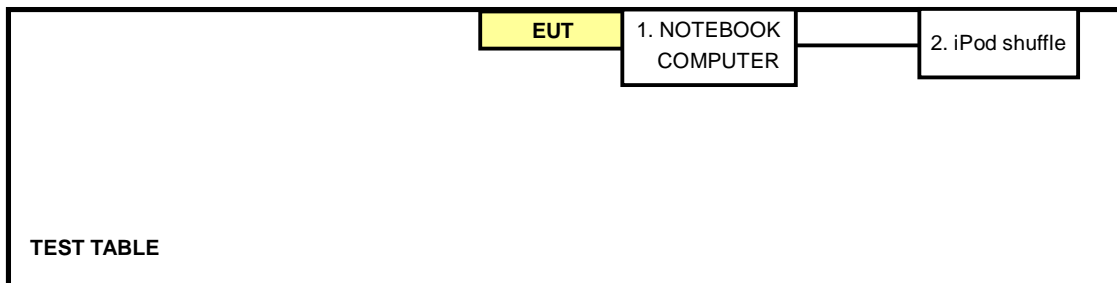

4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2.400 ~ 2.4835GHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	4	Nov. 12, 2011	Nov. 11, 2012
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: July 09, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

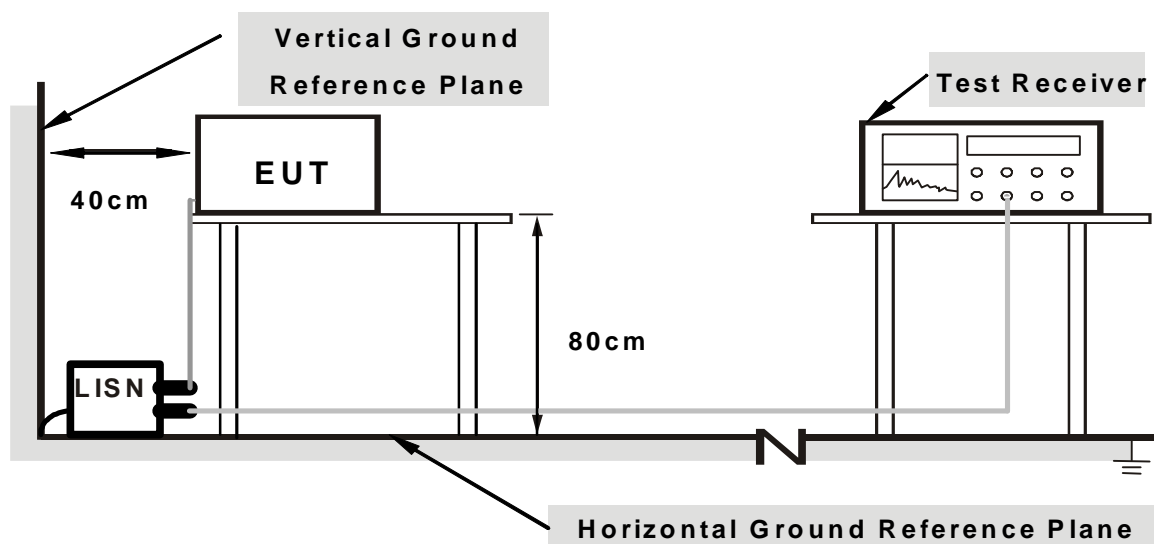

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “MTool.exe v1.0.0.8” to enable EUT under transmission/receiving condition continuously via one UTP cable transmission.


4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.20078	0.06	39.70	37.66	39.76	37.72	63.58	53.58	-23.82
2	0.26719	0.06	39.90	36.69	39.96	36.75	61.20	51.20	-21.24	-14.45
3	0.46641	0.08	36.77	36.13	36.85	36.21	56.58	46.58	-19.73	-10.37
4	0.66953	0.09	32.31	28.60	32.40	28.69	56.00	46.00	-23.60	-17.31
5	2.93359	0.23	34.05	30.65	34.28	30.88	56.00	46.00	-21.72	-15.12
6	5.40234	0.30	34.04	26.51	34.34	26.81	60.00	50.00	-25.66	-23.19

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

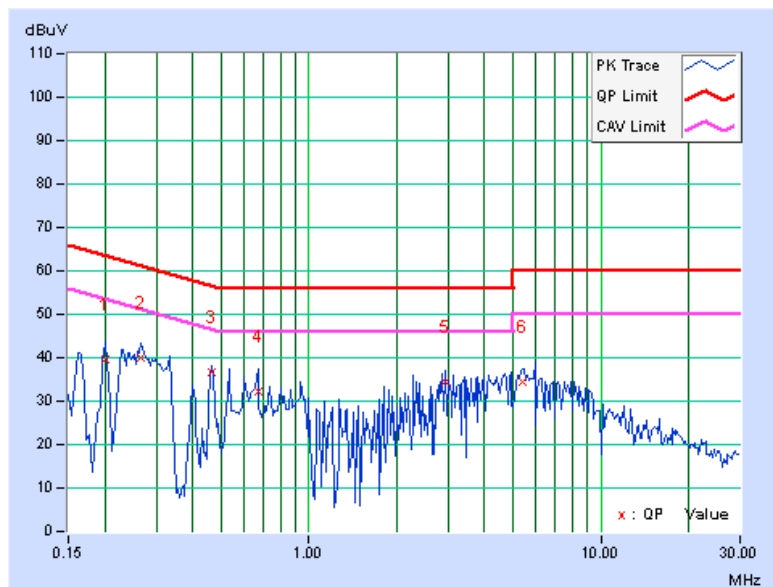


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.22031	0.07	39.47	22.46	39.54	22.53	62.81	52.81	-23.27
2	0.47031	0.08	33.80	32.86	33.88	32.94	56.51	46.51	-22.62	-13.56
3	0.93906	0.12	28.03	22.85	28.15	22.97	56.00	46.00	-27.85	-23.03
4	1.73828	0.16	32.10	28.53	32.26	28.69	56.00	46.00	-23.74	-17.31
5	5.87891	0.29	30.23	22.14	30.52	22.43	60.00	50.00	-29.48	-27.57
6	9.62109	0.37	26.90	18.93	27.27	19.30	60.00	50.00	-32.73	-30.70

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

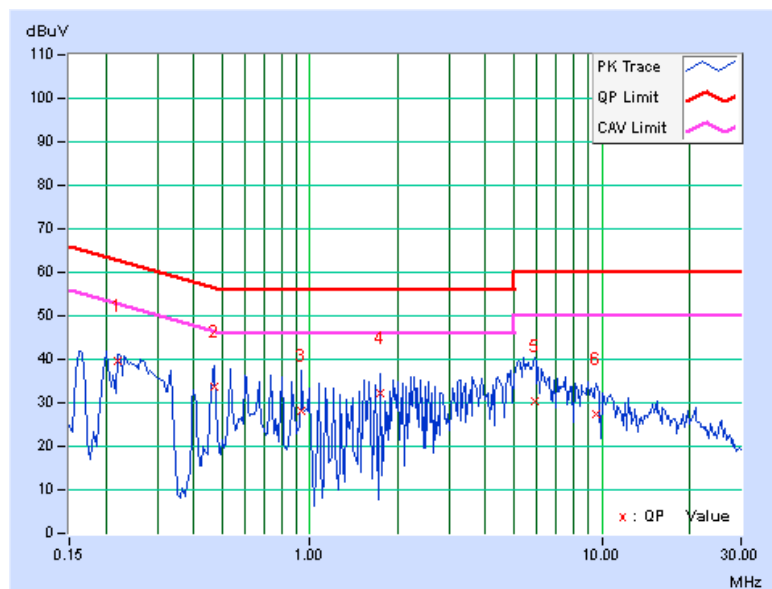

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 12, 2011	July 11, 2012
Pre-Selector Agilent	N9039A	MY46520311	July 12, 2011	July 11, 2012
Signal Generator Agilent	N5181A	MY49060517	July 12, 2011	July 11, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: July 03, 2012



A D T

For above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Pre-Selector Agilent	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Signal Generator Agilent	N5181A	MY49060347	July 25, 2011	July 24, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: July 03, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

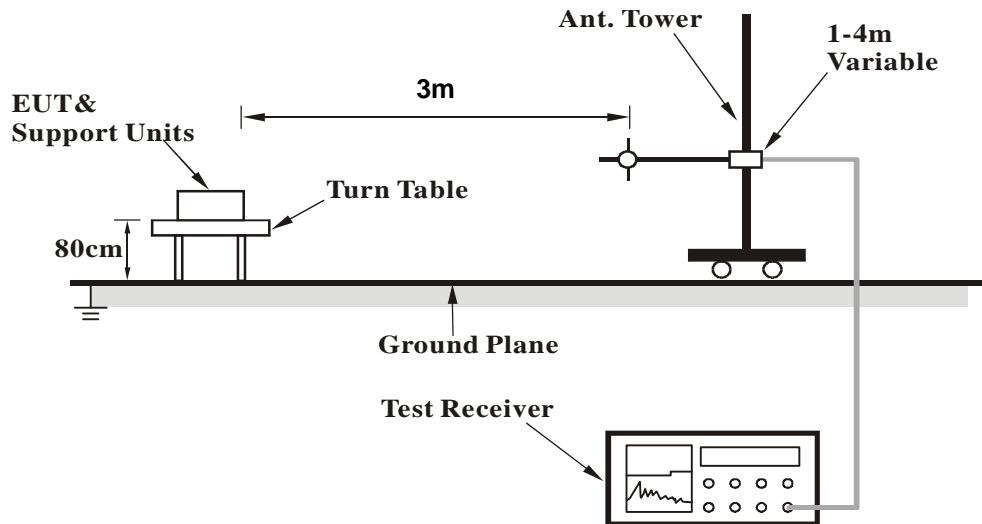

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.07	33.5 QP	40.0	-6.5	1.75 H	0	23.05	10.49
2	99.75	37.1 QP	43.5	-6.4	1.75 H	84	27.37	9.70
3	222.20	34.9 QP	46.0	-11.2	1.50 H	120	22.82	12.03
4	480.01	28.7 QP	46.0	-17.3	1.50 H	92	9.16	19.56
5	563.26	28.1 QP	46.0	-17.9	1.25 H	191	6.64	21.42
6	959.97	38.6 QP	46.0	-7.5	1.25 H	136	10.57	27.98
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.18	34.8 QP	40.0	-5.2	1.00 V	98	24.35	10.46
2	140.49	38.5 QP	43.5	-5.0	1.75 V	360	24.34	14.19
3	187.27	31.5 QP	43.5	-12.0	1.25 V	267	19.26	12.24
4	514.70	26.6 QP	46.0	-19.4	1.00 V	95	6.25	20.36
5	749.54	31.6 QP	46.0	-14.4	2.00 V	174	7.05	24.55
6	959.97	38.1 QP	46.0	-8.0	1.00 V	81	10.07	27.98

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2334.00	56.6 PK	74.0	-17.4	1.36 H	123	24.60	32.00
2	2334.00	45.7 AV	54.0	-8.3	1.36 H	123	13.70	32.00
3	*2412.00	107.4 PK			1.36 H	123	75.15	32.25
4	*2412.00	104.9 AV			1.36 H	123	72.65	32.25
5	2493.00	59.3 PK	74.0	-14.7	1.35 H	122	26.85	32.45
6	2493.00	47.2 AV	54.0	-6.8	1.35 H	122	14.75	32.45
7	4824.00	53.5 PK	74.0	-20.5	1.00 H	25	11.93	41.57
8	4824.00	50.1 AV	54.0	-3.9	1.00 H	25	8.53	41.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.69 V	241	23.21	32.19
2	2390.00	44.4 AV	54.0	-9.6	1.69 V	241	12.21	32.19
3	*2412.00	104.5 PK			1.69 V	241	72.25	32.25
4	*2412.00	101.9 AV			1.69 V	241	69.65	32.25
5	2489.00	57.1 PK	74.0	-16.9	1.69 V	241	24.66	32.44
6	2489.00	46.4 AV	54.0	-7.6	1.69 V	241	13.96	32.44
7	4824.00	55.9 PK	74.0	-18.1	1.33 V	263	14.33	41.57
8	4824.00	53.4 AV	54.0	-0.6	1.33 V	263	11.83	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	56.9 PK	74.0	-17.1	1.35 H	122	24.81	32.09
2	2360.00	46.5 AV	54.0	-7.5	1.35 H	122	14.41	32.09
3	*2437.00	106.9 PK			1.35 H	122	74.59	32.31
4	*2437.00	104.2 AV			1.35 H	122	71.89	32.31
5	4874.00	54.4 PK	74.0	-19.6	1.00 H	24	12.74	41.66
6	4874.00	50.9 AV	54.0	-3.1	1.00 H	24	9.24	41.66
7	7311.00	54.3 PK	74.0	-19.7	1.12 H	160	8.16	46.14
8	7311.00	43.0 AV	54.0	-11.0	1.12 H	160	-3.14	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.6 PK			1.74 V	271	72.29	32.31
2	*2437.00	102.1 AV			1.74 V	271	69.79	32.31
3	4874.00	56.3 PK	74.0	-17.7	1.30 V	262	14.64	41.66
4	4874.00	53.7 AV	54.0	-0.3	1.30 V	262	12.04	41.66
5	7311.00	53.9 PK	74.0	-20.1	1.28 V	145	7.76	46.14
6	7311.00	41.8 AV	54.0	-12.2	1.28 V	145	-4.34	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.7 PK			1.35 H	121	74.33	32.37
2	*2462.00	104.2 AV			1.35 H	121	71.83	32.37
3	2483.50	57.5 PK	74.0	-16.5	1.35 H	121	25.07	32.43
4	2483.50	44.7 AV	54.0	-9.3	1.35 H	121	12.27	32.43
5	4924.00	54.4 PK	74.0	-19.6	1.00 H	23	12.70	41.70
6	4924.00	50.6 AV	54.0	-3.4	1.00 H	23	8.90	41.70
7	7386.00	53.7 PK	74.0	-20.3	1.11 H	153	7.37	46.33
8	7386.00	42.7 AV	54.0	-11.3	1.11 H	153	-3.63	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.5 PK			1.63 V	246	72.13	32.37
2	*2462.00	101.9 AV			1.63 V	246	69.53	32.37
3	2483.50	56.9 PK	74.0	-17.1	1.63 V	246	24.47	32.43
4	2483.50	44.2 AV	54.0	-9.8	1.63 V	246	11.77	32.43
5	4924.00	56.4 PK	74.0	-17.6	1.32 V	265	14.70	41.70
6	4924.00	53.4 AV	54.0	-0.6	1.32 V	265	11.70	41.70
7	7386.00	53.9 PK	74.0	-20.1	1.25 V	134	7.57	46.33
8	7386.00	42.1 AV	54.0	-11.9	1.25 V	134	-4.23	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.36 H	63	40.21	32.19
2	2390.00	52.9 AV	54.0	-1.1	1.36 H	63	20.71	32.19
3	*2412.00	113.1 PK			1.10 H	34	80.85	32.25
4	*2412.00	102.6 AV			1.10 H	34	70.35	32.25
5	4824.00	51.7 PK	74.0	-22.3	1.00 H	12	10.13	41.57
6	4824.00	38.6 AV	54.0	-15.4	1.00 H	12	-2.97	41.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.7 PK	74.0	-9.3	1.70 V	235	32.51	32.19
2	2390.00	45.9 AV	54.0	-8.1	1.70 V	235	13.71	32.19
3	*2412.00	105.7 PK			1.70 V	273	73.45	32.25
4	*2412.00	96.4 AV			1.70 V	273	64.15	32.25
5	4824.00	56.3 PK	74.0	-17.7	1.28 V	262	14.73	41.57
6	4824.00	42.1 AV	54.0	-11.9	1.28 V	262	0.53	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.12 H	23	24.91	32.19
2	2390.00	43.4 AV	54.0	-10.6	1.12 H	23	11.21	32.19
3	*2437.00	113.2 PK			1.10 H	38	80.89	32.31
4	*2437.00	103.4 AV			1.10 H	38	71.09	32.31
5	2483.50	56.9 PK	74.0	-17.1	1.12 H	23	24.47	32.43
6	2483.50	43.8 AV	54.0	-10.2	1.12 H	23	11.37	32.43
7	4874.00	51.2 PK	74.0	-22.8	1.01 H	29	9.54	41.66
8	4874.00	38.0 AV	54.0	-16.0	1.01 H	29	-3.66	41.66
9	7311.00	53.9 PK	74.0	-20.1	1.11 H	162	7.76	46.14
10	7311.00	41.6 AV	54.0	-12.4	1.11 H	162	-4.54	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.3 PK			1.75 V	271	75.99	32.31
2	*2437.00	98.3 AV			1.75 V	271	65.99	32.31
3	4874.00	56.1 PK	74.0	-17.9	1.31 V	262	14.44	41.66
4	4874.00	42.5 AV	54.0	-11.5	1.31 V	262	0.84	41.66
5	7311.00	51.9 PK	74.0	-22.1	1.23 V	139	5.76	46.14
6	7311.00	40.8 AV	54.0	-13.2	1.23 V	139	-5.34	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.3 PK			1.10 H	38	79.93	32.37
2	*2462.00	101.5 AV			1.10 H	38	69.13	32.37
3	2483.50	71.8 PK	74.0	-2.2	1.10 H	38	39.37	32.43
4	2483.50	53.2 AV	54.0	-0.8	1.10 H	38	20.77	32.43
5	4924.00	51.6 PK	74.0	-22.4	1.00 H	21	9.90	41.70
6	4924.00	38.3 AV	54.0	-15.7	1.00 H	21	-3.40	41.70
7	7386.00	53.1 PK	74.0	-20.9	1.16 H	146	6.77	46.33
8	7386.00	42.2 AV	54.0	-11.8	1.16 H	146	-4.13	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.6 PK			1.66 V	271	73.23	32.37
2	*2462.00	96.8 AV			1.66 V	271	64.43	32.37
3	2483.50	56.8 PK	74.0	-17.2	1.66 V	271	24.37	32.43
4	2483.50	44.6 AV	54.0	-9.4	1.66 V	271	12.17	32.43
5	4924.00	56.5 PK	74.0	-17.5	1.29 V	259	14.80	41.70
6	4924.00	42.8 AV	54.0	-11.2	1.29 V	259	1.10	41.70
7	7386.00	52.1 PK	74.0	-21.9	1.21 V	131	5.77	46.33
8	7386.00	40.9 AV	54.0	-13.1	1.21 V	131	-5.43	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	1.10 H	35	37.11	32.19
2	2390.00	53.1 AV	54.0	-0.9	1.10 H	35	20.91	32.19
3	*2412.00	111.3 PK			1.10 H	35	79.05	32.25
4	*2412.00	100.1 AV			1.10 H	35	67.85	32.25
5	2487.00	59.3 PK	74.0	-14.7	1.10 H	35	26.86	32.44
6	2487.00	48.4 AV	54.0	-5.6	1.10 H	35	15.96	32.44
7	4824.00	51.2 PK	74.0	-22.8	1.00 H	21	9.63	41.57
8	4824.00	38.1 AV	54.0	-15.9	1.00 H	21	-3.47	41.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.75 V	268	30.11	32.19
2	2390.00	48.1 AV	54.0	-5.9	1.75 V	268	15.91	32.19
3	*2412.00	103.4 PK			1.75 V	268	71.15	32.25
4	*2412.00	93.3 AV			1.75 V	268	61.05	32.25
5	4824.00	56.9 PK	74.0	-17.1	1.21 V	263	15.33	41.57
6	4824.00	42.7 AV	54.0	-11.3	1.21 V	263	1.13	41.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2357.00	57.6 PK	74.0	-16.4	1.12 H	22	25.52	32.08
2	2357.00	44.9 AV	54.0	-9.1	1.12 H	22	12.82	32.08
3	*2437.00	112.6 PK			1.12 H	22	80.29	32.31
4	*2437.00	102.8 AV			1.12 H	22	70.49	32.31
5	2483.50	58.2 PK	74.0	-15.8	1.12 H	22	25.77	32.43
6	2483.50	43.8 AV	54.0	-10.2	1.12 H	22	11.37	32.43
7	4874.00	50.1 PK	74.0	-23.9	1.00 H	22	8.44	41.66
8	4874.00	38.5 AV	54.0	-15.5	1.00 H	22	-3.16	41.66
9	7311.00	52.7 PK	74.0	-21.3	1.16 H	155	6.56	46.14
10	7311.00	40.7 AV	54.0	-13.3	1.16 H	155	-5.44	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.9 PK			1.75 V	269	74.59	32.31
2	*2437.00	97.1 AV			1.75 V	269	64.79	32.31
3	4874.00	56.7 PK	74.0	-17.3	1.24 V	266	15.04	41.66
4	4874.00	42.5 AV	54.0	-11.5	1.24 V	266	0.84	41.66
5	7311.00	52.1 PK	74.0	-21.9	1.00 V	144	5.96	46.14
6	7311.00	40.7 AV	54.0	-13.3	1.00 V	144	-5.44	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.7 PK			1.11 H	26	78.33	32.37
2	*2462.00	100.5 AV			1.11 H	26	68.13	32.37
3	2483.50	72.8 PK	74.0	-1.2	1.11 H	26	40.37	32.43
4	2483.50	53.4 AV	54.0	-0.6	1.11 H	26	20.97	32.43
5	4924.00	48.5 PK	74.0	-25.5	1.00 H	21	6.80	41.70
6	4924.00	36.1 AV	54.0	-17.9	1.00 H	21	-5.60	41.70
7	7386.00	52.8 PK	74.0	-21.2	1.11 H	153	6.47	46.33
8	7386.00	40.8 AV	54.0	-13.2	1.11 H	153	-5.53	46.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.1 PK			1.70 V	271	72.73	32.37
2	*2462.00	95.5 AV			1.70 V	271	63.13	32.37
3	2483.50	67.3 PK	74.0	-6.7	1.70 V	271	34.87	32.43
4	2483.50	50.2 AV	54.0	-3.8	1.70 V	271	17.77	32.43
5	4924.00	56.3 PK	74.0	-17.7	1.27 V	265	14.60	41.70
6	4924.00	42.4 AV	54.0	-11.6	1.27 V	265	0.70	41.70
7	7386.00	52.5 PK	74.0	-21.5	1.23 V	148	6.17	46.33
8	7386.00	40.9 AV	54.0	-13.1	1.23 V	148	-5.43	46.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.12 H	23	39.91	32.19
2	2390.00	53.5 AV	54.0	-0.5	1.12 H	23	21.31	32.19
3	*2422.00	104.7 PK			1.12 H	23	72.43	32.27
4	*2422.00	93.1 AV			1.12 H	23	60.83	32.27
5	4844.00	49.5 PK	74.0	-24.5	1.03 H	8	7.89	41.61
6	4844.00	38.0 AV	54.0	-16.0	1.03 H	8	-3.61	41.61
7	7266.00	52.4 PK	74.0	-21.6	1.13 H	168	6.38	46.02
8	7266.00	40.5 AV	54.0	-13.5	1.13 H	168	-5.52	46.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.69 V	269	34.61	32.19
2	2390.00	50.5 AV	54.0	-3.5	1.69 V	269	18.31	32.19
3	*2422.00	101.1 PK			1.69 V	269	68.83	32.27
4	*2422.00	90.7 AV			1.69 V	269	58.43	32.27
5	4844.00	56.8 PK	74.0	-17.2	1.28 V	257	15.19	41.61
6	4844.00	42.6 AV	54.0	-11.4	1.28 V	257	0.99	41.61
7	7266.00	52.5 PK	74.0	-21.5	1.24 V	146	6.48	46.02
8	7266.00	40.9 AV	54.0	-13.1	1.24 V	146	-5.12	46.02

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.08 H	22	39.51	32.19
2	2390.00	52.3 AV	54.0	-1.7	1.08 H	22	20.11	32.19
3	*2437.00	108.8 PK			1.08 H	22	76.49	32.31
4	*2437.00	96.6 AV			1.08 H	22	64.29	32.31
5	2483.50	72.8 PK	74.0	-1.2	1.08 H	22	40.37	32.43
6	2483.50	52.2 AV	54.0	-1.8	1.08 H	22	19.77	32.43
7	4874.00	50.5 PK	74.0	-23.5	1.02 H	38	8.84	41.66
8	4874.00	38.7 AV	54.0	-15.3	1.02 H	38	-2.96	41.66
9	7311.00	53.2 PK	74.0	-20.8	1.20 H	147	7.06	46.14
10	7311.00	41.1 AV	54.0	-12.9	1.20 H	147	-5.04	46.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.7 PK			1.71 V	253	71.39	32.31
2	*2437.00	93.5 AV			1.71 V	253	61.19	32.31
3	4874.00	57.2 PK	74.0	-16.8	1.17 V	276	15.54	41.66
4	4874.00	43.2 AV	54.0	-10.8	1.17 V	276	1.54	41.66
5	7311.00	53.1 PK	74.0	-20.9	1.24 V	134	6.96	46.14
6	7311.00	41.3 AV	54.0	-12.7	1.24 V	134	-4.84	46.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.9 PK			1.12 H	24	72.55	32.35
2	*2452.00	94.7 AV			1.12 H	24	62.35	32.35
3	2483.50	71.5 PK	74.0	-2.5	1.12 H	24	39.07	32.43
4	2483.50	53.3 AV	54.0	-0.7	1.12 H	24	20.87	32.43
5	4904.00	49.9 PK	74.0	-24.1	1.06 H	32	8.19	41.71
6	4904.00	38.2 AV	54.0	-15.8	1.06 H	32	-3.51	41.71
7	7356.00	53.1 PK	74.0	-20.9	1.17 H	154	6.84	46.26
8	7356.00	40.9 AV	54.0	-13.1	1.17 H	154	-5.36	46.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.3 PK			1.61 V	284	70.95	32.35
2	*2452.00	92.9 AV			1.61 V	284	60.55	32.35
3	2483.50	69.7 PK	74.0	-4.3	1.61 V	284	37.27	32.43
4	2483.50	53.5 AV	54.0	-0.5	1.61 V	284	21.07	32.43
5	4904.00	56.6 PK	74.0	-17.4	1.25 V	261	14.89	41.71
6	4904.00	42.3 AV	54.0	-11.7	1.25 V	261	0.59	41.71
7	7356.00	52.4 PK	74.0	-21.6	1.19 V	130	6.14	46.26
8	7356.00	41.1 AV	54.0	-12.9	1.19 V	130	-5.16	46.26

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 03, 2012


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.72	10.65	0.5	PASS
6	2437	10.68	10.71	0.5	PASS
11	2462	10.84	10.80	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.52	16.50	0.5	PASS
6	2437	16.50	16.51	0.5	PASS
11	2462	16.50	16.48	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.77	17.78	0.5	PASS
6	2437	17.72	17.75	0.5	PASS
11	2462	17.77	17.70	0.5	PASS

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.54	36.60	0.5	PASS
6	2437	36.93	36.89	0.5	PASS
9	2452	36.51	36.62	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 03, 2012

4.4.3 TEST PROCEDURES

Follow FCC KDB 558074 DTS test procedure:


Measurement Procedure PK2

1. Set RBW =1MHz.
2. Set VBW =3MHz.
3. Set the analyzer span to 5-30% greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Compute power by integrating the spectrum across the EBW of the signal.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	20.74	19.98	218.118	23.39	30	PASS
6	2437	20.79	20.02	220.412	23.43	30	PASS
11	2462	20.91	20.36	231.953	23.65	30	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain0})/20} + 10^{G2(\text{Chain1})/20})^2 / 2]$

Effective Legacy Gain (dBi) = 5.54

The effective legacy gain is 5.54 dBi, therefore the limit doesn't reduce.

802.11g

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.55	22.18	345.083	25.38	30	PASS
6	2437	22.71	22.35	358.429	25.54	30	PASS
11	2462	22.69	22.47	362.384	25.59	30	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain0})/20} + 10^{G2(\text{Chain1})/20})^2 / 2]$

Effective Legacy Gain (dBi) = 5.54

The effective legacy gain is 5.54 dBi, therefore the limit doesn't reduce.

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.32	21.97	328.006	25.16	30	PASS
6	2437	22.59	22.35	353.343	25.48	30	PASS
11	2462	23.27	23.11	416.968	26.20	30	PASS

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	21.13	20.92	253.313	24.04	30	PASS
6	2437	23.40	23.12	423.892	26.27	30	PASS
9	2452	22.01	21.89	313.380	24.96	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 03, 2012


4.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple.
3. Trace mode = max hold.
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{kHz})$

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	5.08	-10.15	3.01	-7.14	8	PASS
	6	2437	5.23	-10.00	3.01	-6.99	8	PASS
	11	2462	5.42	-9.81	3.01	-6.80	8	PASS
1	1	2412	4.29	-10.94	3.01	-7.93	8	PASS
	6	2437	4.51	-10.72	3.01	-7.71	8	PASS
	11	2462	4.70	-10.53	3.01	-7.52	8	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain0})/20} + 10^{G2(\text{Chain1})/20})^2 / 2]$

Effective Legacy Gain (dBi) = 5.54

The effective legacy gain is 5.54 dBi, therefore the limit doesn't reduce.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.53	-11.70	3.01	-8.69	8	PASS
	6	2437	3.96	-11.27	3.01	-8.26	8	PASS
	11	2462	3.88	-11.35	3.01	-8.34	8	PASS
1	1	2412	2.66	-12.57	3.01	-9.56	8	PASS
	6	2437	2.94	-12.29	3.01	-9.28	8	PASS
	11	2462	2.66	-12.57	3.01	-9.56	8	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain0})/20} + 10^{G2(\text{Chain1})/20})^2 / 2]$

Effective Legacy Gain (dBi) = 5.54

The effective legacy gain is 5.54 dBi, therefore the limit doesn't reduce.



A D T

802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.50	-11.73	3.01	-8.72	8	PASS
	6	2437	3.87	-11.36	3.01	-8.35	8	PASS
	11	2462	4.39	-10.84	3.01	-7.83	8	PASS
1	1	2412	2.63	-12.60	3.01	-9.59	8	PASS
	6	2437	3.17	-12.06	3.01	-9.05	8	PASS
	11	2462	3.92	-11.31	3.01	-8.30	8	PASS

802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-1.07	-16.30	3.01	-13.29	8	PASS
	6	2437	1.45	-13.78	3.01	-10.77	8	PASS
	9	2452	-0.24	-15.47	3.01	-12.46	8	PASS
1	3	2422	-1.61	-16.84	3.01	-13.83	8	PASS
	6	2437	0.75	-14.48	3.01	-11.47	8	PASS
	9	2452	-0.48	-15.71	3.01	-12.70	8	PASS



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 03, 2012

4.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

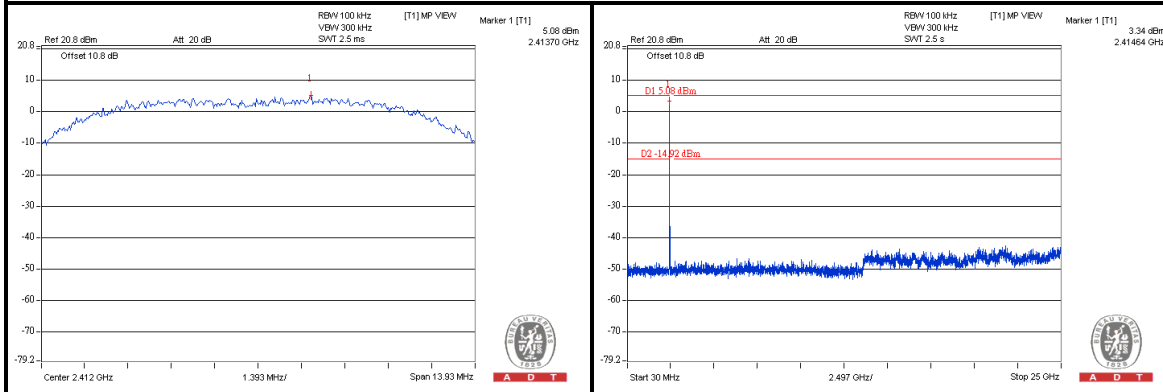

CH 6

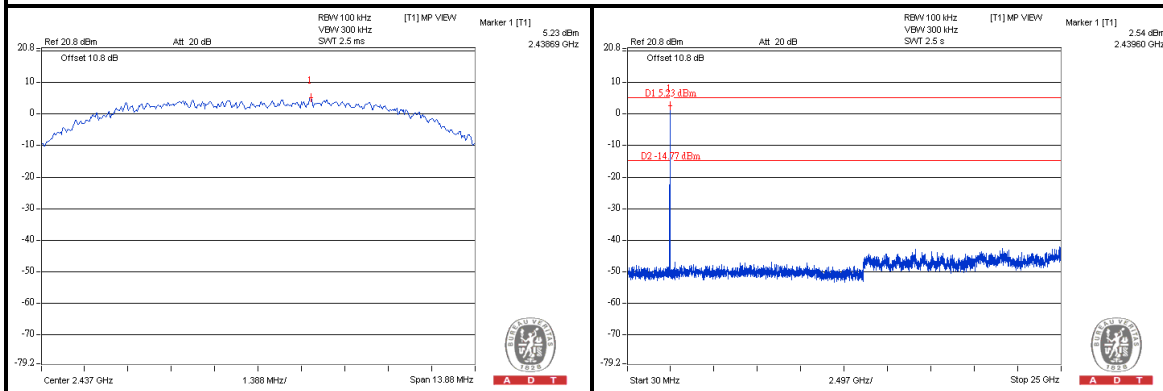

CH 11


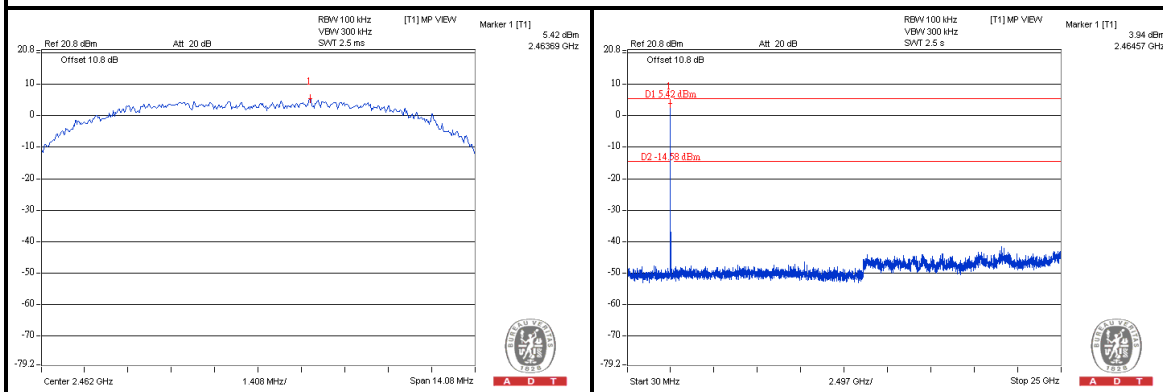






A D T

802.11g



CH 1

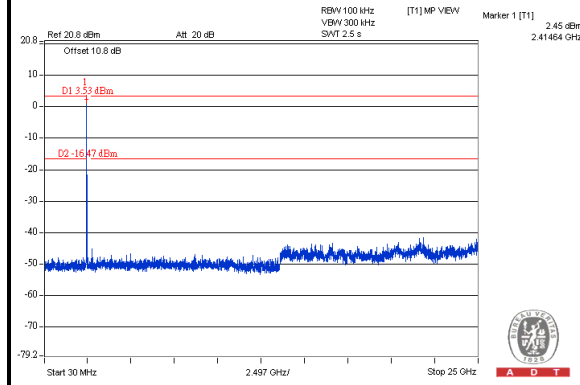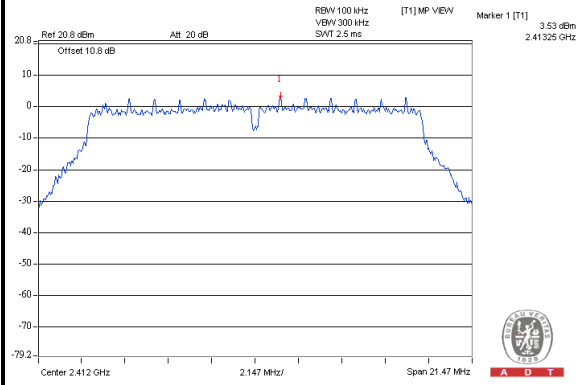

CH 6

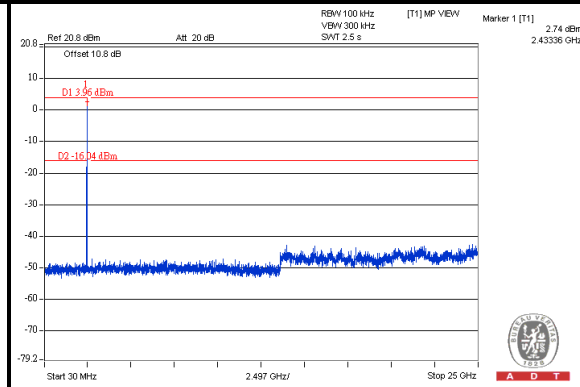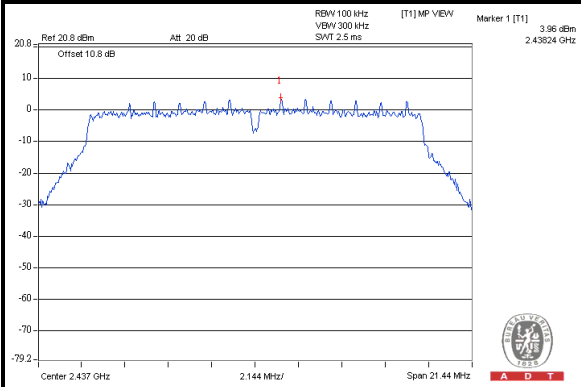

CH 11

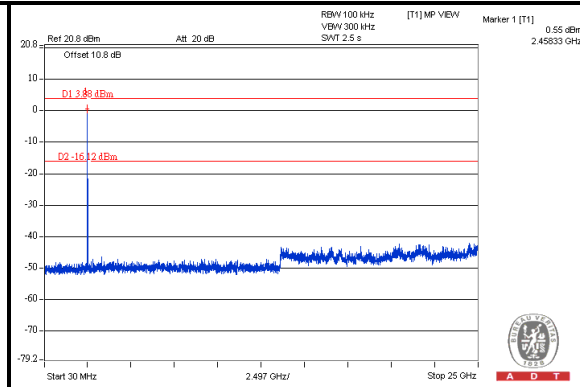
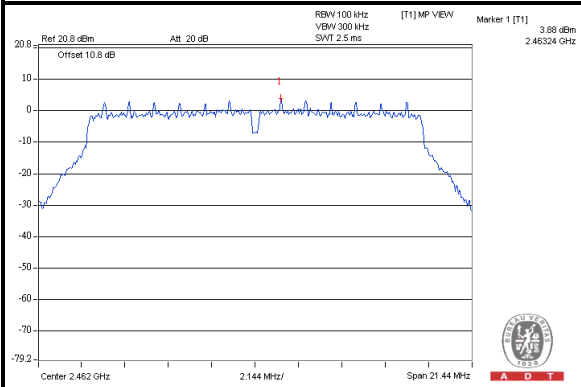






A D T

802.11n (HT20)



CH 1

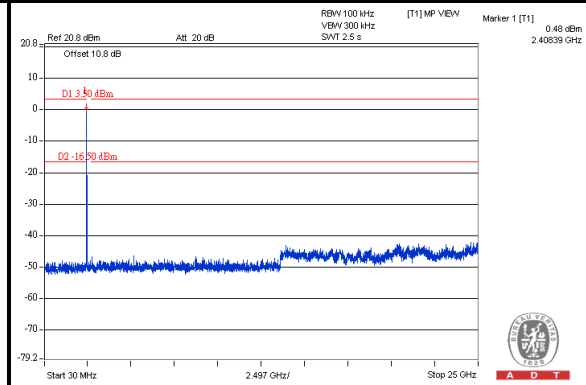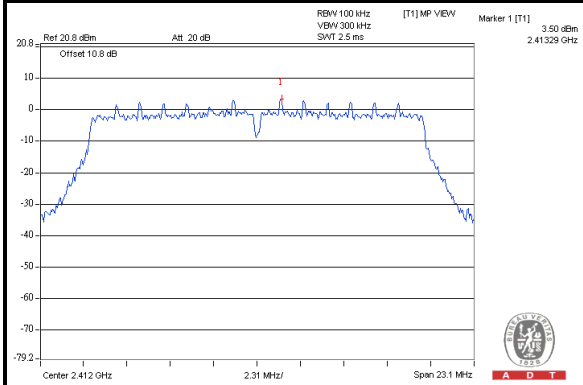

CH 6

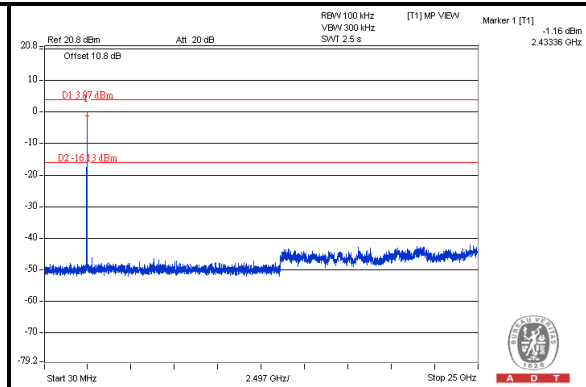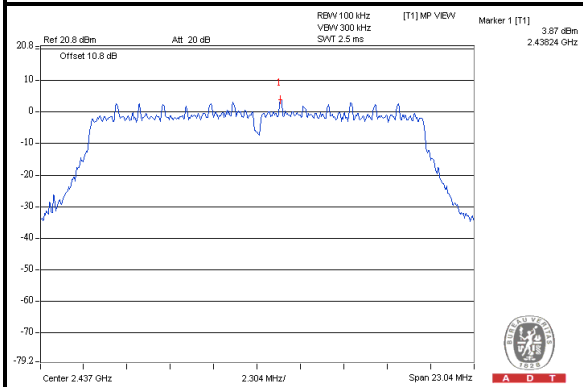

CH 11

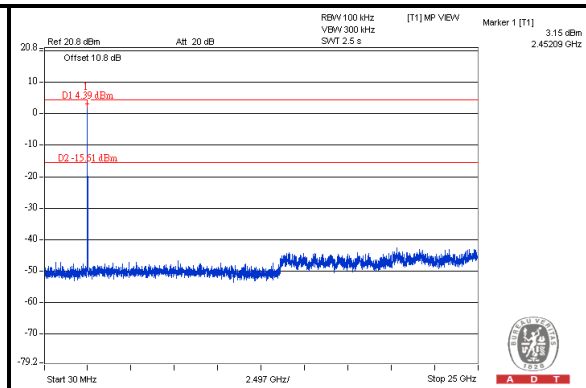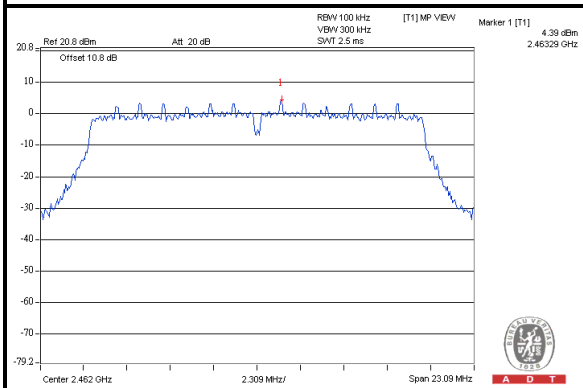





A D T

802.11n (HT40)


CH 3

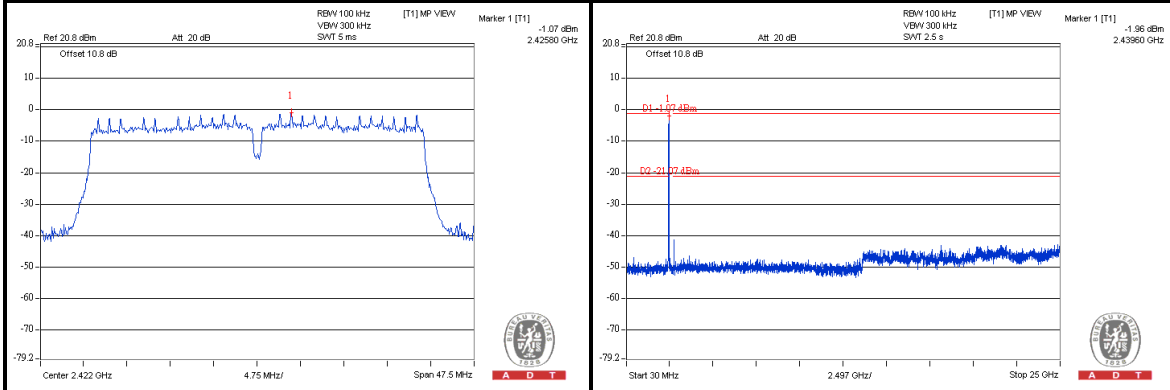

CH 6

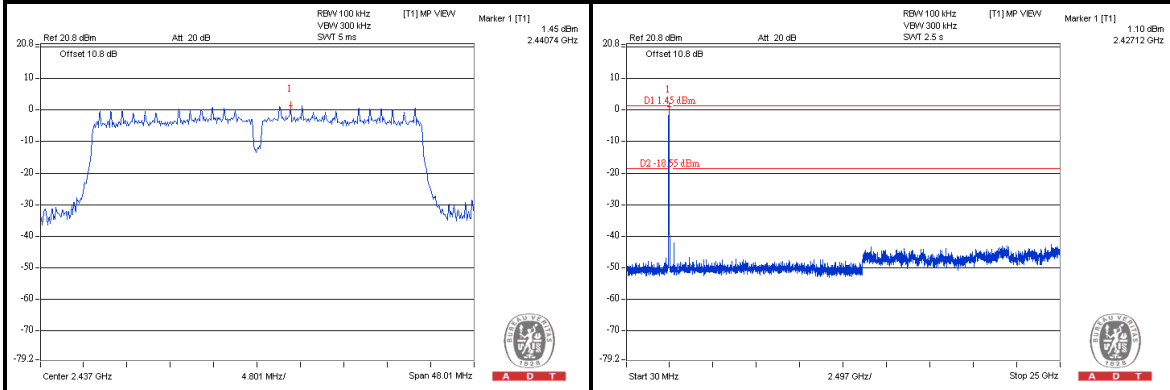

CH 9

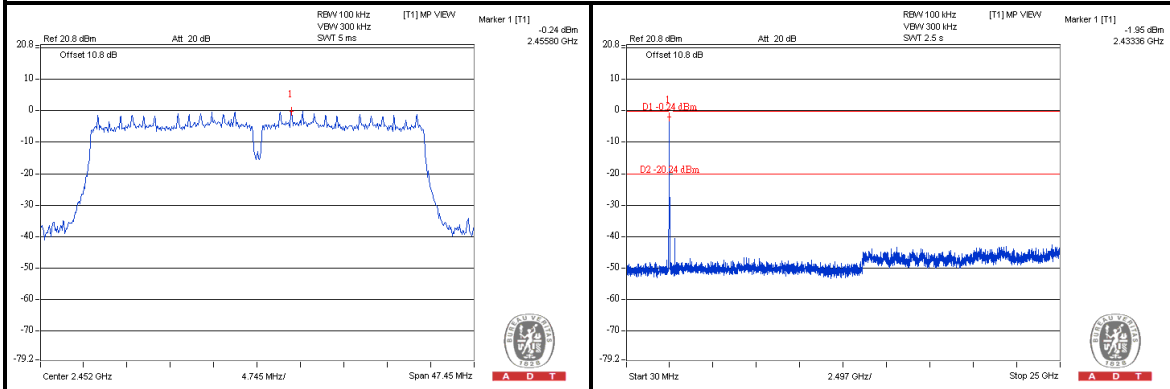

5. TEST TYPES AND RESULTS (FOR 5GHz, 5.725~5.850GHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	4	Nov. 12, 2011	Nov. 11, 2012
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: July 09, 2012


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

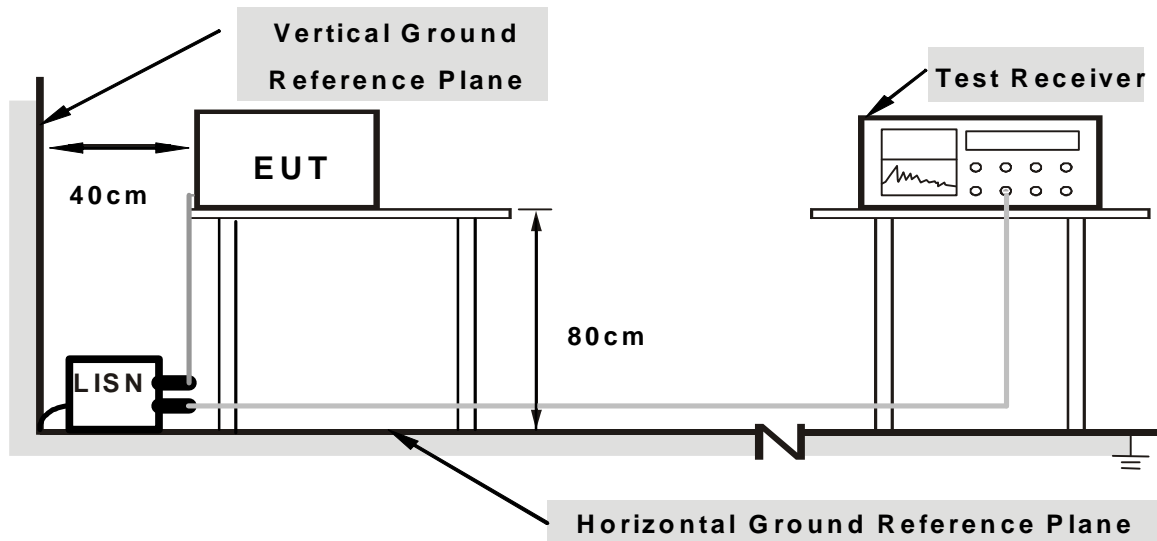

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as the 4.1.6


5.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.26719	0.06	40.10	36.74	40.16	36.80	61.20	51.20	-21.04
2	0.47031	0.08	36.95	35.33	37.03	35.41	56.51	46.51	-19.48	-11.10
3	0.60313	0.09	35.62	33.41	35.71	33.50	56.00	46.00	-20.29	-12.50
4	2.47656	0.21	32.95	29.20	33.16	29.41	56.00	46.00	-22.84	-16.59
5	4.82422	0.29	36.98	32.51	37.27	32.80	56.00	46.00	-18.73	-13.20
6	5.82422	0.31	33.88	25.81	34.19	26.12	60.00	50.00	-25.81	-23.88

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

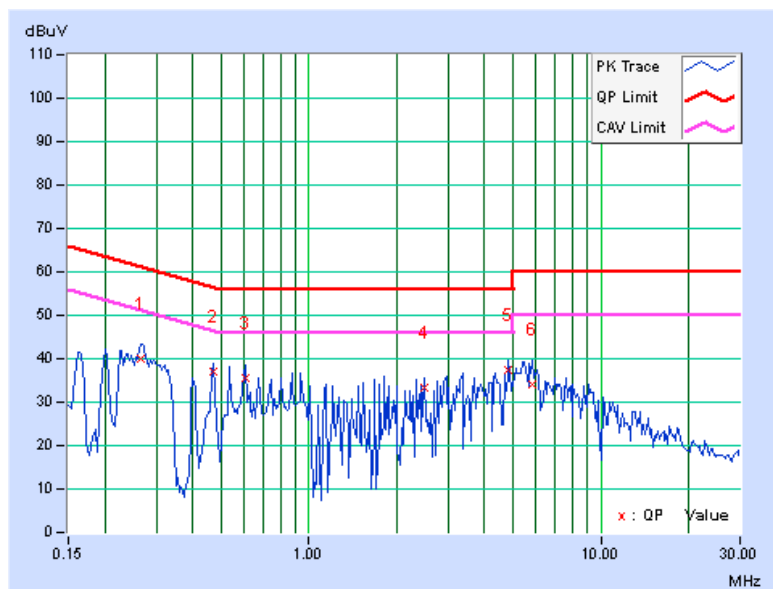


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.20469	0.07	35.58	32.38	35.65	32.45	63.42	53.42	-27.77
2	0.26719	0.07	37.17	32.17	37.24	32.24	61.20	51.20	-23.96	-18.96
3	1.27344	0.14	32.17	29.10	32.31	29.24	56.00	46.00	-23.69	-16.76
4	3.28125	0.22	34.82	30.43	35.04	30.65	56.00	46.00	-20.96	-15.35
5	5.82813	0.29	32.36	26.99	32.65	27.28	60.00	50.00	-27.35	-22.72
6	10.23828	0.39	26.25	19.00	26.64	19.39	60.00	50.00	-33.36	-30.61

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

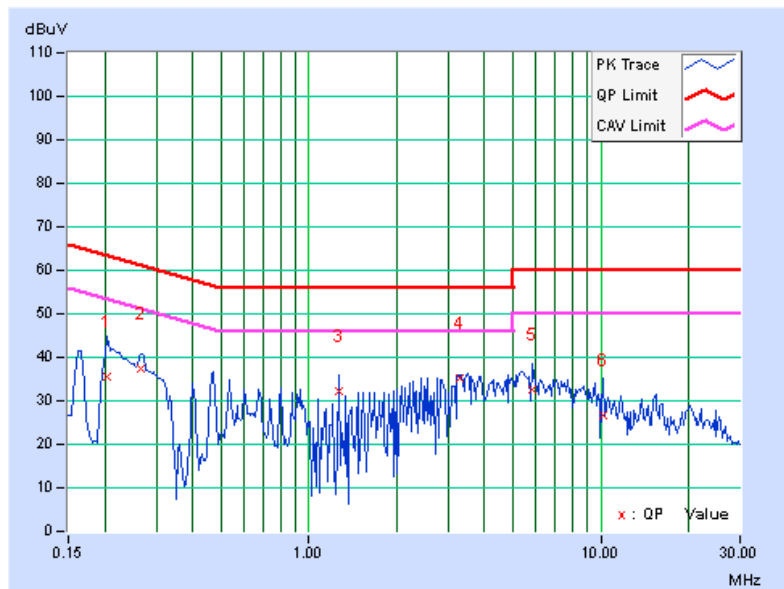

5.2 RADIATED AND BANDEGE EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED AND BANDEGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.2.2 TEST INSTRUMENTS

For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 12, 2011	July 11, 2012
Pre-Selector Agilent	N9039A	MY46520311	July 12, 2011	July 11, 2012
Signal Generator Agilent	N5181A	MY49060517	July 12, 2011	July 11, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: July 03, 2012



A D T

For above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Pre-Selector Agilent	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Signal Generator Agilent	N5181A	MY49060347	July 25, 2011	July 24, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: July 03, 2012

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

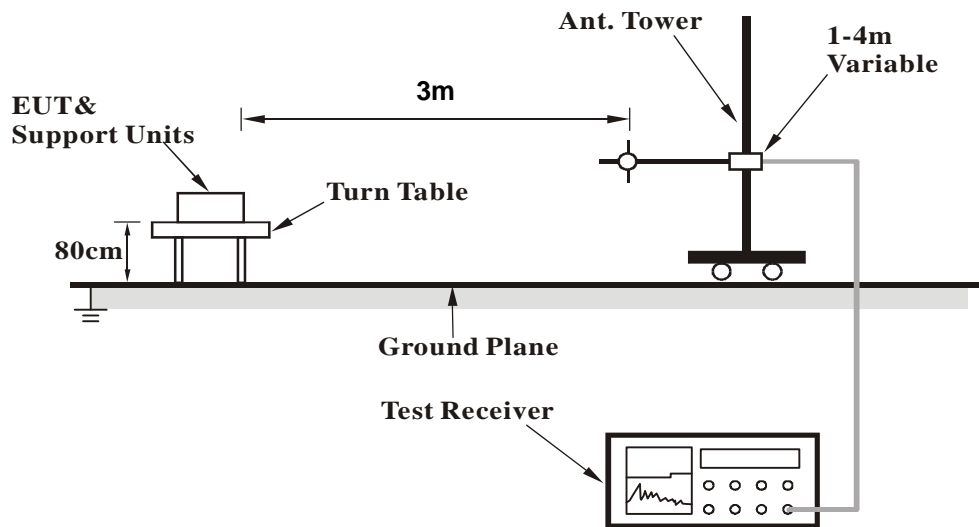

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11a

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	77.31	33.7 QP	40.0	-6.3	1.75 H	358	23.56	10.12
2	100.75	37.2 QP	43.5	-6.3	1.75 H	100	27.34	9.83
3	224.24	35.1 QP	46.0	-10.9	1.50 H	150	22.96	12.13
4	480.17	30.0 QP	46.0	-16.0	1.50 H	100	10.40	19.57
5	565.34	30.2 QP	46.0	-15.8	1.25 H	191	8.77	21.47
6	958.99	40.0 QP	46.0	-6.0	1.25 H	151	12.03	27.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.80	35.0 QP	40.0	-5.1	1.00 V	100	24.68	10.27
2	139.87	38.2 QP	43.5	-5.3	1.75 V	0	24.08	14.16
3	187.37	31.6 QP	43.5	-11.9	1.25 V	250	19.41	12.23
4	515.43	27.6 QP	46.0	-18.5	1.25 V	125	7.17	20.38
5	750.24	32.2 QP	46.0	-13.8	1.00 V	0	7.62	24.57
6	960.22	38.2 QP	54.0	-15.8	1.00 V	75	10.18	27.98

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.3 PK			1.62 H	89	72.35	42.95
2	*5745.00	105.2 AV			1.62 H	89	62.25	42.95
3	11490.00	58.6 PK	74.0	-15.4	1.30 H	267	9.35	49.25
4	11490.00	45.5 AV	54.0	-8.5	1.30 H	267	-3.75	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	113.2 PK			1.00 V	271	70.25	42.95
2	*5745.00	102.9 AV			1.00 V	271	59.95	42.95
3	11490.00	59.4 PK	74.0	-14.6	1.04 V	163	10.15	49.25
4	11490.00	44.9 AV	54.0	-9.1	1.04 V	163	-4.35	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.4 PK			1.64 H	86	71.40	43.00
2	*5785.00	104.7 AV			1.64 H	86	61.70	43.00
3	11570.00	58.5 PK	74.0	-15.5	1.33 H	267	9.21	49.29
4	11570.00	45.3 AV	54.0	-8.7	1.33 H	267	-3.99	49.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.9 PK			1.00 V	269	69.90	43.00
2	*5785.00	102.8 AV			1.00 V	269	59.80	43.00
3	11570.00	59.0 PK	74.0	-15.0	1.00 V	167	9.71	49.29
4	11570.00	44.6 AV	54.0	-9.4	1.00 V	167	-4.69	49.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.6 PK			1.63 H	88	70.50	43.10
2	*5825.00	104.2 AV			1.63 H	88	61.10	43.10
3	11650.00	58.3 PK	74.0	-15.7	1.33 H	256	8.73	49.57
4	11650.00	45.1 AV	54.0	-8.9	1.33 H	256	-4.47	49.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.9 PK			1.00 V	272	67.80	43.10
2	*5825.00	101.1 AV			1.00 V	272	58.00	43.10
3	11650.00	58.9 PK	74.0	-15.1	1.00 V	155	9.33	49.57
4	11650.00	44.5 AV	54.0	-9.5	1.00 V	155	-5.07	49.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.2 PK			1.63 H	91	71.25	42.95
2	*5745.00	104.1 AV			1.63 H	91	61.15	42.95
3	11490.00	58.3 PK	74.0	-15.7	1.00 H	153	9.05	49.25
4	11490.00	44.5 AV	54.0	-9.5	1.00 H	153	-4.75	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	111.4 PK			1.00 V	270	68.45	42.95
2	*5745.00	101.6 AV			1.00 V	270	58.65	42.95
3	11490.00	57.9 PK	74.0	-16.1	1.00 V	20	8.65	49.25
4	11490.00	44.5 AV	54.0	-9.5	1.00 V	20	-4.75	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.4 PK			1.64 H	90	71.40	43.00
2	*5785.00	104.2 AV			1.64 H	90	61.20	43.00
3	11570.00	57.9 PK	74.0	-16.1	1.00 H	160	8.61	49.29
4	11570.00	44.4 AV	54.0	-9.6	1.00 H	160	-4.89	49.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.9 PK			1.00 V	267	69.90	43.00
2	*5785.00	102.5 AV			1.00 V	267	59.50	43.00
3	11570.00	58.1 PK	74.0	-15.9	1.05 V	10	8.81	49.29
4	11570.00	44.9 AV	54.0	-9.1	1.05 V	10	-4.39	49.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.4 PK			1.61 H	89	70.30	43.10
2	*5825.00	103.4 AV			1.61 H	89	60.30	43.10
3	11650.00	58.6 PK	74.0	-15.4	1.05 H	156	9.03	49.57
4	11650.00	44.7 AV	54.0	-9.3	1.05 H	156	-4.87	49.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.0 PK			1.00 V	271	66.90	43.10
2	*5825.00	100.0 AV			1.00 V	271	56.90	43.10
3	11650.00	58.3 PK	74.0	-15.7	1.02 V	32	8.73	49.57
4	11650.00	44.7 AV	54.0	-9.3	1.02 V	32	-4.87	49.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	110.2 PK			1.64 H	91	67.23	42.97
2	*5755.00	99.8 AV			1.64 H	91	56.83	42.97
3	11510.00	58.0 PK	74.0	-16.0	1.00 H	23	8.75	49.25
4	11510.00	44.5 AV	54.0	-9.5	1.00 H	23	-4.75	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	108.6 PK			1.00 V	91	65.63	42.97
2	*5755.00	96.9 AV			1.00 V	91	53.93	42.97
3	11510.00	57.9 PK	74.0	-16.1	1.00 V	153	8.65	49.25
4	11510.00	44.7 AV	54.0	-9.3	1.00 V	153	-4.55	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.1 PK			1.64 H	92	68.09	43.01
2	*5795.00	98.5 AV			1.64 H	92	55.49	43.01
3	11590.00	58.4 PK	74.0	-15.6	1.00 H	39	9.10	49.30
4	11590.00	44.6 AV	54.0	-9.4	1.00 H	39	-4.70	49.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	108.7 PK			1.00 V	103	65.69	43.01
2	*5795.00	96.1 AV			1.00 V	103	53.09	43.01
3	11590.00	57.7 PK	74.0	-16.3	1.03 V	144	8.40	49.30
4	11590.00	44.6 AV	54.0	-9.4	1.03 V	144	-4.70	49.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5133.00	61.4 PK	74.0	-12.6	1.02 H	174	19.47	41.93
2	5133.00	51.0 AV	54.0	-3.0	1.02 H	174	9.07	41.93
3	*5775.00	107.7 PK			1.60 H	93	64.71	42.99
4	*5775.00	95.3 AV			1.60 H	93	52.31	42.99
5	11550.00	58.0 PK	74.0	-16.0	1.00 H	23	8.72	49.28
6	11550.00	44.5 AV	54.0	-9.5	1.00 H	23	-4.78	49.28
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5133.00	58.8 PK	74.0	-15.2	1.00 V	314	16.87	41.93
2	5133.00	47.8 AV	54.0	-6.2	1.00 V	314	5.87	41.93
3	*5775.00	104.8 PK			1.00 V	105	61.81	42.99
4	*5775.00	92.5 AV			1.00 V	105	49.51	42.99
5	11550.00	58.1 PK	74.0	-15.9	1.00 V	145	8.82	49.28
6	11550.00	44.9 AV	54.0	-9.1	1.00 V	145	-4.38	49.28

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 04, 2012


5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

5.3.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.54	16.56	0.5	PASS
157	5785	16.55	16.57	0.5	PASS
165	5825	16.54	16.59	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.80	17.75	0.5	PASS
157	5785	17.84	17.81	0.5	PASS
165	5825	17.82	17.76	0.5	PASS

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.58	36.60	0.5	PASS
159	5795	36.72	36.77	0.5	PASS

802.11ac (VHT80)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
155	5775	76.36	75.90	0.5	PASS

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 04, 2012

5.4.3 TEST PROCEDURES

Follow FCC KDB 558074 DTS test procedure:

Measurement Procedure PK2

1. Set RBW =1MHz.
2. Set VBW =3MHz.
3. Set the analyzer span to 5-30% greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Compute power by integrating the spectrum across the EBW of the signal.


5.4.4 DEVIATION FROM TEST STANDARD

No deviation.



A D T

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

5.4.7 TEST RESULTS

802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.13	23.39	423.862	26.27	29.66	PASS
157	5785	23.45	23.53	446.733	26.50	29.66	PASS
165	5825	23.49	23.69	457.241	26.60	29.66	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain}0)/20} + 10^{G2(\text{Chain}1)/20})^2 / 2]$

Effective Legacy Gain (dBi) = 6.34

The effective legacy gain is 6.34dBi, therefore the limit needs to reduce.

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.17	23.36	424.261	26.28	30	PASS
157	5785	23.48	23.39	441.117	26.45	30	PASS
165	5825	23.38	23.35	434.043	26.38	30	PASS

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	23.36	23.20	425.700	26.29	30	PASS
159	5795	24.51	24.50	564.326	27.52	30	PASS

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
155	5775	25.05	25.17	648.742	28.12	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 04, 2012


5.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple.
3. Trace mode = max hold.
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP





A D T

5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

5.5.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	4.13	-11.10	3.01	-8.09	7.66	PASS
	157	5785	4.25	-10.98	3.01	-7.97	7.66	PASS
	165	5825	4.37	-10.86	3.01	-7.85	7.66	PASS
1	149	5745	3.48	-11.75	3.01	-8.74	7.66	PASS
	157	5785	3.68	-11.55	3.01	-8.54	7.66	PASS
	165	5825	3.69	-11.54	3.01	-8.53	7.66	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain}0)/20} + 10^{G2(\text{Chain}1)/20})^2 / 2]$

Effective Legacy Gain (dBi) = 6.34

The effective legacy gain is 6.34dBi, therefore the limit needs to reduce.

802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	4.21	-11.02	3.01	-8.01	8	PASS
	157	5785	4.33	-10.90	3.01	-7.89	8	PASS
	165	5825	4.06	-11.17	3.01	-8.16	8	PASS
1	149	5745	3.57	-11.66	3.01	-8.65	8	PASS
	157	5785	3.63	-11.60	3.01	-8.59	8	PASS
	165	5825	3.53	-11.70	3.01	-8.69	8	PASS

802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	0.87	-14.36	3.01	-11.35	8	PASS
	159	5795	2.37	-12.86	3.01	-9.85	8	PASS
1	151	5755	0.86	-14.37	3.01	-11.36	8	PASS
	159	5795	2.19	-13.04	3.01	-10.03	8	PASS

802.11ac (VHT80)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	155	5775	-0.03	-15.26	3.01	-12.25	8	PASS
1	155	5775	-0.33	-15.56	3.01	-12.55	8	PASS

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 04, 2012

5.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 TEST SETUP



5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

802.11a



CH 149

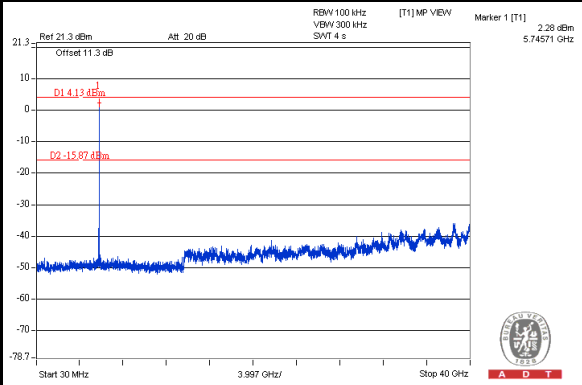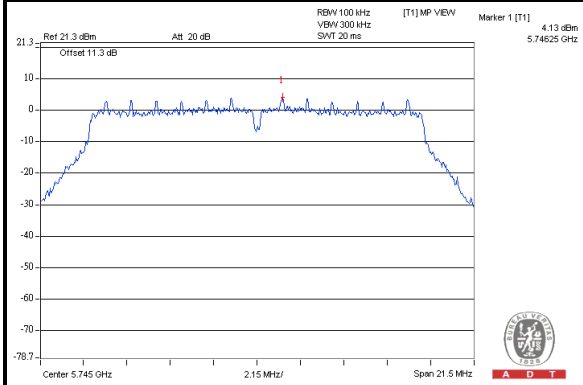

CH 157

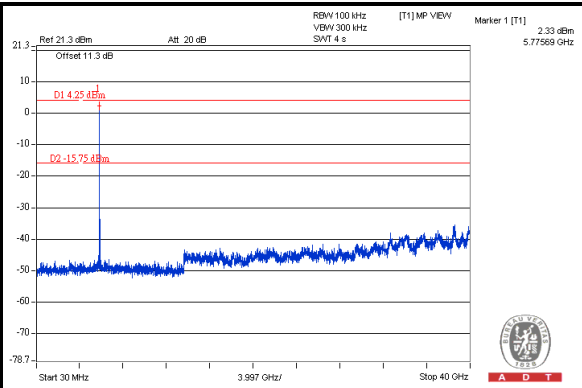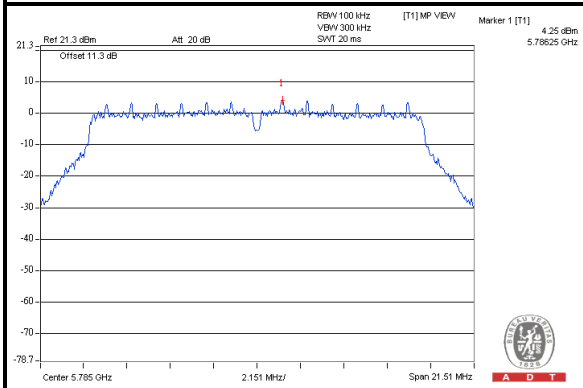

CH 165

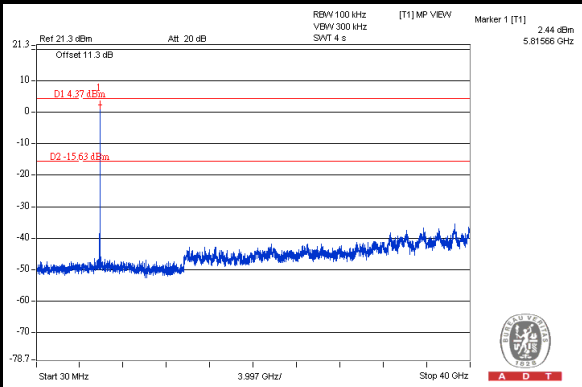
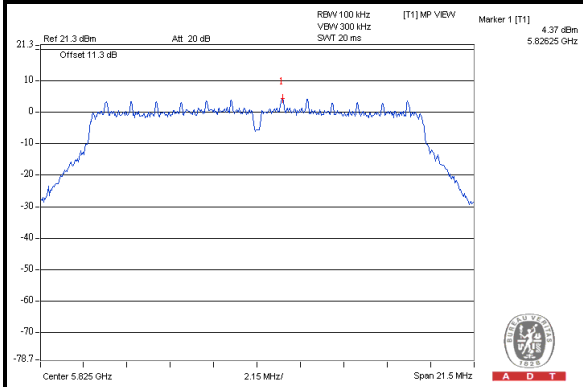






A D T

802.11n (HT20)



CH 149

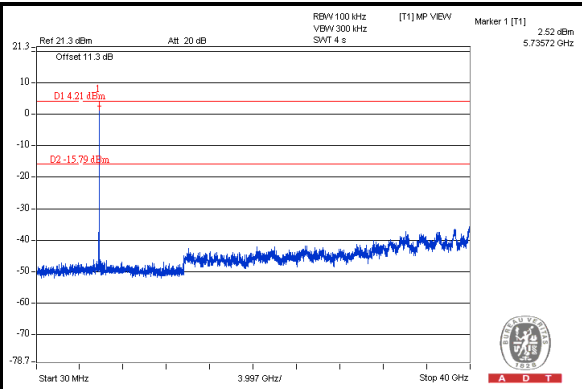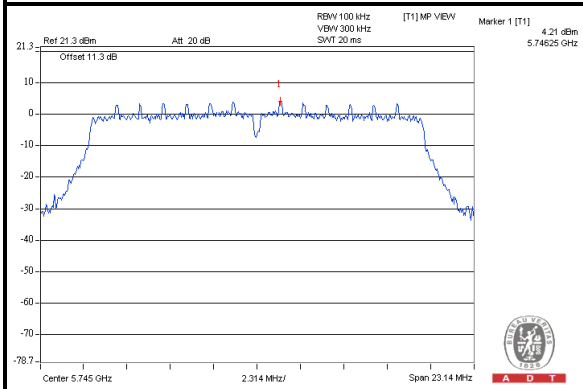

CH 157

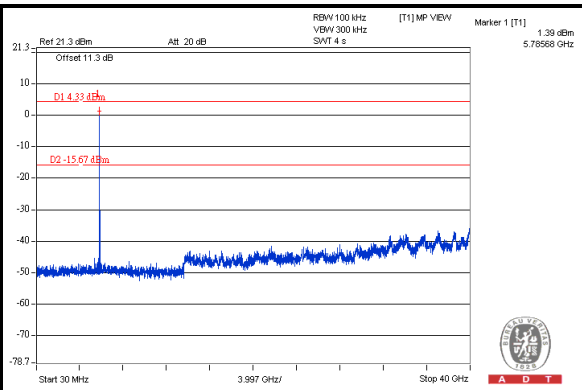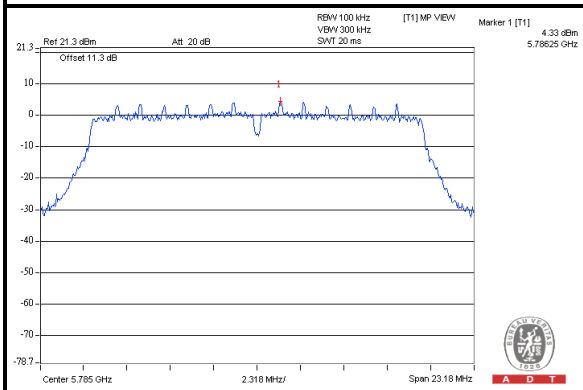

CH 165

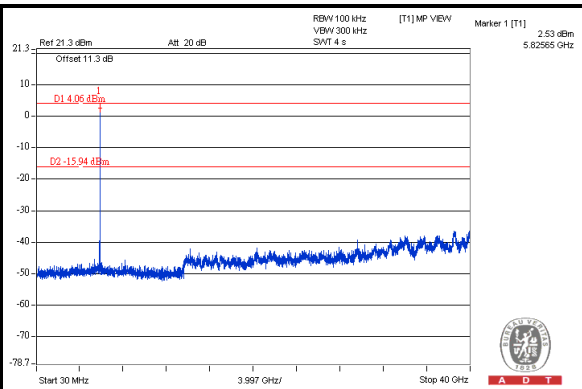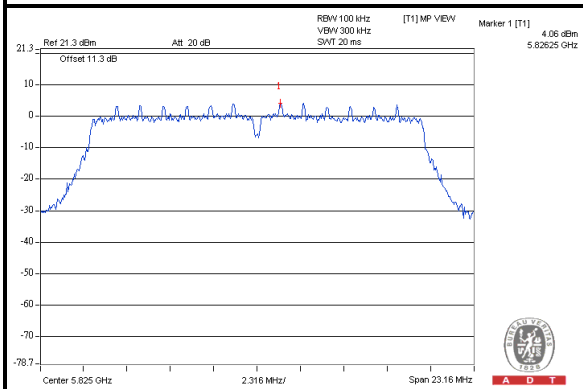





A D T

802.11n (HT40)

CH 151

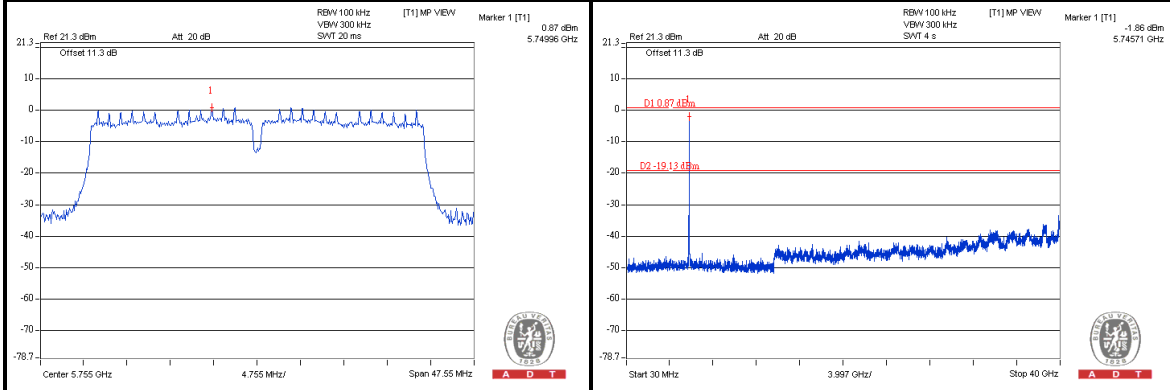


CH 159

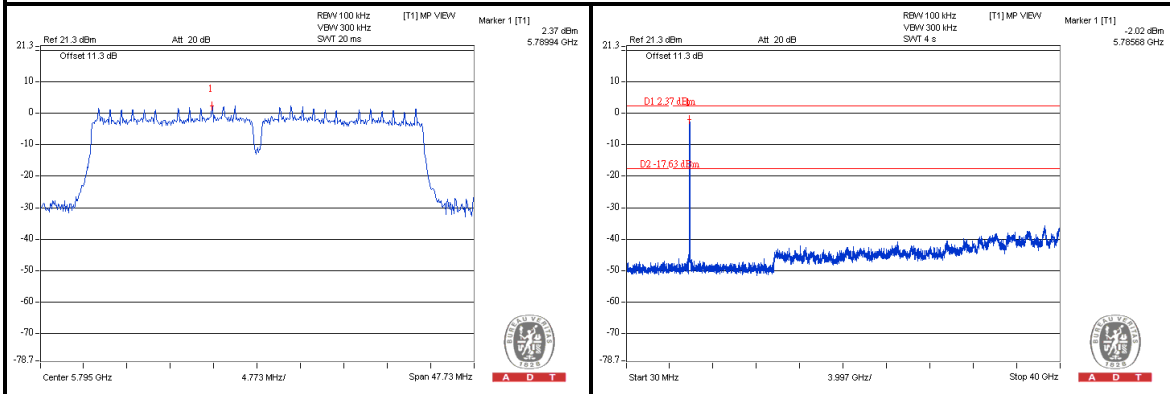

802.11ac (VHT80)

CH 155

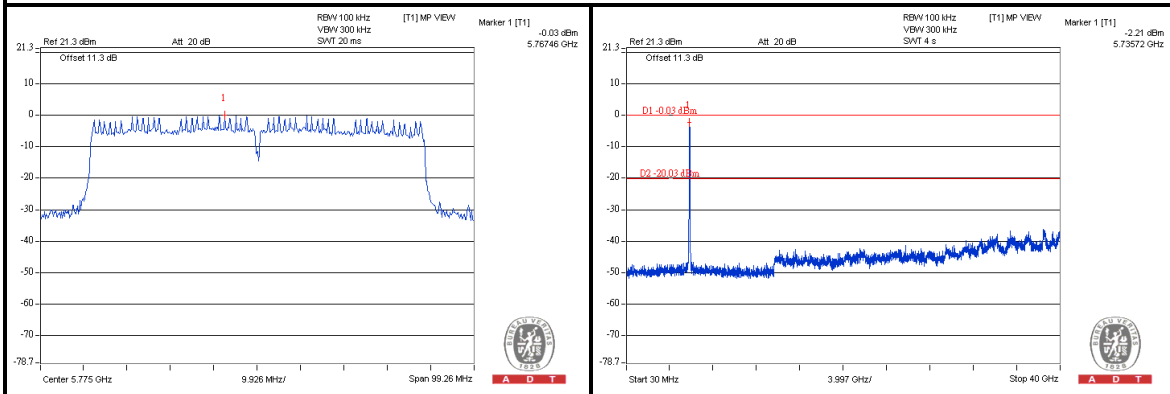



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---