



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF140612E02

MODEL NO.: DWA-582

FCC ID: KA2WA582A1

RECEIVED: June 12, 2014

TESTED: June 17 to 19, 2014

ISSUED: July 17, 2014

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL.....	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2 TEST INSTRUMENTS.....	17
4.1.3 TEST PROCEDURES	18
4.1.4 DEVIATION FROM TEST STANDARD.....	18
4.1.5 TEST SETUP.....	18
4.1.6 EUT OPERATING CONDITIONS	19
4.1.7 TEST RESULTS	20
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	22
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
4.2.2 TEST INSTRUMENTS.....	23
4.2.3 TEST PROCEDURES	24
4.2.4 DEVIATION FROM TEST STANDARD.....	24
4.2.5 TEST SETUP.....	25
4.2.6 EUT OPERATING CONDITIONS	25
4.2.7 TEST RESULTS	26
4.3 6dB BANDWIDTH MEASUREMENT.....	39
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2 TEST INSTRUMENTS.....	39
4.3.3 TEST PROCEDURE.....	39
4.3.4 DEVIATION FROM TEST STANDARD.....	39
4.3.5 TEST SETUP.....	39
4.3.6 EUT OPERATING CONDITIONS	39
4.3.7 TEST RESULTS	40
4.4 CONDUCTED OUTPUT POWER MEASUREMENT.....	42
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	42
4.4.2 TEST INSTRUMENTS.....	42
4.4.3 TEST PROCEDURES	42
4.4.4 DEVIATION FROM TEST STANDARD.....	43
4.4.5 TEST SETUP.....	43
4.4.6 EUT OPERATING CONDITIONS	43
4.4.7 TEST RESULTS	44
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2 TEST INSTRUMENTS.....	46
4.5.3 TEST PROCEDURE.....	46
4.5.4 DEVIATION FROM TEST STANDARD.....	46
4.5.5 TEST SETUP.....	46



A D T

4.5.6	EUT OPERATING CONDITION.....	46
4.5.7	TEST RESULTS	47
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	49
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	49
4.6.2	TEST INSTRUMENTS.....	49
4.6.3	TEST PROCEDURE.....	49
4.6.4	DEVIATION FROM TEST STANDARD.....	50
4.6.5	TEST SETUP.....	50
4.6.6	EUT OPERATING CONDITION.....	50
4.6.7	TEST RESULTS	50
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	57
6.	INFORMATION ON THE TESTING LABORATORIES	58
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	59



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140612E02	Original release	July 17, 2014




A D T

1. CERTIFICATION

PRODUCT: Wireless AC1200 Dual Band PCI Express Adapter
BRAND NAME: D-Link
MODEL NO.: DWA-582
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: D-Link Corporation
TESTED: June 17 to 19, 2014
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: DWA-582) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** July 17, 2014
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** July 17, 2014
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.39dB at 0.18125MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 4824.00MHz & 2390.00MHz & 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: 1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz. For the 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless AC1200 Dual Band PCI Express Adapter
MODEL NO.	DWA-582
POWER SUPPLY	3.3Vdc (from host equipment)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.58GHz, 5.66GHz ~ 5.70GHz, 5.745 ~ 5.825GHz
	For 15.247 2.412 ~ 2.462GHz
NUMBER OF CHANNEL	For 15.407 21 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 9 for 802.11n (HT40), 802.11ac (VHT40) 4 for 802.11ac (VHT80)
	For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 191.867mW 802.11ac (VHT20): 236.671mW 802.11ac (VHT40): 135.001mW 802.11ac (VHT80): 31.959mW
	For 15.247 802.11b: 126.183mW 802.11g: 430.527mW 802.11n (HT20): 738.584mW 802.11n (HT40): 483.42mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

Note:

- 2.4GHz and 5GHz technology can not transmit at same time.
- The antennas provided to the EUT, please refer to the following table:

Antenna No.	Transmitter Circuit	Antenna Gain(dBi) < including cable loss>	Frequency range (GHz ~ GHz)	Antenna Type	Connector Type
1	Chain (0)	3.5	2.4~2.4835	Dipole	R-SMA
		4.5	5.15~5.850		
2	Chain (1)	3.5	2.4~2.4835	Dipole	R-SMA
		4.5	5.15~5.850		

- The EUT incorporates a MIMO function without beamforming.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	1TX (Diversity)	2RX
802.11b	1 ~ 11Mbps	1TX (Diversity)	2RX
802.11g	6 ~ 54Mbps	1TX (Diversity)	2RX
802.11n (HT20)	MCS 0~7	1TX (Diversity)	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	1TX (Diversity)	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20) (5GHz)	MCS0~8 (256QAM) Nss= 1	1TX (Diversity)	2RX
	MCS0~8 (256QAM) Nss= 2	2TX	2RX
802.11ac (VHT40) (5GHz)	MCS0~9 (256QAM) Nss= 1	1TX (Diversity)	2RX
	MCS0~9 (256QAM) Nss= 2	2TX	2RX
802.11ac (VHT80) (5GHz)	MCS0~9 (256QAM) Nss= 1	1TX (Diversity)	2RX
	MCS0~9 (256QAM) Nss= 2	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

- The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	13

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	13

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	26deg. C, 65%RH	120Vac, 60Hz	Ping Liu
RE<1G	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
RE≥1G	21deg. C, 69%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
OB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.



3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	E6420	H62T3R1	FCC DoC
2	iPod Shuffle	Apple	MC749TA/A	CC4DMFJUDFDM	NA
3	Express Card Adapter	Alpha	NA	NA	NA

No.	Signal cable description
1	NA
2	USB cable (0.1m)
3	NA

Note: The power cords of the above support units were unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

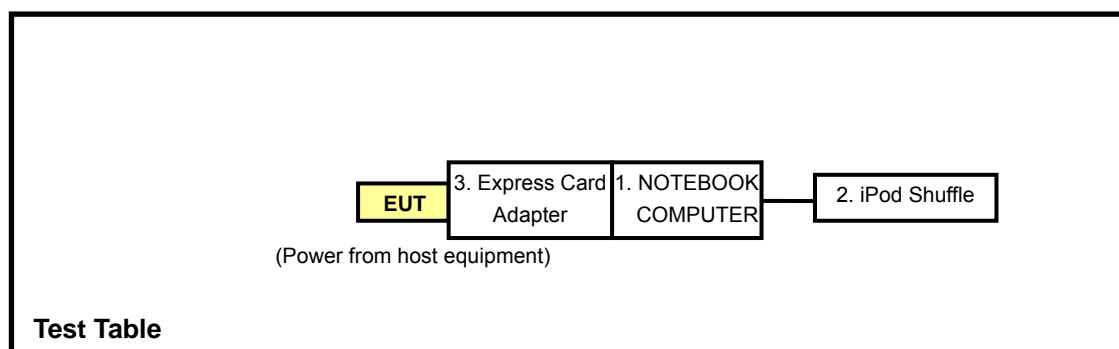



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: June 18, 2014

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

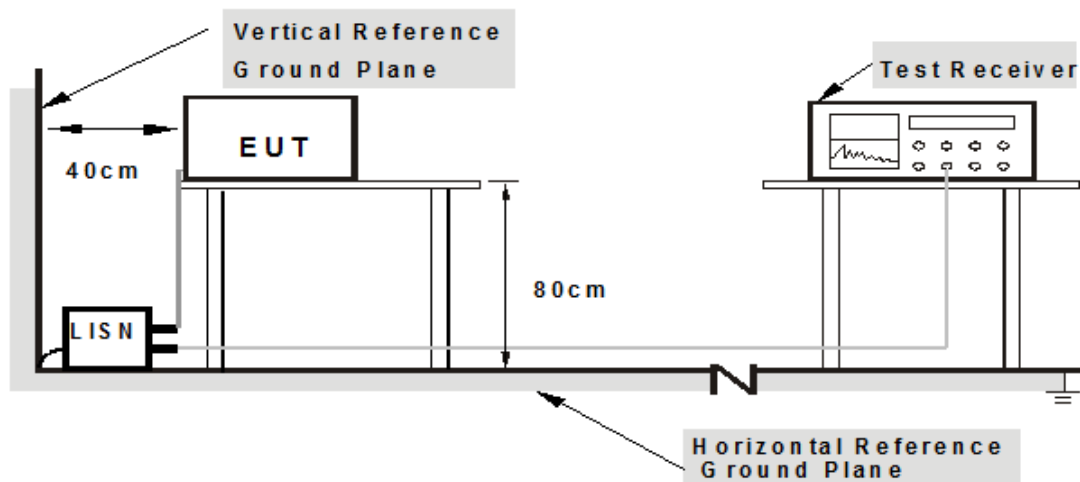

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “MP_Kit_RTL11ac_8812AE_PCIE_[Ver0.0057.07.20140328]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18516	0.07	45.75	26.38	45.82	26.45	64.25
2	0.25156	0.08	29.11	11.84	29.19	11.92	61.71	51.71	-32.52	-39.79
3	0.64609	0.11	30.25	19.81	30.36	19.92	56.00	46.00	-25.64	-26.08
4	0.97031	0.13	22.54	15.42	22.67	15.55	56.00	46.00	-33.33	-30.45
5	2.57031	0.20	24.72	19.56	24.92	19.76	56.00	46.00	-31.08	-26.24
6	7.16016	0.36	24.03	17.73	24.39	18.09	60.00	50.00	-35.61	-31.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

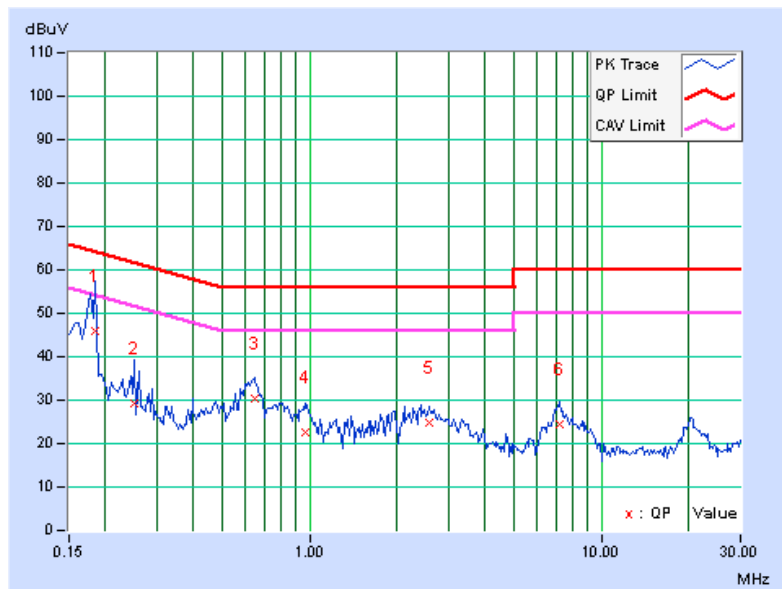


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.07	44.52	32.75	44.59	32.82	65.38	55.38	-20.78	-22.55
2	0.18125	0.07	46.97	28.31	47.04	28.38	64.43	54.43	-17.39	-26.05
3	0.25547	0.08	29.46	13.64	29.54	13.72	61.58	51.58	-32.04	-37.86
4	0.61875	0.10	31.03	19.40	31.13	19.50	56.00	46.00	-24.87	-26.50
5	2.51953	0.20	25.27	20.32	25.47	20.52	56.00	46.00	-30.53	-25.48
6	7.30469	0.36	23.13	16.99	23.49	17.35	60.00	50.00	-36.51	-32.65

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

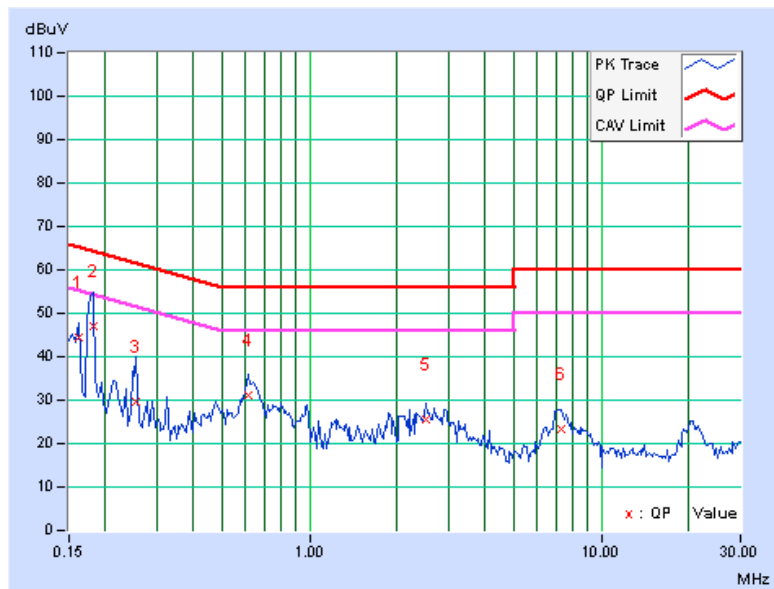



A D T

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21, 2014	Jan. 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: June 18, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

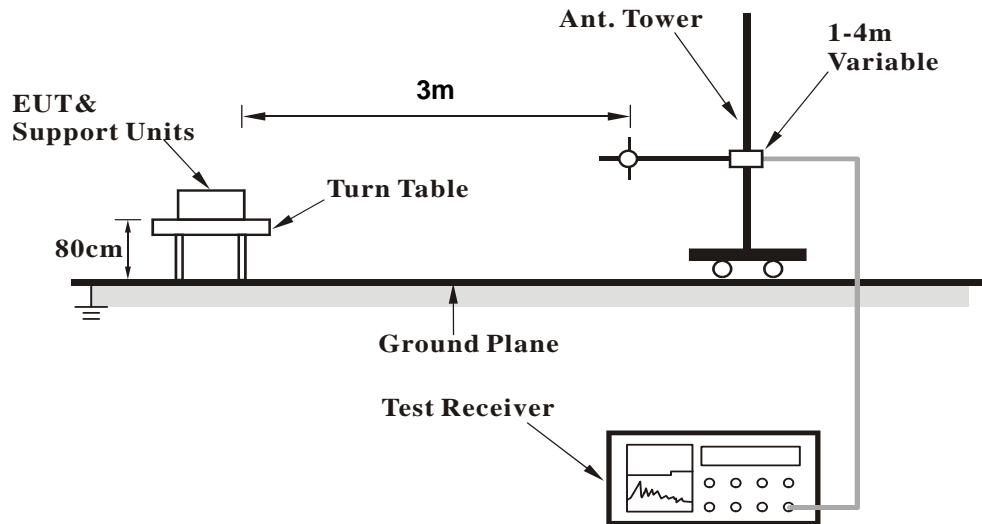

<Frequency Range above 1GHz>

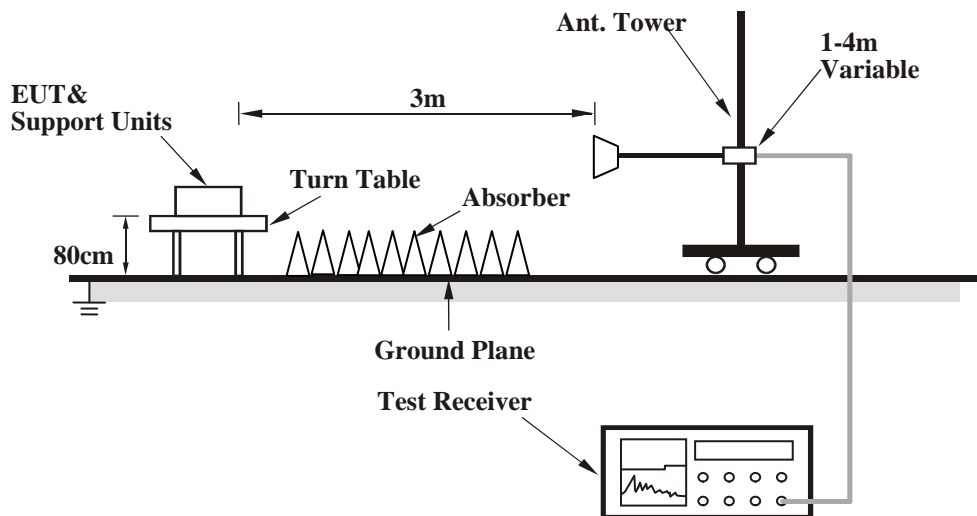

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.94	31.4 QP	43.5	-12.2	2.00 H	282	49.33	-17.98
2	199.27	35.8 QP	43.5	-7.7	1.00 H	120	52.07	-16.30
3	232.39	42.4 QP	46.0	-3.6	1.50 H	148	57.94	-15.57
4	283.36	34.7 QP	46.0	-11.3	1.00 H	156	47.58	-12.87
5	666.56	34.0 QP	46.0	-12.0	1.00 H	111	37.96	-3.99
6	942.19	35.3 QP	46.0	-10.7	1.50 H	299	34.36	0.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.77	32.6 QP	43.5	-10.9	1.00 V	51	46.67	-14.10
2	199.90	34.2 QP	43.5	-9.3	1.50 V	46	50.50	-16.30
3	233.22	40.1 QP	46.0	-5.9	2.00 V	24	55.58	-15.46
4	560.01	31.0 QP	46.0	-15.0	2.00 V	106	37.16	-6.17
5	640.03	34.7 QP	46.0	-11.3	2.00 V	164	38.87	-4.14
6	663.90	32.2 QP	46.0	-13.8	1.50 V	129	36.19	-4.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.00 H	211	57.67	-2.47
2	2390.00	42.1 AV	54.0	-11.9	1.00 H	211	44.57	-2.47
3	*2412.00	100.7 PK			1.00 H	211	103.07	-2.37
4	*2412.00	98.1 AV			1.00 H	211	100.47	-2.37
5	4824.00	50.2 PK	74.0	-23.8	1.06 H	280	44.49	5.71
6	4824.00	45.8 AV	54.0	-8.2	1.06 H	280	40.09	5.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.04 V	79	59.87	-2.47
2	2390.00	47.1 AV	54.0	-6.9	1.04 V	79	49.57	-2.47
3	*2412.00	110.8 PK			1.04 V	79	113.17	-2.37
4	*2412.00	109.2 AV			1.04 V	79	111.57	-2.37
5	4824.00	56.2 PK	74.0	-17.8	1.02 V	222	50.49	5.71
6	4824.00	53.9 AV	54.0	-0.1	1.02 V	222	48.19	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	56.1 PK	74.0	-17.9	1.00 H	200	58.93	-2.83
2	2310.00	43.5 AV	54.0	-10.5	1.00 H	200	46.33	-2.83
3	*2437.00	100.5 PK			1.00 H	200	102.75	-2.25
4	*2437.00	98.0 AV			1.00 H	200	100.25	-2.25
5	4874.00	50.5 PK	74.0	-23.5	1.00 H	286	44.60	5.90
6	4874.00	46.1 AV	54.0	-7.9	1.00 H	286	40.20	5.90
7	7311.00	51.5 PK	74.0	-22.5	1.00 H	169	38.33	13.17
8	7311.00	38.9 AV	54.0	-15.1	1.00 H	169	25.73	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	54.1 PK	74.0	-19.9	1.10 V	90	56.93	-2.83
2	2310.00	45.6 AV	54.0	-8.4	1.10 V	90	48.43	-2.83
3	*2437.00	112.2 PK			1.10 V	90	114.45	-2.25
4	*2437.00	110.0 AV			1.10 V	90	112.25	-2.25
5	4874.00	56.1 PK	74.0	-17.9	1.00 V	222	50.20	5.90
6	4874.00	53.6 AV	54.0	-0.4	1.00 V	222	47.70	5.90
7	7311.00	52.1 PK	74.0	-21.9	1.00 V	206	38.93	13.17
8	7311.00	40.1 AV	54.0	-13.9	1.00 V	206	26.93	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.7 PK			1.00 H	208	102.84	-2.14
2	*2462.00	98.1 AV			1.00 H	208	100.24	-2.14
3	2483.50	55.1 PK	74.0	-18.9	1.00 H	208	57.13	-2.03
4	2483.50	43.1 AV	54.0	-10.9	1.00 H	208	45.13	-2.03
5	4924.00	51.0 PK	74.0	-23.0	1.01 H	279	44.89	6.11
6	4924.00	46.5 AV	54.0	-7.5	1.01 H	279	40.39	6.11
7	7386.00	51.7 PK	74.0	-22.3	1.00 H	173	38.52	13.18
8	7386.00	39.3 AV	54.0	-14.7	1.00 H	173	26.12	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	55.6 PK	74.0	-18.4	1.06 V	94	58.43	-2.83
2	2310.00	46.3 AV	54.0	-7.7	1.06 V	94	49.13	-2.83
3	*2462.00	112.4 PK			1.06 V	94	114.54	-2.14
4	*2462.00	110.0 AV			1.06 V	94	112.14	-2.14
5	2483.50	58.5 PK	74.0	-15.5	1.04 V	94	60.53	-2.03
6	2483.50	47.6 AV	54.0	-6.4	1.04 V	94	49.63	-2.03
7	4924.00	56.4 PK	74.0	-17.6	1.00 V	222	50.29	6.11
8	4924.00	53.7 AV	54.0	-0.3	1.00 V	222	47.59	6.11
9	7386.00	52.4 PK	74.0	-21.6	1.00 V	222	39.22	13.18
10	7386.00	40.6 AV	54.0	-13.4	1.00 V	222	27.42	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.00 H	204	68.87	-2.47
2	2390.00	45.7 AV	54.0	-8.3	1.00 H	204	48.17	-2.47
3	*2412.00	103.1 PK			1.00 H	204	105.47	-2.37
4	*2412.00	95.3 AV			1.00 H	204	97.67	-2.37
5	4824.00	50.7 PK	74.0	-23.3	1.00 H	272	44.99	5.71
6	4824.00	39.4 AV	54.0	-14.6	1.00 H	272	33.69	5.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.6 PK	74.0	-0.4	1.04 V	78	76.07	-2.47
2	2390.00	52.4 AV	54.0	-1.6	1.04 V	78	54.87	-2.47
3	*2412.00	112.8 PK			1.04 V	78	115.17	-2.37
4	*2412.00	105.3 AV			1.04 V	78	107.67	-2.37
5	4824.00	50.9 PK	74.0	-23.1	1.12 V	138	45.19	5.71
6	4824.00	40.9 AV	54.0	-13.1	1.12 V	138	35.19	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.00 H	204	68.57	-2.47
2	2390.00	49.2 AV	54.0	-4.8	1.00 H	204	51.67	-2.47
3	*2437.00	111.6 PK			1.00 H	204	113.85	-2.25
4	*2437.00	99.2 AV			1.00 H	204	101.45	-2.25
5	4874.00	51.3 PK	74.0	-22.7	1.00 H	263	45.40	5.90
6	4874.00	39.9 AV	54.0	-14.1	1.00 H	263	34.00	5.90
7	7311.00	51.3 PK	74.0	-22.7	1.00 H	179	38.13	13.17
8	7311.00	38.9 AV	54.0	-15.1	1.00 H	179	25.73	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.06 V	93	73.07	-2.47
2	2390.00	53.9 AV	54.0	-0.1	1.06 V	93	56.37	-2.47
3	*2437.00	119.5 PK			1.06 V	93	121.75	-2.25
4	*2437.00	109.8 AV			1.06 V	93	112.05	-2.25
5	2483.50	70.9 PK	74.0	-3.1	1.06 V	93	72.93	-2.03
6	2483.50	53.1 AV	54.0	-0.9	1.06 V	93	55.13	-2.03
7	4874.00	58.2 PK	74.0	-15.8	1.06 V	161	52.30	5.90
8	4874.00	46.5 AV	54.0	-7.5	1.06 V	161	40.60	5.90
9	7311.00	60.7 PK	74.0	-13.3	1.44 V	209	47.53	13.17
10	7311.00	49.2 AV	54.0	-4.8	1.44 V	209	36.03	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.8 PK			1.00 H	214	105.94	-2.14
2	*2462.00	94.1 AV			1.00 H	214	96.24	-2.14
3	2483.50	68.9 PK	74.0	-5.1	1.00 H	214	70.93	-2.03
4	2483.50	46.8 AV	54.0	-7.2	1.00 H	214	48.83	-2.03
5	4924.00	50.5 PK	74.0	-23.5	1.00 H	265	44.39	6.11
6	4924.00	39.3 AV	54.0	-14.7	1.00 H	265	33.19	6.11
7	7386.00	49.3 PK	74.0	-24.7	1.00 H	153	36.12	13.18
8	7386.00	36.9 AV	54.0	-17.1	1.00 H	153	23.72	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.6 PK			1.06 V	93	115.74	-2.14
2	*2462.00	104.3 AV			1.06 V	93	106.44	-2.14
3	2483.50	73.5 PK	74.0	-0.5	1.06 V	93	75.53	-2.03
4	2483.50	51.2 AV	54.0	-2.8	1.06 V	93	53.23	-2.03
5	4924.00	49.6 PK	74.0	-24.4	1.14 V	127	43.49	6.11
6	4924.00	43.2 AV	54.0	-10.8	1.14 V	127	37.09	6.11
7	7386.00	48.9 PK	74.0	-25.1	1.09 V	110	35.72	13.18
8	7386.00	39.2 AV	54.0	-14.8	1.09 V	110	26.02	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.01 H	210	71.67	-2.47
2	2390.00	47.4 AV	54.0	-6.6	1.01 H	210	49.87	-2.47
3	*2412.00	103.8 PK			1.01 H	210	106.17	-2.37
4	*2412.00	94.0 AV			1.01 H	210	96.37	-2.37
5	4824.00	49.8 PK	74.0	-24.2	1.00 H	237	44.09	5.71
6	4824.00	37.5 AV	54.0	-16.5	1.00 H	237	31.79	5.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.10 V	95	71.57	-2.47
2	2390.00	53.9 AV	54.0	-0.1	1.10 V	95	56.37	-2.47
3	*2412.00	114.0 PK			1.10 V	95	116.37	-2.37
4	*2412.00	104.1 AV			1.10 V	95	106.47	-2.37
5	4824.00	50.1 PK	74.0	-23.9	1.37 V	180	44.39	5.71
6	4824.00	38.4 AV	54.0	-15.6	1.37 V	180	32.69	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.01 H	210	71.67	-2.47
2	2390.00	47.6 AV	54.0	-6.4	1.01 H	210	50.07	-2.47
3	*2437.00	109.1 PK			1.01 H	210	111.35	-2.25
4	*2437.00	98.1 AV			1.01 H	210	100.35	-2.25
5	2483.50	69.8 PK	74.0	-4.2	1.01 H	210	71.83	-2.03
6	2483.50	48.5 AV	54.0	-5.5	1.01 H	210	50.53	-2.03
7	4874.00	49.9 PK	74.0	-24.1	1.00 H	269	44.00	5.90
8	4874.00	38.8 AV	54.0	-15.2	1.00 H	269	32.90	5.90
9	7311.00	51.3 PK	74.0	-22.7	1.00 H	160	38.13	13.17
10	7311.00	39.1 AV	54.0	-14.9	1.00 H	160	25.93	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.05 V	81	71.57	-2.47
2	2390.00	52.2 AV	54.0	-1.8	1.05 V	81	54.67	-2.47
3	*2437.00	119.2 PK			1.05 V	81	121.45	-2.25
4	*2437.00	108.3 AV			1.05 V	81	110.55	-2.25
5	2483.50	67.6 PK	74.0	-6.4	1.05 V	81	69.63	-2.03
6	2483.50	53.2 AV	54.0	-0.8	1.05 V	81	55.23	-2.03
7	4874.00	58.3 PK	74.0	-15.7	1.09 V	156	52.40	5.90
8	4874.00	46.8 AV	54.0	-7.2	1.09 V	156	40.90	5.90
9	7311.00	60.2 PK	74.0	-13.8	1.50 V	195	47.03	13.17
10	7311.00	48.7 AV	54.0	-5.3	1.50 V	195	35.53	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.8 PK			1.00 H	201	105.94	-2.14
2	*2462.00	94.1 AV			1.00 H	201	96.24	-2.14
3	2483.50	69.0 PK	74.0	-5.0	1.00 H	201	71.03	-2.03
4	2483.50	47.3 AV	54.0	-6.7	1.00 H	201	49.33	-2.03
5	4924.00	51.4 PK	74.0	-22.6	1.00 H	287	45.29	6.11
6	4924.00	39.9 AV	54.0	-14.1	1.00 H	287	33.79	6.11
7	7386.00	49.4 PK	74.0	-24.6	1.00 H	133	36.22	13.18
8	7386.00	36.6 AV	54.0	-17.4	1.00 H	133	23.42	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.8 PK			1.22 V	110	116.94	-2.14
2	*2462.00	104.2 AV			1.22 V	110	106.34	-2.14
3	2483.50	71.9 PK	74.0	-2.1	1.22 V	110	73.93	-2.03
4	2483.50	53.9 AV	54.0	-0.1	1.22 V	110	55.93	-2.03
5	4924.00	49.9 PK	74.0	-24.1	1.11 V	131	43.79	6.11
6	4924.00	43.6 AV	54.0	-10.4	1.11 V	131	37.49	6.11
7	7386.00	49.5 PK	74.0	-24.5	1.11 V	95	36.32	13.18
8	7386.00	39.7 AV	54.0	-14.3	1.11 V	95	26.52	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.00 H	201	71.07	-2.47
2	2390.00	47.0 AV	54.0	-7.0	1.00 H	201	49.47	-2.47
3	*2422.00	98.2 PK			1.00 H	201	100.52	-2.32
4	*2422.00	89.1 AV			1.00 H	201	91.42	-2.32
5	4844.00	50.8 PK	74.0	-23.2	1.00 H	273	45.02	5.78
6	4844.00	39.4 AV	54.0	-14.6	1.00 H	273	33.62	5.78
7	7266.00	49.4 PK	74.0	-24.6	1.00 H	149	36.20	13.20
8	7266.00	37.0 AV	54.0	-17.0	1.00 H	149	23.80	13.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.08 V	99	68.87	-2.47
2	2390.00	53.8 AV	54.0	-0.2	1.08 V	99	56.27	-2.47
3	*2422.00	109.2 PK			1.08 V	99	111.52	-2.32
4	*2422.00	99.4 AV			1.08 V	99	101.72	-2.32
5	4844.00	50.3 PK	74.0	-23.7	1.06 V	131	44.52	5.78
6	4844.00	39.8 AV	54.0	-14.2	1.06 V	131	34.02	5.78
7	7266.00	48.1 PK	74.0	-25.9	1.12 V	86	34.90	13.20
8	7266.00	38.2 AV	54.0	-15.8	1.12 V	86	25.00	13.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	67.9 PK	74.0	-6.1	1.00 H	198	70.73	-2.83
2	2310.00	47.2 AV	54.0	-6.8	1.00 H	198	50.03	-2.83
3	*2437.00	101.2 PK			1.00 H	198	103.45	-2.25
4	*2437.00	91.0 AV			1.00 H	198	93.25	-2.25
5	2483.50	69.5 PK	74.0	-4.5	1.00 H	198	71.53	-2.03
6	2483.50	48.2 AV	54.0	-5.8	1.00 H	198	50.23	-2.03
7	4874.00	50.6 PK	74.0	-23.4	1.00 H	260	44.70	5.90
8	4874.00	39.2 AV	54.0	-14.8	1.00 H	260	33.30	5.90
9	7311.00	49.7 PK	74.0	-24.3	1.00 H	119	36.53	13.17
10	7311.00	37.1 AV	54.0	-16.9	1.00 H	119	23.93	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	66.1 PK	74.0	-7.9	1.20 V	90	68.93	-2.83
2	2310.00	50.1 AV	54.0	-3.9	1.20 V	90	52.93	-2.83
3	*2437.00	111.4 PK			1.20 V	90	113.65	-2.25
4	*2437.00	101.3 AV			1.20 V	90	103.55	-2.25
5	2483.50	67.1 PK	74.0	-6.9	1.20 V	90	69.13	-2.03
6	2483.50	52.9 AV	54.0	-1.1	1.20 V	90	54.93	-2.03
7	4874.00	50.1 PK	74.0	-23.9	1.08 V	102	44.20	5.90
8	4874.00	39.9 AV	54.0	-14.1	1.08 V	102	34.00	5.90
9	7311.00	48.4 PK	74.0	-25.6	1.00 V	95	35.23	13.17
10	7311.00	38.7 AV	54.0	-15.3	1.00 V	95	25.53	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.2 PK			1.00 H	201	102.38	-2.18
2	*2452.00	90.1 AV			1.00 H	201	92.28	-2.18
3	2483.50	69.4 PK	74.0	-4.6	1.00 H	201	71.43	-2.03
4	2483.50	47.7 AV	54.0	-6.3	1.00 H	201	49.73	-2.03
5	4904.00	50.8 PK	74.0	-23.2	1.00 H	266	44.78	6.02
6	4904.00	39.8 AV	54.0	-14.2	1.00 H	266	33.78	6.02
7	7356.00	49.2 PK	74.0	-24.8	1.00 H	159	36.02	13.18
8	7356.00	37.1 AV	54.0	-16.9	1.00 H	159	23.92	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.7 PK			1.04 V	95	112.88	-2.18
2	*2452.00	100.9 AV			1.04 V	95	103.08	-2.18
3	2483.50	66.7 PK	74.0	-7.3	1.04 V	95	68.73	-2.03
4	2483.50	53.5 AV	54.0	-0.5	1.04 V	95	55.53	-2.03
5	4904.00	49.9 PK	74.0	-24.1	1.07 V	134	43.88	6.02
6	4904.00	39.7 AV	54.0	-14.3	1.07 V	134	33.68	6.02
7	7356.00	48.5 PK	74.0	-25.5	1.14 V	83	35.32	13.18
8	7356.00	38.4 AV	54.0	-15.6	1.14 V	83	25.22	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 17, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

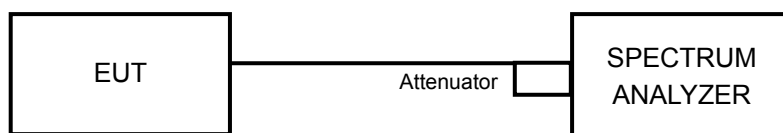

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.15	0.5	PASS
6	2437	10.18	0.5	PASS
11	2462	10.15	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.61	0.5	PASS
6	2437	16.61	0.5	PASS
11	2462	16.60	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.84	17.78	0.5	PASS
6	2437	17.82	17.79	0.5	PASS
11	2462	17.86	17.76	0.5	PASS

802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.60	36.53	0.5	PASS
6	2437	36.68	36.55	0.5	PASS
9	2452	36.65	36.57	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH1

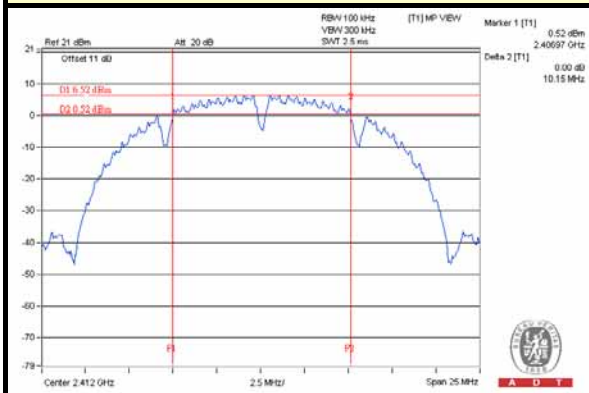


802.11g / CH11

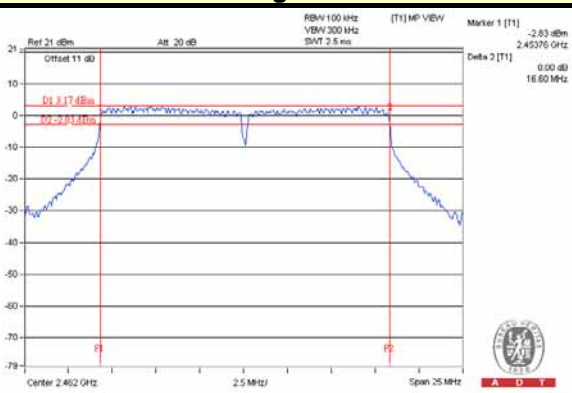

802.11n (HT20) / Chain (1) : CH11

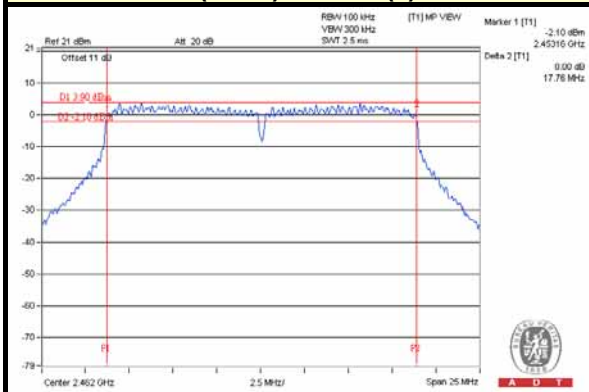

802.11n (HT40) / Chain (1) : CH3

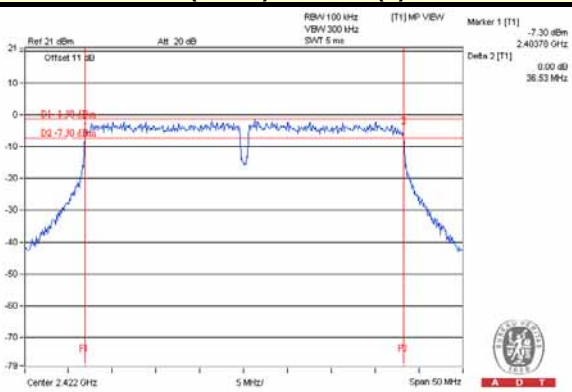



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = $5 \log(\text{NANT}/\text{NSS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 17, 2014


4.4.3 TEST PROCEDURES

The peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

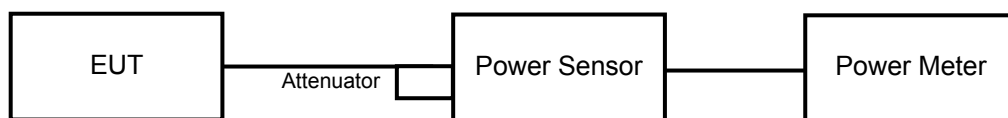

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	88.308	19.46	30	PASS
6	2437	97.949	19.91	30	PASS
11	2462	126.183	21.01	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	372.392	25.71	30	PASS
6	2437	430.527	26.34	30	PASS
11	2462	126.474	21.02	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	24.64	23.96	539.958	27.32	30	PASS
6	2437	25.94	25.39	738.584	28.68	30	PASS
11	2462	24.72	24.21	560.116	27.48	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	22.37	22.92	368.468	25.66	30	PASS
6	2437	23.99	23.67	483.42	26.84	30	PASS
9	2452	23.71	22.36	407.15	26.10	30	PASS



A D T

FOR AVERAGE POWER

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	50.699	17.05
6	2437	56.364	17.51
11	2462	74.302	18.71

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	51.404	17.11
6	2437	138.357	21.41
11	2462	51.761	17.14

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	16.02	16.05	80.266	19.05
6	2437	20.91	20.67	239.991	23.80
11	2462	16.61	16.47	90.175	19.55

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	13.97	15.28	58.675	17.68
6	2437	16.05	16.34	83.325	19.21
9	2452	14.96	15.14	63.992	18.06



A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 17, 2014

4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

**A D T**

4.5.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-13.44	8	PASS
6	2437	-13.13	8	PASS
11	2462	-12.56	8	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-11.08	8	PASS
6	2437	-6.66	8	PASS
11	2462	-11.34	8	PASS

802.11n (HT20)


TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-11.18	3.01	-8.17	8	PASS
	6	2437	-6.14	3.01	-3.13	8	PASS
	11	2462	-10.12	3.01	-7.11	8	PASS
1	1	2412	-10.76	3.01	-7.75	8	PASS
	6	2437	-5.86	3.01	-2.85	8	PASS
	11	2462	-9.84	3.01	-6.83	8	PASS

802.11n (HT40)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	LIMIT (dBm)	PASS /FAIL
0	3	2422	-15.23	3.01	-12.22	8	PASS
	6	2437	-14.37	3.01	-11.36	8	PASS
	9	2452	-15.30	3.01	-12.29	8	PASS
1	3	2422	-16.12	3.01	-13.11	8	PASS
	6	2437	-14.12	3.01	-11.11	8	PASS
	9	2452	-15.88	3.01	-12.87	8	PASS



A D T

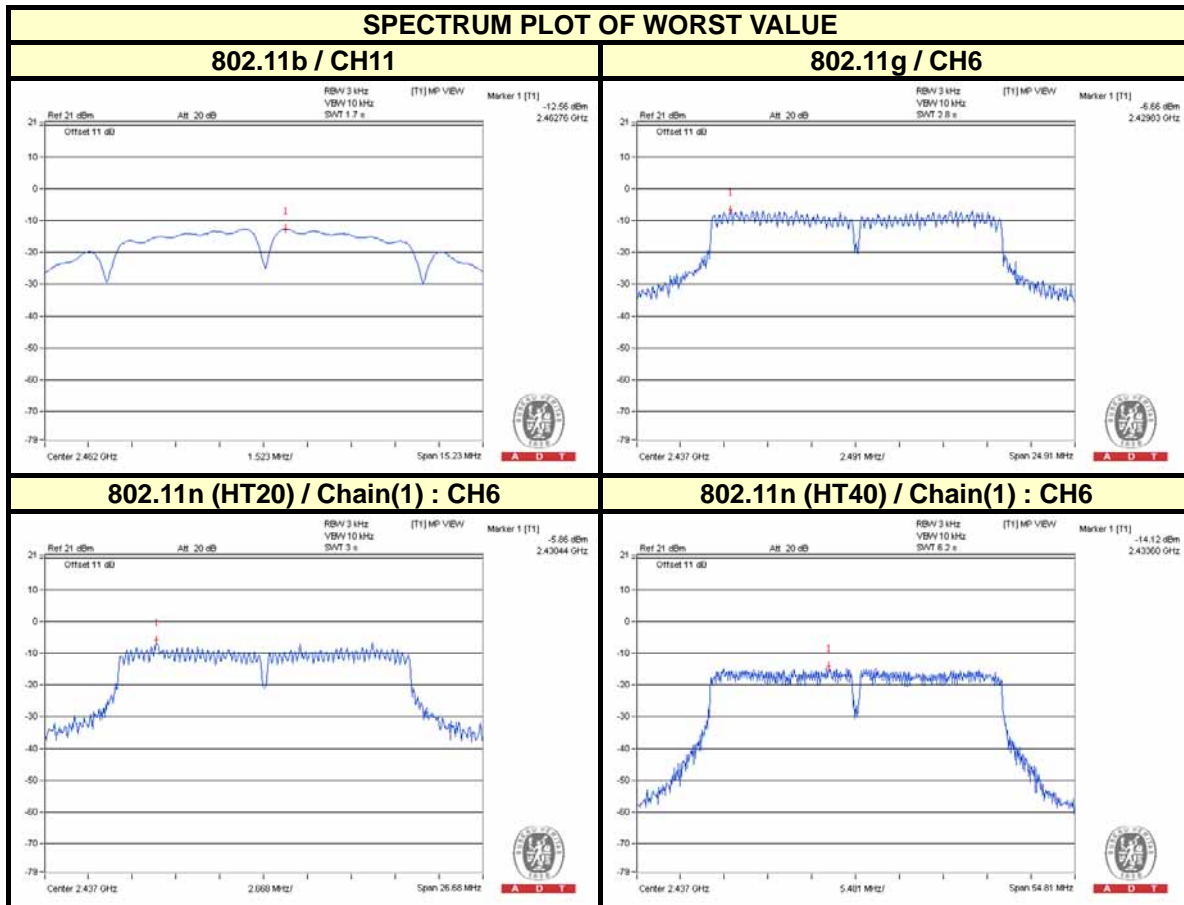



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 17, 2014

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

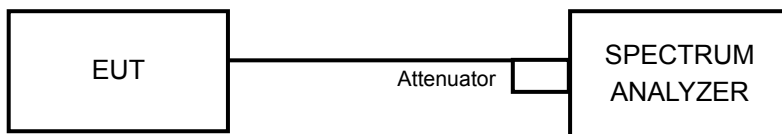

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


Maximum REF

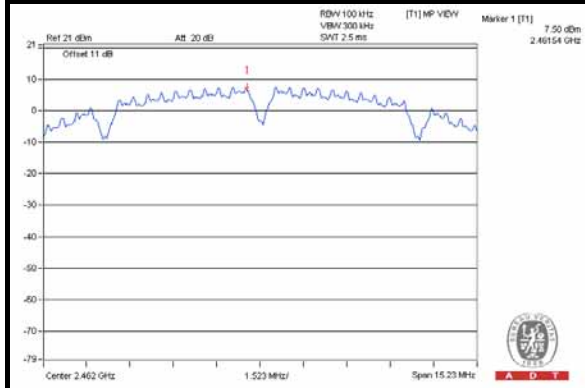



CH 1

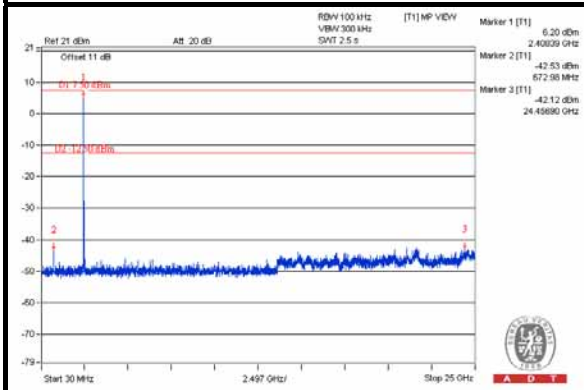


CH 6

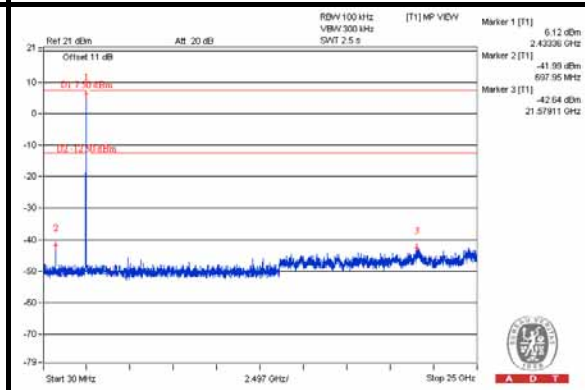


CH 11

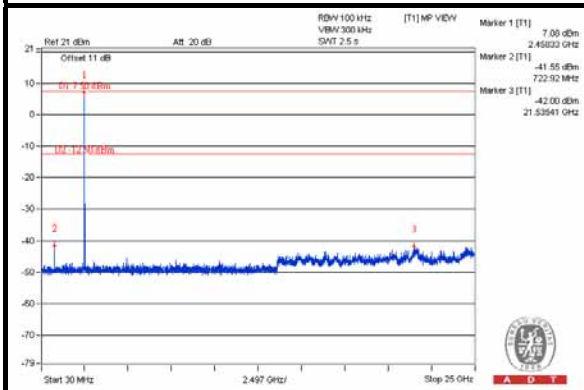

CH 1 Band edge

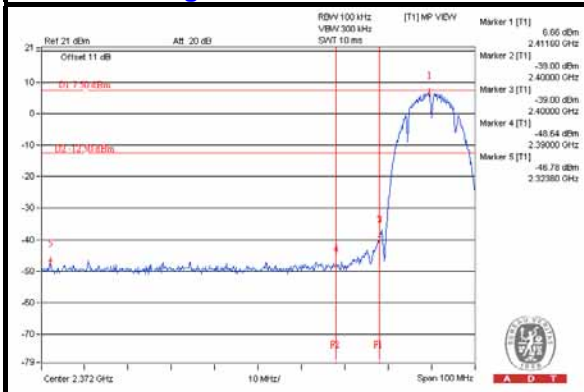

CH 11 Band edge

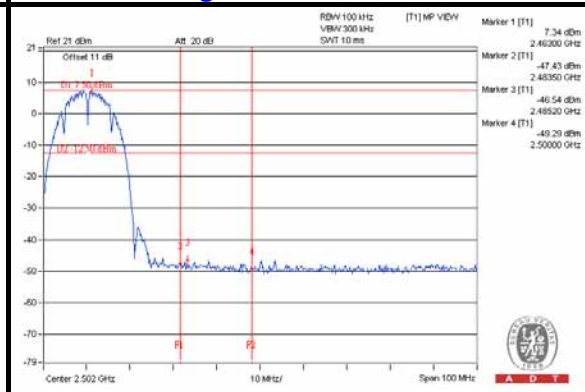





A D T

802.11g


Maximum REF

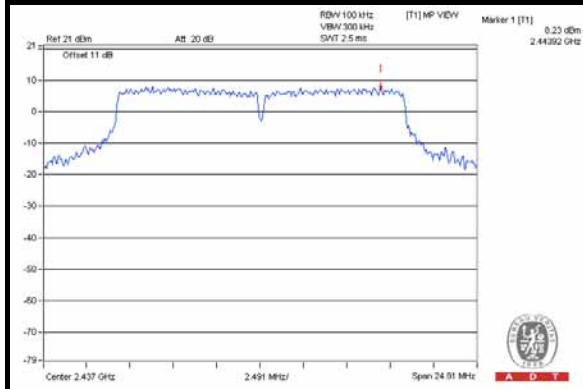


CH 1

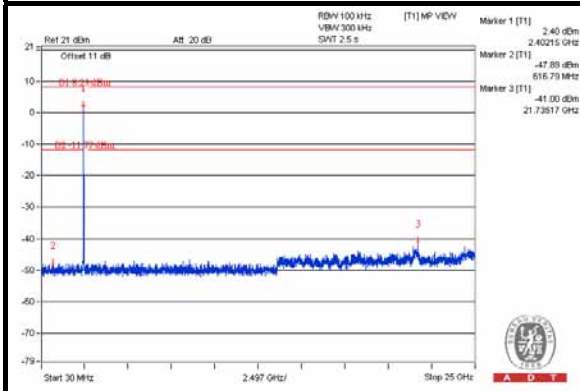


CH 6

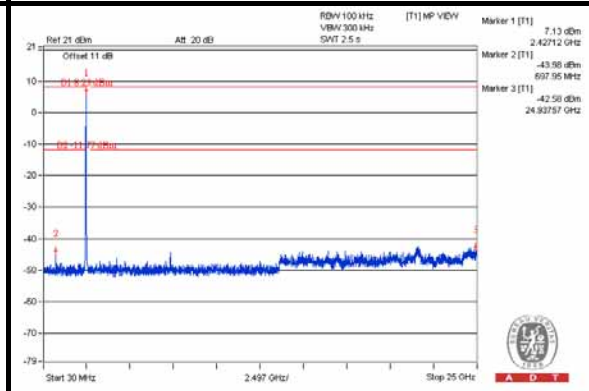


CH 11

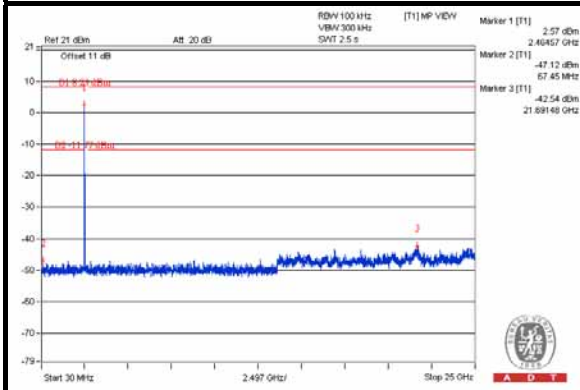


CH 1 Band edge

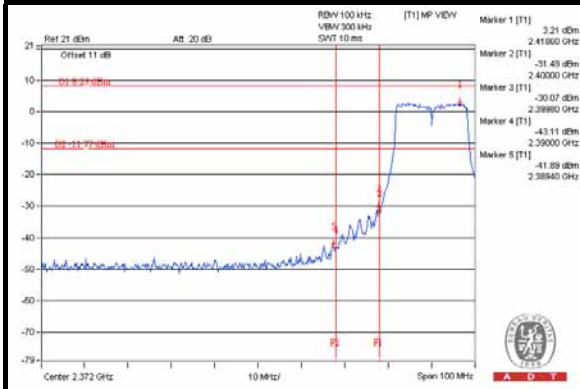

CH 11 Band edge

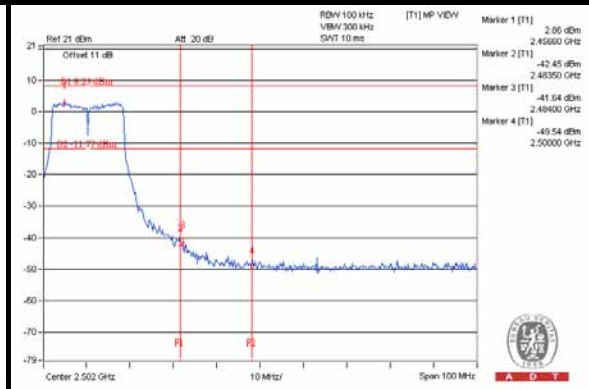


802.11n (HT20)

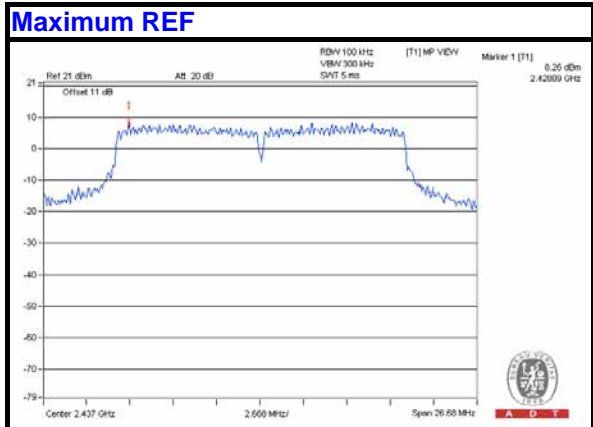


Chain (0)


CH 1

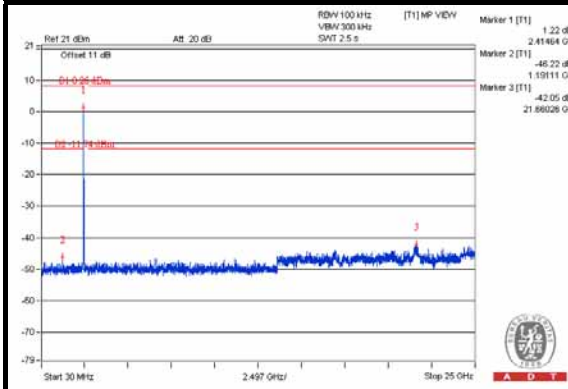


CH 6

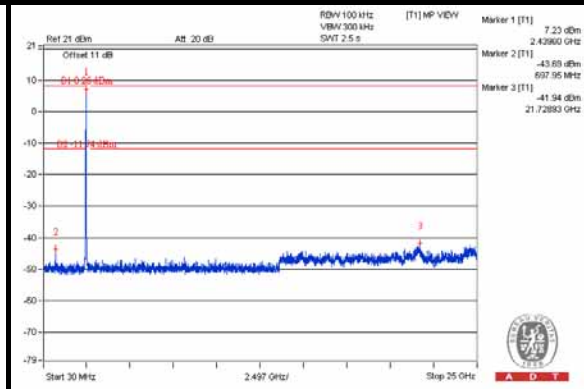


CH 11

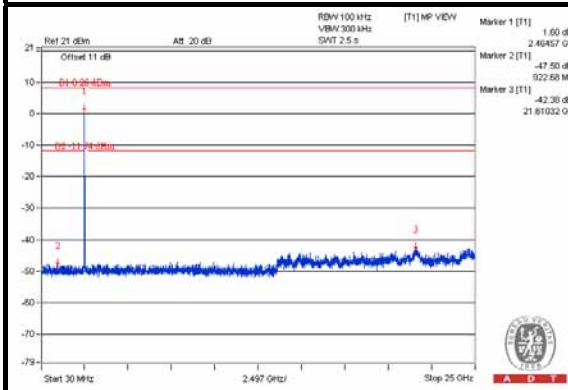

CH 1 Band edge

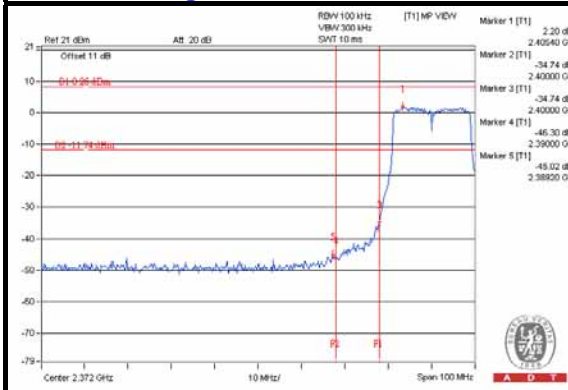


CH 11 Band edge

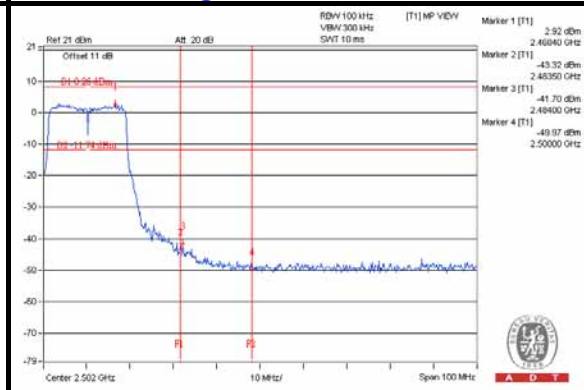




A D T

Maximum REF

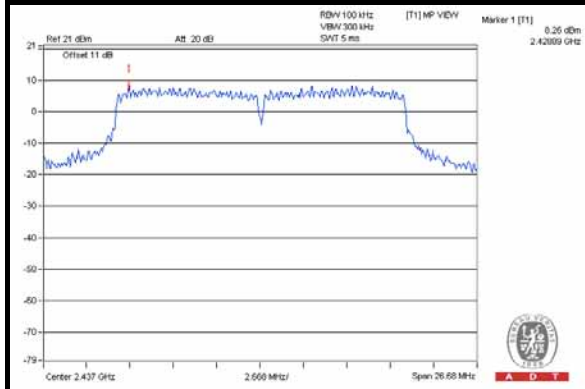


Chain (1)



CH 1

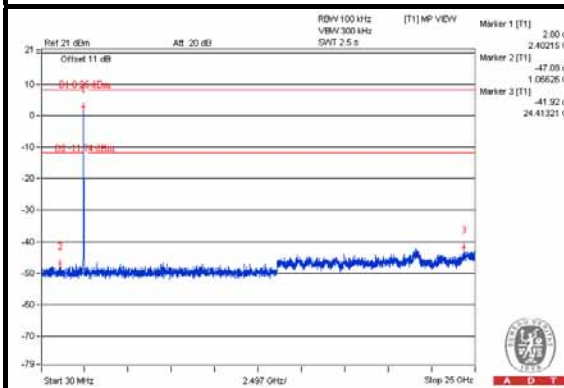


CH 6

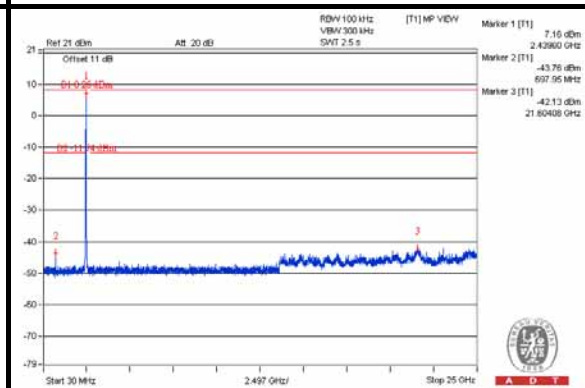


CH 11

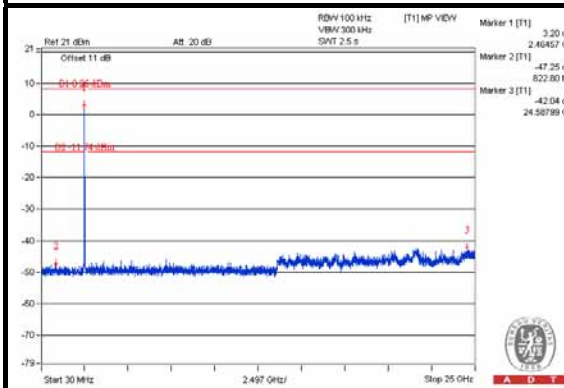

CH 1 Band edge

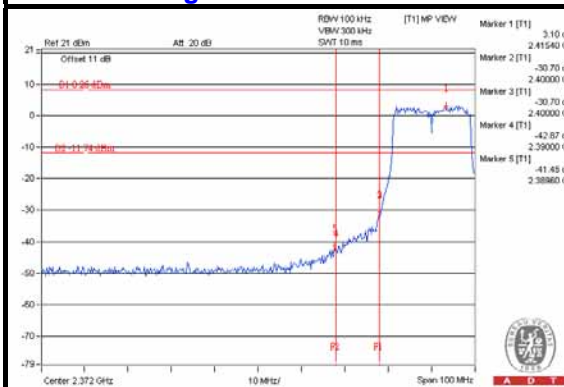

CH 11 Band edge

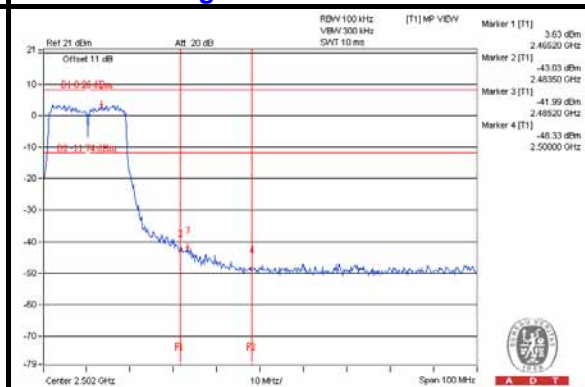




A D T


802.11n (HT40)

Maximum REF

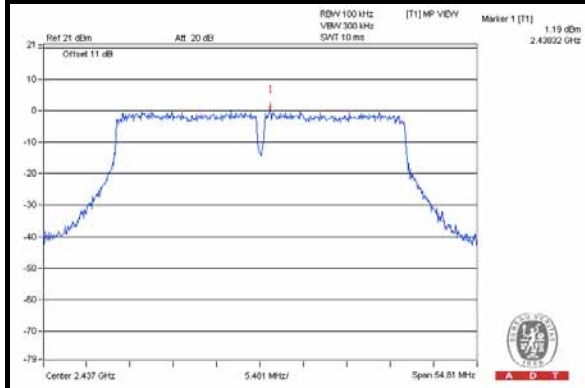


Chain (0)


CH 3

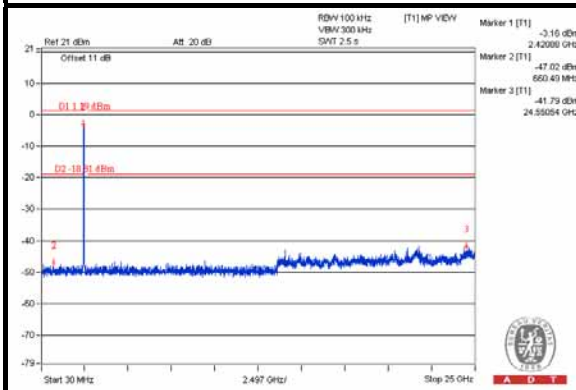


CH 6

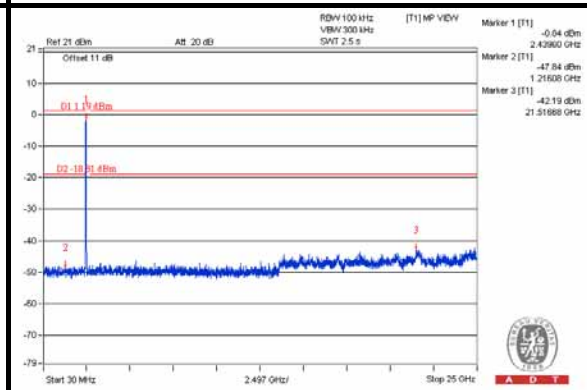


CH 9

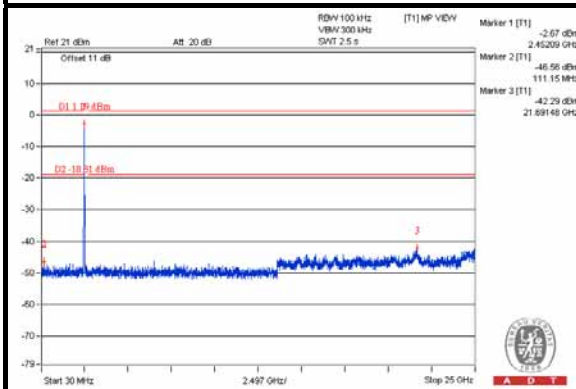

CH 3 Band edge

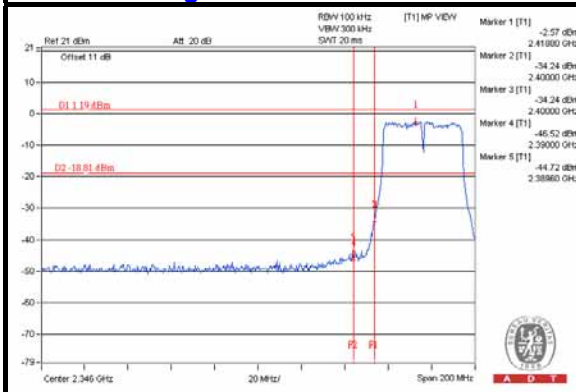


CH 9 Band edge

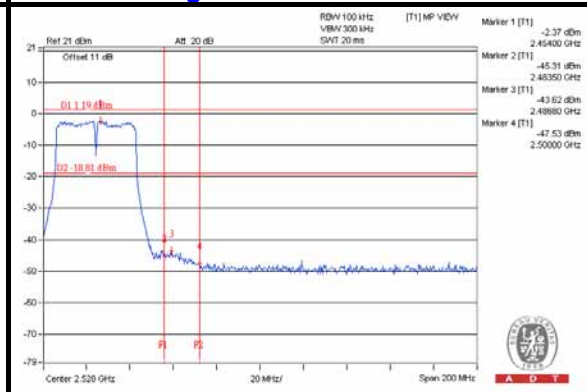




A D T

Maximum REF

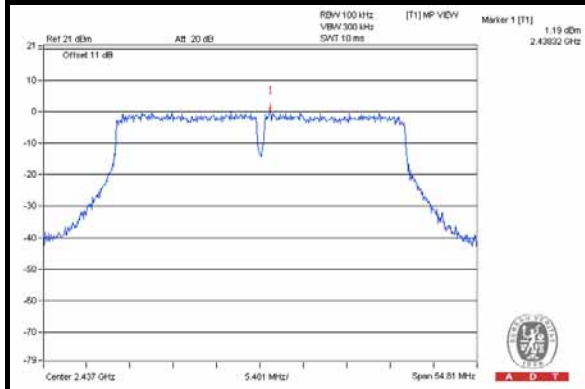


Chain (1)


CH 3

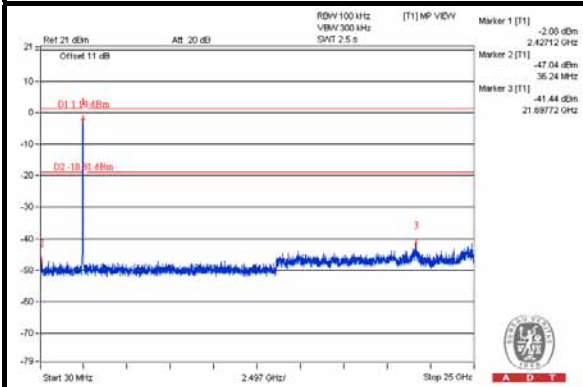


CH 6

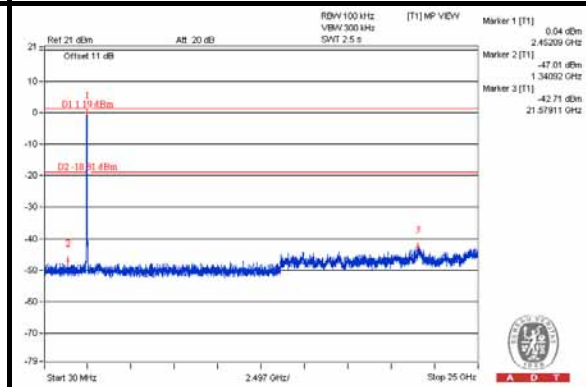


CH 9

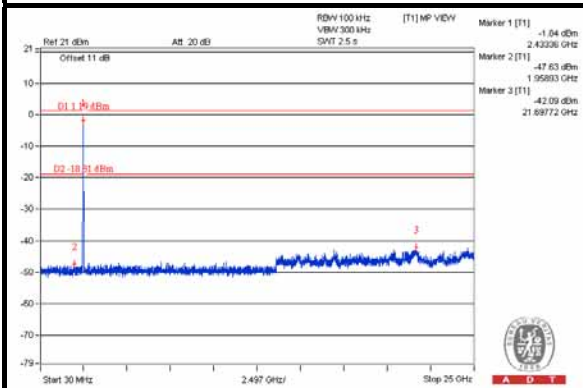

CH 3 Band edge

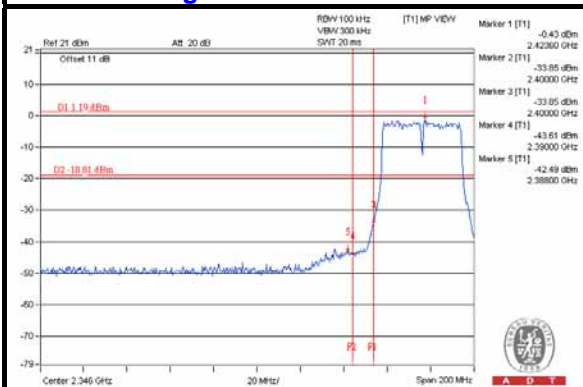

CH 9 Band edge

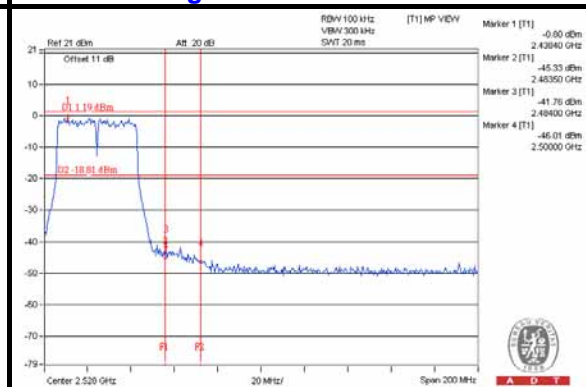



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---