

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Report No.:** RFBEBW-WTW-P21020566B-1

**FCC ID:** KA2WAX1850A1

**Product:** AX1800 Wi-Fi 6 USB Adapter

**Brand:** D-Link

**Model No.:** DWA-X1850

**Series Model:** DWA-F18, DWA-X1850B1

**Received Date:** 2024/8/21

**Test Date:** 2024/9/4 ~ 2024/9/5

**Issued Date:** 2024/10/14

**Applicant:** D-Link Corporation

**Address:** 14420 Myford Road Suite 100 Irvine, California United States 92606

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /** 281270 / TW0032

**Designation Number:**

Approved by: \_\_\_\_\_

*Jeremy Lin*

Jeremy Lin / Project Engineer

, Date: \_\_\_\_\_

2024/10/14

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Gina Liu / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate.....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Supplementary Information .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Antenna Description of EUT .....	7
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Test Program Used and Operation Descriptions .....	9
3.6 Connection Diagram of EUT and Peripheral Devices .....	9
3.7 Configuration of Peripheral Devices and Cable Connections .....	9
<b>4 Test Instruments .....</b>	<b>10</b>
4.1 Unwanted Emissions below 1 GHz .....	10
4.2 Unwanted Emissions above 1 GHz.....	11
<b>5 Limits of Test Items.....</b>	<b>12</b>
5.1 Unwanted Emissions below 1 GHz .....	12
5.2 Unwanted Emissions above 1 GHz.....	12
<b>6 Test Arrangements.....</b>	<b>13</b>
6.1 Unwanted Emissions below 1 GHz .....	13
6.1.1 Test Setup .....	13
6.1.2 Test Procedure.....	14
6.2 Unwanted Emissions above 1 GHz.....	15
6.2.1 Test Setup .....	15
6.2.2 Test Procedure.....	15
<b>7 Test Results of Test Item .....</b>	<b>16</b>
7.1 Unwanted Emissions below 1 GHz .....	16
7.2 Unwanted Emissions above 1 GHz.....	18
<b>8 Pictures of Test Arrangements .....</b>	<b>21</b>
<b>9 Information of the Testing Laboratories .....</b>	<b>22</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBEBW-WTW-P21020566B-1	Original release.	2024/10/14

## 1 Certificate

**Product:** AX1800 Wi-Fi 6 USB Adapter

**Brand:** D-Link

**Test Model:** DWA-X1850

**Series Model:** DWA-F18, DWA-X1850B1

**Sample Status:** Engineering sample

**Applicant:** D-Link Corporation

**Test Date:** 2024/9/4 ~ 2024/9/5

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Measurement** ANSI C63.10-2013

**procedure:** KDB 789033 D02 General UNII Test Procedure New Rules v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	N/A	Refer to Note
15.407(a)(1/2/3)	RF Output Power	N/A	Refer to Note
15.407(a)(1/2/3)	Power Spectral Density	N/A	Refer to Note
15.407(e)	6 dB Bandwidth	N/A	Refer to Note
---	Occupied Bandwidth	N/A	Refer to Note
15.407(b)(9)	AC Power Conducted Emissions	N/A	Refer to Note
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -8.3 dB at 48.43 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -3.1 dB at 10360.00 MHz
15.203	Antenna Requirement	N/A	Refer to Note

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- Only Radiated Spurious Emissions tests was performed for this addendum. Refer to original report for other test data.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AX1800 Wi-Fi 6 USB Adapter
Brand	D-Link
Test Model	DWA-X1850
Series Model	DWA-F18, DWA-X1850B1
Status of EUT	Engineering sample
Power Supply Rating	5.0 Vdc (host equipment)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDMA
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1200 Mbps
Operating Frequency	5180 ~ 5240 MHz, 5745 ~ 5825 MHz
Number of Channel	5180 ~ 5240 MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 2 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 1 for 802.11ac (VHT80), 802.11ax (HE80) 5745 ~ 5825 MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 2 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 1 for 802.11ac (VHT80), 802.11ax (HE80)

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RFBEBW-WTW-P21020566-1. The differences compared with original report is listed as below, therefore only Radiated Spurious Emissions tests was performed for this addendum. Refer to original report for other test data.

- Add new model (DWA-X1850B1)
- Software change: disable DFS band
- Hardware change: remove Flash component
- Revise FW version

2. All models are listed as below. The model DWA-X1850B1 was chosen for final test.

Brand	Model	FVIN	Difference
D-Link	DWA-X1850	v1.00	-
	DWA-F18	v1.01	1. Software change: disable DFS band 2. Hardware change: remove Flash component
	DWA-X1850B1	v1.07	1. Software change: Disable DFS band 2. Hardware change: Remove Flash component 3. Different in label and manual.

3. The EUT uses following accessories.

Item	Brand	Model	Description
Cradle	Nienyi	NA	I/P: +5Vdc, 0.9A O/P: 5Vdc, 0.9A Power code: 0.91m, non-shielded cable, w/o ferrite core

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

5. 2.4 and 5GHz WLAN cannot transmit simultaneously

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Gain (dBi)		Antenna Type	Connector Type
		5.15~5.25GHz	5.725~5.85GHz		
5G-1	Chain0	1.2	2.0	PIFA	N/A
5G-2	Chain1	2.1	0.2	PCB	N/A

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

Modulation Mode	CDD	Beamforming	TX Function
802.11a	Support	Not Support	2TX (MIMO)
802.11n (HT20)	Support	Support	2TX (MIMO)
802.11n (HT40)	Support	Support	2TX (MIMO)
802.11ac (VHT20)	Support	Support	2TX (MIMO)
802.11ac (VHT40)	Support	Support	2TX (MIMO)
802.11ac (VHT80)	Support	Support	2TX (MIMO)
802.11ax (HE20)	Support	Support	2TX (MIMO)
802.11ax (HE40)	Support	Support	2TX (MIMO)
802.11ax (HE80)	Support	Support	2TX (MIMO)

Note:

1. The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40 / VHT80 and 802.11ax mode for HE20 / HE40 / HE80, therefore investigated worst case to representative mode in test report.
2. For 802.11n and 802.11ac and 802.11ax, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting

### 3.3 Channel List

#### For 5180 ~ 5240 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)
42	5210

#### For 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)
155	5775



### 3.4 Test Mode Applicability and Tested Channel Detail

Worst Case:	1. Worst Condition: Y-axis
-------------	----------------------------


Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
Unwanted Emissions below 1 GHz	802.11a	CDD	157	BPSK	6Mb/s
Unwanted Emissions above 1 GHz	802.11a	CDD	36, 157	BPSK	6Mb/s

### 3.5 Test Program Used and Operation Descriptions

Controlling software Realtek Version mp\_v1.1.26 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.6 Connection Diagram of EUT and Peripheral Devices

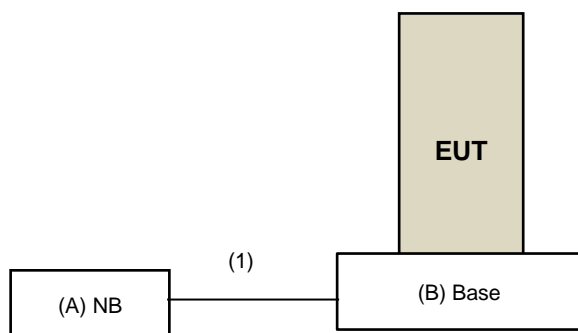

-----  
**Under Table**

-----  
**Remote Site**

### 3.7 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	NB	Dell	INSPIRON 5421	7LRKKW1	N/A	Provided by Lab (for RF Setup)
B	Base(with USB Cable)	N/A	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Base(with USB Cable)	1	1	Y	0	Supplied by applicant

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1213	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC330N	980782	2024/1/15	2025/1/14
	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable EMCI	EMCCFD400-NM-NM- 500	201233	2024/1/15	2025/1/14
	EMCCFD400-NM-NM- 3000	201235	2024/1/15	2025/1/14
	EMCCFD400-NM-NM- 9000	201236(with PAD)	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/9/4

## 4.2 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna RFSPIN	DRH18-E	210103A18E	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC118A45SE	980808	2023/12/28	2024/12/27
	EMC184045SE	980788	2024/1/15	2025/1/14
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2024/1/15	2025/1/14
	EMC101G-KM-KM-3000	201258	2024/1/15	2025/1/14
	EMC101G-KM-KM-5000	201261	2024/1/15	2025/1/14
	EMC104-SM-SM-1000	210102	2024/1/15	2025/1/14
	EMC104-SM-SM-3000	201231	2024/1/15	2025/1/14
	EMC104-SM-SM-9000	201243	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

### Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/9/5

## 5 Limits of Test Items

### 5.1 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

### 5.2 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBµV/m)	AV: 54 (dBµV/m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

## 6 Test Arrangements


### 6.1 Unwanted Emissions below 1 GHz

#### 6.1.1 Test Setup

##### For Radiated emission below 30 MHz

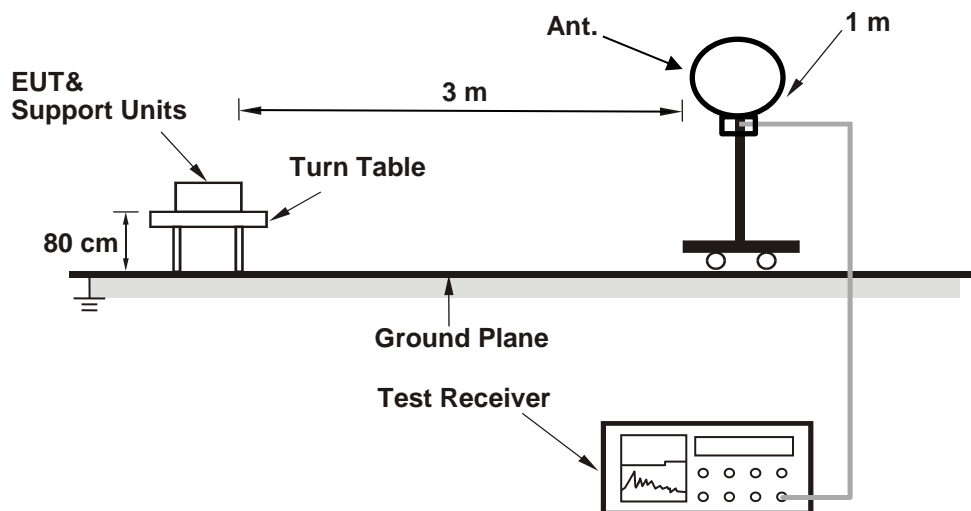

##### For Radiated emission above 30 MHz

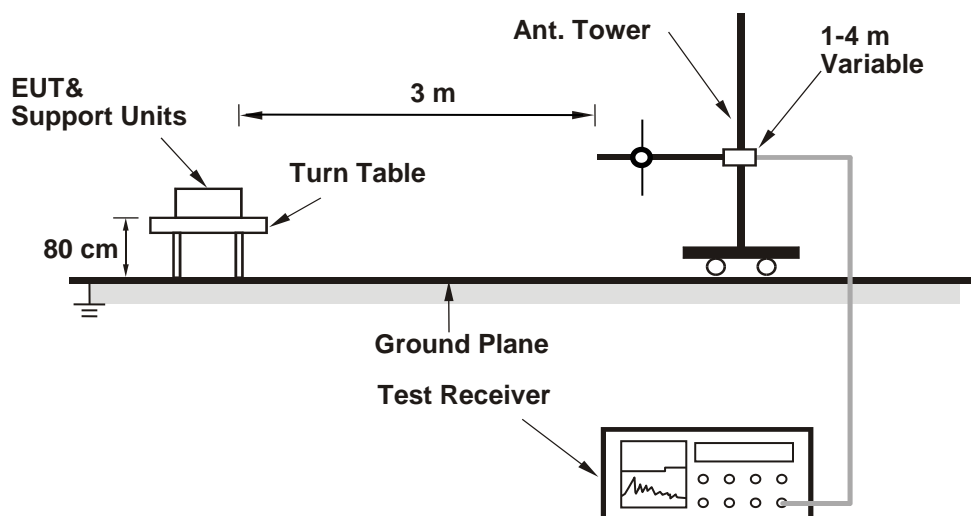

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.1.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.2 Unwanted Emissions above 1 GHz

### 6.2.1 Test Setup

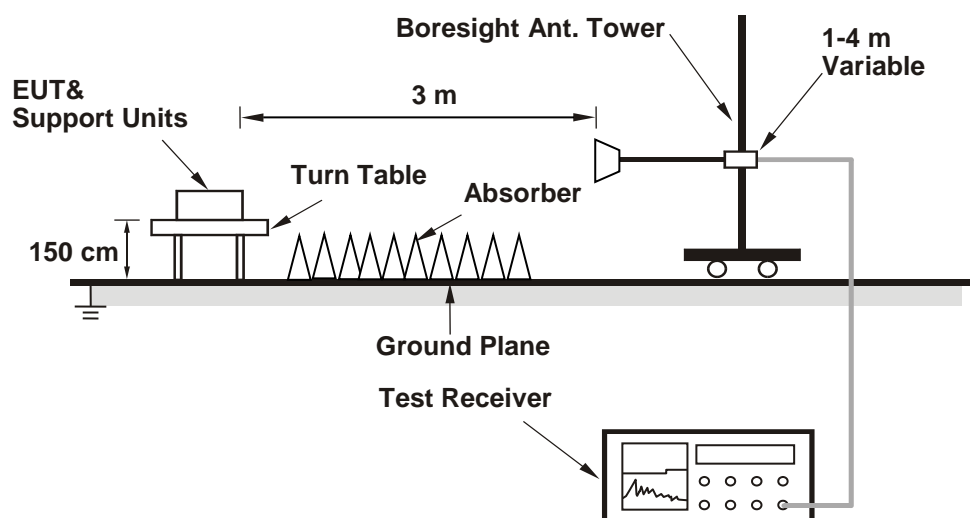

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.2.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 Unwanted Emissions below 1 GHz


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Karl Lee		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	30.9 QP	40.0	-9.1	1.38 H	264	43.9	-13.0
2	151.25	29.1 QP	43.5	-14.4	1.59 H	225	42.0	-12.9
3	210.42	28.5 QP	43.5	-15.0	1.96 H	202	45.1	-16.6
4	315.18	26.2 QP	46.0	-19.8	1.84 H	124	38.2	-12.0
5	435.46	25.8 QP	46.0	-20.2	2.25 H	178	34.7	-8.9
6	494.63	29.0 QP	46.0	-17.0	1.74 H	153	36.7	-7.7

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

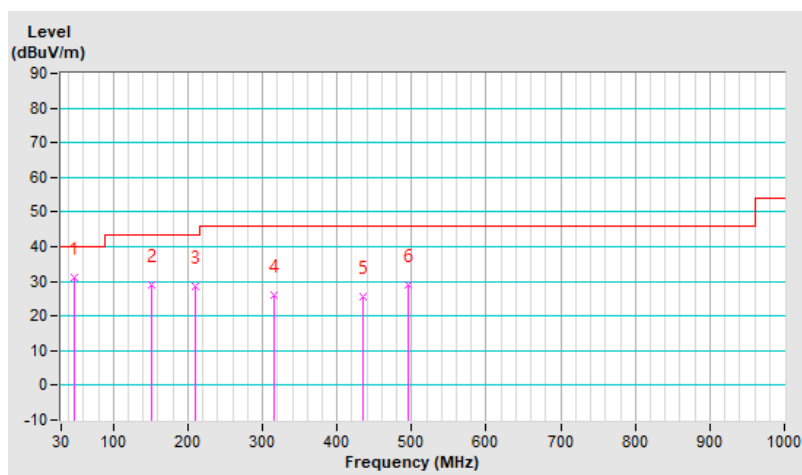




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 67 % RH
<b>Tested By</b>	Karl Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	31.7 QP	40.0	-8.3	1.35 V	54	44.7	-13.0
2	125.06	27.9 QP	43.5	-15.6	1.77 V	125	42.8	-14.9
3	210.42	21.1 QP	43.5	-22.4	1.88 V	263	37.7	-16.6
4	430.61	25.0 QP	46.0	-21.0	1.36 V	82	34.1	-9.1
5	493.66	29.8 QP	46.0	-16.2	1.75 V	114	37.5	-7.7
6	582.90	32.7 QP	46.0	-13.3	2.31 V	181	38.5	-5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

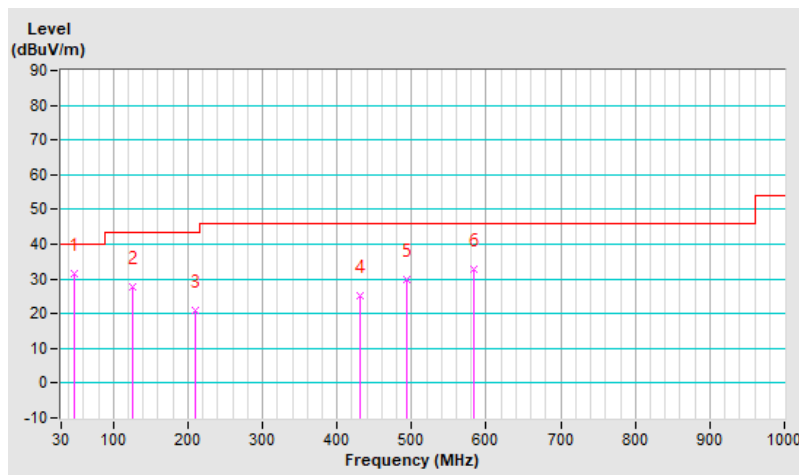

## 7.2 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 67 % RH
<b>Tested By</b>	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.02 H	0	56.7	2.8
2	5150.00	46.0 AV	54.0	-8.0	1.02 H	0	43.2	2.8
3	*5180.00	108.5 PK			1.02 H	0	68.1	40.4
4	*5180.00	98.0 AV			1.02 H	0	57.6	40.4
<b>5</b>	<b>#10360.00</b>	<b>65.1 PK</b>	<b>68.2</b>	<b>-3.1</b>	<b>2.00 H</b>	<b>261</b>	<b>55.8</b>	<b>9.3</b>
6	15540.00	64.2 PK	74.0	-9.8	1.69 H	118	53.3	10.9
7	15540.00	50.8 AV	54.0	-3.2	1.69 H	118	39.9	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	2.56 V	287	56.5	2.8
2	5150.00	47.1 AV	54.0	-6.9	2.56 V	287	44.3	2.8
3	*5180.00	111.6 PK			2.56 V	287	71.2	40.4
4	*5180.00	101.2 AV			2.56 V	287	60.8	40.4
5	#10360.00	63.2 PK	68.2	-5.0	2.53 V	108	53.9	9.3
6	15540.00	62.5 PK	74.0	-11.5	2.31 V	135	51.6	10.9
7	15540.00	50.1 AV	54.0	-3.9	2.31 V	135	39.2	10.9

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23 °C, 67 % RH
<b>Tested By</b>	Karl Lee		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.80	59.9 PK	68.2	-8.3	1.14 H	12	56.1	3.8
2	*5785.00	105.2 PK			1.14 H	12	63.1	42.1
3	*5785.00	95.5 AV			1.14 H	12	53.4	42.1
4	#5990.80	60.6 PK	68.2	-7.6	1.14 H	12	56.0	4.6
5	11570.00	61.9 PK	74.0	-12.1	2.14 H	282	52.1	9.8
6	11570.00	49.1 AV	54.0	-4.9	2.14 H	282	39.3	9.8

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.40	60.2 PK	68.2	-8.0	2.35 V	285	56.4	3.8
2	*5785.00	111.1 PK			2.35 V	285	69.0	42.1
3	*5785.00	101.0 AV			2.35 V	285	58.9	42.1
4	#5992.00	60.0 PK	68.2	-8.2	2.35 V	285	55.3	4.7
5	11570.00	59.5 PK	74.0	-14.5	2.51 V	174	49.7	9.8
6	11570.00	46.4 AV	54.0	-7.6	2.51 V	174	36.6	9.8

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

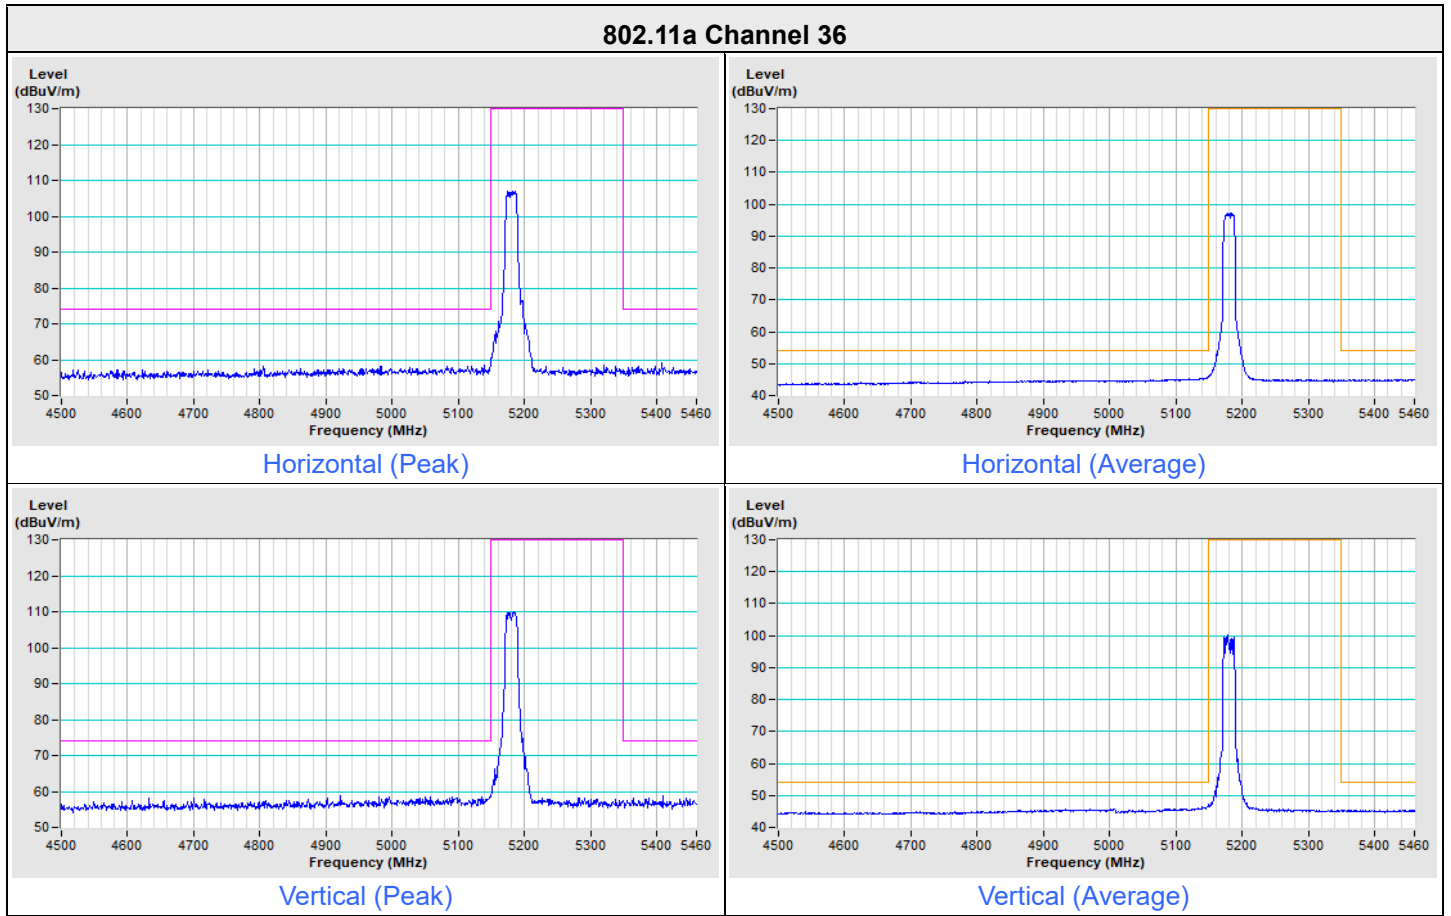

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

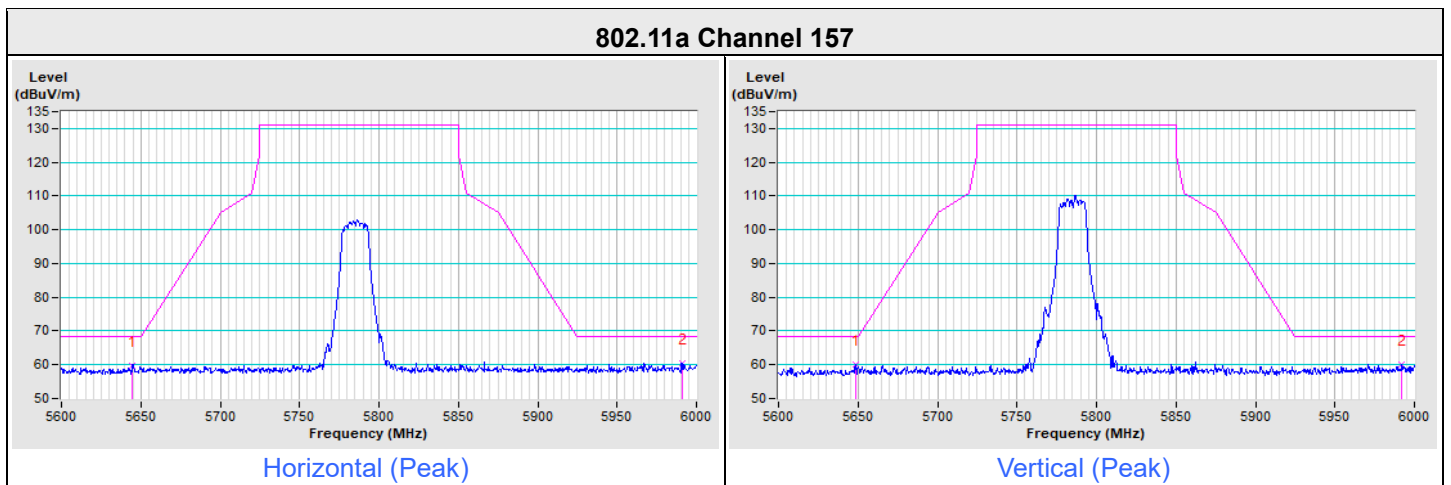

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---