

FCC Test Report

Report No.: RF170801C12C

FCC ID: KA2WL6620APSA1

Test Model: DWL-6620APS

Received Date: Aug. 01, 2017

Test Date: Aug. 25 ~ Sep. 05, 2017 (For all tests except radiated emissions below 1GHz and AC power conducted emissions)

Jun. 21, 2018 (For radiated emissions below 1GHz and AC power conducted emissions)

Issued Date: Jun. 25, 2018

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States, 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

FCC Registration / Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	13
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	14
3.5 General Description of Applied Standards.....	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	16
4.1.2 Test Instruments.....	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard.....	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results.....	21
4.2 Conducted Emission Measurement.....	48
4.2.1 Limits of Conducted Emission Measurement.....	48
4.2.2 Test Instruments.....	48
4.2.3 Test Procedures.....	49
4.2.4 Deviation from Test Standard.....	49
4.2.5 Test Setup.....	49
4.2.6 EUT Operating Conditions.....	49
4.2.7 Test Results.....	50
4.3 Transmit Power Measurement.....	56
4.3.1 Limits of Transmit Power Measurement.....	56
4.3.2 Test Setup.....	56
4.3.3 Test Instruments.....	56
4.3.4 Test Procedure.....	57
4.3.5 Deviation from Test Standard.....	57
4.3.6 EUT Operating Conditions.....	57
4.3.7 Test Result.....	58
4.4 Occupied Bandwidth Measurement.....	70
4.4.1 Test Setup.....	70
4.4.2 Test Instruments.....	70
4.4.3 Test Procedure.....	70
4.4.4 Test Result.....	71
4.5 Peak Power Spectral Density Measurement.....	74
4.5.1 Limits of Peak Power Spectral Density Measurement.....	74
4.5.2 Test Setup.....	74
4.5.3 Test Instruments.....	74
4.5.4 Test Procedures.....	74
4.5.5 Deviation from Test Standard.....	75
4.5.6 EUT Operating Conditions.....	75
4.5.7 Test Results.....	76
4.6 Frequency Stability.....	81
4.6.1 Limits of Frequency Stability Measurement.....	81

4.6.2	Test Setup.....	81
4.6.3	Test Instruments	81
4.6.4	Test Procedure	81
4.6.5	Deviation from Test Standard	81
4.6.6	EUT Operating Condition	81
4.6.7	Test Results	82
4.7	6dB Bandwidth Measurement.....	83
4.7.1	Limits of 6dB Bandwidth Measurement.....	83
4.7.2	Test Setup.....	83
4.7.3	Test Instruments	83
4.7.4	Test Procedure	83
4.7.5	Deviation from Test Standard	83
4.7.6	EUT Operating Condition	83
4.7.7	Test Results	84
5	Pictures of Test Arrangements.....	86
	Appendix – Information on the Testing Laboratories	87

Release Control Record

Issue No.	Description	Date Issued
RF170801C12C	Original release.	Jun. 25, 2018

1 Certificate of Conformity

Product: Unified AC Concurrent Dual-band PoE Access Point

Brand: D-Link Corporation

Test Model: DWL-6620APS

Sample Status: Identical Prototype

Applicant: D-Link Corporation

Test Date: Aug. 25 ~ Sep. 05, 2017 (For all tests except radiated emissions below 1GHz and AC power conducted emissions)

Jun. 21, 2018 (For radiated emissions below 1GHz and AC power conducted emissions)

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jun. 25, 2018
Celine Chou / Specialist

Approved by : Bruce Chen , **Date:** Jun. 25, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -5.96dB at 0.35312MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5470.00MHz and 5725.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-pex not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Unified AC Concurrent Dual-band PoE Access Point
Brand	D-Link Corporation
Test Model	DWL-6620APS
Sample Status	Identical Prototype
Power Supply Rating	12Vdc from adapter 53Vdc from POE
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5260 ~ 5320MHz, 5500 ~ 5720MHz
Number of Channel	5260 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5720MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 12 802.11n (HT40), 802.11ac (VHT40): 6 802.11ac (VHT80): 3
Output Power	CDD Mode: 5260 ~ 5320MHz: 185.899mW 5500 ~ 5720MHz: 196.546mW Beamforming Mode: 5260 ~ 5320MHz: 92.897mW 5500 ~ 5720MHz: 98.175mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RF170801C12-1) is adding 5.26GHz to 5.32GHz and 5.50GHz to 5.70GHz by software.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11a	Not Support	2TX
802.11n (HT20)	Support	2TX
802.11n (HT40)	Support	2TX
802.11ac (VHT20)	Support	2TX
802.11ac (VHT40)	Support	2TX
802.11ac (VHT80)	Support	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

3. The EUT uses following antennas.

Type	Connector	Gain (dBi)	
		2.4GHz	5GHz
Smart Antenna	I-pex	4.90	6.10

4. The EUT consumes power from the following adapters and POE. (POE for support unit only)

Adapter 1	
Brand	D-Link
Model	AMS115-1202000FU
Input Power	100-240Vac, 50-60Hz, 0.8A
Output Power	12Vdc, 2A
Power Line	1.2m power cable without core attached on adapter

Adapter 2	
Brand	D-Link
Model	WA-24Q12R
Input Power	100-240Vac, 50-60Hz, 0.7A
Output Power	12Vdc, 2A
Power Line	1.2m power cable without core attached on adapter

POE	
Brand	D-Link
Model	PGS-1210-10P
Input Power	100-240Vac
Output Power	53Vdc

5. 2.4GHz & 5GHz technology can transmit at same time.

3.2 Description of Test Modes

5260~5320MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
58	5290MHz

5500~5720MHz:

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz
138	5690 MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 2
C	-	√	√	-	Power from POE

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11n (HT20)		52 to 64	52, 60, 64	OFDM	6.5
	802.11n (HT40)		54 to 62	54, 62	OFDM	13.5
	802.11ac (VHT80)		58	58	OFDM	29.3
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11n (HT20)		100 to 144	100, 116, 140, 144	OFDM	6.5
	802.11n (HT40)		102 to 142	102, 110, 134, 142	OFDM	13.5
	802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B, C	802.11a	5260-5320	52 to 64	116	OFDM	6.0
	802.11a	5500-5720	100 to 144		OFDM	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B, C	802.11a	5260-5320	52 to 64	116	OFDM	6.0
	802.11a	5500-5720	100 to 144		OFDM	6.0

Transmit Power Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
CDD Mode						
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11n (HT20)		52 to 64	52, 60, 64	OFDM	6.5
	802.11n (HT40)		54 to 62	54, 62	OFDM	13.5
	802.11ac (VHT80)		58	58	OFDM	29.3
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11n (HT20)		100 to 144	100, 116, 140, 144	OFDM	6.5
	802.11n (HT40)		102 to 142	102, 110, 134, 142	OFDM	13.5
	802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3
Beamforming Mode						
A	802.11n (HT20)	5260-5320	52 to 64	52, 60, 64	OFDM	6.5
	802.11n (HT40)		54 to 62	54, 62	OFDM	13.5
	802.11ac (VHT80)		58	58	OFDM	29.3
A	802.11n (HT20)	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.5
	802.11n (HT40)		102 to 142	102, 110, 134, 142	OFDM	13.5
	802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3

Peak Power Spectral Density, Bandwidth and Frequency Stability Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11n (HT20)		52 to 64	52, 60, 64	OFDM	6.5
	802.11n (HT40)		54 to 62	54, 62	OFDM	13.5
	802.11ac (VHT80)		58	58	OFDM	29.3
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11n (HT20)		100 to 144	100, 116, 140, 144	OFDM	6.5
	802.11n (HT40)		102 to 142	102, 110, 134, 142	OFDM	13.5
	802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE _≥ 1G	25 deg. C, 66% RH	120Vac, 60Hz	James Yang
RE<1G	25 deg. C, 65% RH	120Vac, 60Hz 53Vdc	James Yang
PLC	23 deg. C, 64% RH	120Vac, 60Hz 53Vdc	Willy Cheng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Leo Tsai Frank Liu

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor is required.

802.11a: Duty cycle = $2.000/2.119 = 0.944$, Duty factor = $10 * \log(1/0.944) = 0.25$

802.11n (HT20): Duty cycle = $4.925/5.050 = 0.975$, Duty factor = $10 * \log(1/0.975) = 0.11$

802.11n (HT40): Duty cycle = $2.337/2.487 = 0.940$, Duty factor = $10 * \log(1/0.940) = 0.27$

802.11ac (VHT80): Duty cycle = $1.115/1.220 = 0.914$, Duty factor = $10 * \log(1/0.914) = 0.39$

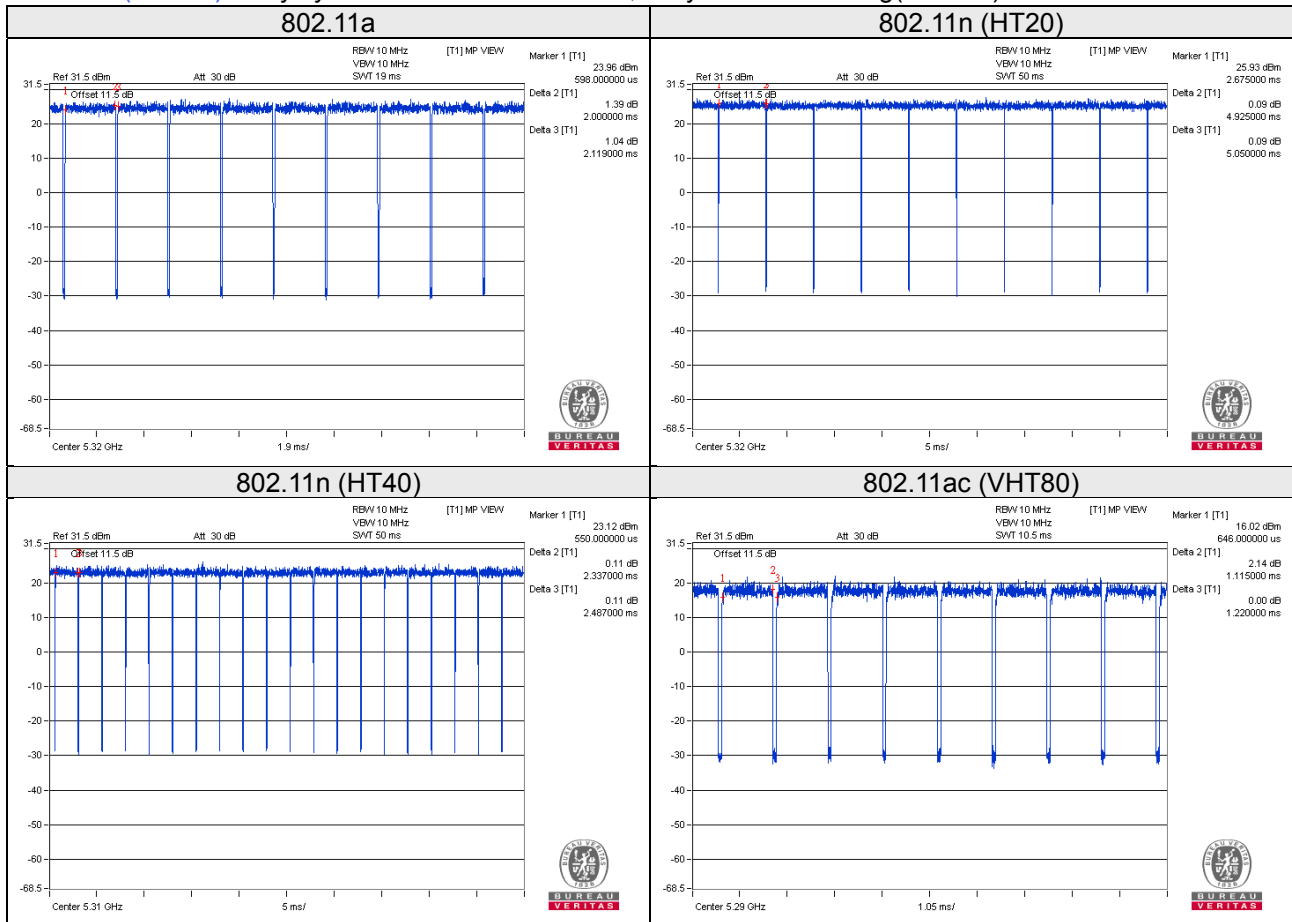

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	POE	D-Link	PGS-1210-10P	NA	NA	Provided by manufacturer


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	2	1.8	N	0	-
3.	RJ45, Cat5e	1	1.8	N	0	-

3.4.1 Configuration of System under Test

Adapter Mode

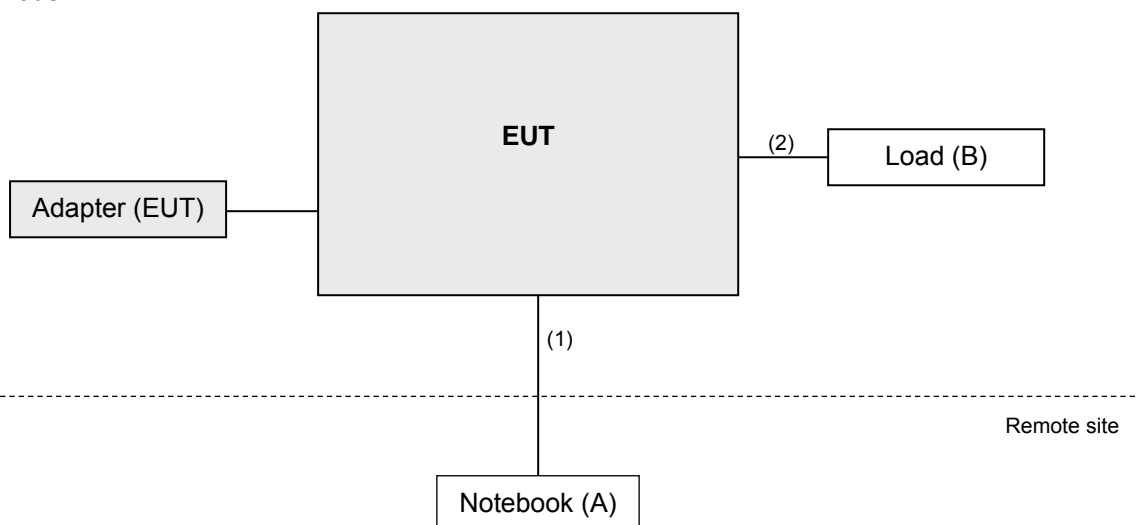

POE Mode

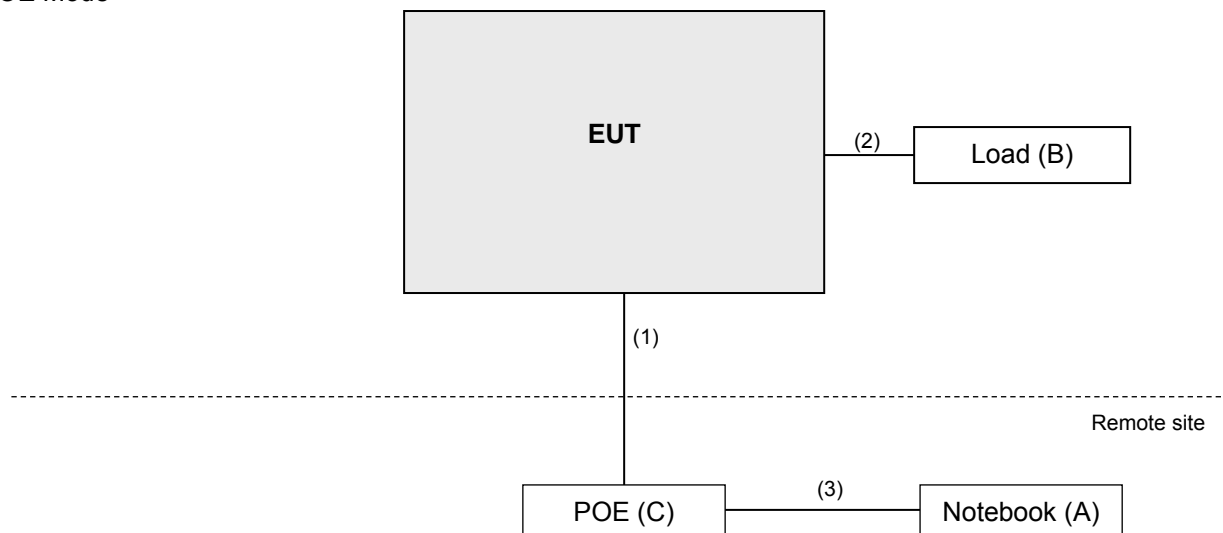

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK: 74 (dBuV/m)	AV: 54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK: 105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK: 122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Mar. 27, 2017	Mar. 26, 2018
			Apr. 11, 2018	Apr. 10, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 18, 2017	Aug. 17, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 28, 2016	Dec. 27, 2017
			Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 27, 2016	Dec. 26, 2017
			Dec. 12, 2017	Dec. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
			Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent	8449B	3008A01638	Feb. 22, 2017	Feb. 21, 2018
			Feb. 22, 2018	Feb. 21, 2019
Preamplifier Agilent	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-02 (248780+MY13377)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
26GHz ~ 40GHz Amplifier Agilent	8449B	3008A1960	Aug. 08, 2017	Aug. 07, 2018
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 07, 2017	Jun. 06, 2018
			Jun. 13, 2018	Jun. 12, 2019

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
 4. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

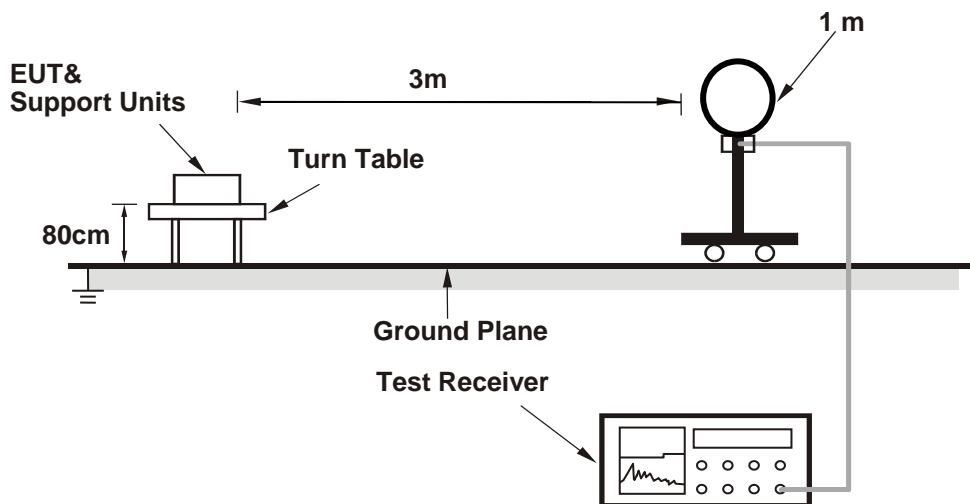

For Radiated emission 30MHz to 1GHz

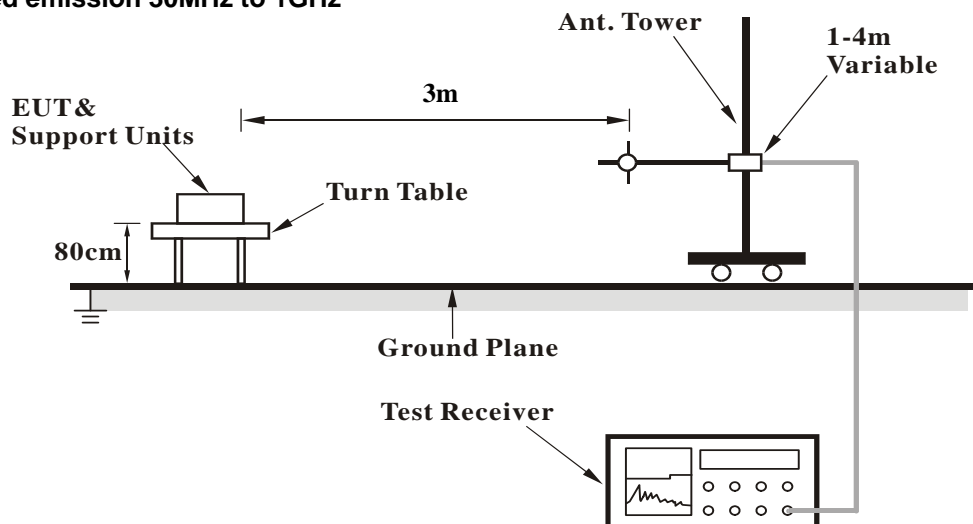

For Radiated emission above 1GHz

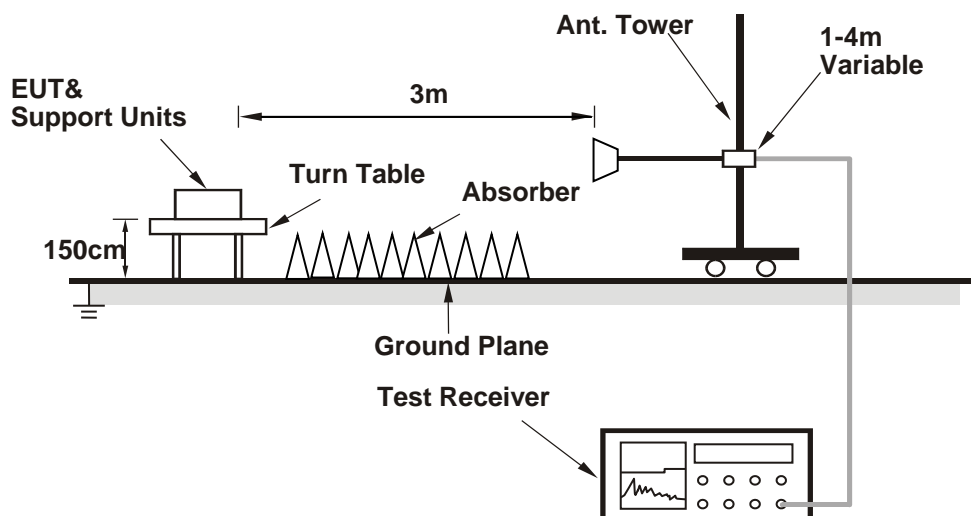

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 52	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	2.98 H	274	53.2	3.9
2	5150.00	43.6 AV	54.0	-10.4	2.98 H	274	39.7	3.9
3	*5260.00	111.5 PK			3.04 H	288	70.6	40.9
4	*5260.00	101.4 AV			3.04 H	288	60.5	40.9
5	#10520.00	57.0 PK	74.0	-17.0	1.34 H	55	41.8	15.2
6	#10520.00	43.9 AV	54.0	-10.1	1.34 H	55	28.7	15.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	2.95 V	333	53.1	3.9
2	5150.00	44.5 AV	54.0	-9.5	2.95 V	333	40.6	3.9
3	*5260.00	118.7 PK			2.93 V	316	77.8	40.9
4	*5260.00	108.6 AV			2.93 V	316	67.7	40.9
5	#10520.00	57.4 PK	74.0	-16.6	1.69 V	243	42.2	15.2
6	#10520.00	44.6 AV	54.0	-9.4	1.69 V	243	29.4	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	110.8 PK			2.84 H	291	69.8	41.0
2	*5300.00	100.6 AV			2.84 H	291	59.6	41.0
3	10600.00	58.1 PK	74.0	-15.9	1.72 H	124	42.0	16.1
4	10600.00	45.4 AV	54.0	-8.6	1.72 H	124	29.3	16.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	118.8 PK			3.03 V	221	77.8	41.0
2	*5300.00	108.6 AV			3.03 V	221	67.6	41.0
3	10600.00	58.0 PK	74.0	-16.0	1.38 V	270	41.9	16.1
4	10600.00	45.3 AV	54.0	-8.7	1.38 V	270	29.2	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	110.9 PK			3.01 H	286	69.9	41.0
2	*5320.00	100.2 AV			3.01 H	286	59.2	41.0
3	5350.00	60.8 PK	74.0	-13.2	2.94 H	285	56.4	4.4
4	5350.00	47.0 AV	54.0	-7.0	2.94 H	285	42.6	4.4
5	10640.00	58.1 PK	74.0	-15.9	1.66 H	168	42.1	16.0
6	10640.00	44.8 AV	54.0	-9.2	1.66 H	168	28.8	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	118.7 PK			3.50 V	200	77.7	41.0
2	*5320.00	108.3 AV			3.50 V	200	67.3	41.0
3	5350.00	67.7 PK	74.0	-6.3	3.50 V	149	63.3	4.4
4	5350.00	53.2 AV	54.0	-0.8	3.50 V	149	48.8	4.4
5	10640.00	57.4 PK	74.0	-16.6	1.62 V	284	41.4	16.0
6	10640.00	44.6 AV	54.0	-9.4	1.62 V	284	28.6	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	57.4 PK	74.0	-16.6	3.34 H	217	53.0	4.4
2	5460.00	44.7 AV	54.0	-9.3	3.34 H	217	40.3	4.4
3	#5470.00	59.1 PK	74.0	-14.9	3.25 H	230	54.6	4.5
4	#5470.00	46.3 AV	54.0	-7.7	3.25 H	230	41.8	4.5
5	*5500.00	109.1 PK			3.30 H	224	67.8	41.3
6	*5500.00	98.4 AV			3.30 H	224	57.1	41.3
7	11000.00	59.6 PK	74.0	-14.4	1.38 H	150	42.1	17.5
8	11000.00	45.9 AV	54.0	-8.1	1.38 H	150	28.4	17.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	63.6 PK	74.0	-10.4	3.46 V	185	59.2	4.4
2	5460.00	48.4 AV	54.0	-5.6	3.46 V	185	44.0	4.4
3	#5470.00	69.8 PK	74.0	-4.2	3.49 V	184	65.3	4.5
4	#5470.00	53.5 AV	54.0	-0.5	3.49 V	184	49.0	4.5
5	*5500.00	119.5 PK			3.29 V	195	78.2	41.3
6	*5500.00	108.8 AV			3.29 V	195	67.5	41.3
7	11000.00	58.6 PK	74.0	-15.4	1.83 V	213	41.1	17.5
8	11000.00	46.3 AV	54.0	-7.7	1.83 V	213	28.8	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	110.7 PK			3.22 H	224	69.2	41.5
2	*5580.00	100.1 AV			3.22 H	224	58.6	41.5
3	11160.00	59.0 PK	74.0	-15.0	1.67 H	208	42.6	16.4
4	11160.00	45.7 AV	54.0	-8.3	1.67 H	208	29.3	16.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	120.0 PK			3.52 V	199	78.5	41.5
2	*5580.00	109.2 AV			3.52 V	199	67.7	41.5
3	11160.00	58.8 PK	74.0	-15.2	2.75 V	221	42.4	16.4
4	11160.00	45.9 AV	54.0	-8.1	2.75 V	221	29.5	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	109.2 PK			3.24 H	225	67.6	41.6
2	*5700.00	98.4 AV			3.24 H	225	56.8	41.6
3	#5725.00	63.1 PK	74.0	-10.9	3.22 H	226	58.3	4.8
4	#5725.00	47.3 AV	54.0	-6.7	3.22 H	226	42.5	4.8
5	11400.00	58.6 PK	74.0	-15.4	1.21 H	243	42.4	16.2
6	11400.00	45.6 AV	54.0	-8.4	1.21 H	243	29.4	16.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	117.8 PK			3.06 V	196	76.2	41.6
2	*5700.00	107.2 AV			3.06 V	196	65.6	41.6
3	#5725.00	71.7 PK	74.0	-2.3	3.40 V	114	66.9	4.8
4	#5725.00	53.4 AV	54.0	-0.6	3.40 V	114	48.6	4.8
5	11400.00	59.4 PK	74.0	-14.6	1.68 V	299	43.2	16.2
6	11400.00	46.0 AV	54.0	-8.0	1.68 V	299	29.8	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.2 PK	74.0	-16.8	3.00 H	218	52.7	4.5
2	#5470.00	44.3 AV	54.0	-9.7	3.00 H	218	39.8	4.5
3	*5720.00	109.0 PK			3.11 H	226	67.4	41.6
4	*5720.00	98.6 AV			3.11 H	226	57.0	41.6
5	#5825.00	58.0 PK	74.0	-16.0	3.05 H	239	53.3	4.7
6	#5825.00	44.8 AV	54.0	-9.2	3.05 H	239	40.1	4.7
7	11440.00	58.5 PK	74.0	-15.5	2.68 H	113	42.4	16.1
8	11440.00	45.5 AV	54.0	-8.5	2.68 H	113	29.4	16.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.5 PK	74.0	-16.5	2.93 V	205	53.0	4.5
2	#5470.00	44.5 AV	54.0	-9.5	2.93 V	205	40.0	4.5
3	*5720.00	119.2 PK			2.90 V	201	77.6	41.6
4	*5720.00	108.9 AV			2.90 V	201	67.3	41.6
5	#5825.00	58.1 PK	74.0	-15.9	2.97 V	195	53.4	4.7
6	#5825.00	45.0 AV	54.0	-9.0	2.97 V	195	40.3	4.7
7	11440.00	59.4 PK	74.0	-14.6	2.96 V	202	43.3	16.1
8	11440.00	46.7 AV	54.0	-7.3	2.96 V	202	30.6	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 52	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	2.77 H	289	52.5	3.9
2	5150.00	43.6 AV	54.0	-10.4	2.77 H	289	39.7	3.9
3	*5260.00	111.0 PK			2.73 H	286	70.1	40.9
4	*5260.00	100.5 AV			2.73 H	286	59.6	40.9
5	#10520.00	57.4 PK	74.0	-16.6	2.09 H	354	42.2	15.2
6	#10520.00	44.2 AV	54.0	-9.8	2.09 H	354	29.0	15.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	3.10 V	154	53.0	3.9
2	5150.00	43.6 AV	54.0	-10.4	3.10 V	154	39.7	3.9
3	*5260.00	119.7 PK			3.14 V	149	78.8	40.9
4	*5260.00	108.8 AV			3.14 V	149	67.9	40.9
5	#10520.00	56.8 PK	74.0	-17.2	1.62 V	198	41.6	15.2
6	#10520.00	44.0 AV	54.0	-10.0	1.62 V	198	28.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	110.9 PK			3.18 H	283	69.9	41.0
2	*5300.00	100.3 AV			3.18 H	283	59.3	41.0
3	10600.00	58.2 PK	74.0	-15.8	2.60 H	138	42.1	16.1
4	10600.00	45.3 AV	54.0	-8.7	2.60 H	138	29.2	16.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	119.3 PK			2.92 V	321	78.3	41.0
2	*5300.00	108.5 AV			2.92 V	321	67.5	41.0
3	10600.00	58.5 PK	74.0	-15.5	2.93 V	242	42.4	16.1
4	10600.00	45.2 AV	54.0	-8.8	2.93 V	242	29.1	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	109.4 PK			3.00 H	286	68.4	41.0
2	*5320.00	99.1 AV			3.00 H	286	58.1	41.0
3	5350.00	60.5 PK	74.0	-13.5	3.13 H	291	56.1	4.4
4	5350.00	46.9 AV	54.0	-7.1	3.13 H	291	42.5	4.4
5	10640.00	59.6 PK	74.0	-14.4	2.92 H	68	43.6	16.0
6	10640.00	44.6 AV	54.0	-9.4	2.92 H	68	28.6	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	118.2 PK			2.96 V	21	77.2	41.0
2	*5320.00	107.0 AV			2.96 V	21	66.0	41.0
3	5350.00	67.2 PK	74.0	-6.8	3.09 V	137	62.8	4.4
4	5350.00	53.4 AV	54.0	-0.6	3.09 V	137	49.0	4.4
5	10640.00	57.8 PK	74.0	-16.2	1.26 V	213	41.8	16.0
6	10640.00	44.7 AV	54.0	-9.3	1.26 V	213	28.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	3.06 H	215	53.2	4.4
2	5460.00	44.4 AV	54.0	-9.6	3.06 H	215	40.0	4.4
3	#5470.00	59.6 PK	74.0	-14.4	3.14 H	224	55.1	4.5
4	#5470.00	45.9 AV	54.0	-8.1	3.14 H	224	41.4	4.5
5	*5500.00	108.1 PK			3.19 H	225	66.8	41.3
6	*5500.00	97.5 AV			3.19 H	225	56.2	41.3
7	11000.00	59.3 PK	74.0	-14.7	2.03 H	356	41.8	17.5
8	11000.00	45.8 AV	54.0	-8.2	2.03 H	356	28.3	17.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	62.8 PK	74.0	-11.2	3.02 V	190	58.4	4.4
2	5460.00	47.6 AV	54.0	-6.4	3.02 V	190	43.2	4.4
3	#5470.00	58.6 PK	74.0	-15.4	3.02 V	196	54.1	4.5
4	#5470.00	53.2 AV	54.0	-0.8	3.02 V	196	48.7	4.5
5	*5500.00	118.7 PK			3.14 V	190	77.4	41.3
6	*5500.00	108.2 AV			3.14 V	190	66.9	41.3
7	11000.00	58.7 PK	74.0	-15.3	1.04 V	26	41.2	17.5
8	11000.00	45.8 AV	54.0	-8.2	1.04 V	26	28.3	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	110.9 PK			3.33 H	276	69.4	41.5
2	*5580.00	99.8 AV			3.33 H	276	58.3	41.5
3	11160.00	58.5 PK	74.0	-15.5	1.54 H	162	42.1	16.4
4	11160.00	45.7 AV	54.0	-8.3	1.54 H	162	29.3	16.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	119.5 PK			3.16 V	203	78.0	41.5
2	*5580.00	108.9 AV			3.16 V	203	67.4	41.5
3	11160.00	59.2 PK	74.0	-14.8	3.00 V	106	42.8	16.4
4	11160.00	45.9 AV	54.0	-8.1	3.00 V	106	29.5	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	109.0 PK			3.20 H	276	67.4	41.6
2	*5700.00	98.1 AV			3.20 H	276	56.5	41.6
3	#5725.00	62.6 PK	74.0	-11.4	3.17 H	280	57.8	4.8
4	#5725.00	47.0 AV	54.0	-7.0	3.17 H	280	42.2	4.8
5	11400.00	59.0 PK	74.0	-15.0	1.65 H	152	42.8	16.2
6	11400.00	45.6 AV	54.0	-8.4	1.65 H	152	29.4	16.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	117.7 PK			3.00 V	207	76.1	41.6
2	*5700.00	107.5 AV			3.00 V	207	65.9	41.6
3	#5725.00	70.1 PK	74.0	-3.9	2.76 V	144	65.3	4.8
4	#5725.00	53.5 AV	54.0	-0.5	2.76 V	144	48.7	4.8
5	11400.00	59.0 PK	74.0	-15.0	2.40 V	133	42.8	16.2
6	11400.00	45.6 AV	54.0	-8.4	2.40 V	133	29.4	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	58.0 PK	74.0	-16.0	3.12 H	280	53.5	4.5
2	#5470.00	44.4 AV	54.0	-9.6	3.12 H	280	39.9	4.5
3	*5720.00	109.9 PK			3.02 H	276	68.3	41.6
4	*5720.00	98.7 AV			3.02 H	276	57.1	41.6
5	#5825.00	57.2 PK	74.0	-16.8	3.08 H	281	52.5	4.7
6	#5825.00	44.6 AV	54.0	-9.4	3.08 H	281	39.9	4.7
7	11440.00	58.6 PK	74.0	-15.4	1.50 H	197	42.5	16.1
8	11440.00	45.8 AV	54.0	-8.2	1.50 H	197	29.7	16.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.7 PK	74.0	-16.3	2.94 V	211	53.2	4.5
2	#5470.00	34.7 AV	54.0	-19.3	2.94 V	211	30.2	4.5
3	*5720.00	119.3 PK			2.98 V	204	77.7	41.6
4	*5720.00	108.9 AV			2.98 V	204	67.3	41.6
5	#5845.00	57.9 PK	74.0	-16.1	2.90 V	197	53.1	4.8
6	#5845.00	45.1 AV	54.0	-8.9	2.90 V	197	40.3	4.8
7	11440.00	59.1 PK	74.0	-14.9	3.42 V	84	43.0	16.1
8	11440.00	46.0 AV	54.0	-8.0	3.42 V	84	29.9	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	3.00 H	215	52.2	3.9
2	5150.00	43.6 AV	54.0	-10.4	3.00 H	215	39.7	3.9
3	*5270.00	107.7 PK			3.12 H	228	66.7	41.0
4	*5270.00	98.3 AV			3.12 H	228	57.3	41.0
5	#10540.00	57.7 PK	74.0	-16.3	1.93 H	179	42.3	15.4
6	#10540.00	44.7 AV	54.0	-9.3	1.93 H	179	29.3	15.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	2.91 V	314	53.6	3.9
2	5150.00	44.6 AV	54.0	-9.4	2.91 V	314	40.7	3.9
3	*5270.00	116.4 PK			2.86 V	325	75.4	41.0
4	*5270.00	107.2 AV			2.86 V	325	66.2	41.0
5	#10540.00	57.6 PK	74.0	-16.4	2.37 V	218	42.2	15.4
6	#10540.00	44.7 AV	54.0	-9.3	2.37 V	218	29.3	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	105.0 PK			3.50 H	286	64.0	41.0
2	*5310.00	95.6 AV			3.50 H	286	54.6	41.0
3	5350.00	59.5 PK	74.0	-14.5	3.49 H	287	55.1	4.4
4	5350.00	46.7 AV	54.0	-7.3	3.49 H	287	42.3	4.4
5	10620.00	58.1 PK	74.0	-15.9	2.13 H	108	42.1	16.0
6	10620.00	45.2 AV	54.0	-8.8	2.13 H	108	29.2	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	114.1 PK			3.91 V	194	73.1	41.0
2	*5310.00	104.5 AV			3.91 V	194	63.5	41.0
3	5350.00	67.0 PK	74.0	-7.0	3.09 V	316	62.6	4.4
4	5350.00	53.2 AV	54.0	-0.8	3.09 V	316	48.8	4.4
5	10620.00	58.0 PK	74.0	-16.0	1.07 V	284	42.0	16.0
6	10620.00	45.2 AV	54.0	-8.8	1.07 V	284	29.2	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.4 PK	74.0	-15.6	3.05 H	214	54.0	4.4
2	5460.00	45.2 AV	54.0	-8.8	3.05 H	214	40.8	4.4
3	#5470.00	60.9 PK	74.0	-13.1	3.04 H	228	56.4	4.5
4	#5470.00	45.8 AV	54.0	-8.2	3.04 H	228	41.3	4.5
5	*5510.00	104.1 PK			3.15 H	224	62.8	41.3
6	*5510.00	94.5 AV			3.15 H	224	53.2	41.3
7	11020.00	59.7 PK	74.0	-14.3	1.85 H	37	42.5	17.2
8	11020.00	46.6 AV	54.0	-7.4	1.85 H	37	29.4	17.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	65.5 PK	74.0	-8.5	3.05 V	295	61.1	4.4
2	5460.00	49.8 AV	54.0	-4.2	3.05 V	295	45.4	4.4
3	#5470.00	69.5 PK	74.0	-4.5	3.09 V	310	65.0	4.5
4	#5470.00	53.1 AV	54.0	-0.9	3.09 V	310	48.6	4.5
5	*5510.00	114.9 PK			2.95 V	195	73.6	41.3
6	*5510.00	104.9 AV			2.95 V	195	63.6	41.3
7	11020.00	59.0 PK	74.0	-15.0	1.36 V	305	41.8	17.2
8	11020.00	46.7 AV	54.0	-7.3	1.36 V	305	29.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	106.3 PK			3.10 H	224	64.8	41.5
2	*5550.00	96.8 AV			3.10 H	224	55.3	41.5
3	11100.00	59.1 PK	74.0	-14.9	1.27 H	46	42.7	16.4
4	11100.00	46.0 AV	54.0	-8.0	1.27 H	46	29.6	16.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	116.6 PK			3.36 V	197	75.1	41.5
2	*5550.00	107.1 AV			3.36 V	197	65.6	41.5
3	11100.00	58.8 PK	74.0	-15.2	1.74 V	218	42.4	16.4
4	11100.00	46.0 AV	54.0	-8.0	1.74 V	218	29.6	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	104.4 PK			2.92 H	225	62.9	41.5
2	*5670.00	95.0 AV			2.92 H	225	53.5	41.5
3	#5725.00	58.2 PK	74.0	-15.8	2.98 H	214	53.4	4.8
4	#5725.00	45.4 AV	54.0	-8.6	2.98 H	214	40.6	4.8
5	11340.00	58.1 PK	74.0	-15.9	1.31 H	248	41.5	16.6
6	11340.00	45.4 AV	54.0	-8.6	1.31 H	248	28.8	16.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	114.7 PK			3.08 V	200	73.2	41.5
2	*5670.00	105.3 AV			3.08 V	200	63.8	41.5
3	#5725.00	69.6 PK	74.0	-4.4	3.19 V	192	64.8	4.8
4	#5725.00	53.1 AV	54.0	-0.9	3.19 V	192	48.3	4.8
5	11340.00	58.9 PK	74.0	-15.1	1.69 V	140	42.3	16.6
6	11340.00	45.6 AV	54.0	-8.4	1.69 V	140	29.0	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.0 PK	74.0	-17.0	3.05 H	243	52.5	4.5
2	#5470.00	44.3 AV	54.0	-9.7	3.05 H	243	39.8	4.5
3	*5710.00	106.2 PK			3.10 H	226	64.6	41.6
4	*5710.00	96.6 AV			3.10 H	226	55.0	41.6
5	#5825.00	57.5 PK	74.0	-16.5	3.00 H	224	52.8	4.7
6	#5825.00	44.5 AV	54.0	-9.5	3.00 H	224	39.8	4.7
7	11420.00	57.7 PK	74.0	-16.3	1.64 H	161	41.6	16.1
8	11420.00	45.4 AV	54.0	-8.6	1.64 H	161	29.3	16.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.3 PK	74.0	-16.7	3.00 V	194	52.8	4.5
2	#5470.00	44.7 AV	54.0	-9.3	3.00 V	194	40.2	4.5
3	*5710.00	116.8 PK			3.06 V	198	75.2	41.6
4	*5710.00	107.3 AV			3.06 V	198	65.7	41.6
5	#5825.00	59.4 PK	74.0	-14.6	3.15 V	204	54.7	4.7
6	#5825.00	45.3 AV	54.0	-8.7	3.15 V	204	40.6	4.7
7	11420.00	58.7 PK	74.0	-15.3	2.11 V	275	42.6	16.1
8	11420.00	45.9 AV	54.0	-8.1	2.11 V	275	29.8	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.3 PK	74.0	-17.7	2.05 H	325	52.4	3.9
2	5150.00	43.7 AV	54.0	-10.3	2.05 H	325	39.8	3.9
3	*5290.00	97.0 PK			1.97 H	309	56.0	41.0
4	*5290.00	86.8 AV			1.97 H	309	45.8	41.0
5	5350.00	58.1 PK	74.0	-15.9	1.92 H	312	53.7	4.4
6	5350.00	45.2 AV	54.0	-8.8	1.92 H	312	40.8	4.4
7	#10580.00	58.1 PK	74.0	-15.9	1.68 H	224	42.2	15.9
8	#10580.00	45.1 AV	54.0	-8.9	1.68 H	224	29.2	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	3.25 V	178	53.8	3.9
2	5150.00	44.8 AV	54.0	-9.2	3.25 V	178	40.9	3.9
3	*5290.00	108.0 PK			3.19 V	190	67.0	41.0
4	*5290.00	98.3 AV			3.19 V	190	57.3	41.0
5	5350.00	67.8 PK	74.0	-6.2	3.46 V	197	63.4	4.4
6	5350.00	53.3 AV	54.0	-0.7	3.46 V	197	48.9	4.4
7	#10580.00	58.4 PK	74.0	-15.6	2.13 V	255	42.5	15.9
8	#10580.00	45.0 AV	54.0	-9.0	2.13 V	255	29.1	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	3.15 H	217	54.4	4.4
2	5460.00	45.6 AV	54.0	-8.4	3.15 H	217	41.2	4.4
3	#5470.00	58.6 PK	74.0	-15.4	3.02 H	231	54.1	4.5
4	#5470.00	46.0 AV	54.0	-8.0	3.02 H	231	41.5	4.5
5	*5530.00	99.8 PK			3.10 H	226	58.5	41.3
6	*5530.00	90.4 AV			3.10 H	226	49.1	41.3
7	11060.00	59.0 PK	74.0	-15.0	2.43 H	118	42.1	16.9
8	11060.00	46.3 AV	54.0	-7.7	2.43 H	118	29.4	16.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	66.2 PK	74.0	-7.8	3.19 V	183	61.8	4.4
2	5460.00	53.1 AV	54.0	-0.9	3.19 V	183	48.7	4.4
3	#5470.00	66.5 PK	74.0	-7.5	3.15 V	183	62.0	4.5
4	#5470.00	52.4 AV	54.0	-1.6	3.15 V	183	47.9	4.5
5	*5530.00	110.6 PK			3.27 V	191	69.3	41.3
6	*5530.00	100.9 AV			3.27 V	191	59.6	41.3
7	11060.00	58.6 PK	74.0	-15.4	1.63 V	157	41.7	16.9
8	11060.00	46.1 AV	54.0	-7.9	1.63 V	157	29.2	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	56.8 PK	74.0	-17.2	2.22 H	227	52.3	4.5
2	#5470.00	44.2 AV	54.0	-9.8	2.22 H	227	39.7	4.5
3	*5610.00	103.1 PK			2.31 H	231	61.5	41.6
4	*5610.00	93.4 AV			2.31 H	231	51.8	41.6
5	#5725.00	58.7 PK	74.0	-15.3	2.27 H	235	53.9	4.8
6	#5725.00	45.6 AV	54.0	-8.4	2.27 H	235	40.8	4.8
7	11220.00	58.3 PK	74.0	-15.7	3.32 H	89	41.8	16.5
8	11220.00	45.4 AV	54.0	-8.6	3.32 H	89	28.9	16.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	64.7 PK	74.0	-9.3	2.33 V	92	60.2	4.5
2	#5470.00	48.9 AV	54.0	-5.1	2.33 V	92	44.4	4.5
3	*5610.00	111.1 PK			2.45 V	91	69.5	41.6
4	*5610.00	101.5 AV			2.45 V	91	59.9	41.6
5	#5725.00	68.0 PK	74.0	-6.0	2.40 V	91	63.2	4.8
6	#5725.00	53.2 AV	54.0	-0.8	2.40 V	91	48.4	4.8
7	11220.00	58.6 PK	74.0	-15.4	1.78 V	136	42.1	16.5
8	11220.00	45.5 AV	54.0	-8.5	1.78 V	136	29.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.7 PK	74.0	-16.3	2.99 H	215	53.2	4.5
2	#5470.00	44.4 AV	54.0	-9.6	2.99 H	215	39.9	4.5
3	*5690.00	103.0 PK			3.10 H	225	61.4	41.6
4	*5690.00	92.9 AV			3.10 H	225	51.3	41.6
5	#5825.00	59.0 PK	74.0	-15.0	3.08 H	228	54.3	4.7
6	#5825.00	45.8 AV	54.0	-8.2	3.08 H	228	41.1	4.7
7	11380.00	58.5 PK	74.0	-15.5	1.76 H	172	42.2	16.3
8	11380.00	45.9 AV	54.0	-8.1	1.76 H	172	29.6	16.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.9 PK	74.0	-16.1	3.61 V	205	53.4	4.5
2	#5470.00	45.1 AV	54.0	-8.9	3.61 V	205	40.6	4.5
3	*5690.00	113.4 PK			3.70 V	201	71.8	41.6
4	*5690.00	103.8 AV			3.70 V	201	62.2	41.6
5	#5825.00	68.1 PK	74.0	-5.9	3.16 V	204	63.4	4.7
6	#5825.00	53.3 AV	54.0	-0.7	3.16 V	204	48.6	4.7
7	11380.00	58.2 PK	74.0	-15.8	1.46 V	185	41.9	16.3
8	11380.00	45.5 AV	54.0	-8.5	1.46 V	185	29.2	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	33.6 QP	40.0	-6.4	2.00 H	218	43.7	-10.1
2	311.30	40.1 QP	46.0	-5.9	1.25 H	277	46.8	-6.7
3	359.80	44.2 QP	46.0	-1.8	1.00 H	178	50.2	-6.0
4	575.14	40.3 QP	46.0	-5.7	1.50 H	167	42.5	-2.2
5	722.58	42.6 QP	46.0	-3.4	2.00 H	119	41.8	0.8
6	937.92	38.3 QP	46.0	-7.7	1.50 H	213	33.5	4.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.10	37.9 QP	40.0	-2.1	1.25 V	26	46.6	-8.7
2	311.30	38.7 QP	46.0	-7.3	1.50 V	221	45.4	-6.7
3	359.80	43.2 QP	46.0	-2.8	1.50 V	287	49.2	-6.0
4	437.40	35.8 QP	46.0	-10.2	1.00 V	124	40.2	-4.4
5	582.90	35.1 QP	46.0	-10.9	1.25 V	265	36.9	-1.8
6	937.92	35.8 QP	46.0	-10.2	2.00 V	304	31.0	4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	92.08	33.5 QP	43.5	-10.0	2.00 H	261	47.3	-13.8
2	222.06	34.3 QP	46.0	-11.7	1.00 H	298	45.2	-10.9
3	359.80	43.8 QP	46.0	-2.2	1.00 H	66	49.8	-6.0
4	573.20	41.3 QP	46.0	-4.7	1.50 H	184	43.6	-2.3
5	747.80	38.2 QP	46.0	-7.8	2.00 H	194	36.6	1.6
6	974.78	30.3 QP	54.0	-23.7	1.25 H	201	25.0	5.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.10	37.9 QP	40.0	-2.1	1.50 V	39	46.6	-8.7
2	169.68	29.4 QP	43.5	-14.1	1.25 V	297	38.0	-8.6
3	367.56	42.9 QP	46.0	-3.1	1.50 V	87	48.7	-5.8
4	575.14	37.5 QP	46.0	-8.5	1.50 V	103	39.7	-2.2
5	747.80	41.5 QP	46.0	-4.5	2.00 V	333	39.9	1.6
6	924.34	29.7 QP	46.0	-16.3	2.00 V	19	25.3	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.22	32.9 QP	40.0	-7.1	1.00 H	179	41.5	-8.6
2	249.22	37.4 QP	46.0	-8.6	1.50 H	133	46.4	-9.0
3	369.50	42.5 QP	46.0	-3.5	1.25 H	254	48.2	-5.7
4	569.32	41.5 QP	46.0	-4.5	1.50 H	183	44.0	-2.5
5	751.68	35.5 QP	46.0	-10.5	1.50 H	290	33.8	1.7
6	1000.00	31.4 QP	54.0	-22.6	2.00 H	88	25.8	5.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.84	36.5 QP	43.5	-7.0	1.25 V	316	49.4	-12.9
2	167.74	33.5 QP	43.5	-10.0	1.50 V	273	42.0	-8.5
3	365.62	41.8 QP	46.0	-4.2	1.50 V	99	47.7	-5.9
4	499.48	36.4 QP	46.0	-9.6	1.00 V	186	39.9	-3.5
5	594.54	33.7 QP	46.0	-12.3	1.00 V	157	35.1	-1.4
6	875.84	30.2 QP	46.0	-15.8	2.00 V	12	26.8	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 08, 2018	Feb. 07, 2019
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 08, 2017	Sep. 07, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 05, 2018	Feb. 04, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 02, 2017	Aug. 01, 2018
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

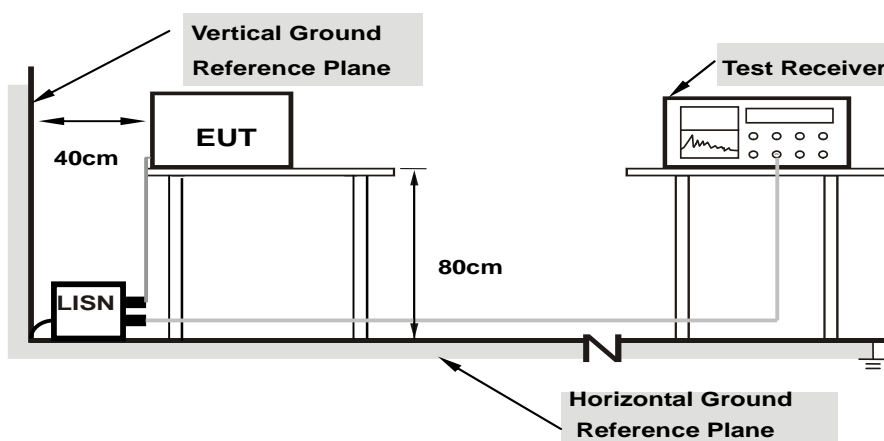

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.29	36.84	27.78	47.13	38.07	65.58	55.58	-18.45	-17.51
2	0.35703	10.34	33.87	32.40	44.21	42.74	58.80	48.80	-14.59	-6.06
3	0.57969	10.36	16.14	10.32	26.50	20.68	56.00	46.00	-29.50	-25.32
4	4.67578	10.54	16.51	8.96	27.05	19.50	56.00	46.00	-28.95	-26.50
5	13.46484	10.71	16.87	9.85	27.58	20.56	60.00	50.00	-32.42	-29.44
6	19.12500	10.90	15.74	8.68	26.64	19.58	60.00	50.00	-33.36	-30.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

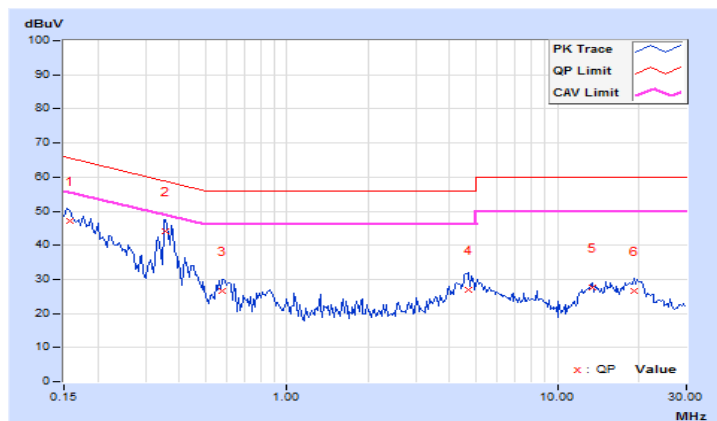


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	10.34	36.97	27.80	47.31	38.14	65.58
2	0.37656	10.31	34.85	26.29	45.16	36.60	58.35	48.35	-13.19	-11.75
3	1.10938	10.42	11.87	10.09	22.29	20.51	56.00	46.00	-33.71	-25.49
4	4.48828	10.57	14.78	10.34	25.35	20.91	56.00	46.00	-30.65	-25.09
5	12.67188	10.79	14.15	7.86	24.94	18.65	60.00	50.00	-35.06	-31.35
6	20.07051	11.06	13.42	7.23	24.48	18.29	60.00	50.00	-35.52	-31.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

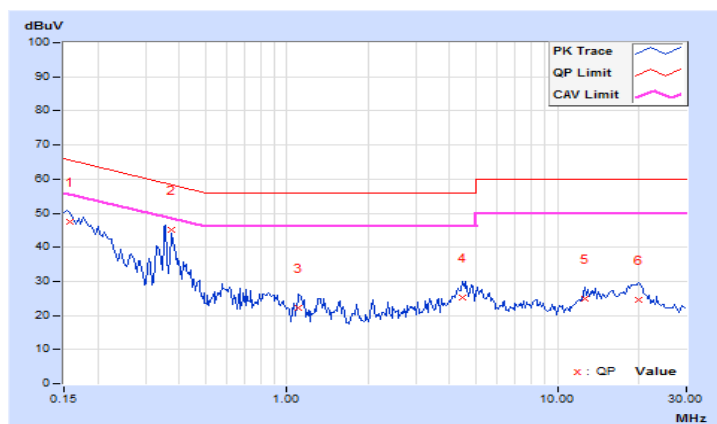

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	10.28	37.61	28.45	47.89	38.73	65.79
2	0.35703	10.34	35.67	32.06	46.01	42.40	58.80	48.80	-12.79	-6.40
3	0.56797	10.36	17.34	11.46	27.70	21.82	56.00	46.00	-28.30	-24.18
4	2.14063	10.44	9.12	3.45	19.56	13.89	56.00	46.00	-36.44	-32.11
5	4.26172	10.54	16.77	8.67	27.31	19.21	56.00	46.00	-28.69	-26.79
6	19.48828	10.91	15.44	8.88	26.35	19.79	60.00	50.00	-33.65	-30.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	10.34	36.22	27.68	46.56	38.02	65.58
2	0.35312	10.31	34.58	32.62	44.89	42.93	58.89	48.89	-14.00	-5.96
3	0.89219	10.39	13.62	11.88	24.01	22.27	56.00	46.00	-31.99	-23.73
4	4.88281	10.58	14.72	8.50	25.30	19.08	56.00	46.00	-30.70	-26.92
5	14.10156	10.84	13.27	7.74	24.11	18.58	60.00	50.00	-35.89	-31.42
6	19.60547	11.05	14.77	8.62	25.82	19.67	60.00	50.00	-34.18	-30.33

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

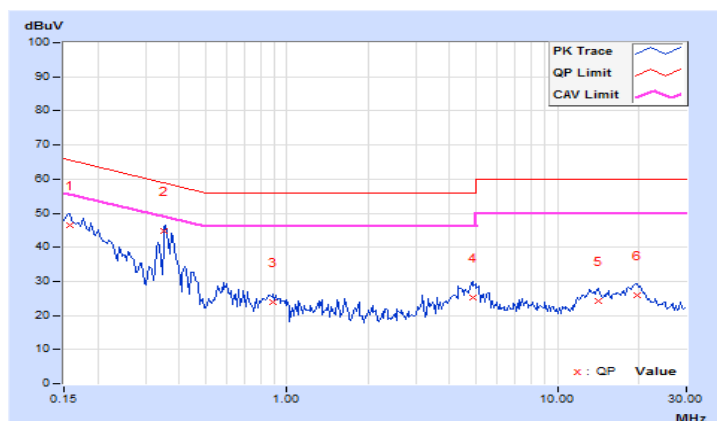


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20078	10.31	31.92	18.27	42.23	28.58	63.58
2	0.32969	10.33	31.66	18.00	41.99	28.33	59.46	49.46	-17.47	-21.13
3	0.83750	10.39	27.58	15.67	37.97	26.06	56.00	46.00	-18.03	-19.94
4	1.81641	10.43	24.37	18.75	34.80	29.18	56.00	46.00	-21.20	-16.82
5	6.83594	10.57	26.44	18.77	37.01	29.34	60.00	50.00	-22.99	-20.66
6	13.48438	10.72	31.06	29.66	41.78	40.38	60.00	50.00	-18.22	-9.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

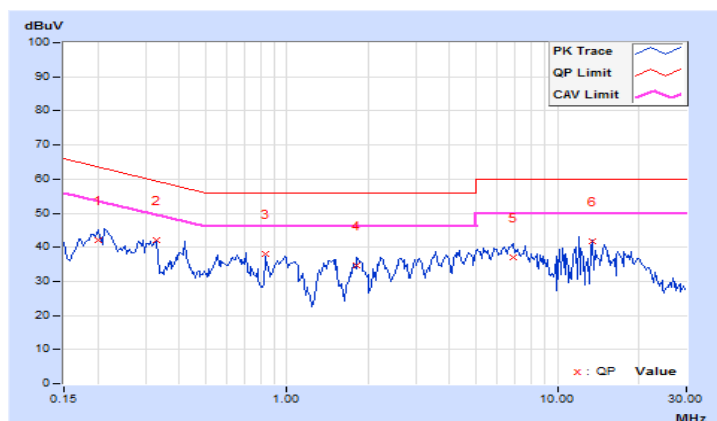


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16562	10.33	27.82	18.49	38.15	28.82	65.18
2	0.25156	10.31	27.66	14.57	37.97	24.88	61.71	51.71	-23.74	-26.83
3	0.65391	10.35	23.76	17.69	34.11	28.04	56.00	46.00	-21.89	-17.96
4	2.22656	10.49	25.78	21.04	36.27	31.53	56.00	46.00	-19.73	-14.47
5	6.78906	10.63	26.84	21.71	37.47	32.34	60.00	50.00	-22.53	-17.66
6	15.01172	10.87	28.94	27.55	39.81	38.42	60.00	50.00	-20.19	-11.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

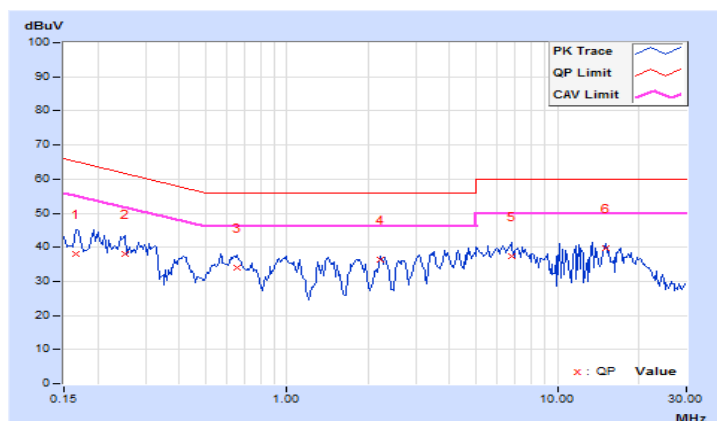

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

For Power Output


802.11a, 802.11n (HT20), 802.11n (HT40)

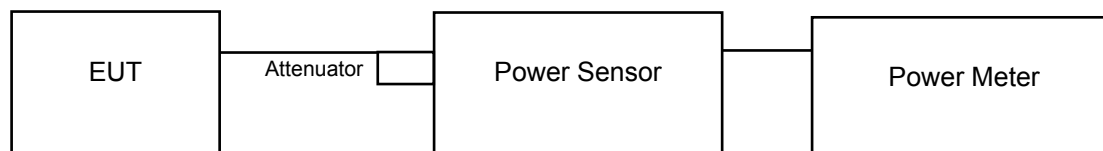

802.11ac (VHT80)



For 26dB Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to “free run”.
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz.
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
52	5260	16.93	16.54	94.399	19.75	23.71	Pass
60	5300	16.64	16.21	87.915	19.44	23.73	Pass
64	5320	17.12	16.84	99.829	19.99	23.73	Pass
100	5500	17.24	17.12	104.489	20.19	23.77	Pass
116	5580	17.34	17.06	105.016	20.21	23.73	Pass
140	5700	17.36	17.13	106.092	20.26	23.71	Pass
144	5720 For U-NII-2C	13.29	14.67	53.360	17.27	22.55	Pass
144	5720 For U-NII-3	7.26	8.67	13.365	11.26	29.90	Pass

Note:

- 5260MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 23.81-(6.1-6) = 23.71dBm.
- 5300~5320MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 23.83-(6.1-6) = 23.73dBm.
- 5500MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 23.87-(6.1-6) = 23.77dBm.
- 5580MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 23.83-(6.1-6) = 23.73dBm.
- 5700MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 23.81-(6.1-6) = 23.71dBm.
- 5720MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 22.65-(6.1-6) = 22.55dBm.
- 5745~5825MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 30-(6.1-6) = 29.90dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (19.52) = 23.90 dBm < 24dBm
- 11dBm + 10log (19.70) = 23.94 dBm < 24dBm
- 11dBm + 10log (19.53) = 23.91 dBm < 24dBm
- 11dBm + 10log (19.40) = 23.88 dBm < 24dBm
- 11dBm + 10log (19.55) = 23.91 dBm < 24dBm
- 11dBm + 10log (19.61) = 23.92 dBm < 24dBm
- 11dBm + 10log (5725.00 - 5710.21) = 22.70 dBm < 24dBm

Chain 1

- 11dBm + 10log (19.10) = 23.81 dBm < 24dBm
- 11dBm + 10log (19.20) = 23.83 dBm < 24dBm
- 11dBm + 10log (19.21) = 23.83 dBm < 24dBm
- 11dBm + 10log (19.41) = 23.87 dBm < 24dBm
- 11dBm + 10log (19.21) = 23.83 dBm < 24dBm
- 11dBm + 10log (19.13) = 23.81 dBm < 24dBm
- 11dBm + 10log (5725.00 - 5710.39) = 22.65 dBm < 24dBm

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
52	5260	17.43	16.69	102.001	20.09	23.90	Pass
60	5300	17.12	16.84	99.829	19.99	23.90	Pass
64	5320	17.93	17.55	118.972	20.75	23.90	Pass
100	5500	18.36	18.39	137.573	21.39	23.90	Pass
116	5580	17.46	17.13	107.361	20.31	23.90	Pass
140	5700	17.86	17.62	118.904	20.75	23.90	Pass
144	5720 For U-NII-2C	15.67	15.83	75.180	18.76	22.72	Pass
144	5720 For U-NII-3	8.76	8.70	14.929	11.74	29.90	Pass

Note:

- 5260~5320MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5500~5700MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5720MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 22.82-(6.1-6) = 22.72dBm.
- 5745~5825MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 30-(6.1-6) = 29.90dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (20.32) = 24.08 dBm > 24dBm
- 11dBm + 10log (20.53) = 24.12 dBm > 24dBm
- 11dBm + 10log (20.56) = 24.13 dBm > 24dBm
- 11dBm + 10log (20.67) = 24.15 dBm > 24dBm
- 11dBm + 10log (20.37) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.42) = 24.10 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5709.75) = 22.83 dBm < 24dBm

Chain 1

- 11dBm + 10log (20.41) = 24.10 dBm > 24dBm
- 11dBm + 10log (20.63) = 24.14 dBm > 24dBm
- 11dBm + 10log (20.31) = 24.08 dBm > 24dBm
- 11dBm + 10log (20.37) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.39) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.41) = 24.10 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5709.81) = 22.82 dBm < 24dBm

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
54	5270	19.93	19.42	185.899	22.69	23.90	Pass
62	5310	18.41	18.27	136.486	21.35	23.90	Pass
102	5510	18.74	18.51	145.775	21.64	23.90	Pass
110	5550	20.20	19.63	196.546	22.93	23.90	Pass
134	5670	19.44	19.38	174.598	22.42	23.90	Pass
142	5710 For U-NII-2C	17.74	18.45	135.938	21.33	23.90	Pass
142	5710 For U-NII-3	6.78	7.09	10.379	10.16	29.90	Pass

Note:

- 5260~5320MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5500~5720MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5745~5825MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 30-(6.1-6) = 29.90dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (40.65) = 27.09 dBm > 24dBm
- 11dBm + 10log (40.77) = 27.10 dBm > 24dBm
- 11dBm + 10log (40.50) = 27.07 dBm > 24dBm
- 11dBm + 10log (46.73) = 27.70 dBm > 24dBm
- 11dBm + 10log (40.53) = 27.08 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5689.68) = 26.48 dBm > 24dBm

Chain 1

- 11dBm + 10log (40.87) = 27.11 dBm > 24dBm
- 11dBm + 10log (40.83) = 27.11 dBm > 24dBm
- 11dBm + 10log (40.98) = 27.13 dBm > 24dBm
- 11dBm + 10log (41.18) = 27.15 dBm > 24dBm
- 11dBm + 10log (41.17) = 27.15 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5689.70) = 26.48 dBm > 24dBm

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
58	5290	15.86	15.84	76.919	18.86	23.90	Pass
106	5530	18.03	17.96	126.050	21.01	23.90	Pass
122	5610	19.99	19.77	194.612	22.89	23.90	Pass
138	5690 For U-NII-2C	17.58	18.27	136.130	21.34	23.90	Pass
138	5690 For U-NII-3	2.54	3.38	4.347	6.38	29.90	Pass

Note:

- 5260~5320MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5500~5720MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 24-(6.1-6) = 23.90dBm.
- 5745~5825MHz gain = 6.1dBi > 6dBi, so the power limit shall be reduced to 30-(6.1-6) = 29.90dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (83.61) = 30.22 dBm > 24dBm
- 11dBm + 10log (83.85) = 30.24 dBm > 24dBm
- 11dBm + 10log (84.02) = 30.24 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5647.74) = 29.88 dBm > 24dBm

Chain 1

- 11dBm + 10log (83.81) = 30.23 dBm > 24dBm
- 11dBm + 10log (83.78) = 30.23 dBm > 24dBm
- 11dBm + 10log (83.59) = 30.22 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5647.74) = 29.88 dBm > 24dBm

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
52	5260	14.42	13.68	51.050	17.08	20.89	Pass
60	5300	14.11	13.83	49.888	16.98	20.89	Pass
64	5320	14.92	14.54	59.429	17.74	20.89	Pass
100	5500	15.35	15.38	68.865	18.38	20.89	Pass
116	5580	14.45	14.12	53.703	17.30	20.89	Pass
140	5700	14.85	14.61	59.429	17.74	20.89	Pass
144	5720 For U-NII-2C	12.66	12.82	37.584	15.75	19.71	Pass
144	5720 For U-NII-3	5.75	5.69	7.464	8.73	26.89	Pass

Note:

- 5260~5320MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5500~5700MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5720MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 22.82-(9.11-6) = 19.71dBm.
- 5745~5825MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 30-(9.11-6) = 26.89dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (20.32) = 24.08 dBm > 24dBm
- 11dBm + 10log (20.53) = 24.12 dBm > 24dBm
- 11dBm + 10log (20.56) = 24.13 dBm > 24dBm
- 11dBm + 10log (20.67) = 24.15 dBm > 24dBm
- 11dBm + 10log (20.37) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.42) = 24.10 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5709.75) = 22.83 dBm < 24dBm

Chain 1

- 11dBm + 10log (20.41) = 24.10 dBm > 24dBm
- 11dBm + 10log (20.63) = 24.14 dBm > 24dBm
- 11dBm + 10log (20.31) = 24.08 dBm > 24dBm
- 11dBm + 10log (20.37) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.39) = 24.09 dBm > 24dBm
- 11dBm + 10log (20.41) = 24.10 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5709.81) = 22.82 dBm < 24dBm

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
54	5270	16.92	16.41	92.897	19.68	20.89	Pass
62	5310	15.40	15.26	68.234	18.34	20.89	Pass
102	5510	15.73	15.50	72.946	18.63	20.89	Pass
110	5550	17.19	16.62	98.175	19.92	20.89	Pass
134	5670	16.43	16.37	87.297	19.41	20.89	Pass
142	5710 For U-NII-2C	14.73	15.44	67.920	18.32	20.89	Pass
142	5710 For U-NII-3	3.77	4.08	5.188	7.15	26.89	Pass

Note:

- 5260~5320MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5500~5720MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5745~5825MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 30-(9.11-6) = 26.89dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (40.65) = 27.09 dBm > 24dBm
- 11dBm + 10log (40.77) = 27.10 dBm > 24dBm
- 11dBm + 10log (40.50) = 27.07 dBm > 24dBm
- 11dBm + 10log (46.73) = 27.70 dBm > 24dBm
- 11dBm + 10log (40.53) = 27.08 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5689.68) = 26.48 dBm > 24dBm

Chain 1

- 11dBm + 10log (40.87) = 27.11 dBm > 24dBm
- 11dBm + 10log (40.83) = 27.11 dBm > 24dBm
- 11dBm + 10log (40.98) = 27.13 dBm > 24dBm
- 11dBm + 10log (41.18) = 27.15 dBm > 24dBm
- 11dBm + 10log (41.17) = 27.15 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5689.70) = 26.48 dBm > 24dBm

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
58	5290	12.85	12.83	38.459	15.85	20.89	Pass
106	5530	15.02	14.95	63.096	18.00	20.89	Pass
122	5610	16.98	16.76	97.275	19.88	20.89	Pass
138	5690 For U-NII-2C	14.57	15.26	68.077	18.33	20.89	Pass
138	5690 For U-NII-3	-0.47	0.37	2.173	3.37	26.89	Pass

Note:

- 5260~5320MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5500~5720MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 24-(9.11-6) = 20.89dBm.
- 5745~5825MHz directional gain = 6.1dBi + 10log(2) = 9.11dBi > 6dBi, so the power limit shall be reduced to 30-(9.11-6) = 26.89dBm.

For U-NII-2A, U-NII-2C Band:

Chain 0

- 11dBm + 10log (83.61) = 30.22 dBm > 24dBm
- 11dBm + 10log (83.85) = 30.24 dBm > 24dBm
- 11dBm + 10log (84.02) = 30.24 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5647.74) = 29.88 dBm > 24dBm

Chain 1

- 11dBm + 10log (83.81) = 30.23 dBm > 24dBm
- 11dBm + 10log (83.78) = 30.23 dBm > 24dBm
- 11dBm + 10log (83.59) = 30.22 dBm > 24dBm
- 11dBm + 10log (5725.00 - 5647.74) = 29.88 dBm > 24dBm

26dB Bandwidth:

802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	19.52	19.10
60	5300	19.70	19.20
64	5320	19.53	19.21
100	5500	19.40	19.41
116	5580	19.55	19.21
140	5700	19.61	19.13
144	5720 For U-NII-2C	14.79	14.61
144	5720 For U-NII-3	4.67	4.60

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	20.32	20.41
60	5300	20.53	20.63
64	5320	20.56	20.31
100	5500	20.67	20.37
116	5580	20.37	20.39
140	5700	20.42	20.41
144	5720 For U-NII-2C	15.25	15.19
144	5720 For U-NII-3	5.18	5.15

802.11n (HT40)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	40.65	40.87
62	5310	40.77	40.83
102	5510	40.50	40.98
110	5550	46.73	41.18
134	5670	40.53	41.17
142	5710 For U-NII-2C	35.32	35.30
142	5710 For U-NII-3	5.29	5.14

802.11ac (VHT80)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	83.61	83.81
106	5530	83.85	83.78
122	5610	84.02	83.59
138	5690 For U-NII-2C	77.26	77.26
138	5690 For U-NII-3	7.37	6.99

Spectrum Plot of Worst Value


802.11a

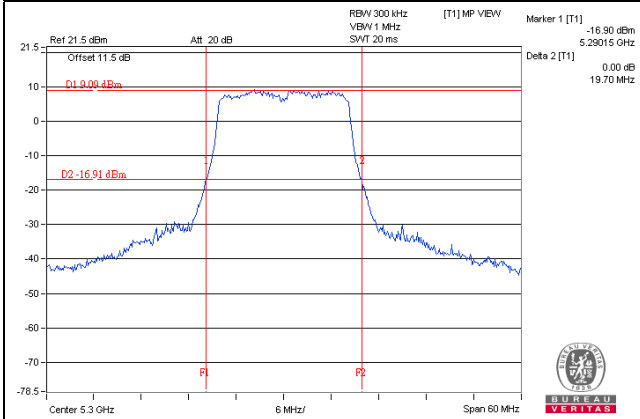


802.11n (HT20)

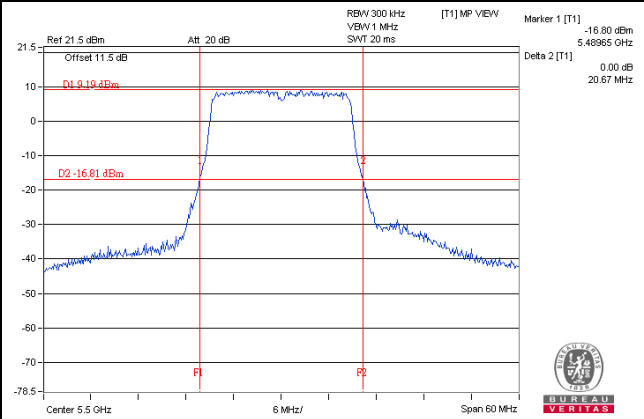

802.11n (HT40)

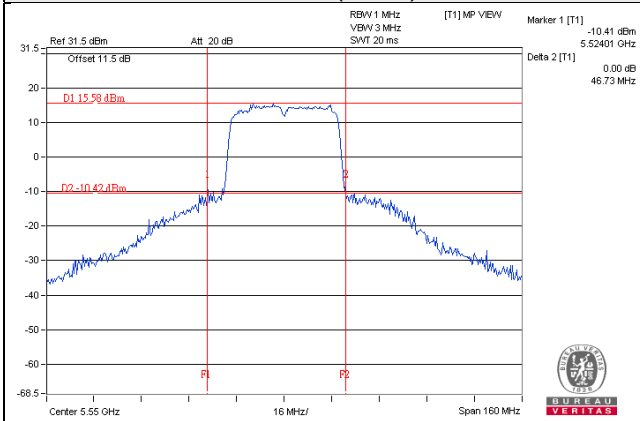

802.11ac (VHT80)

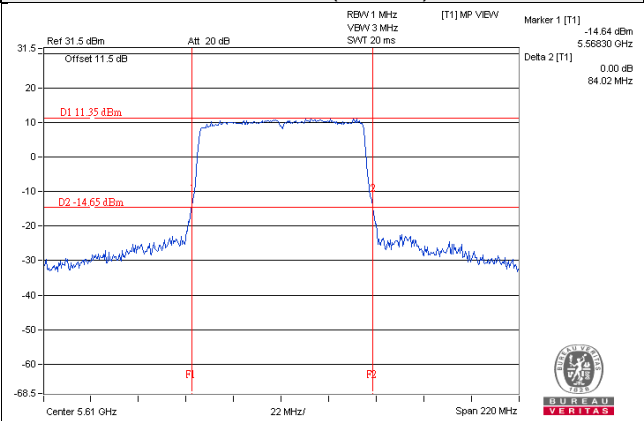

EUT Maximum Conducted Power

CDD Mode

802.11a

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	99.829	19.99
5470~5725	106.092	20.26

802.11n (HT20)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	118.972	20.75
5470~5725	137.573	21.39

802.11n (HT40)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	185.899	22.69
5470~5725	196.546	22.93

802.11ac (VHT80)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	76.919	18.86
5470~5725	194.612	22.89

Beamforming Mode

802.11n (HT20)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	59.429	17.74
5470~5725	68.865	18.38

802.11n (HT40)


Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	92.897	19.68
5470~5725	98.175	19.92

802.11ac (VHT80)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	38.459	15.85
5470~5725	97.275	19.88

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	16.44	16.44
60	5300	16.44	16.44
64	5320	16.44	16.44
100	5500	16.44	16.44
116	5580	16.44	16.44
140	5700	16.44	16.44
144	5720 For U-NII-2C	13.28	13.28
144	5720 For U-NII-3	3.16	3.16

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	17.64	17.64
60	5300	17.64	17.64
64	5320	17.64	17.64
100	5500	17.64	17.64
116	5580	17.64	17.64
140	5700	17.64	17.64
144	5720 For U-NII-2C	13.88	13.88
144	5720 For U-NII-3	3.76	3.76

802.11n (HT40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	36.24	36.12
62	5310	36.12	36.00
102	5510	36.12	36.12
110	5550	36.24	36.24
134	5670	36.24	36.12
142	5710 For U-NII-2C	33.12	33.12
142	5710 For U-NII-3	3.12	3.00



802.11ac (VHT80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	75.84	75.84
106	5530	75.60	75.84
122	5610	76.32	76.32
138	5690 For U-NII-2C	72.92	72.92
138	5690 For U-NII-3	2.92	3.16

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

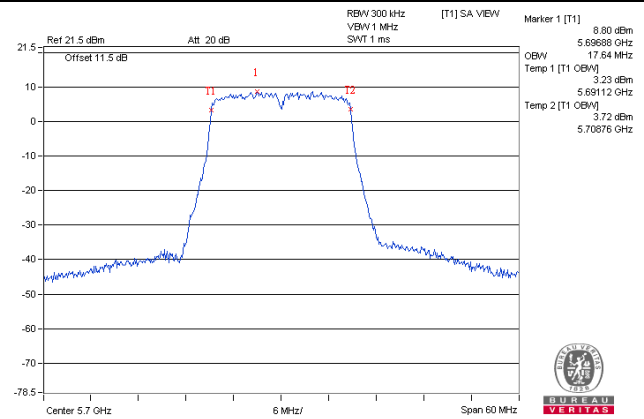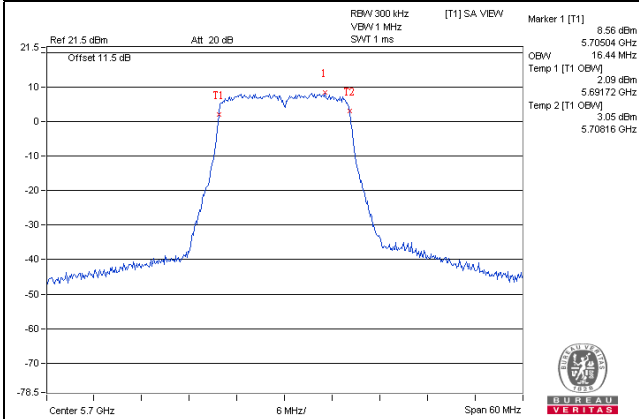

802.11n (HT40)

802.11ac (VHT80)

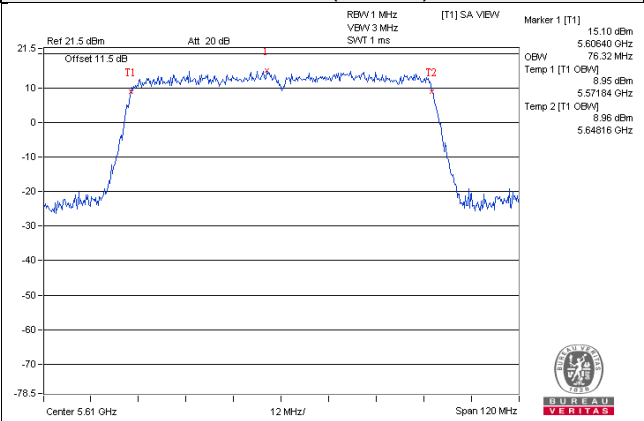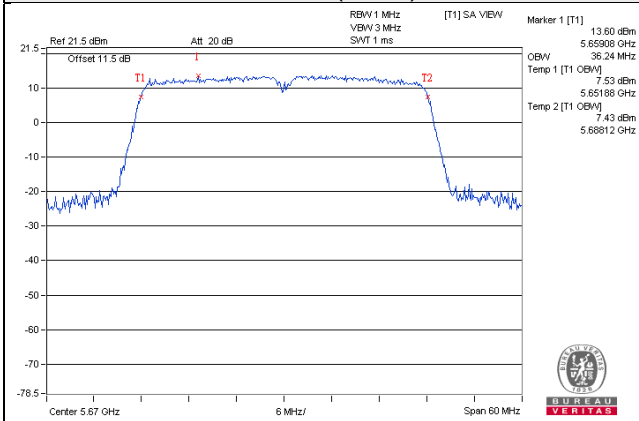


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-2A, U-NII-2C band:

Duty cycle of test signal is > 98%

Using method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Duty cycle of test signal is < 98%

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

Duty cycle of test signal is > 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value

Duty cycle of test signal is < 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-2A, U-NII-2C band:

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
52	5260	4.91	4.17	0.25	7.82	7.89	Pass
60	5300	4.80	4.17	0.25	7.76	7.89	Pass
64	5320	4.74	4.32	0.25	7.80	7.89	Pass
100	5500	4.20	3.95	0.25	7.34	7.89	Pass
116	5580	4.66	4.22	0.25	7.71	7.89	Pass
140	5700	4.20	4.24	0.25	7.48	7.89	Pass
144	5720	4.05	4.36	0.25	7.47	7.89	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (9.11 - 6) = 7.89\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
52	5260	4.76	3.91	0.11	7.48	7.89	Pass
60	5300	4.76	4.04	0.11	7.54	7.89	Pass
64	5320	4.68	4.09	0.11	7.52	7.89	Pass
100	5500	4.73	4.47	0.11	7.72	7.89	Pass
116	5580	4.56	4.05	0.11	7.43	7.89	Pass
140	5700	4.55	4.68	0.11	7.74	7.89	Pass
144	5720	4.47	4.78	0.11	7.75	7.89	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (9.11 - 6) = 7.89\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
54	5270	4.50	4.50	0.27	7.78	7.89	Pass
62	5310	3.29	2.67	0.27	6.27	7.89	Pass
102	5510	2.19	3.13	0.27	5.96	7.89	Pass
110	5550	3.80	4.40	0.27	7.39	7.89	Pass
134	5670	3.77	3.93	0.27	7.13	7.89	Pass
142	5710	4.20	4.50	0.27	7.64	7.89	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (9.11 - 6) = 7.89\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
58	5290	-2.91	-3.75	0.39	0.09	7.89	Pass
106	5530	-1.30	-1.41	0.39	2.05	7.89	Pass
122	5610	0.59	0.48	0.39	3.94	7.89	Pass
138	5690	1.79	1.99	0.39	5.29	7.89	Pass

Note:


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (9.11 - 6) = 7.89\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 0 / CH 52

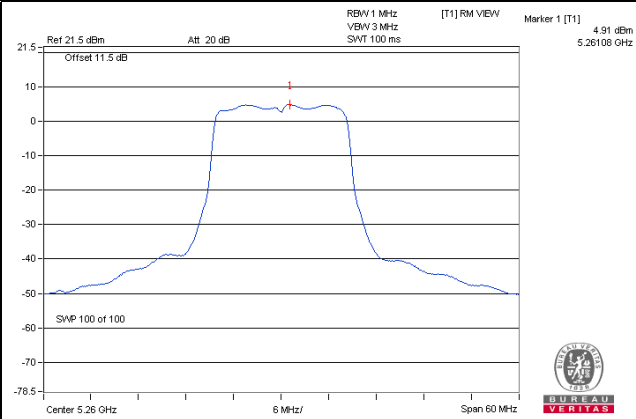


802.11n (HT20) / Chain 1 / CH 144

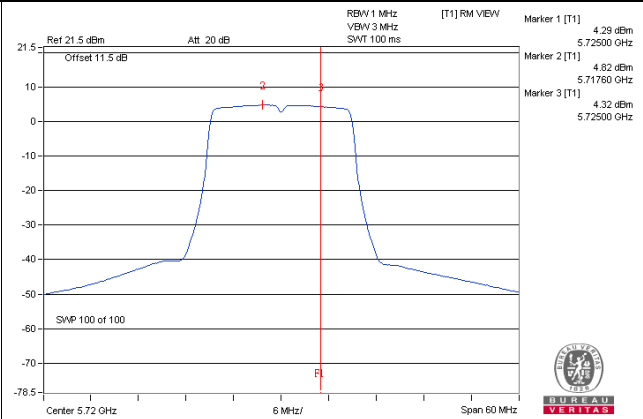

802.11n (HT40) / Chain 0 / CH 54

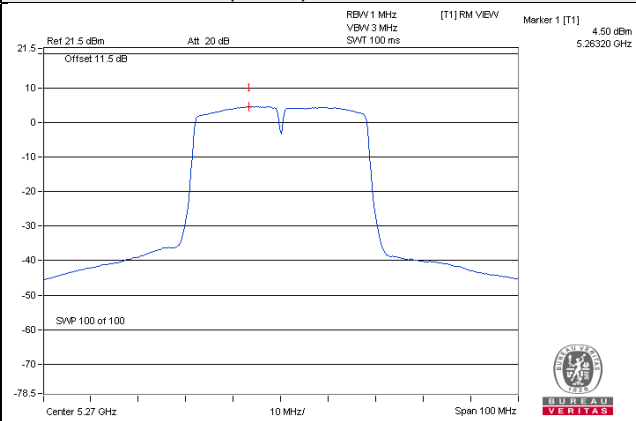

802.11ac (VHT80) / Chain 1 / CH 138

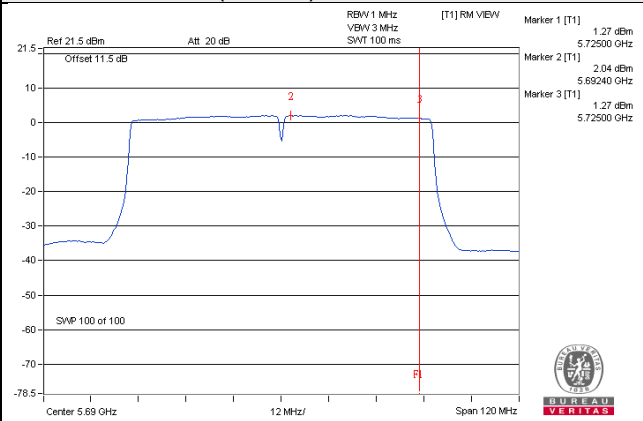

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	144	5720	-4.45	-2.23	3.01	0.25	1.03	26.89	Pass
1	144	5720	-4.24	-2.02	3.01	0.25	1.24	26.89	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(9.11-6) = 26.89\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	144	5720	-4.48	-2.26	3.01	0.11	0.86	26.89	Pass
1	144	5720	-4.25	-2.03	3.01	0.11	1.09	26.89	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(9.11-6) = 26.89\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	142	5710	-5.91	-3.69	3.01	0.27	-0.41	26.89	Pass
1	142	5710	-5.62	-3.40	3.01	0.27	-0.12	26.89	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(9.11-6) = 26.89\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	138	5690	-7.81	-5.59	3.01	0.39	-2.19	26.89	Pass
1	138	5690	-7.37	-5.15	3.01	0.39	-1.75	26.89	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $6.10\text{dBi} + 10\log(2) = 9.11\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (9.11 - 6) = 26.89\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

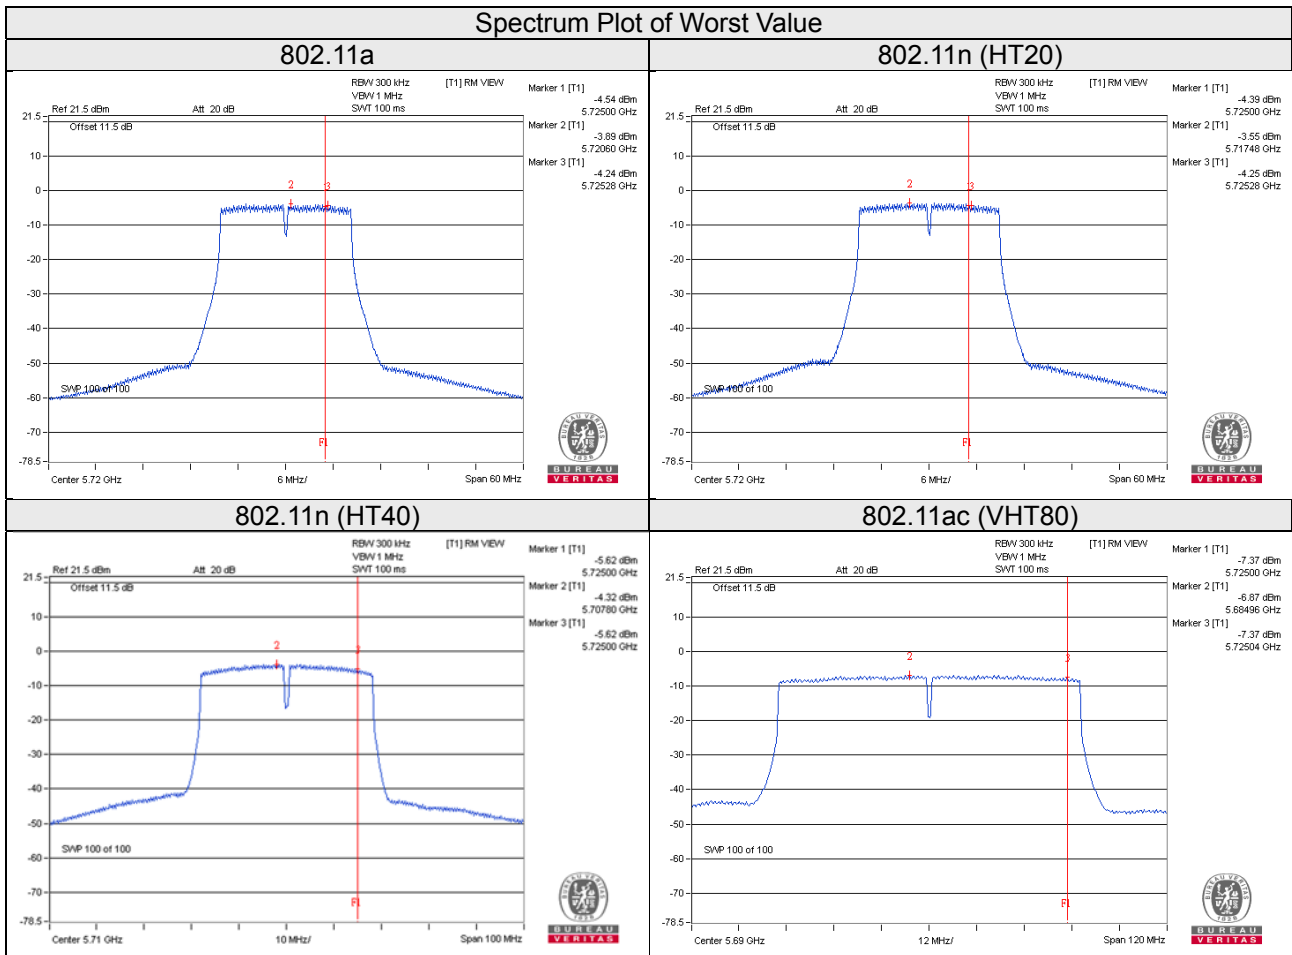


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

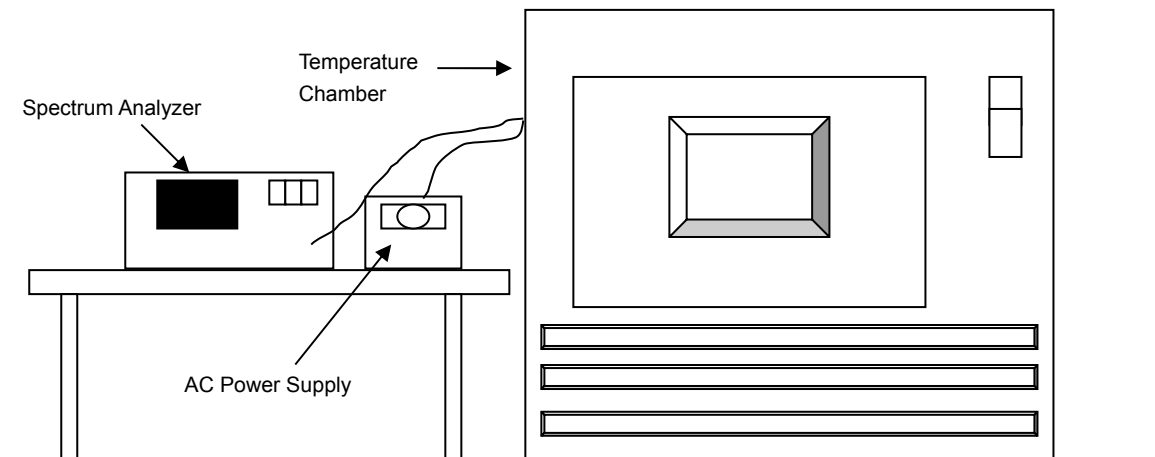

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5260MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5260.0027	0.00005	5260.006	0.00011	5260.004	0.00008	5260.0052	0.00010
40	120	5260.0214	0.00041	5260.0185	0.00035	5260.0178	0.00034	5260.0211	0.00040
30	120	5259.9916	-0.00016	5259.9907	-0.00018	5259.9907	-0.00018	5259.9895	-0.00020
20	120	5260.0186	0.00035	5260.0218	0.00041	5260.0168	0.00032	5260.0202	0.00038
10	120	5259.9783	-0.00041	5259.9741	-0.00049	5259.9767	-0.00044	5259.9763	-0.00045
0	120	5259.9928	-0.00014	5259.9932	-0.00013	5259.99	-0.00019	5259.9894	-0.00020
-10	120	5260.0061	0.00012	5260.0058	0.00011	5260.0061	0.00012	5260.0029	0.00006
-20	120	5260.0169	0.00032	5260.0193	0.00037	5260.0202	0.00038	5260.0164	0.00031
-30	120	5260.0168	0.00032	5260.0145	0.00028	5260.0163	0.00031	5260.0136	0.00026


Frequency Stability Versus Voltage									
Operating Frequency: 5260MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5260.018	0.00034	5260.0212	0.00040	5260.0171	0.00033	5260.0204	0.00039
	120	5260.0186	0.00035	5260.0218	0.00041	5260.0168	0.00032	5260.0202	0.00038
	102	5260.0184	0.00035	5260.0212	0.00040	5260.0166	0.00032	5260.0193	0.00037

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup

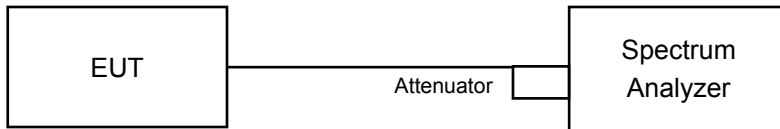

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144	5720 For U-NII-3	3.17	3.18	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144	5720 For U-NII-3	3.80	3.80	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
142	5710 For U-NII-3	2.91	3.20	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
138	5690 For U-NII-3	3.24	3.23	0.5	Pass

Spectrum Plot of Worst Value


802.11a

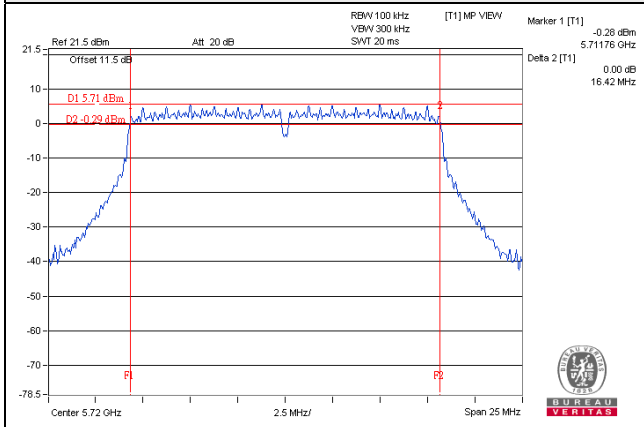


802.11n (HT20)

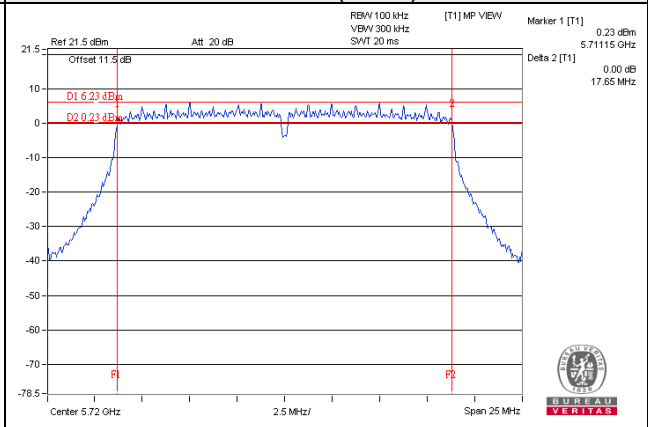

802.11n (HT40)

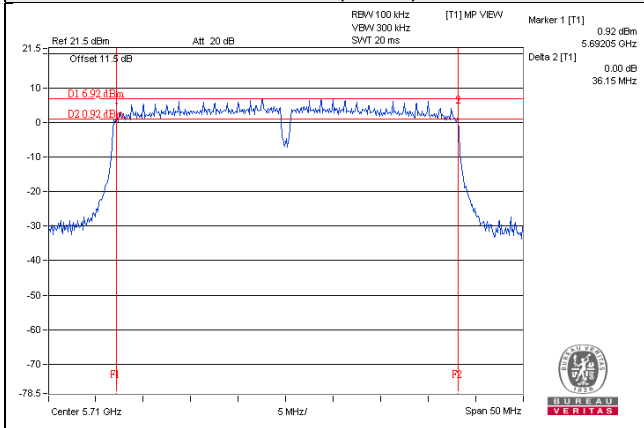

802.11ac (VHT80)

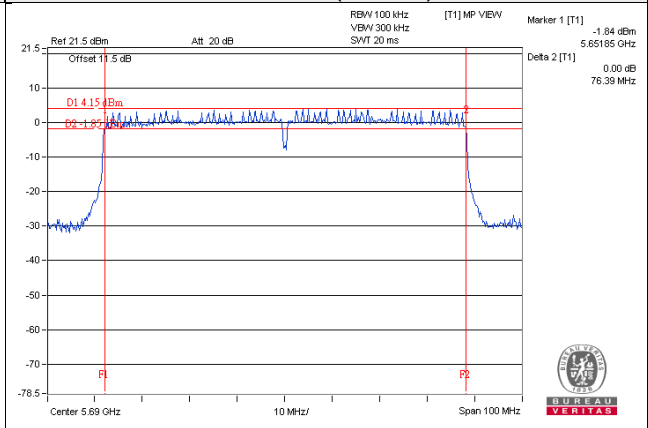

Note:

For CH144 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

For CH142 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

For CH138 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---