

FCC Test Report

Equipment : 802.11n Dual-band Unified Access Point
Brand Name : D-Link
Model No. : DWL-6700AP
FCC ID : KA2WL6700APA1
Standard : 47 CFR FCC Part 15.407
Operating Band : 5725 MHz – 5850 MHz
FCC Classification : NII
Applicant : D-Link Corporation
No. 289, Xinhu 3rd Rd., Neihu District, Taipei City 11494,
Taiwan, R. O. C.

The product sample received on Sep. 04, 2014 and completely tested on Apr. 13, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



James Fan / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	9
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	Emission Bandwidth	15
3.3	RF Output Power.....	18
3.4	Peak Power Spectral Density.....	21
3.5	Transmitter Radiated Unwanted Emissions and Band Edge	24
3.6	Frequency Stability.....	51
4	TEST EQUIPMENT AND CALIBRATION DATA	53
	APPENDIX A. TEST PHOTOS	A1-A5

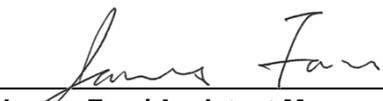

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 21.967MHz 43.47 (Margin 16.53dB) – QP 41.46 (Margin 8.54dB) – AV	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	26dB Bandwidth [MHz] 20M: 42.46 / 40M: 88.70 6dB Bandwidth [MHz] 20M: 16.41 / 40M: 36.41	Information only for 26dB bandwidth 500kHz for 6dB bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm] 5725-5850MHz: 20.88	Power [dBm] 5725-5850MHz: 30	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5725-5850MHz: 6.65	PPSD [dBm/500kHz] 5725-5850MHz: 30	Complied
3.5	15.407(b)	Transmitter Unwanted Emissions and Band Edge	Restricted Bands [dBuV/m at 3m]: 5000.00MHz 52.99 (Margin 1.01dB) – AV	Non-Restricted Bands: ≤ -27dBm (68.2dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.6	15.407(g)	Frequency Stability	5.0285 ppm	Signal shall remain in-band	Complied

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5725-5850	a	5745-5825	149-165 [5]	1 ^{NOTE 4}	19.71	Yes
5725-5850	a	5745-5825	149-165 [5]	2	20.88	Yes
5725-5850	n(HT20)	5745-5825	149-165 [5]	2	20.23	Yes
5725-5850	n(HT40)	5755-5795	151-159 [2]	2	20.82	Yes

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)
 Note 4: 802.11a supports 1Tx and 2Tx function. Only chain 0 transmits under 1Tx mode.

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)	
			2400~2483.5	5150~5850
1	Chip	N/A	2	-
2	Patch	N/A	-	8.08



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 98.73% - IEEE 802.11a – 1Tx	0.06
<input checked="" type="checkbox"/> 98.73% - IEEE 802.11a – 2Tx	0.06
<input checked="" type="checkbox"/> 98.63% - IEEE 802.11an (HT20) – 2Tx	0.06
<input checked="" type="checkbox"/> 97.27% - IEEE 802.11an (HT40) – 2Tx	0.12

1.1.5 EUT Operational Condition

Supply Voltage	24Vdc from POE		
Test Voltage	<input checked="" type="checkbox"/> Vnom (120 V)	<input checked="" type="checkbox"/> Vmax (138 V)	<input checked="" type="checkbox"/> Vmin (102 V)
Test Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (50°C)	<input checked="" type="checkbox"/> Tmin (-30°C)

1.2 Accessories and Support Equipment

Accessories		
No.	Equipment	Description
1	POE	Brand: GME. Model: GFP241DA-240100HB I/P: 100-240Vac, 50-60Hz, 0.55A O/P: 24Vdc, 1A Power line: 0.75m non-shielded without core
2	RJ45 Cable	2m shielded w/o core.

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5420	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ◆ FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rule v01
- ◆ FCC KDB 662911 D01 Multiple Transmitter Output v02r01
- ◆ FCC KDB 412172 D01 Determining ERP and EIRP v01

Note: FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Aaron Liang	22°C / 62%	Apr. 13, 2015
AC Conduction	CO04-HY	Skys Huang	22°C / 61%	Jan. 27, 2015
Radiated Emission	03CH03-HY	Mark Liao	21°C / 63 ~ 64%	Mar. 30 ~ Apr. 09, 2015
Test site registered number [643075] with FCC				
Test site registered number [4086B-1] with IC				

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing (5725-5850 MHz)			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a	1	6-54Mbps	6 Mbps
11a	2	6-54Mbps	6 Mbps
HT20	2	MCS 0-15	MCS 0
HT40	2	MCS 0-15	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter						
Test Software	ART2-GUI, Version: ver_4_6_78_ap13x_Bin					
Modulation Mode	N _{TX}	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5745	5785	5825	5755	5795
11a,6-54Mbps	1	23	24.5	24.5	--	--
11a,6-54Mbps	2	17	19.5	24.5	--	--
HT20,M0-15	2	16.5	20.5	23.5	--	--
HT40,M0-15	2	--	--	--	16	23


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a
Operating Mode	Operating Mode Description
	1. 1Tx / Chain 0
	2. 2Tx
Modulation Mode	HT20, HT40
Operating Mode	Operating Mode Description
	1. 2Tx

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes are Y-plane. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is Z.		
Modulation Mode	11a		
Operating Mode	<input checked="" type="checkbox"/> 1. 1Tx / Chain 0 <input checked="" type="checkbox"/> 2. 2Tx		
Modulation Mode	HT20, HT40		
Operating Mode	<input checked="" type="checkbox"/> 1. 2Tx		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

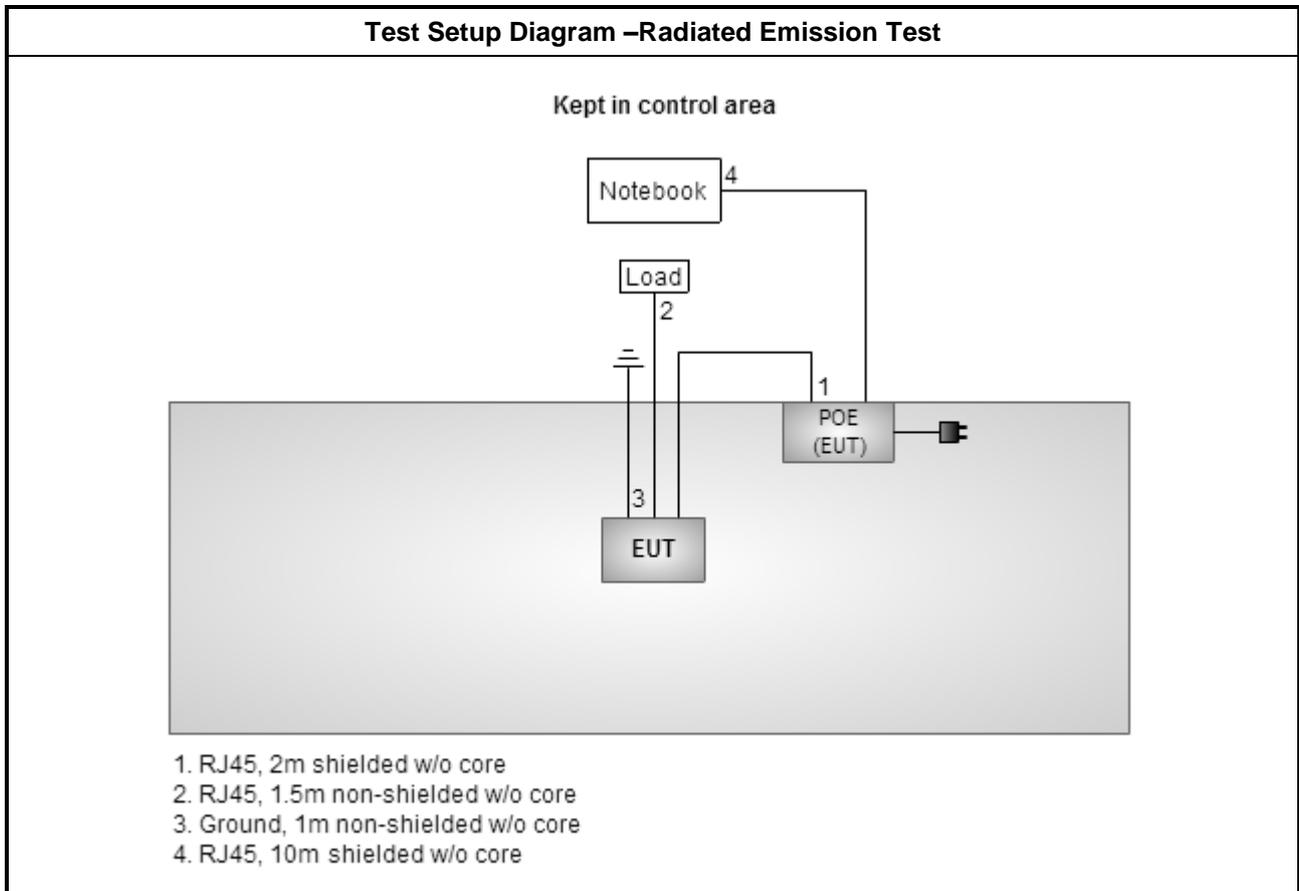

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

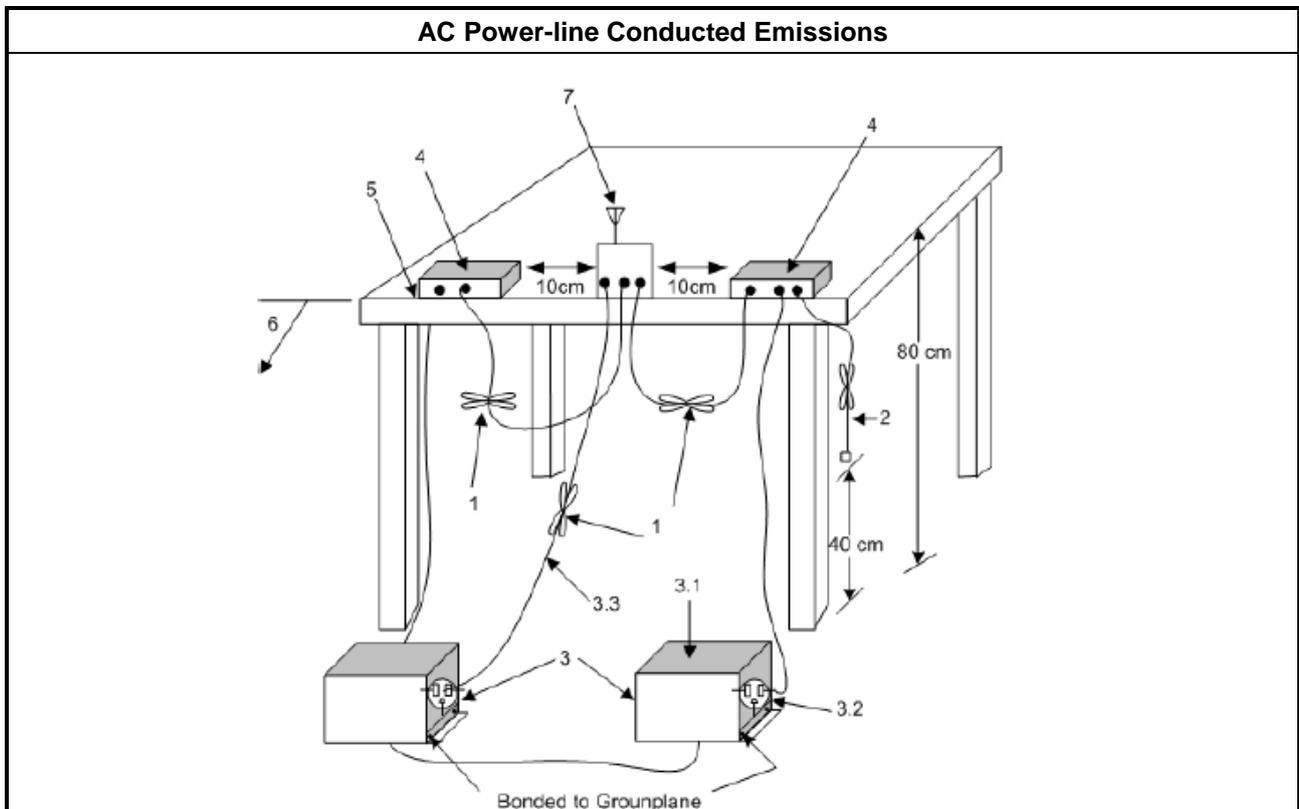


3.1.5 Test Result of AC Power-line Conducted Emissions

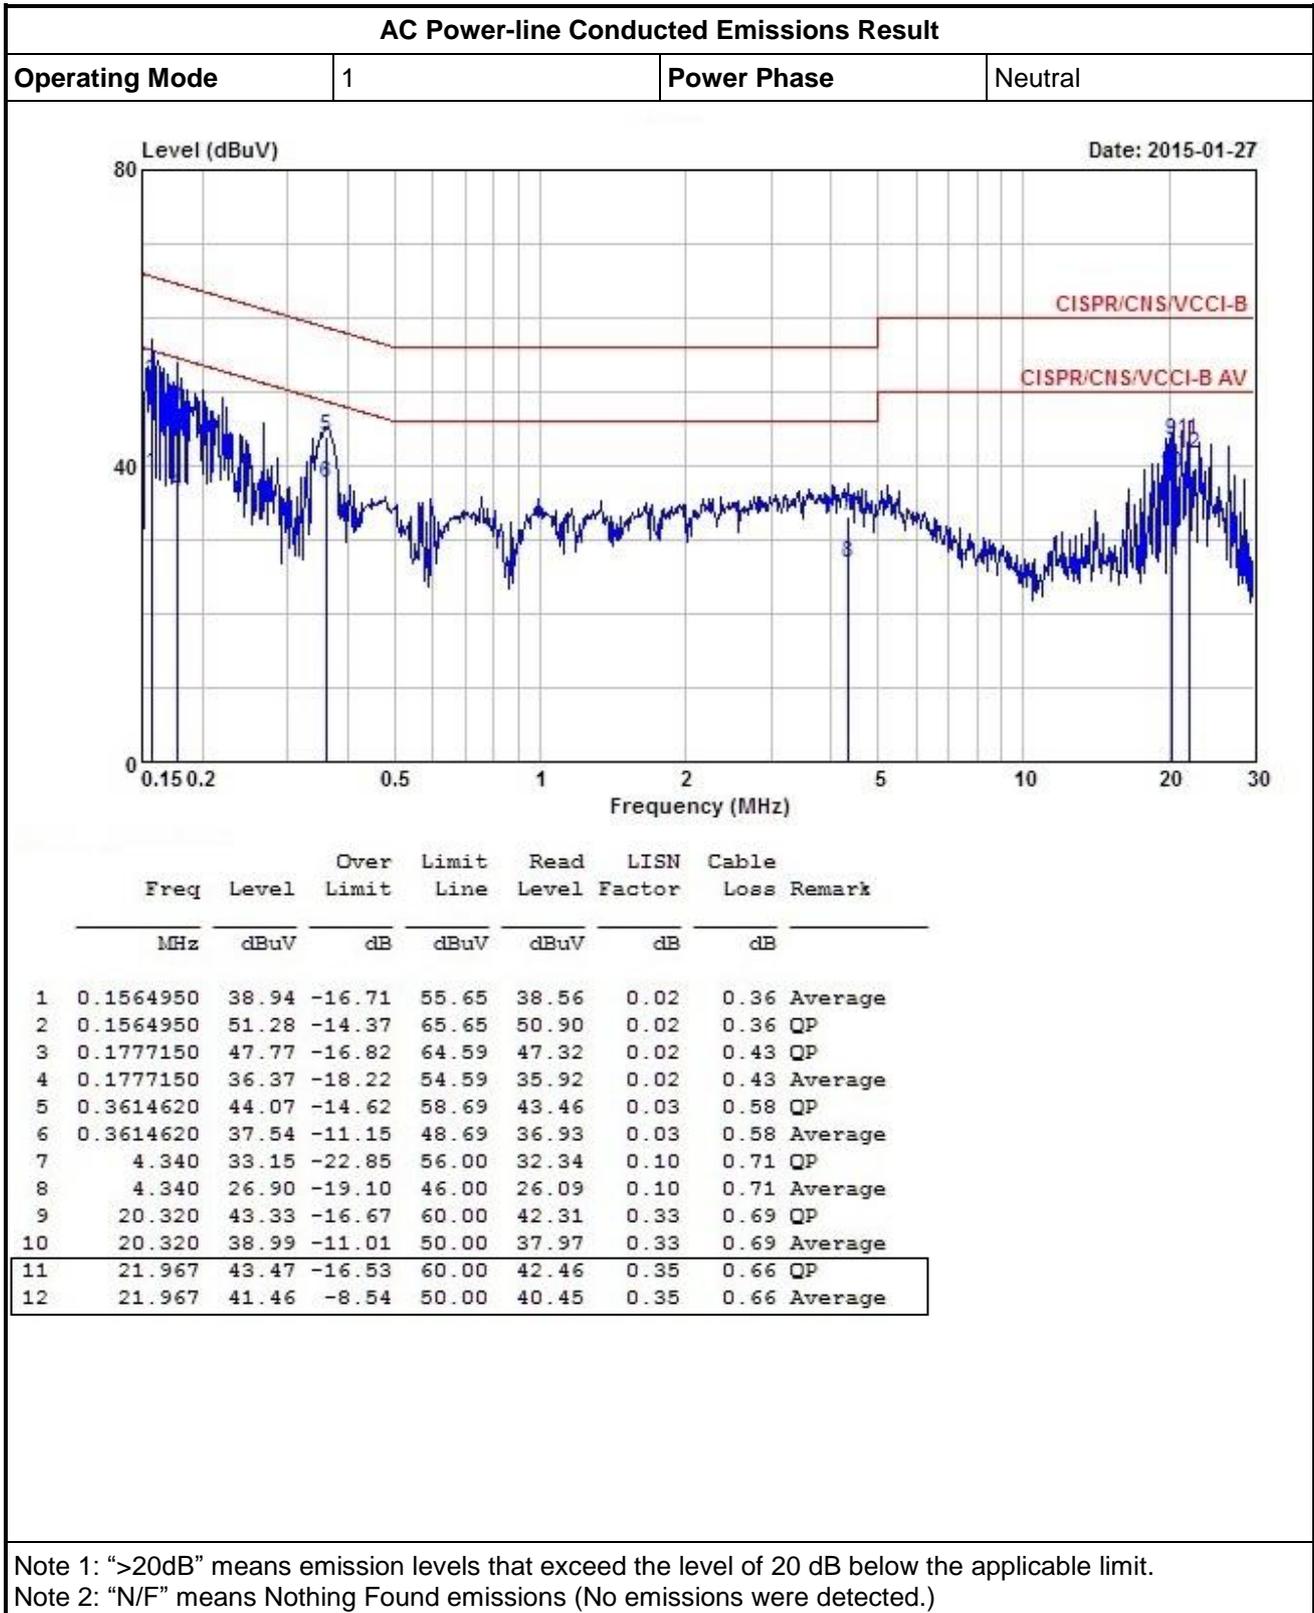



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
----------------	---	-------------	------

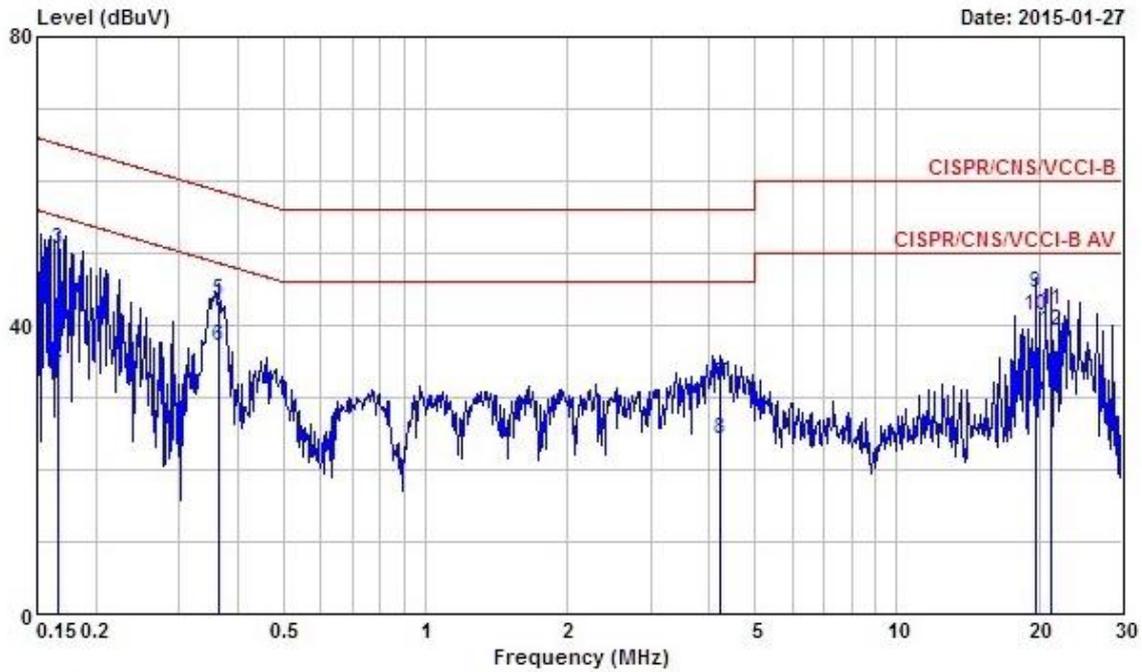

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1500000	53.15	-12.85	66.00	52.78	0.03	0.34	QP
2	0.1500000	34.36	-21.64	56.00	33.99	0.03	0.34	Average
3	0.1667680	50.58	-14.54	65.12	50.15	0.03	0.40	QP
4	0.1667680	34.13	-20.99	55.12	33.70	0.03	0.40	Average
5	0.3633820	43.49	-15.16	58.65	42.87	0.03	0.59	QP
6	0.3633820	37.09	-11.56	48.65	36.47	0.03	0.59	Average
7	4.200	31.74	-24.26	56.00	30.93	0.10	0.71	QP
8	4.200	24.16	-21.84	46.00	23.35	0.10	0.71	Average
9	19.710	44.49	-15.51	60.00	43.47	0.31	0.71	QP
10	19.710	41.31	-8.69	50.00	40.29	0.31	0.71	Average
11	21.260	42.21	-17.79	60.00	41.21	0.33	0.67	QP
12	21.260	39.22	-10.78	50.00	38.22	0.33	0.67	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit
Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause C for EBW / 6dB bandwidth and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 6.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

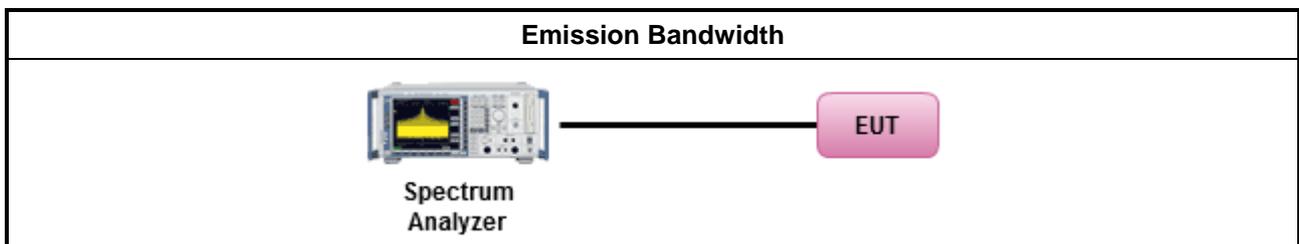




3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result														
Condition			Emission Bandwidth (MHz)											
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				26dB Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11a	1	5745	16.92	--	--	--	29.10	--	--	--	16.52	--	--	--
11a	1	5785	17.86	--	--	--	41.45	--	--	--	16.58	--	--	--
11a	1	5825	19.73	--	--	--	42.46	--	--	--	16.41	--	--	--
11a	2	5745	16.82	16.67	--	--	23.19	22.61	--	--	16.58	16.41	--	--
11a	2	5785	16.94	16.79	--	--	28.77	30.94	--	--	16.58	16.41	--	--
11a	2	5825	17.12	17.12	--	--	41.74	39.35	--	--	16.58	16.46	--	--
HT20	2	5745	17.94	17.83	--	--	23.65	23.65	--	--	17.68	17.68	--	--
HT20	2	5785	18.00	17.92	--	--	28.17	29.86	--	--	17.68	17.62	--	--
HT20	2	5825	18.79	18.31	--	--	40.80	39.64	--	--	17.74	17.68	--	--
HT40	2	5755	37.08	36.98	--	--	50.20	49.16	--	--	36.41	36.52	--	--
HT40	2	5795	37.50	37.42	--	--	88.70	85.80	--	--	36.41	36.52	--	--
Result			Complied											




Worst Emission Bandwidth Plots


99% Bandwidth

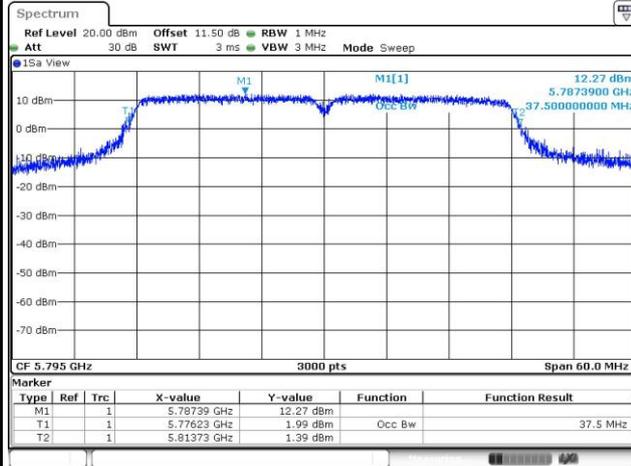

26dB Bandwidth

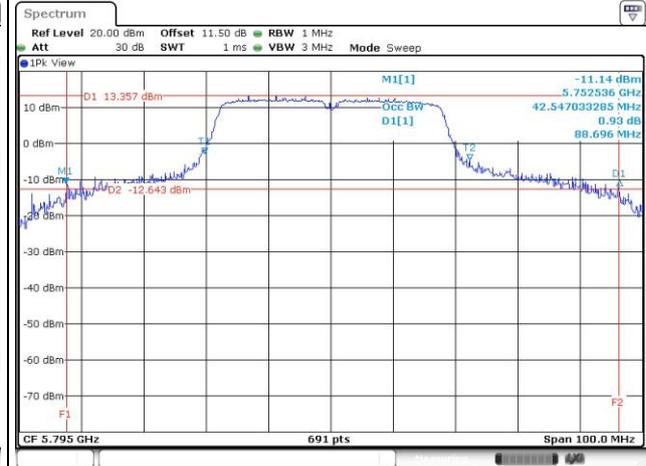

6dB Bandwidth

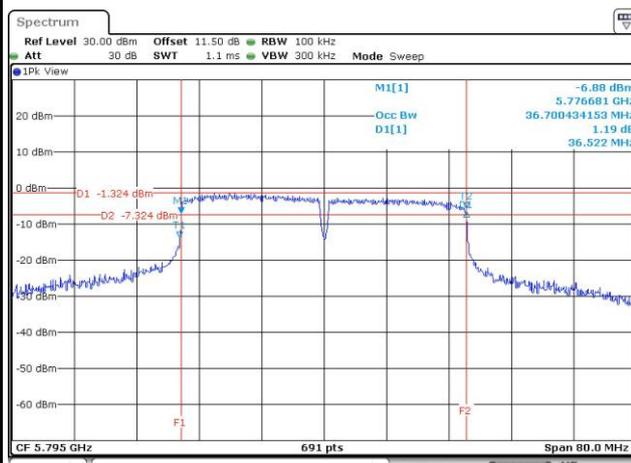

--

--

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit
<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power</p>


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Maximum Conducted Output Power
<input type="checkbox"/> Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor
<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method PM-G (using a gated RF average power meter).
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

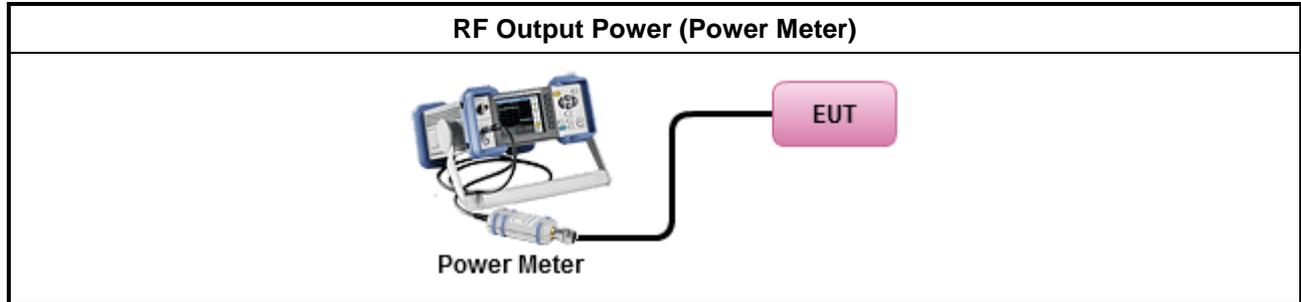

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G _{ANT} (dBi)		8.08	8.08	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	8.08	1	1	-	-
11a,6-54Mbps	8.08	2	1	-	-
HT20,M0-15	8.08	2	1	-	-
HT40,M0-15	8.08	2	1	-	-



3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5745	17.58	--	--	--	17.58	30.00	8.08	25.66	36.00
11a	1	5785	19.71	--	--	--	19.71	30.00	8.08	27.79	36.00
11a	1	5825	19.56	--	--	--	19.56	30.00	8.08	27.64	36.00
11a	2	5745	13.22	13.75	--	--	16.50	30.00	8.08	24.58	36.00
11a	2	5785	16.26	15.12	--	--	18.74	30.00	8.08	26.82	36.00
11a	2	5825	18.95	16.43	--	--	20.88	30.00	8.08	28.96	36.00
HT20	2	5745	12.27	12.21	--	--	15.25	30.00	8.08	23.33	36.00
HT20	2	5785	16.63	14.61	--	--	18.75	30.00	8.08	26.83	36.00
HT20	2	5825	18.47	15.46	--	--	20.23	30.00	8.08	28.31	36.00
HT40	2	5755	12.72	13.51	--	--	16.14	30.00	8.08	24.22	36.00
HT40	2	5795	18.90	16.35	--	--	20.82	30.00	8.08	28.90	36.00
Result			Complied								

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit
The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

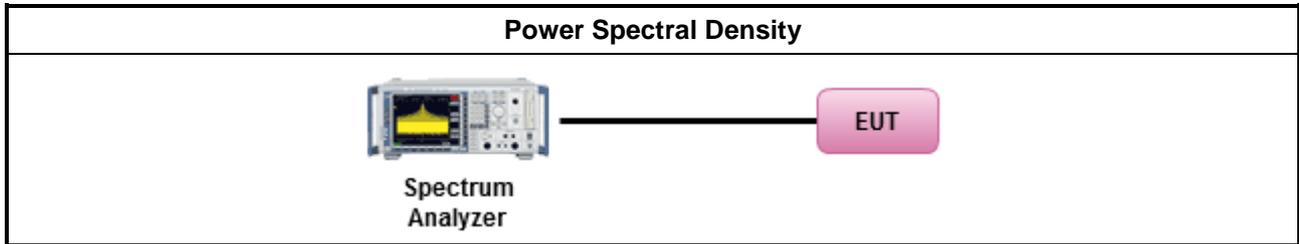


3.4.5 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result							
Condition			Peak Power Spectral Density (dBm/500kHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5745	3.35	30.00	8.08	11.43	36.00
11a	1	5785	4.80	30.00	8.08	12.88	36.00
11a	1	5825	5.26	30.00	8.08	13.34	36.00
11a	2	5745	2.18	30.00	11.09	13.27	36.00
11a	2	5785	4.12	30.00	11.09	15.21	36.00
11a	2	5825	6.65	30.00	11.09	17.74	36.00
HT20	2	5745	0.19	30.00	11.09	11.28	36.00
HT20	2	5785	4.00	30.00	11.09	15.09	36.00
HT20	2	5825	5.55	30.00	11.09	16.64	36.00
HT40	2	5755	-2.46	30.00	11.09	8.63	36.00
HT40	2	5795	3.01	30.00	11.09	14.10	36.00
Result			Complied				

Note:

1. Directional gain = 8.08 + 2*log(2/1) = 11.09 dBi
2. Test results for 2TX mode are bin-by-bin summing measured value of each TX port.

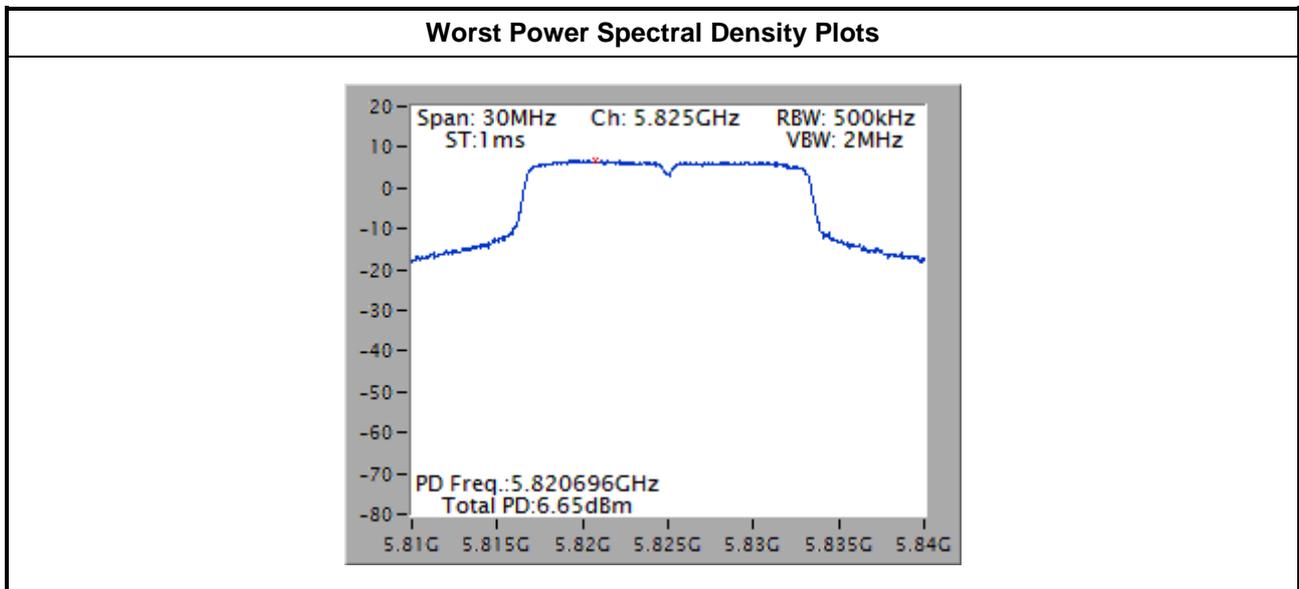

3.5 Transmitter Radiated Unwanted Emissions and Band Edge

3.5.1 Transmitter Radiated Unwanted Emissions and Band Edge Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.715~ 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 ~5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method AD (Trace Averaging).
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method VB (Reduced VBW).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 12.7.7.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 12.7.6 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 789033 D02 General UNII Test Procedures New Rules v01, clause G)3).
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB
<input type="checkbox"/>	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

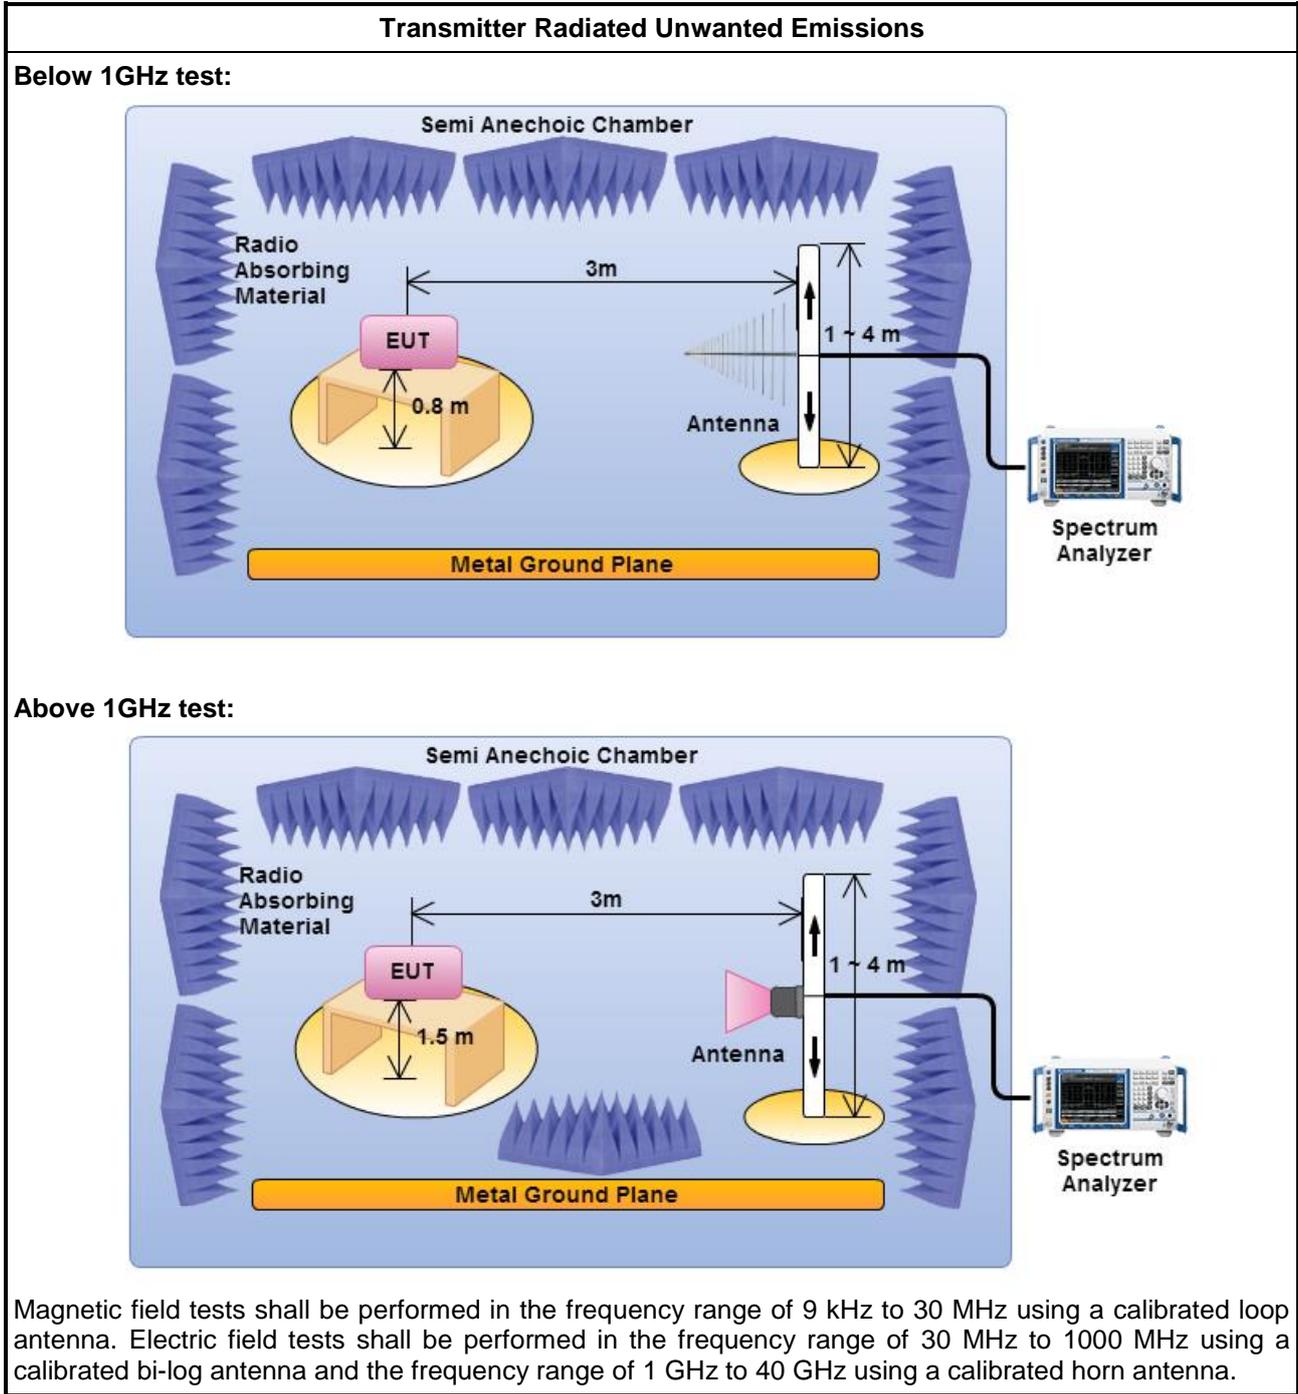


3.5.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5825
Polarization	H		

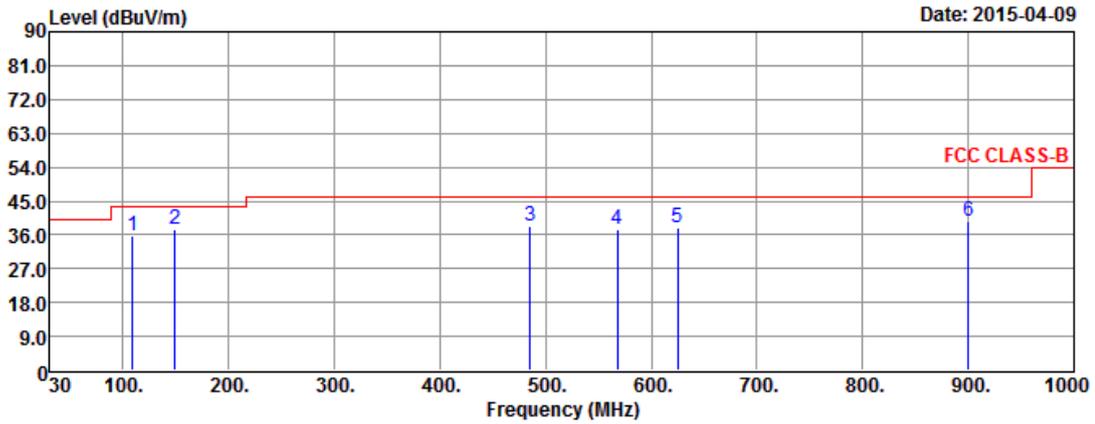


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	108.84	35.91	-7.59	43.50	56.51	10.34	0.75	31.69	---	---	Peak
2	148.87	37.44	-6.06	43.50	54.32	13.84	0.90	31.62	---	---	Peak
3	485.42	38.35	-7.65	46.00	50.10	18.00	1.61	31.36	---	---	Peak
4	567.49	37.65	-8.35	46.00	47.70	19.58	1.74	31.37	---	---	Peak
5	624.51	37.94	-8.06	46.00	47.00	20.50	1.82	31.38	---	---	Peak
6	900.22	39.68	-6.32	46.00	44.71	24.10	2.19	31.32	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
Polarization	V		

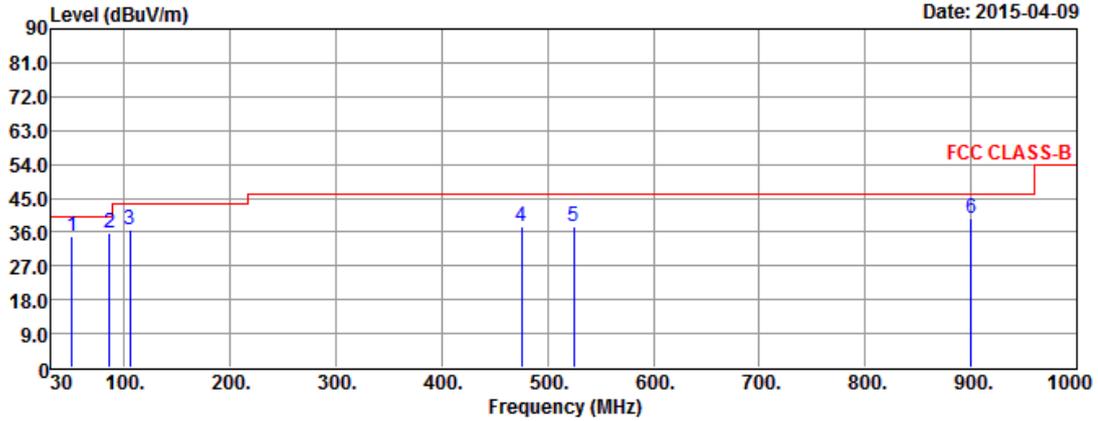


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	50.35	34.79	-5.21	40.00	51.27	14.78	0.55	31.81	---	---	QP
2	85.55	35.62	-4.38	40.00	58.29	8.42	0.67	31.76	---	---	Peak
3	105.34	36.75	-6.75	43.50	57.86	9.85	0.74	31.70	---	---	Peak
4	475.29	37.48	-8.52	46.00	49.40	17.85	1.60	31.37	---	---	Peak
5	524.65	37.42	-8.58	46.00	48.42	18.69	1.67	31.36	---	---	Peak
6	900.11	39.81	-6.19	46.00	44.84	24.10	2.19	31.32	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

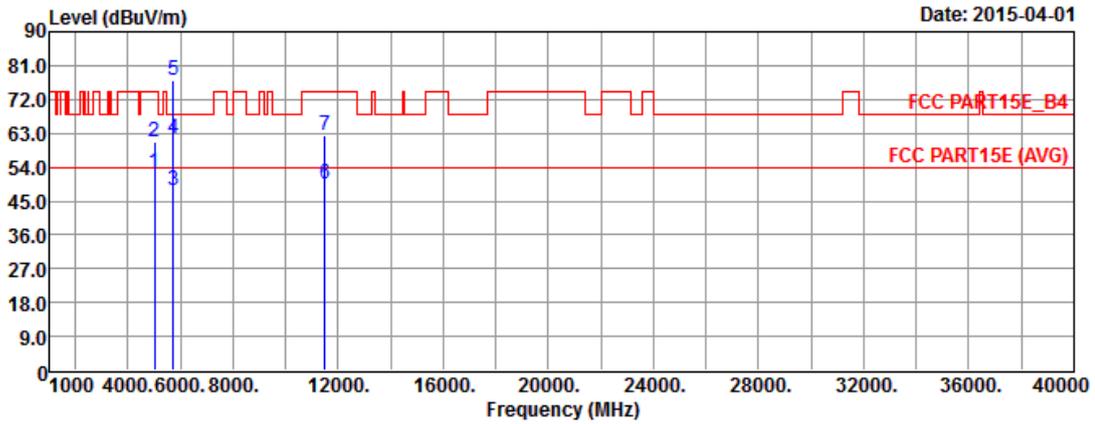


	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor		Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.54	-1.46	54.00	47.16	31.40	6.87	32.89	---	Average
2	5000.00	60.85	-13.15	74.00	55.47	31.40	6.87	32.89	---	Peak
3	5715.00	47.73	-6.27	54.00	41.03	32.10	7.52	32.92	---	Average
4	5715.00	61.68	-6.52	68.20	54.98	32.10	7.52	32.92	---	Peak
5	5725.00	76.96	-1.24	78.20	70.25	32.11	7.53	32.93	---	Peak
6	11490.00	49.35	-4.65	54.00	33.13	40.30	11.19	35.27	---	Average
7	11490.00	62.47	-11.53	74.00	46.25	40.30	11.19	35.27	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	V

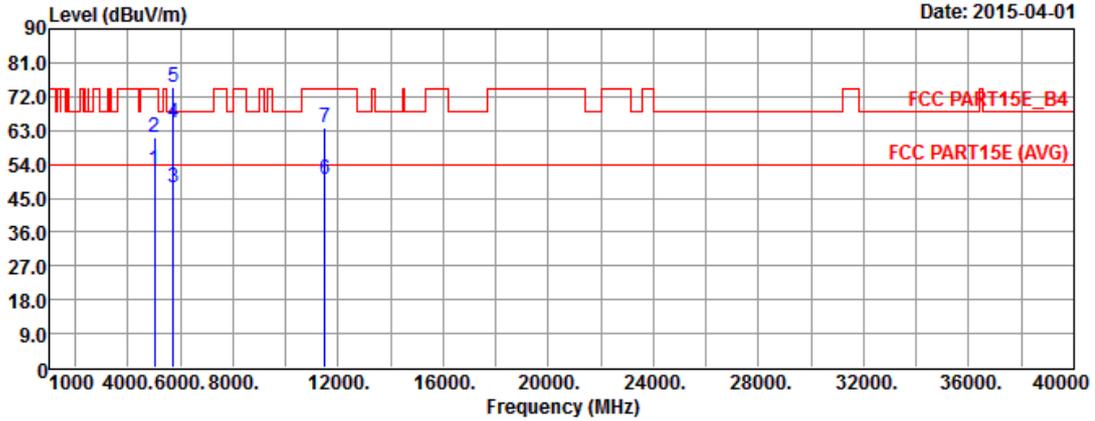


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.63	-1.37	54.00	47.25	31.40	6.87	32.89	---	---	Average
2	5000.00	61.34	-12.66	74.00	55.96	31.40	6.87	32.89	---	---	Peak
3	5715.00	47.98	-6.02	54.00	41.28	32.10	7.52	32.92	---	---	Average
4	5715.00	64.91	-3.29	68.20	58.21	32.10	7.52	32.92	---	---	Peak
5	5725.00	74.69	-3.51	78.20	67.98	32.11	7.53	32.93	---	---	Peak
6	11490.00	49.75	-4.25	54.00	33.53	40.30	11.19	35.27	---	---	Average
7	11490.00	63.70	-10.30	74.00	47.48	40.30	11.19	35.27	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	H

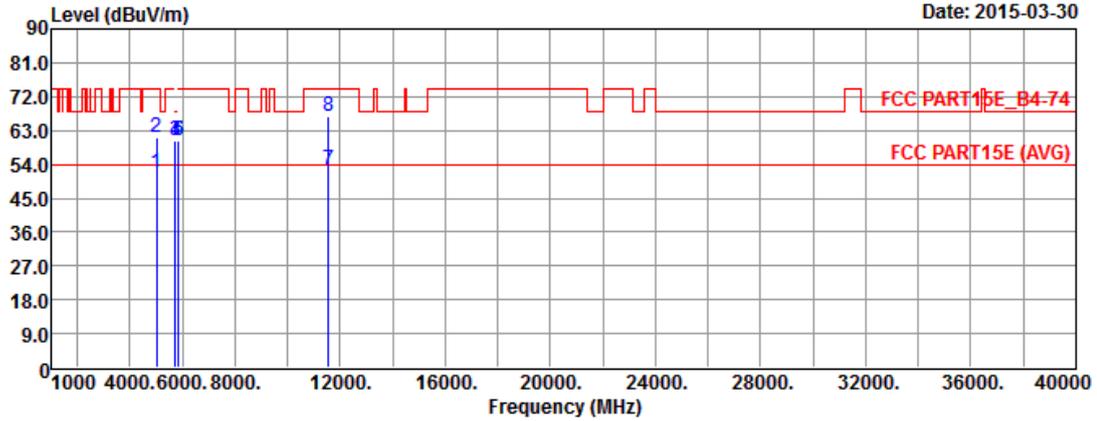


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	51.62	-2.38	54.00	46.24	31.40	6.87	32.89	---	---	Average
2	5000.00	61.29	-12.71	74.00	55.91	31.40	6.87	32.89	---	---	Peak
3	5715.00	60.22	-13.78	74.00	53.52	32.10	7.52	32.92	---	---	Peak
4	5725.00	60.40	-17.80	78.20	53.69	32.11	7.53	32.93	---	---	Peak
5	5850.00	60.48	-17.72	78.20	53.53	32.29	7.63	32.97	---	---	Peak
6	5860.00	60.17	-13.83	74.00	53.22	32.30	7.63	32.98	---	---	Peak
7	11570.00	52.71	-1.29	54.00	36.59	40.16	11.22	35.26	---	---	Average
8	11570.00	66.57	-7.43	74.00	50.45	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	V

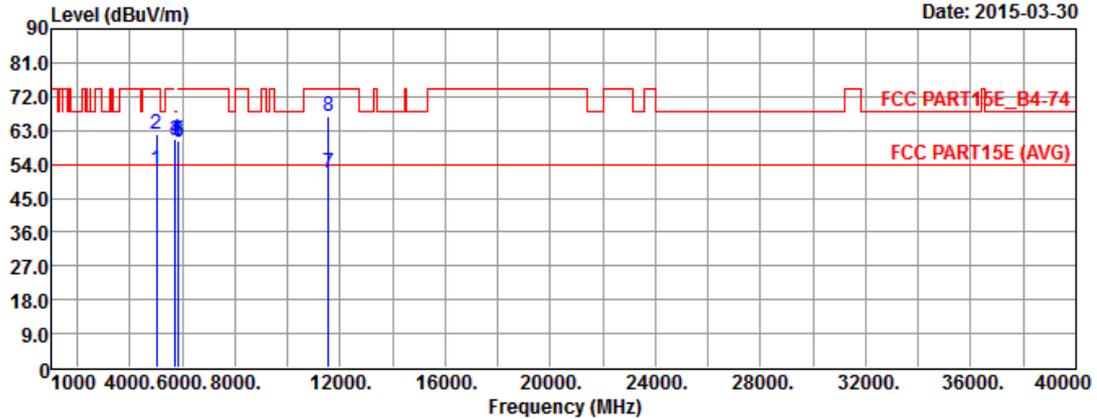


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.73	-1.27	54.00	47.35	31.40	6.87	32.89	---	---	Average
2	5000.00	61.94	-12.06	74.00	56.56	31.40	6.87	32.89	---	---	Peak
3	5715.00	60.43	-13.57	74.00	53.73	32.10	7.52	32.92	---	---	Peak
4	5725.00	60.57	-17.63	78.20	53.86	32.11	7.53	32.93	---	---	Peak
5	5850.00	60.10	-18.10	78.20	53.15	32.29	7.63	32.97	---	---	Peak
6	5860.00	59.94	-14.06	74.00	52.99	32.30	7.63	32.98	---	---	Peak
7	11570.00	51.87	-2.13	54.00	35.75	40.16	11.22	35.26	---	---	Average
8	11570.00	66.65	-7.35	74.00	50.53	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

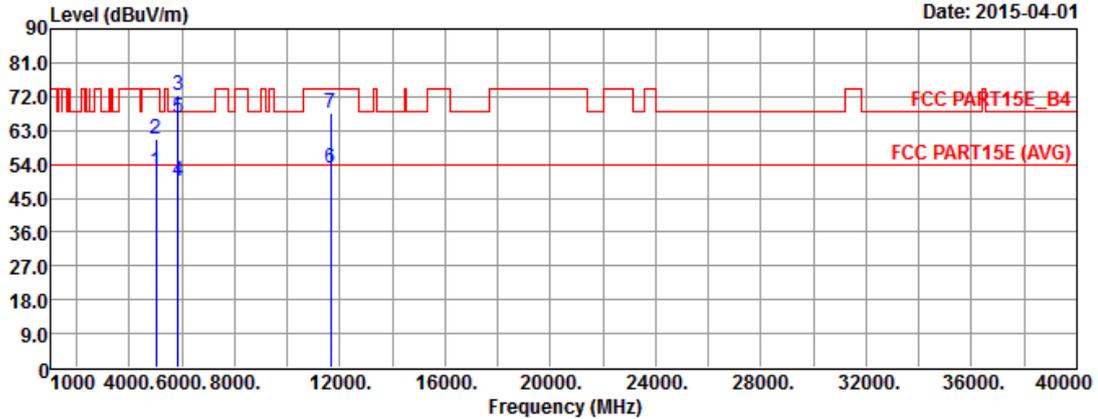


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.23	-1.77	54.00	46.85	31.40	6.87	32.89	---	---	Average
2	5000.00	60.85	-13.15	74.00	55.47	31.40	6.87	32.89	---	---	Peak
3	5850.00	72.54	-5.66	78.20	65.59	32.29	7.63	32.97	---	---	Peak
4	5860.00	49.66	-4.34	54.00	42.71	32.30	7.63	32.98	---	---	Average
5	5860.00	66.40	-1.80	68.20	59.45	32.30	7.63	32.98	---	---	Peak
6	11650.00	52.97	-1.03	54.00	36.95	40.00	11.26	35.24	---	---	Average
7	11650.00	67.82	-6.18	74.00	51.80	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	V

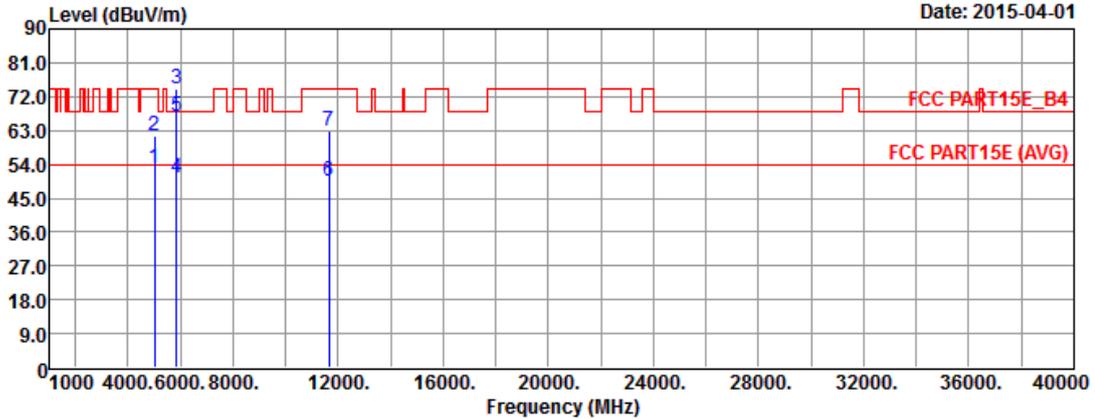


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.96	-1.04	54.00	47.58	31.40	6.87	32.89	---	---	Average
2	5000.00	61.65	-12.35	74.00	56.27	31.40	6.87	32.89	---	---	Peak
3	5850.00	73.97	-4.23	78.20	67.02	32.29	7.63	32.97	---	---	Peak
4	5860.00	50.21	-3.79	54.00	43.26	32.30	7.63	32.98	---	---	Average
5	5860.00	66.84	-1.36	68.20	59.89	32.30	7.63	32.98	---	---	Peak
6	11650.00	49.55	-4.45	54.00	33.53	40.00	11.26	35.24	---	---	Average
7	11650.00	62.87	-11.13	74.00	46.85	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	H

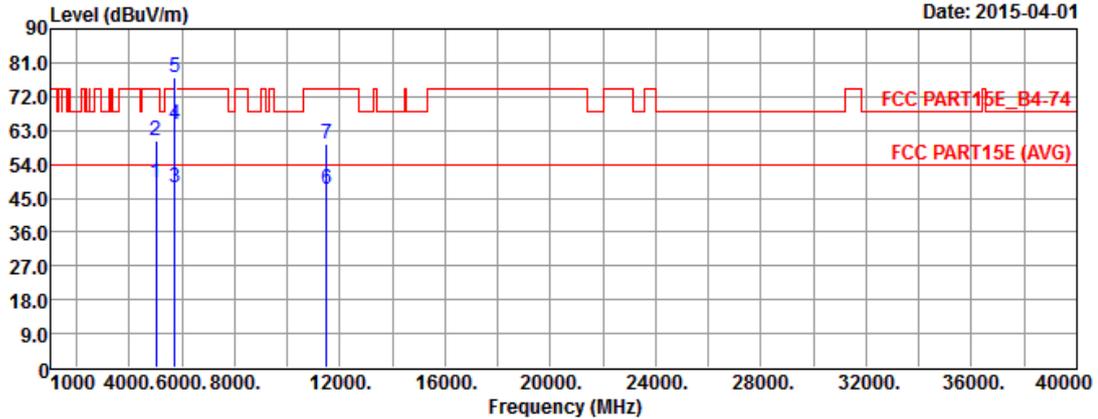


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	49.13	-4.87	54.00	43.75	31.40	6.87	32.89	---	---	Average
2	5000.00	60.32	-13.68	74.00	54.94	31.40	6.87	32.89	---	---	Peak
3	5715.00	47.71	-6.29	54.00	41.01	32.10	7.52	32.92	---	---	Average
4	5715.00	64.46	-9.54	74.00	57.76	32.10	7.52	32.92	---	---	Peak
5	5725.00	76.97	-1.23	78.20	70.26	32.11	7.53	32.93	---	---	Peak
6	11490.00	47.24	-6.76	54.00	31.02	40.30	11.19	35.27	---	---	Average
7	11490.00	59.36	-14.64	74.00	43.14	40.30	11.19	35.27	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

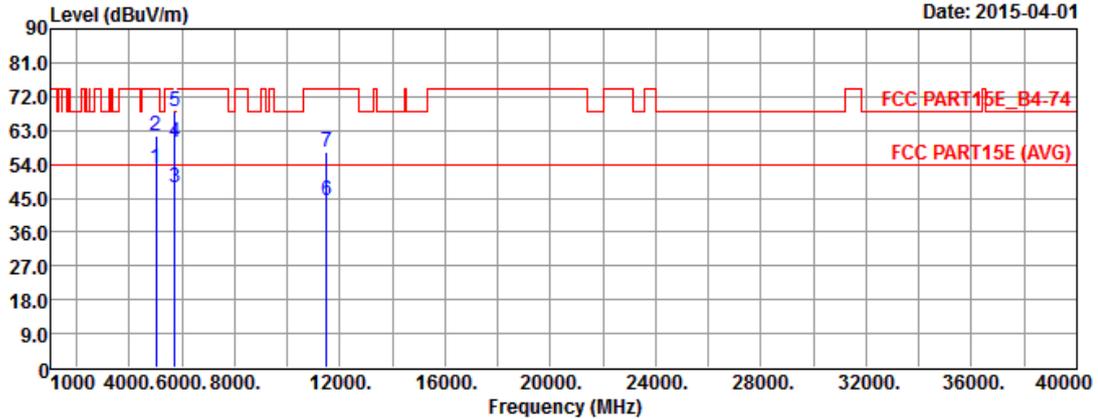


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.82	-1.18	54.00	47.44	31.40	6.87	32.89	---	---	Average
2	5000.00	61.66	-12.34	74.00	56.28	31.40	6.87	32.89	---	---	Peak
3	5715.00	47.93	-6.07	54.00	41.23	32.10	7.52	32.92	---	---	Average
4	5715.00	60.03	-13.97	74.00	53.33	32.10	7.52	32.92	---	---	Peak
5	5725.00	68.02	-10.18	78.20	61.31	32.11	7.53	32.93	---	---	Peak
6	11490.00	44.43	-9.57	54.00	28.21	40.30	11.19	35.27	---	---	Average
7	11490.00	57.17	-16.83	74.00	40.95	40.30	11.19	35.27	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	H

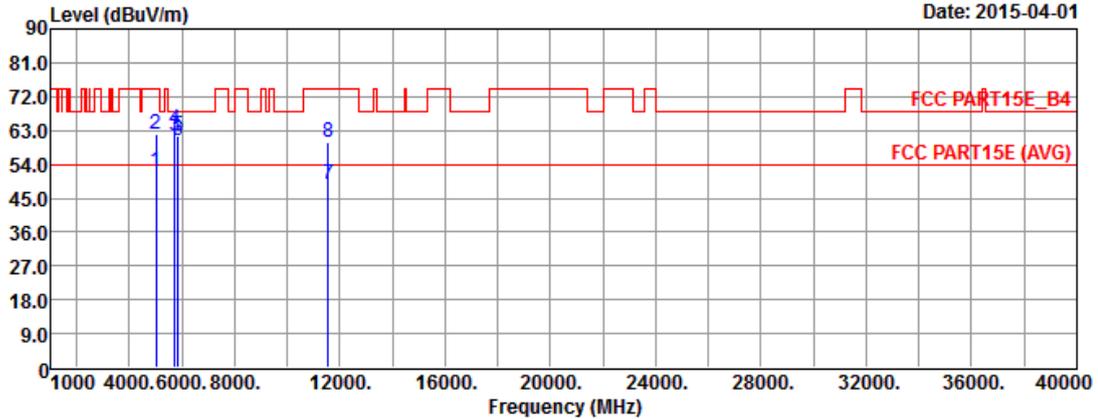


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	51.90	-2.10	54.00	46.52	31.40	6.87	32.89	---	---	Average
2	5000.00	62.15	-11.85	74.00	56.77	31.40	6.87	32.89	---	---	Peak
3	5715.00	61.71	-6.49	68.20	55.01	32.10	7.52	32.92	---	---	Peak
4	5725.00	63.27	-14.93	78.20	56.56	32.11	7.53	32.93	---	---	Peak
5	5850.00	61.57	-16.63	78.20	54.62	32.29	7.63	32.97	---	---	Peak
6	5860.00	60.12	-8.08	68.20	53.17	32.30	7.63	32.98	---	---	Peak
7	11570.00	48.66	-5.34	54.00	32.54	40.16	11.22	35.26	---	---	Average
8	11570.00	60.01	-13.99	74.00	43.89	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	V

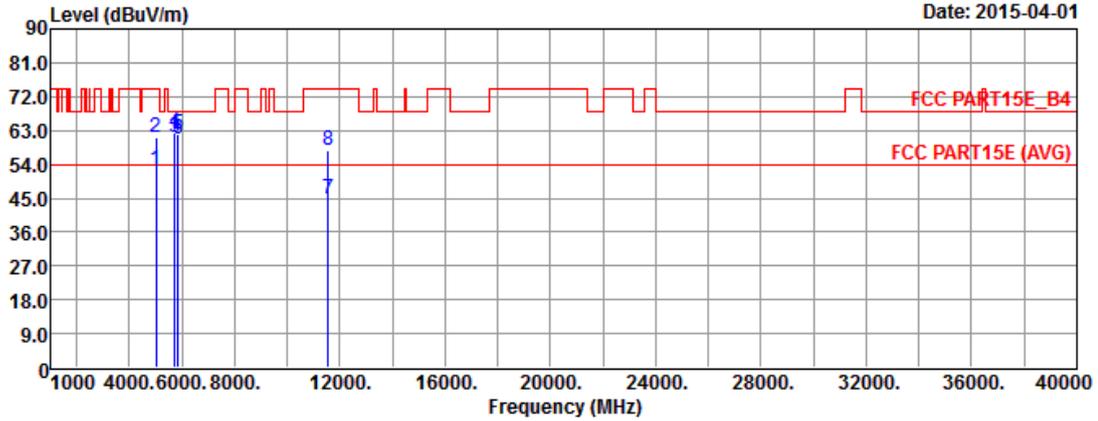


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.48	-1.52	54.00	47.10	31.40	6.87	32.89	---	---	Average
2	5000.00	60.96	-13.04	74.00	55.58	31.40	6.87	32.89	---	---	Peak
3	5715.00	61.18	-7.02	68.20	54.48	32.10	7.52	32.92	---	---	Peak
4	5725.00	62.63	-15.57	78.20	55.92	32.11	7.53	32.93	---	---	Peak
5	5850.00	62.10	-16.10	78.20	55.15	32.29	7.63	32.97	---	---	Peak
6	5860.00	60.92	-7.28	68.20	53.97	32.30	7.63	32.98	---	---	Peak
7	11570.00	44.98	-9.02	54.00	28.86	40.16	11.22	35.26	---	---	Average
8	11570.00	57.72	-16.28	74.00	41.60	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

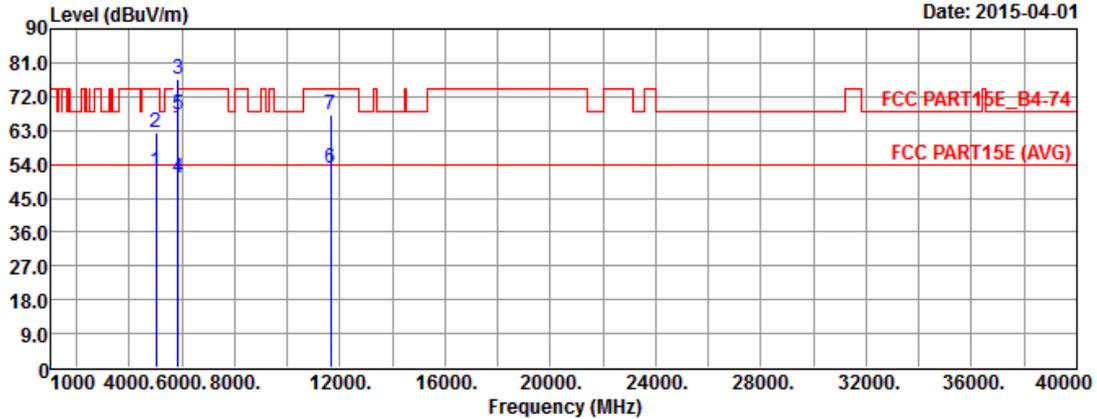


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.14	-1.86	54.00	46.76	31.40	6.87	32.89	---	---	Average
2	5000.00	62.34	-11.66	74.00	56.96	31.40	6.87	32.89	---	---	Peak
3	5850.00	76.68	-1.52	78.20	69.73	32.29	7.63	32.97	---	---	Peak
4	5860.00	50.50	-3.50	54.00	43.55	32.30	7.63	32.98	---	---	Average
5	5860.00	67.30	-6.70	74.00	60.35	32.30	7.63	32.98	---	---	Peak
6	11650.00	52.87	-1.13	54.00	36.85	40.00	11.26	35.24	---	---	Average
7	11650.00	67.09	-6.91	74.00	51.07	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	V

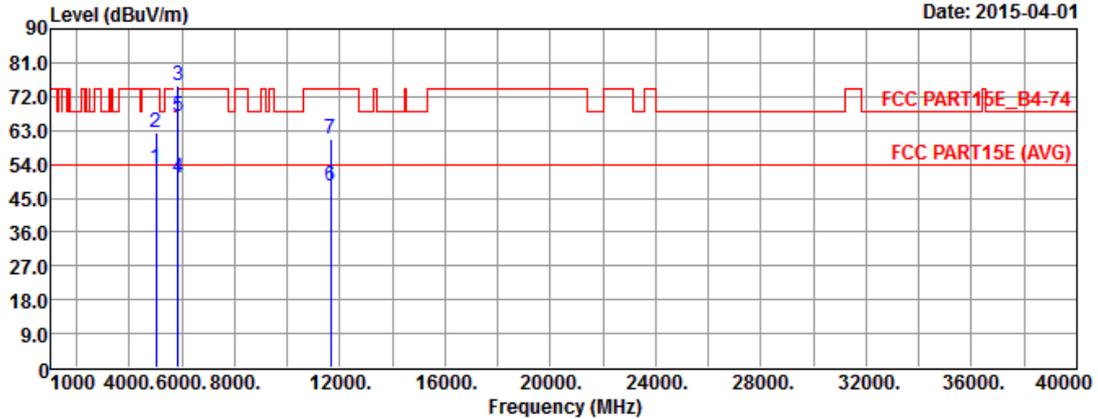

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.99	-1.01	54.00	47.61	31.40	6.87	32.89	---	---	Average
2	5000.00	62.63	-11.37	74.00	57.25	31.40	6.87	32.89	---	---	Peak
3	5850.00	75.02	-3.18	78.20	68.07	32.29	7.63	32.97	---	---	Peak
4	5860.00	50.55	-3.45	54.00	43.60	32.30	7.63	32.98	---	---	Average
5	5860.00	66.66	-7.34	74.00	59.71	32.30	7.63	32.98	---	---	Peak
6	11650.00	48.19	-5.81	54.00	32.17	40.00	11.26	35.24	---	---	Average
7	11650.00	60.55	-13.45	74.00	44.53	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

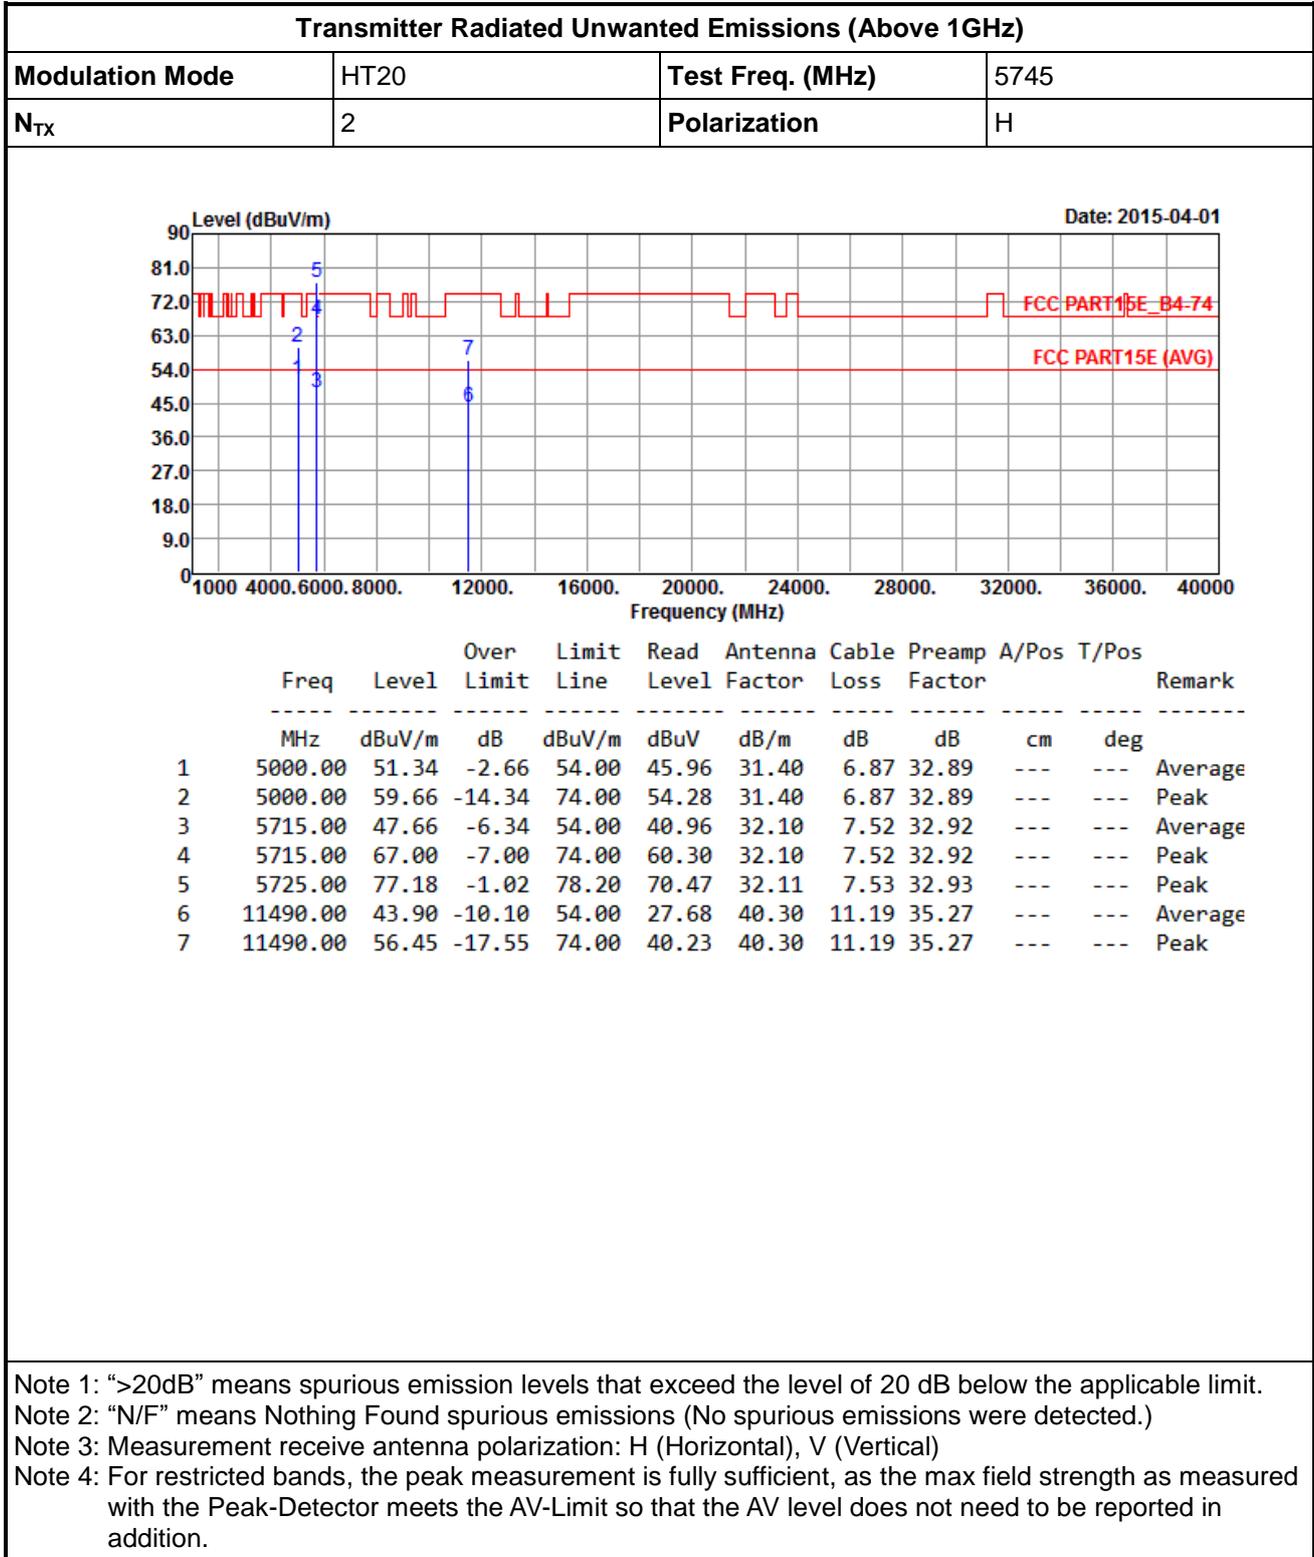



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

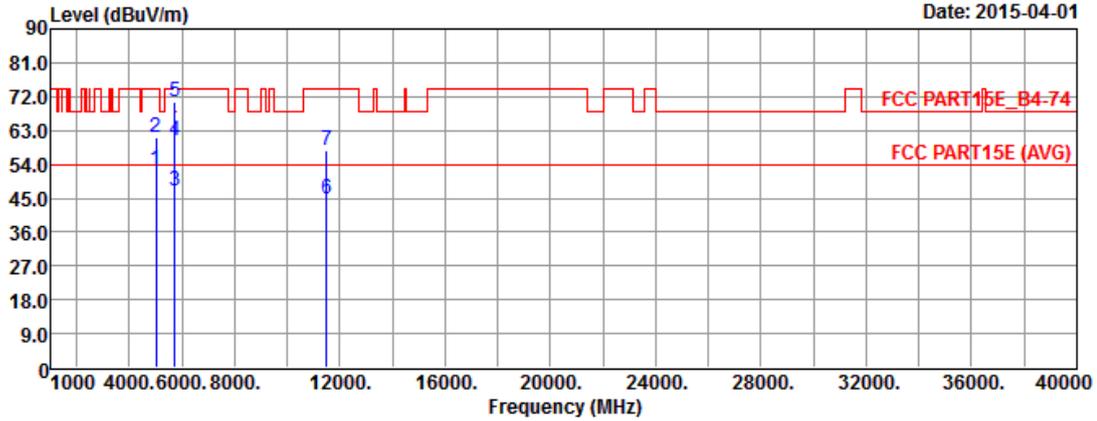


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.73	-1.27	54.00	47.35	31.40	6.87	32.89	---	---	Average
2	5000.00	61.00	-13.00	74.00	55.62	31.40	6.87	32.89	---	---	Peak
3	5715.00	46.92	-7.08	54.00	40.22	32.10	7.52	32.92	---	---	Average
4	5715.00	60.35	-13.65	74.00	53.65	32.10	7.52	32.92	---	---	Peak
5	5725.00	70.77	-7.43	78.20	64.06	32.11	7.53	32.93	---	---	Peak
6	11490.00	44.64	-9.36	54.00	28.42	40.30	11.19	35.27	---	---	Average
7	11490.00	57.52	-16.48	74.00	41.30	40.30	11.19	35.27	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	H

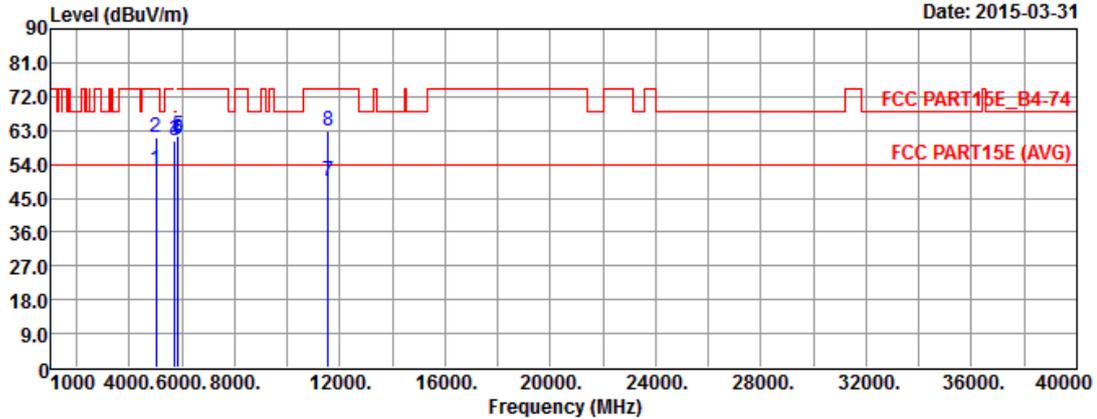


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.36	-1.64	54.00	46.98	31.40	6.87	32.89	---	---	Average
2	5000.00	61.35	-12.65	74.00	55.97	31.40	6.87	32.89	---	---	Peak
3	5715.00	60.14	-13.86	74.00	53.44	32.10	7.52	32.92	---	---	Peak
4	5725.00	60.44	-17.76	78.20	53.73	32.11	7.53	32.93	---	---	Peak
5	5850.00	61.50	-16.70	78.20	54.55	32.29	7.63	32.97	---	---	Peak
6	5860.00	60.63	-13.37	74.00	53.68	32.30	7.63	32.98	---	---	Peak
7	11570.00	49.34	-4.66	54.00	33.22	40.16	11.22	35.26	---	---	Average
8	11570.00	62.67	-11.33	74.00	46.55	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	V

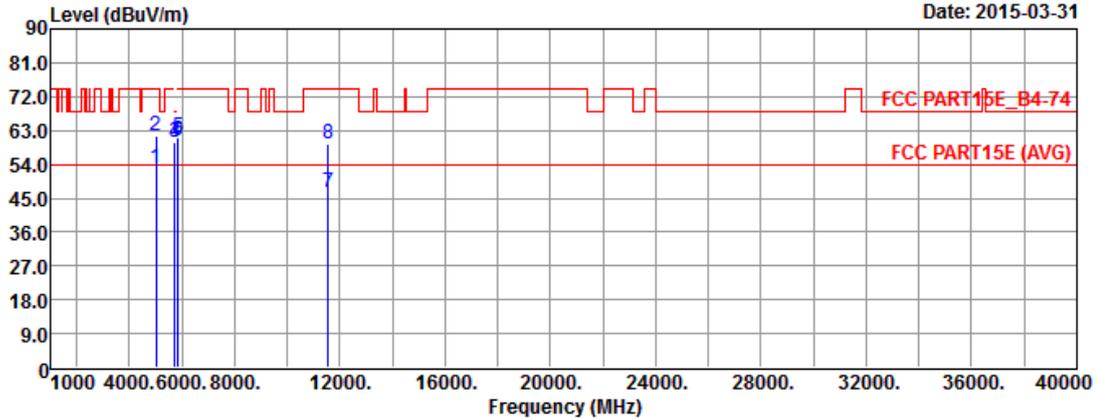


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.90	-1.10	54.00	47.52	31.40	6.87	32.89	---	---	Average
2	5000.00	61.45	-12.55	74.00	56.07	31.40	6.87	32.89	---	---	Peak
3	5715.00	59.88	-14.12	74.00	53.18	32.10	7.52	32.92	---	---	Peak
4	5725.00	60.04	-18.16	78.20	53.33	32.11	7.53	32.93	---	---	Peak
5	5850.00	61.25	-16.95	78.20	54.30	32.29	7.63	32.97	---	---	Peak
6	5860.00	60.40	-13.60	74.00	53.45	32.30	7.63	32.98	---	---	Peak
7	11570.00	46.35	-7.65	54.00	30.23	40.16	11.22	35.26	---	---	Average
8	11570.00	59.62	-14.38	74.00	43.50	40.16	11.22	35.26	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

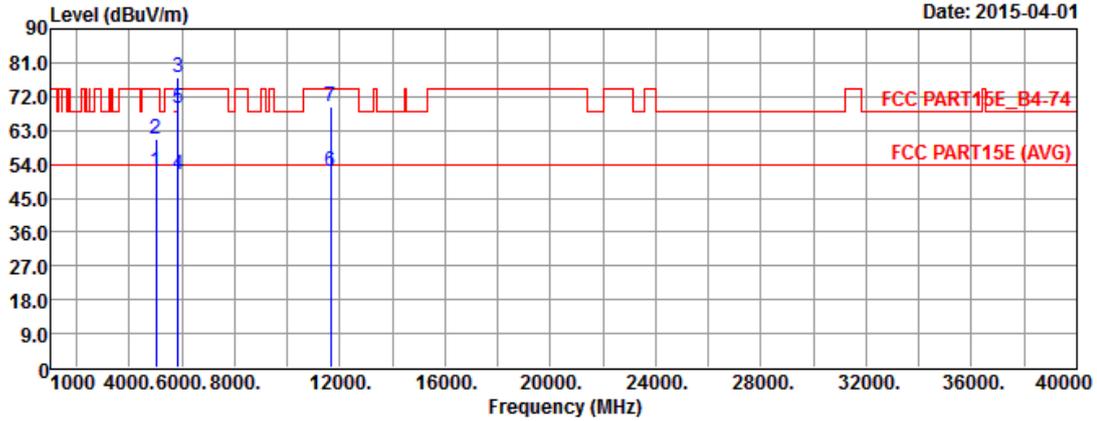


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.16	-1.84	54.00	46.78	31.40	6.87	32.89	---	---	Average
2	5000.00	60.73	-13.27	74.00	55.35	31.40	6.87	32.89	---	---	Peak
3	5850.00	77.17	-1.03	78.20	70.22	32.29	7.63	32.97	---	---	Peak
4	5860.00	51.18	-2.82	54.00	44.23	32.30	7.63	32.98	---	---	Average
5	5860.00	69.03	-4.97	74.00	62.08	32.30	7.63	32.98	---	---	Peak
6	11650.00	52.02	-1.98	54.00	36.00	40.00	11.26	35.24	---	---	Average
7	11650.00	69.16	-4.84	74.00	53.14	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	V

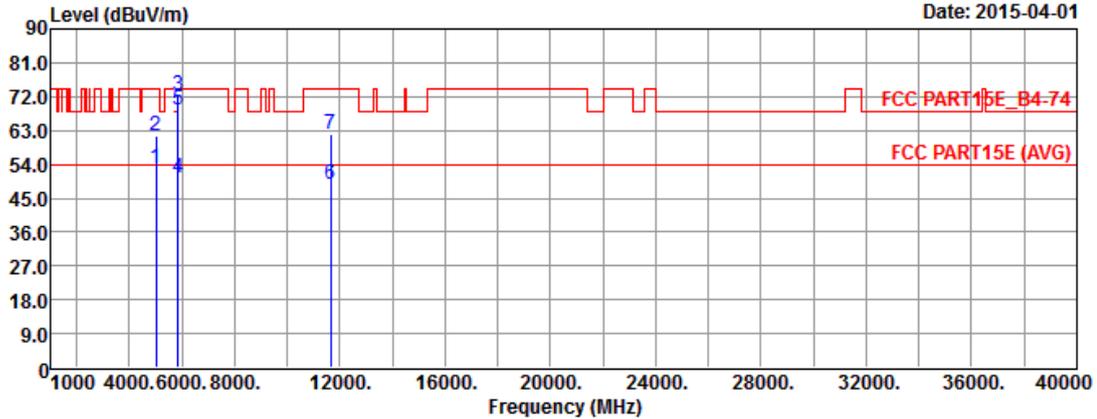


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.81	-1.19	54.00	47.43	31.40	6.87	32.89	---	---	Average
2	5000.00	61.63	-12.37	74.00	56.25	31.40	6.87	32.89	---	---	Peak
3	5850.00	72.15	-6.05	78.20	65.20	32.29	7.63	32.97	---	---	Peak
4	5860.00	50.58	-3.42	54.00	43.63	32.30	7.63	32.98	---	---	Average
5	5860.00	68.41	-5.59	74.00	61.46	32.30	7.63	32.98	---	---	Peak
6	11650.00	48.61	-5.39	54.00	32.59	40.00	11.26	35.24	---	---	Average
7	11650.00	62.19	-11.81	74.00	46.17	40.00	11.26	35.24	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




3.5.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

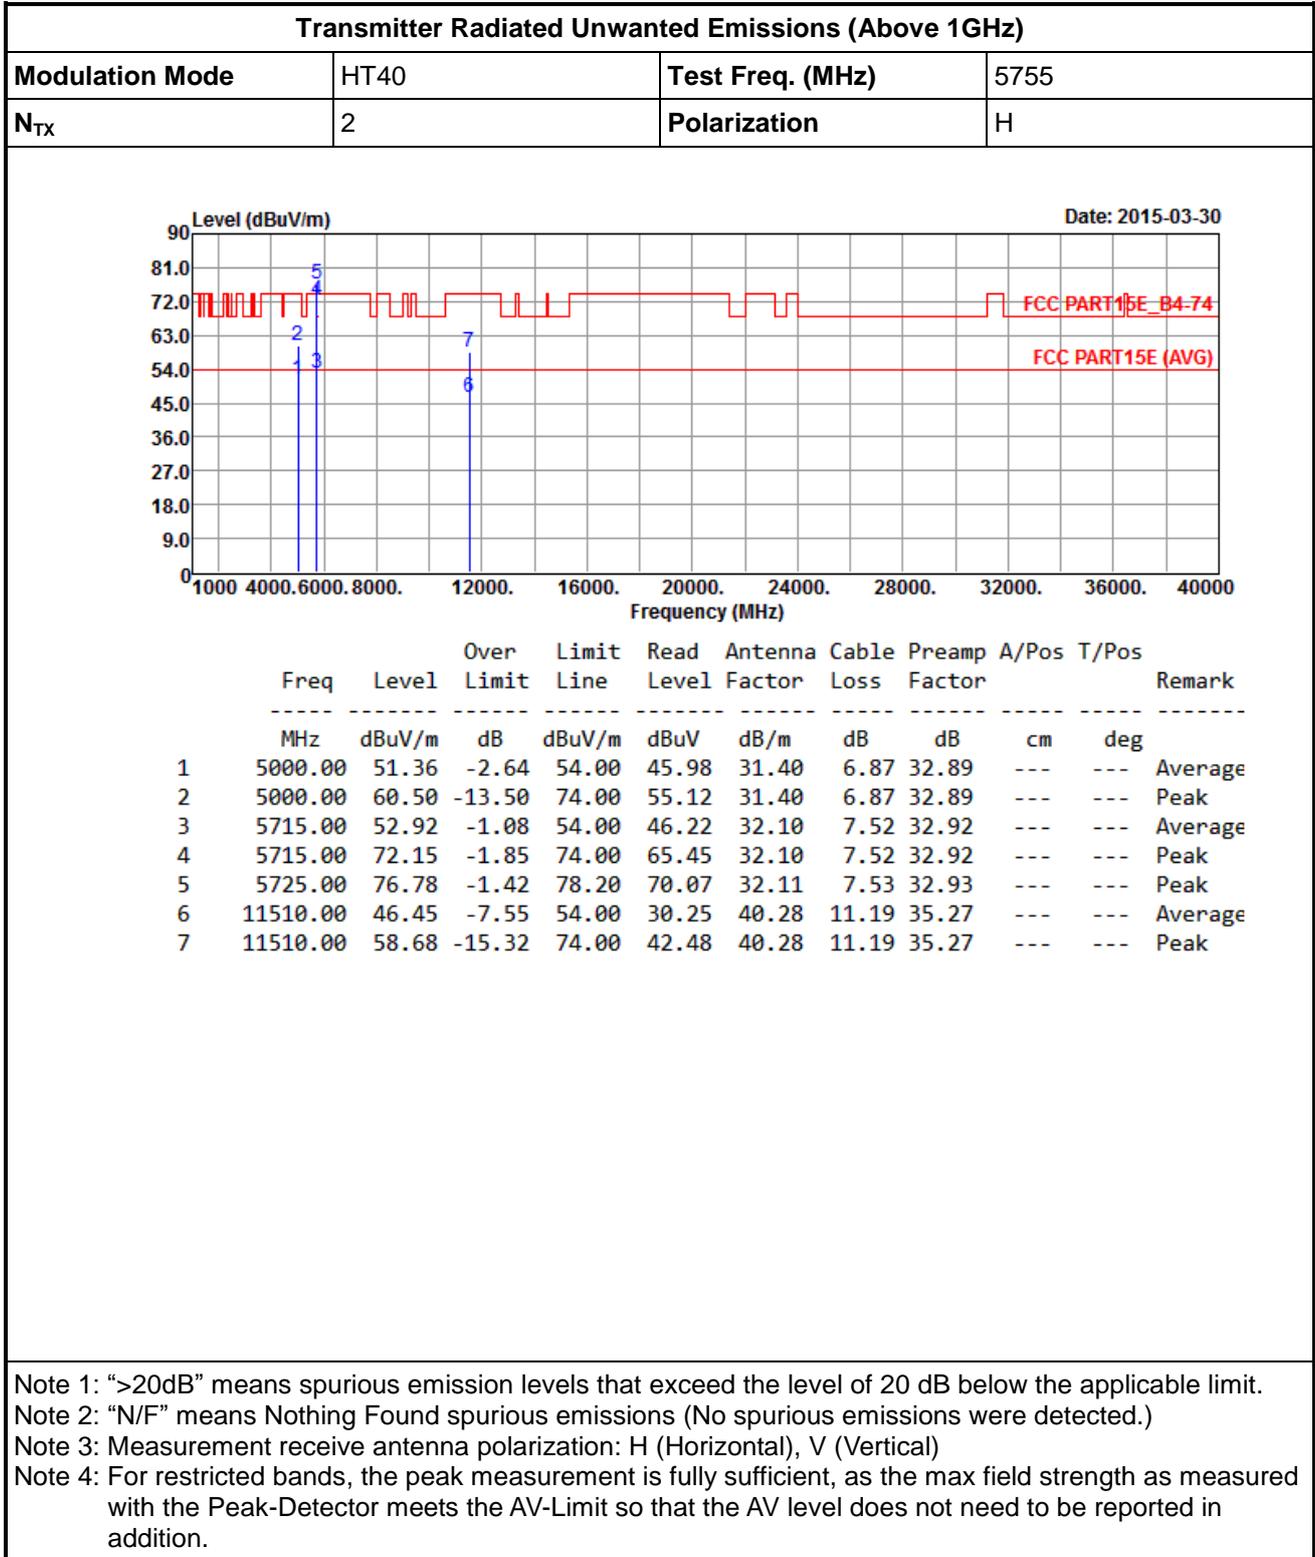



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5755
N _{TX}	2	Polarization	V

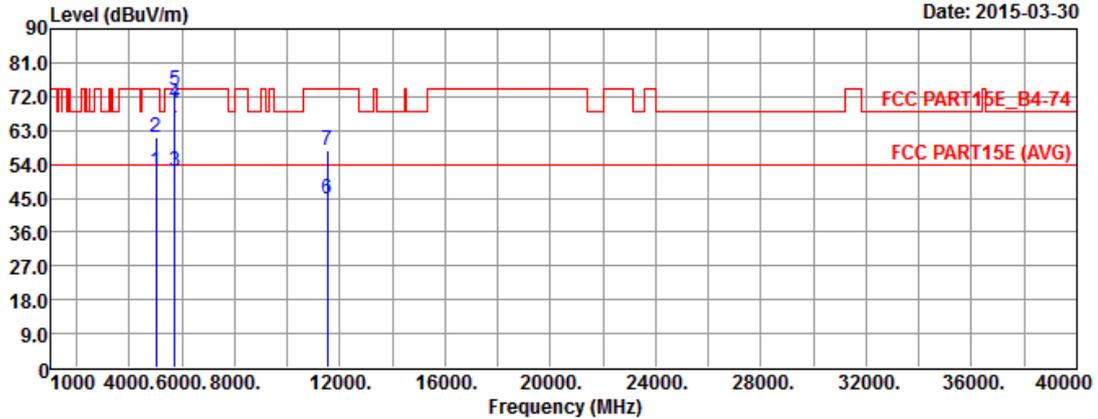


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.03	-1.97	54.00	46.65	31.40	6.87	32.89	---	---	Average
2	5000.00	61.30	-12.70	74.00	55.92	31.40	6.87	32.89	---	---	Peak
3	5715.00	51.91	-2.09	54.00	45.21	32.10	7.52	32.92	---	---	Average
4	5715.00	70.02	-3.98	74.00	63.32	32.10	7.52	32.92	---	---	Peak
5	5725.00	73.58	-4.62	78.20	66.87	32.11	7.53	32.93	---	---	Peak
6	11510.00	44.86	-9.14	54.00	28.66	40.28	11.19	35.27	---	---	Average
7	11510.00	57.59	-16.41	74.00	41.39	40.28	11.19	35.27	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N _{TX}	2	Polarization	H

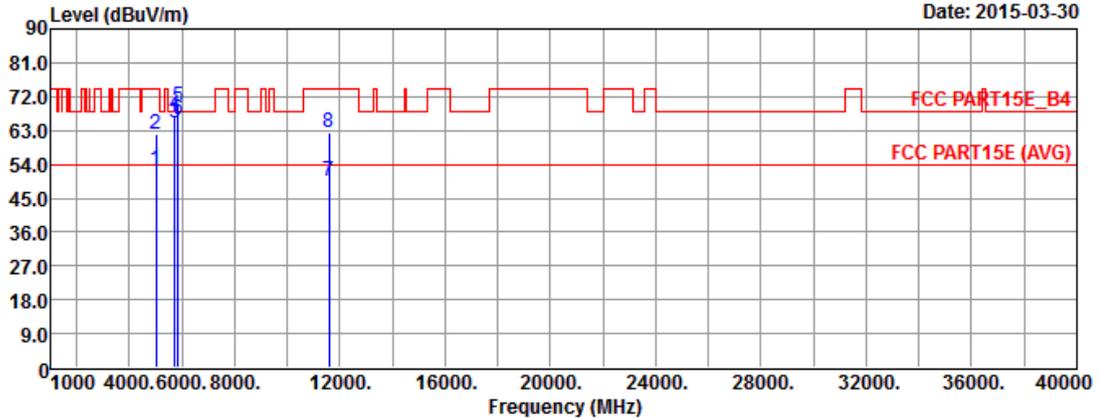


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.41	-1.59	54.00	47.03	31.40	6.87	32.89	---	---	Average
2	5000.00	61.92	-12.08	74.00	56.54	31.40	6.87	32.89	---	---	Peak
3	5715.00	64.99	-3.21	68.20	58.29	32.10	7.52	32.92	---	---	Peak
4	5725.00	67.03	-11.17	78.20	60.32	32.11	7.53	32.93	---	---	Peak
5	5850.00	69.46	-8.74	78.20	62.51	32.29	7.63	32.97	---	---	Peak
6	5860.00	65.71	-2.49	68.20	58.76	32.30	7.63	32.98	---	---	Peak
7	11590.00	49.61	-4.39	54.00	33.51	40.12	11.23	35.25	---	---	Average
8	11590.00	62.48	-11.52	74.00	46.38	40.12	11.23	35.25	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N _{TX}	2	Polarization	V

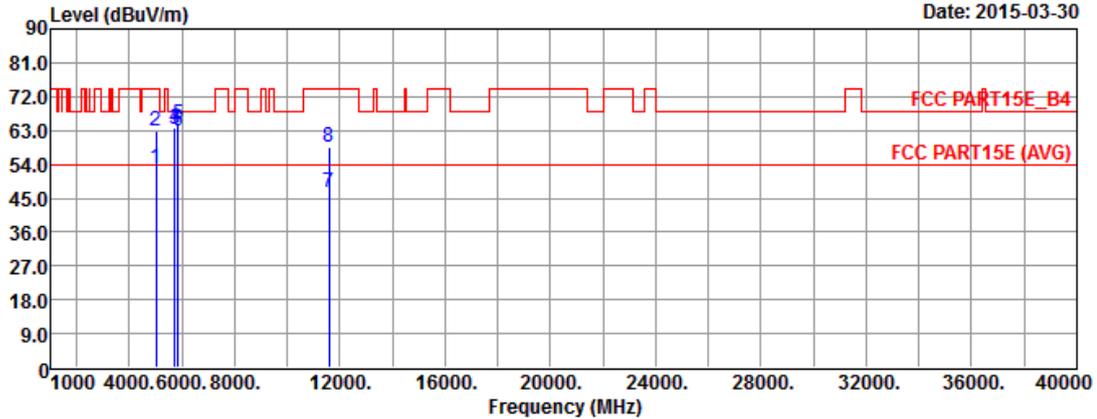

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5000.00	52.84	-1.16	54.00	47.46	31.40	6.87	32.89	---	---	Average
2	5000.00	63.01	-10.99	74.00	57.63	31.40	6.87	32.89	---	---	Peak
3	5715.00	63.23	-4.97	68.20	56.53	32.10	7.52	32.92	---	---	Peak
4	5725.00	63.92	-14.28	78.20	57.21	32.11	7.53	32.93	---	---	Peak
5	5850.00	64.40	-13.80	78.20	57.45	32.29	7.63	32.97	---	---	Peak
6	5860.00	62.84	-5.36	68.20	55.89	32.30	7.63	32.98	---	---	Peak
7	11590.00	46.66	-7.34	54.00	30.56	40.12	11.23	35.25	---	---	Average
8	11590.00	58.58	-15.42	74.00	42.48	40.12	11.23	35.25	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.6 Frequency Stability

3.6.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices	
<input checked="" type="checkbox"/>	N/A
IEEE Std. 802.11n-2009	
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.6.4 Test Setup

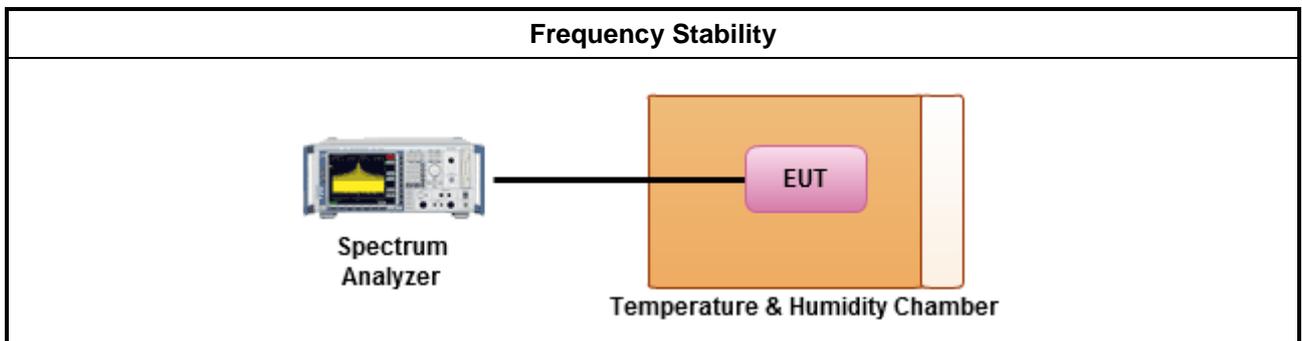

3.6.5 Test Result of Frequency Stability

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T _{20°C} V _{max}	5785	5785.02274	3.9309
T _{20°C} V _{min}	5785	5785.02686	4.6430
T _{50°C} V _{nom}	5785	5785.02216	3.8306
T _{40°C} V _{nom}	5785	5785.02909	5.0285
T _{30°C} V _{nom}	5785	5785.01999	3.4555
T _{20°C} V _{nom}	5785	5785.01232	2.1296
T _{10°C} V _{nom}	5785	5785.02127	3.6768
T _{0°C} V _{nom}	5785	5785.00926	1.6007
T _{-10°C} V _{nom}	5785	5785.00880	1.5212
T _{-20°C} V _{nom}	5785	5785.01447	2.5013
T _{-30°C} V _{nom}	5785	5785.01177	2.0346
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [V _{min}] and 115 % [V _{max}] of the nominal voltage [V _{nom}]. Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.			

4 Test Equipment and Calibration Data

Test date: Jan. 27, 2015

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14, 2014	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	JAN. 22, 2015	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	Conduction (CO04-HY)
ISN	TESEQ	ISN T800	30330	9kHz ~ 30MHz	Mar. 06, 2014	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
CDN	TESEQ	M016	25100	150kHz ~ 26MHz	Feb. 25, 2014	Conduction (CO04-HY)
CDN	TESEQ	M016	25103	150kHz ~ 26MHz	Feb. 25, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	TM012	N/A	Feb. 25, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-02	N/A	Feb. 25, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-01	N/A	Apr. 21, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-03	N/A	Feb. 25, 2014	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 25, 2014	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	150kHz ~ 30MHz	Jun. 30, 2014	Conduction (CO04-HY)
Software	Audix	E3	3	Conducted	NCR	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-666	9kHz ~ 30MHz	Nov. 26, 2014	Conduction (CO04-HY)



Test date: Mar. 30 ~ Apr. 09, 2015

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation (03CH03-HY)
Spectrum	R&S	FSV40	101514	10Hz ~ 40GHz	Jun. 13, 2014	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation (03CH03-HY)
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 11, 2014	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 27, 2015	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400-33-8P	912372	26.5GHz ~ 40GHz	Apr. 19.2013	Radiation (03CH03-HY)
Loop Antenna *(note 1)	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is two year.



Test date: Apr. 13, 2015

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	Apr. 28, 2014	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 15, 2014	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 25, 2014	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Nov. 30, 2014	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	30MHz ~ 26.5GHz	Nov. 30, 2014	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jul. 26, 2014	Conducted (TH01-HY)
Power Meter	Agilent	U2531A	TW54323511	50MHz~18GHz	Aug. 09 2014	Conducted (TH01-HY)
Power Sensor	Agilent	U2021XA	MY54320011	50MHz~18GHz	Sep. 11, 2014	Conducted (TH01-HY)
Power Sensor	Agilent	U2021XA	MY54320013	50MHz~18GHz	Aug. 13, 2014	Conducted (TH01-HY)
Power Meter	Agilent	U2531A	TW54323512	50MHz~18GHz	Aug. 09, 2014	Conducted (TH01-HY)
Power Sensor	Agilent	U2021XA	MY54110022	50MHz~18GHz	Sep. 12, 2014	Conducted (TH01-HY)
Power Sensor	Agilent	U2021XA	MY54320020	50MHz~18GHz	Sep. 13, 2014	Conducted (TH01-HY)