


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	51%
Test Engineer	Eason Chen & Satoshi Yang	Configurations	2.4G + 5G TX

Horizontal

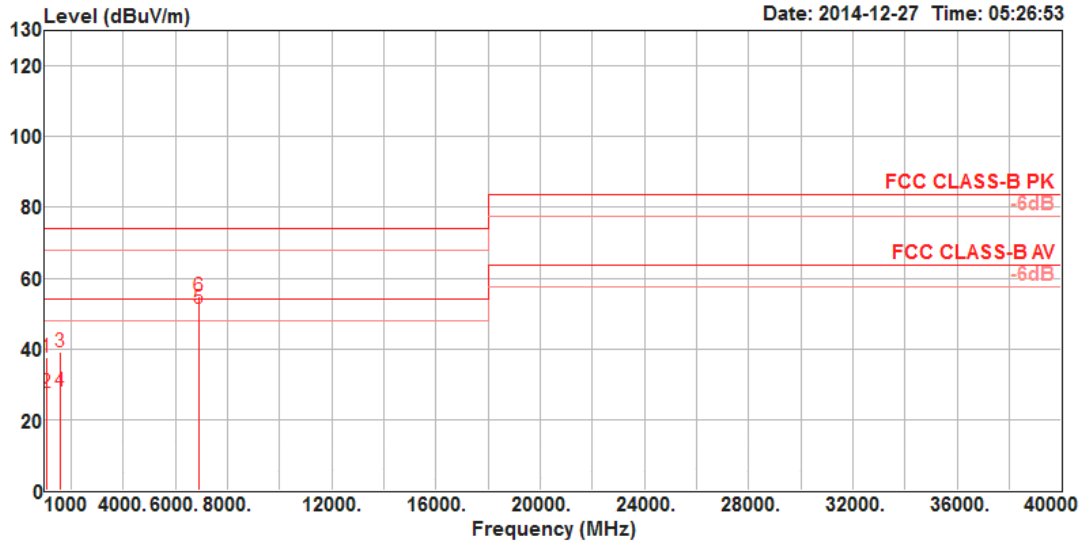

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1065.56	37.75	74.00	-36.25	43.89	2.88	24.45	33.47 Peak	100	249	HORIZONTAL
2	1066.69	27.54	54.00	-26.46	33.68	2.88	24.45	33.47 Average	100	249	HORIZONTAL
3	1595.29	39.25	74.00	-34.75	43.15	3.58	25.52	33.00 Peak	100	314	HORIZONTAL
4	1595.56	28.11	54.00	-25.89	32.01	3.58	25.52	33.00 Average	100	314	HORIZONTAL
5	6906.22	51.24	54.00	-2.76	41.75	7.85	35.03	33.39 Average	110	14	HORIZONTAL
6	6906.66	54.85	74.00	-19.15	45.36	7.85	35.03	33.39 Peak	110	14	HORIZONTAL

Vertical

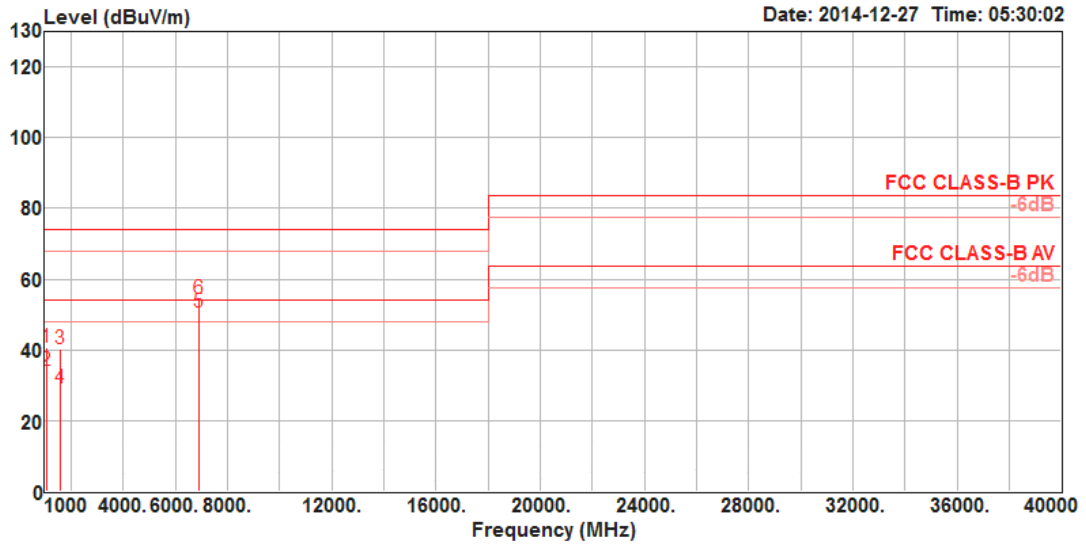

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1066.46	40.65	74.00	-33.35	46.77	2.88	24.47	33.47	169	1	VERTICAL
2	1066.66	34.15	54.00	-19.85	40.26	2.88	24.48	33.47	169	1	VERTICAL
3	1594.70	40.39	74.00	-33.61	44.29	3.58	25.53	33.01	100	42	VERTICAL
4	1595.96	29.22	54.00	-24.78	33.11	3.58	25.53	33.00	100	42	VERTICAL
5	6906.57	50.53	54.00	-3.47	41.01	7.85	35.06	33.39	100	151	VERTICAL
6	6906.68	54.62	74.00	-19.38	45.10	7.85	35.06	33.39	100	151	VERTICAL