



FCC RF Test Report

APPLICANT : D-Link Corporation
EQUIPMENT : 4G/LTE Mobile Router
BRAND NAME : D-Link
MODEL NAME : DWR-932C
FCC ID : KA2WR932CF1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : May 13, 2021 ~ Jun. 01, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 36

 3.6 AC Conducted Emission Measurement..... 40

 3.7 Antenna Requirements 42

4 LIST OF MEASURING EQUIPMENT 43

5 UNCERTAINTY OF EVALUATION 44

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|--|---------------|
| FR140123 | Rev. 01 | Initial issue of report | Jun. 17, 2021 |
| FR140123 | Rev. 02 | Correct the gain of WLAN ant.1 and ant.2 | Jun. 23, 2021 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|-----------------------|-------------|------------------------------------|
| 3.1 | 15.247(a)(2) | 6dB Bandwidth | ≥ 0.5MHz | Pass | - |
| 3.1 | - | 99% Bandwidth | - | Report only | - |
| 3.2 | 15.247(b) | Power Output Measurement | ≤ 30dBm | Pass | - |
| 3.3 | 15.247(e) | Power Spectral Density | ≤ 8dBm/3kHz | Pass | - |
| 3.4 | 15.247(d) | Conducted Band Edges | ≤ 20dBc | Pass | - |
| | | Conducted Spurious Emission | | Pass | - |
| 3.5 | 15.247(d) | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 2.18 dB at 4926.00 MHz |
| 3.6 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 11.22 dB at 0.187 MHz |
| 3.7 | 15.203 & 15.247(b) | Antenna Requirement | 15.203 | Pass | - |

| |
|--|
| Declaration of Conformity: |
| The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits. |
| Comments and Explanations: |
| The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification. |



1 General Description

1.1 Applicant

D-Link Corporation

No.289, Xinhua 3rd Rd., Neihu District, Taipei 11494, Taiwan, R.O.C.

1.2 Manufacturer

D-Link Corporation

No.289, Xinhua 3rd Rd., Neihu District, Taipei 11494, Taiwan, R.O.C.

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | 4G/LTE Mobile Router |
| Brand Name | D-Link |
| Model Name | DWR-932C |
| FCC ID | KA2WR932CF1 |
| EUT supports Radios application | GSM/WCDMA/LTE WLAN 11b/g/n HT20/HT40 |
| HW Version | F1 |
| SW Version | 01.04.WW |
| EUT Stage | Production Unit |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | | | |
|---|--|--------|--------|
| Tx/Rx Channel Frequency Range | 2412 MHz ~ 2462 MHz | | |
| Maximum (Peak) Output Power to antenna | 802.11b : 16.62 dBm (0.0459 W) 802.11g : 21.68 dBm (0.1472 W) 802.11n HT20 : 21.64 dBm (0.1459 W) 802.11n HT40 : 22.30 dBm (0.1698 W) | | |
| Antenna Type / Gain | Ant. 1: Internal Antenna with gain 0.24 dBi Ant. 2: Internal Antenna with gain -0.23 dBi | | |
| Type of Modulation | 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) | | |
| Antenna Function | | Ant. 1 | Ant. 2 |
| | 802.11b/g SISO | V | V |
| | 802.11n MIMO | V | |

Remark: WLAN ant.1 corresponds to Antenna 3 of EP, and WLAN ant.2 corresponds to Antenna 4 of EP.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-KS 03CH05-KS TH01-KS | CN1257 | 314309 |



1.7 Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|---------------|
| 1. | 03CH05-KS | AUDIX | E3 | 6.2009-8-24al |
| 2. | CO01-KS | AUDIX | E3 | 6.2009-8-24 |

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | | |



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

- a. For 802.11b/g SISO mode, only the SISO Antenna with higher output power perform full test.
- b. For 802.11n HT20/HT40, MIMO mode cover SISO mode (MIMO=SISO Ant 1 + SISO Ant 2), only MIMO mode perform full test.


| Modulation | Data Rate |
|--------------|-----------|
| 802.11b | 1 Mbps |
| 802.11g | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |

| |
|---|
| Co-location |
| WIFI 802.11b & LTE B4 BW=20M |


| Test Cases | |
|--|---|
| AC Conducted Emission | Mode 1 :WCDMA Band V Idle + WLAN Link(2.4G) + USB Cable (Charging from Adapter 1) |
| Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable. | |

2.3 Connection Diagram of Test System

For Radiated Emission

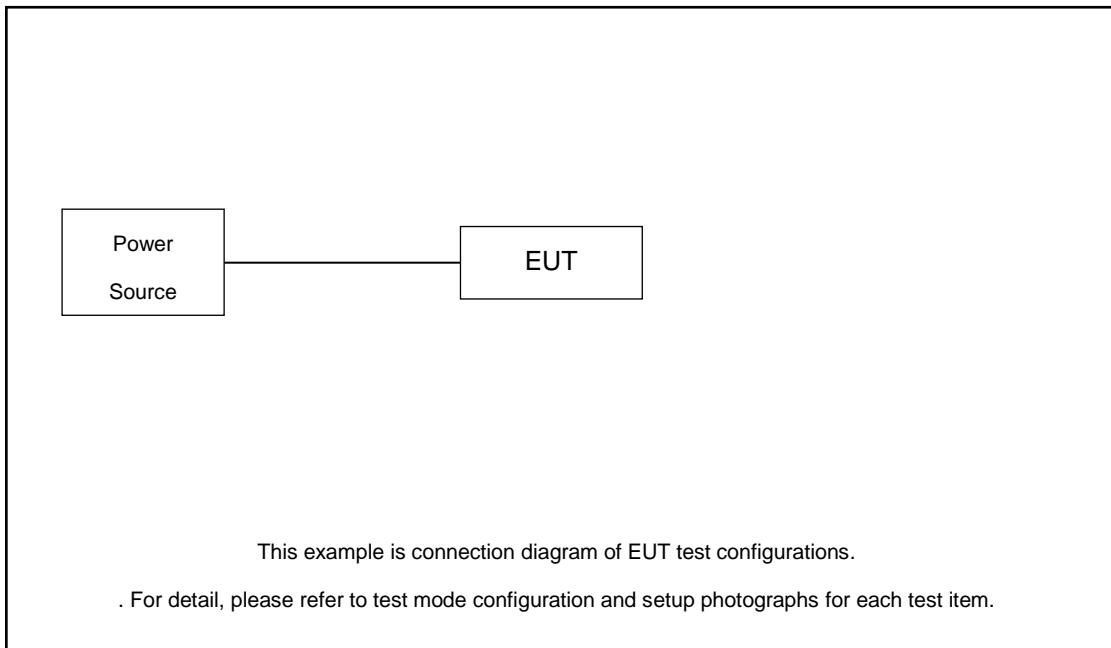

For AC Conducted Emission

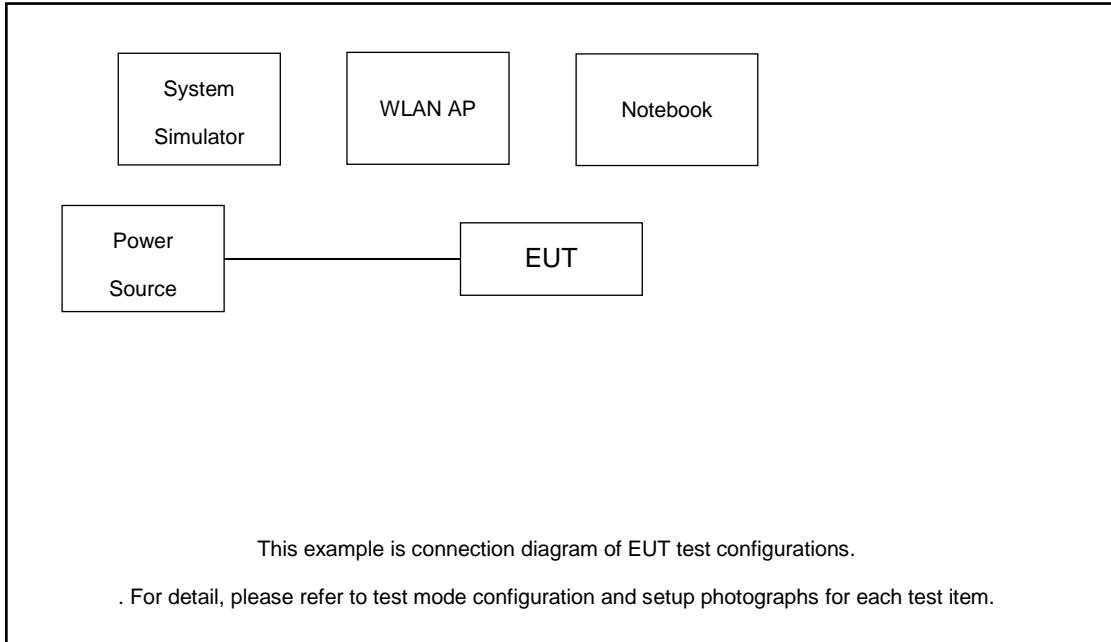

2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|------------------|------------|------------|---------------|----------------|--|
| 1. | LTE Base Station | Anritus | MT8821C | N/A | N/A | Unshielded, 1.8m |
| 2. | WLAN AP | N/A | N/A | N/A | N/A | N/A |
| 3. | Notebook | Lenovo | G480 | QDS-BRCM1050I | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 4. | Hard Disk | Lenovo | F310 | DoC | Shielded, 1.2m | N/A |
| 5. | SD Card | Kingston | 8GB | N/A | N/A | N/A |

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 6.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

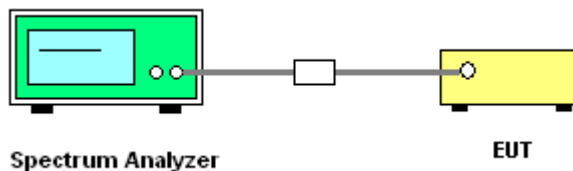



3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

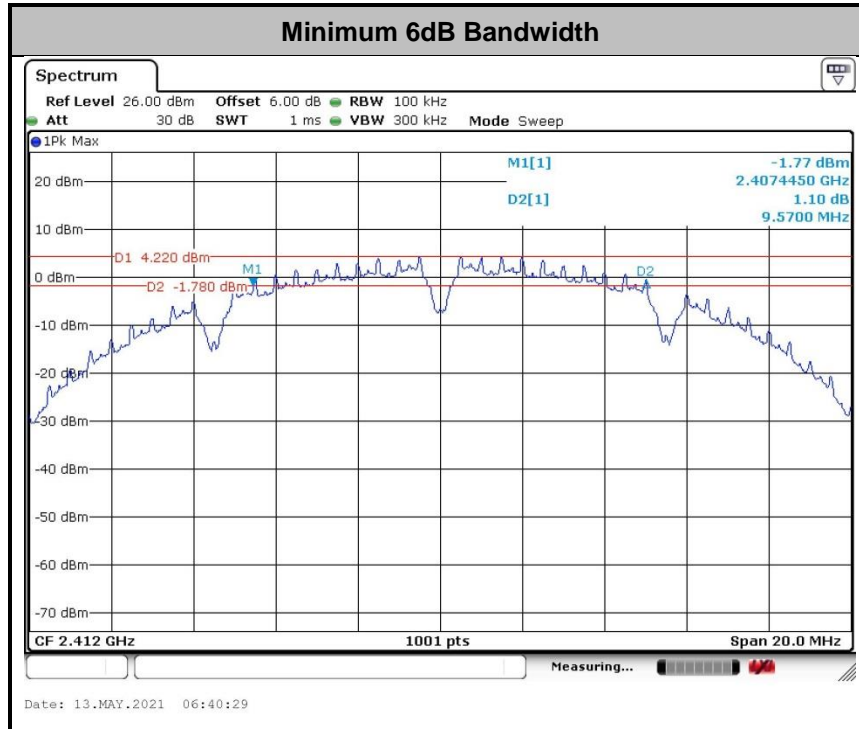

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

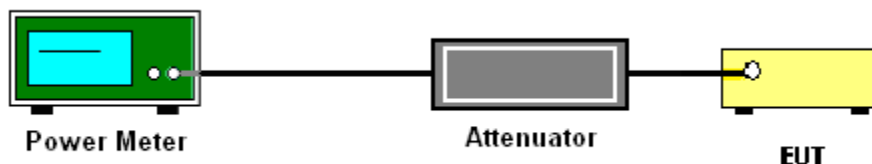

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus 10 log (N) exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add 10 log (N) dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

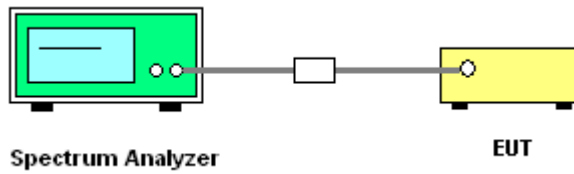

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

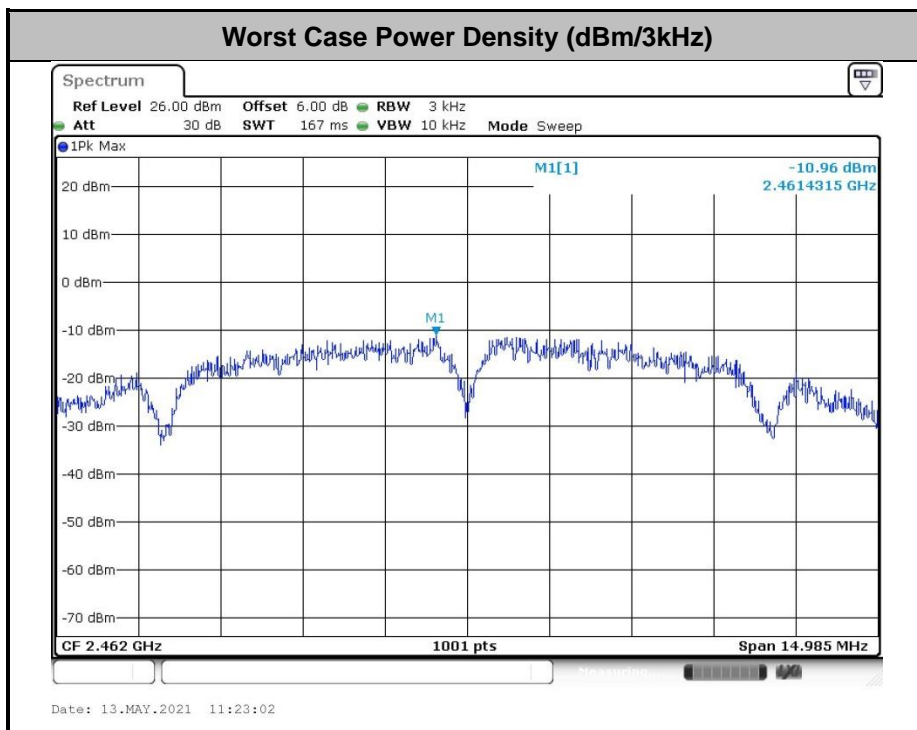

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

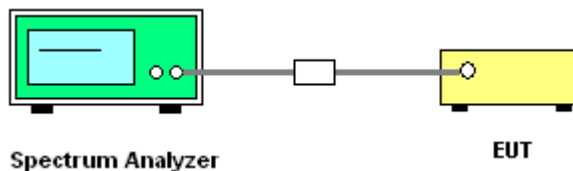




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

| | | |
|---------------------------------|---------------------|---------|
| Test Engineer : Rise Liu/HeYong | Temperature : | 21~25°C |
| | Relative Humidity : | 51~54% |

Number of TX = 1, Ant. 1 (Measured)


| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 01 |
|-------------|---------|----------------|----|

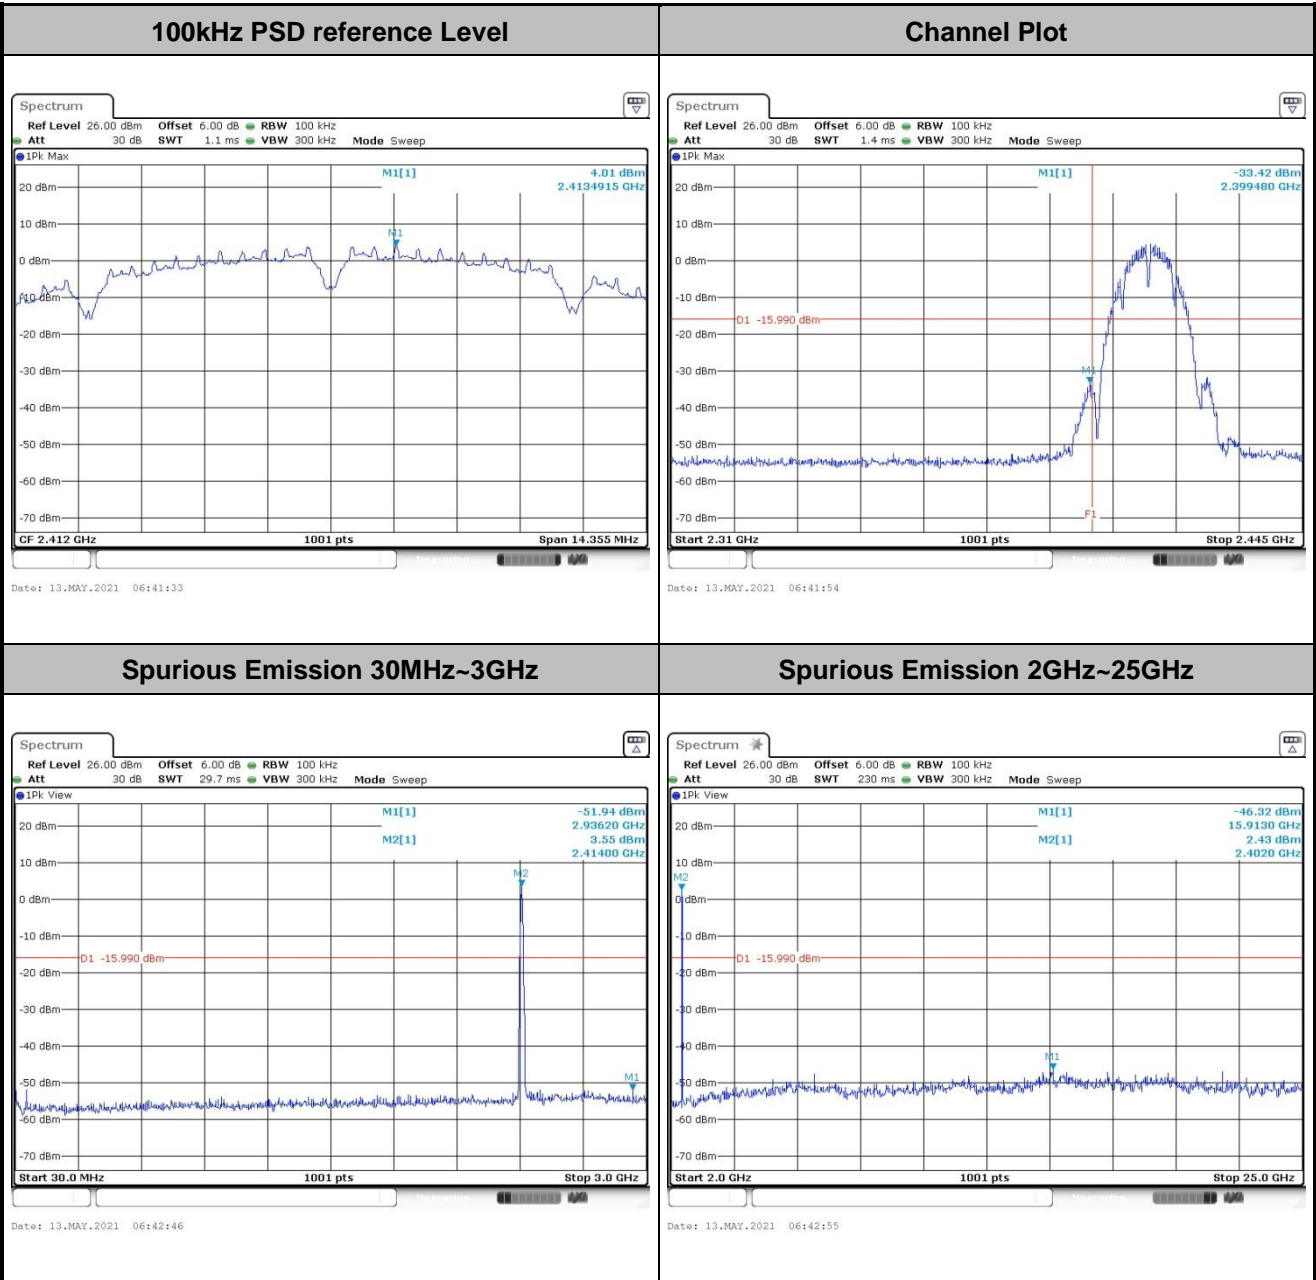




| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 06 |
|-------------|---------|----------------|----|


100kHz PSD reference Level

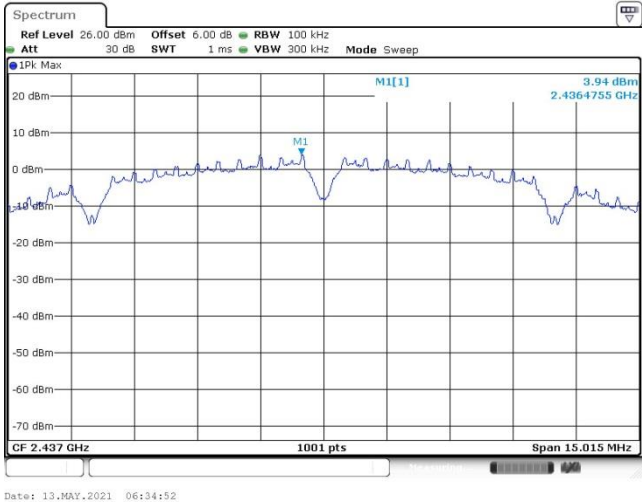

Spurious Emission 30MHz~3GHz

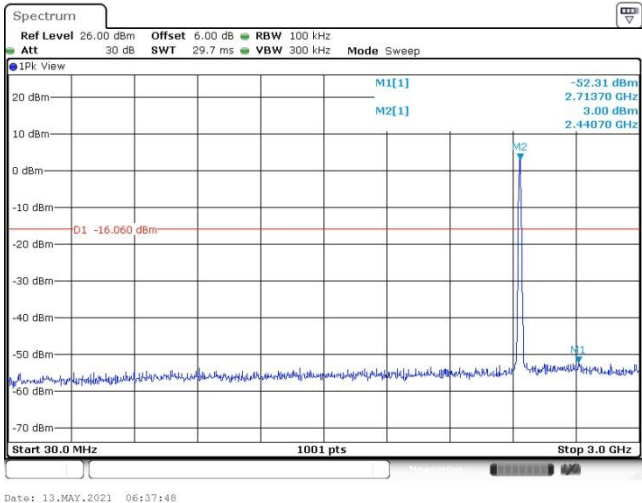


Spurious Emission 2GHz~25GHz

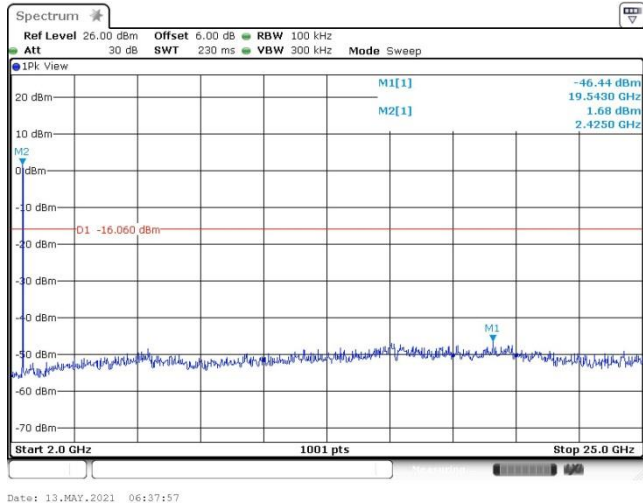




| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 11 |
|-------------|---------|----------------|----|

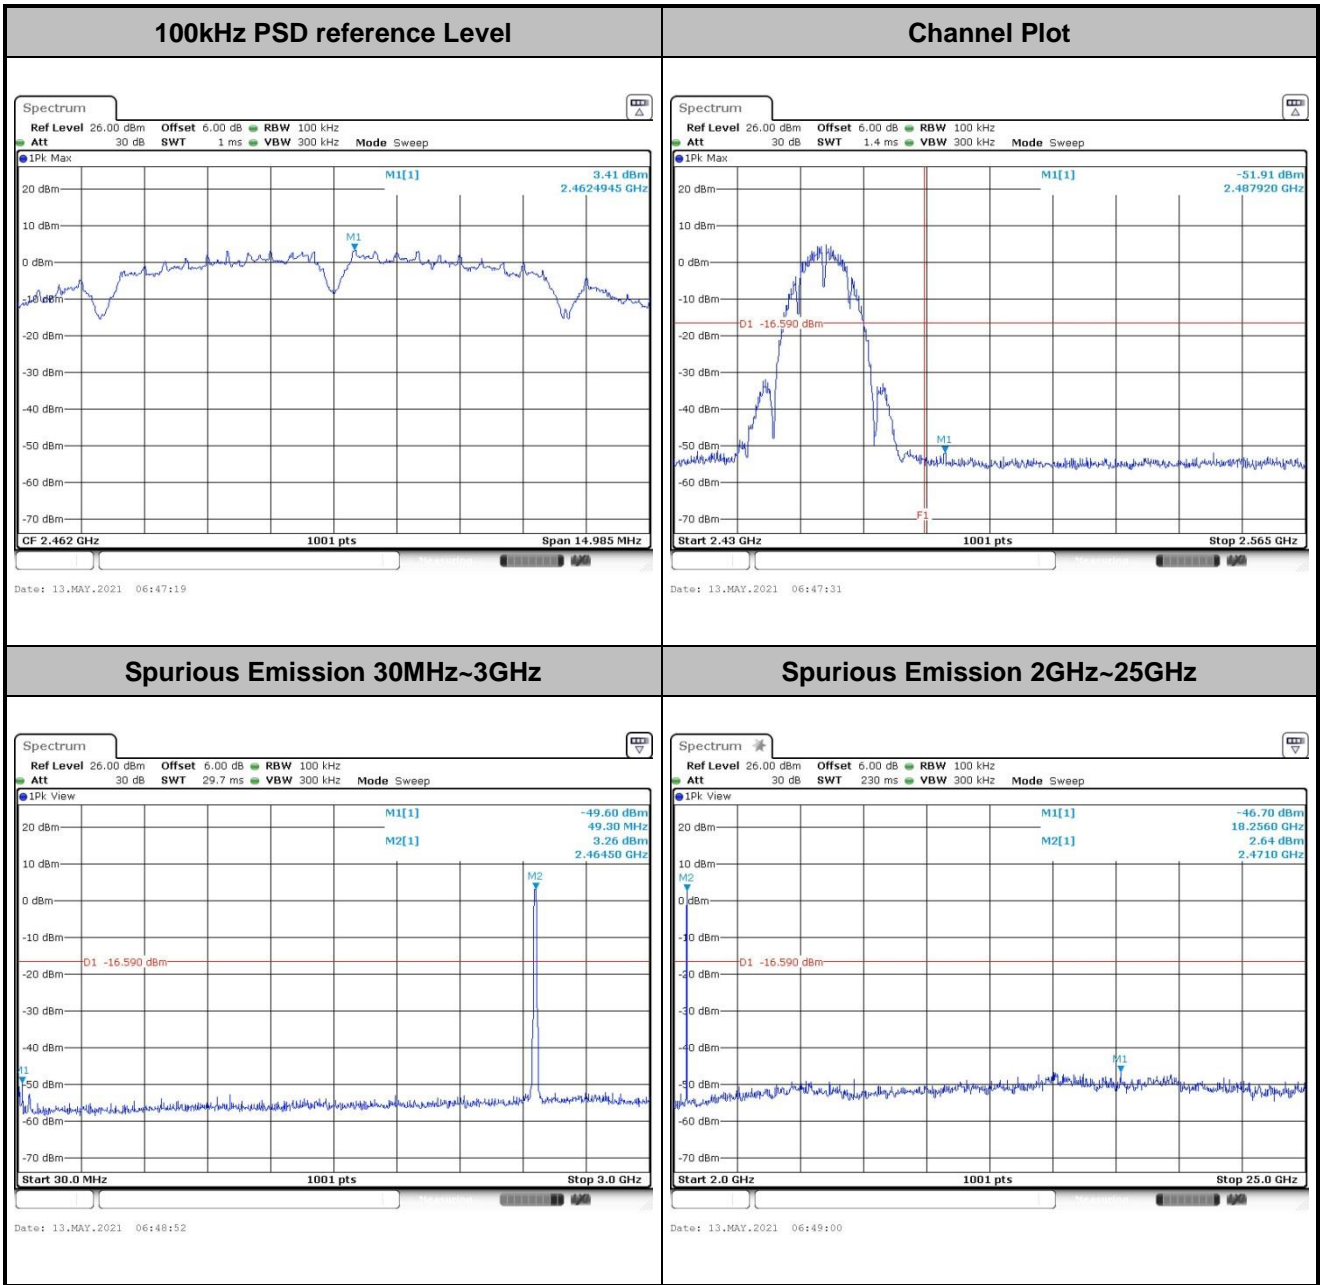






Number of TX = 1, Ant. 2 (Measured)

| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 01 |
|-------------|---------|----------------|----|

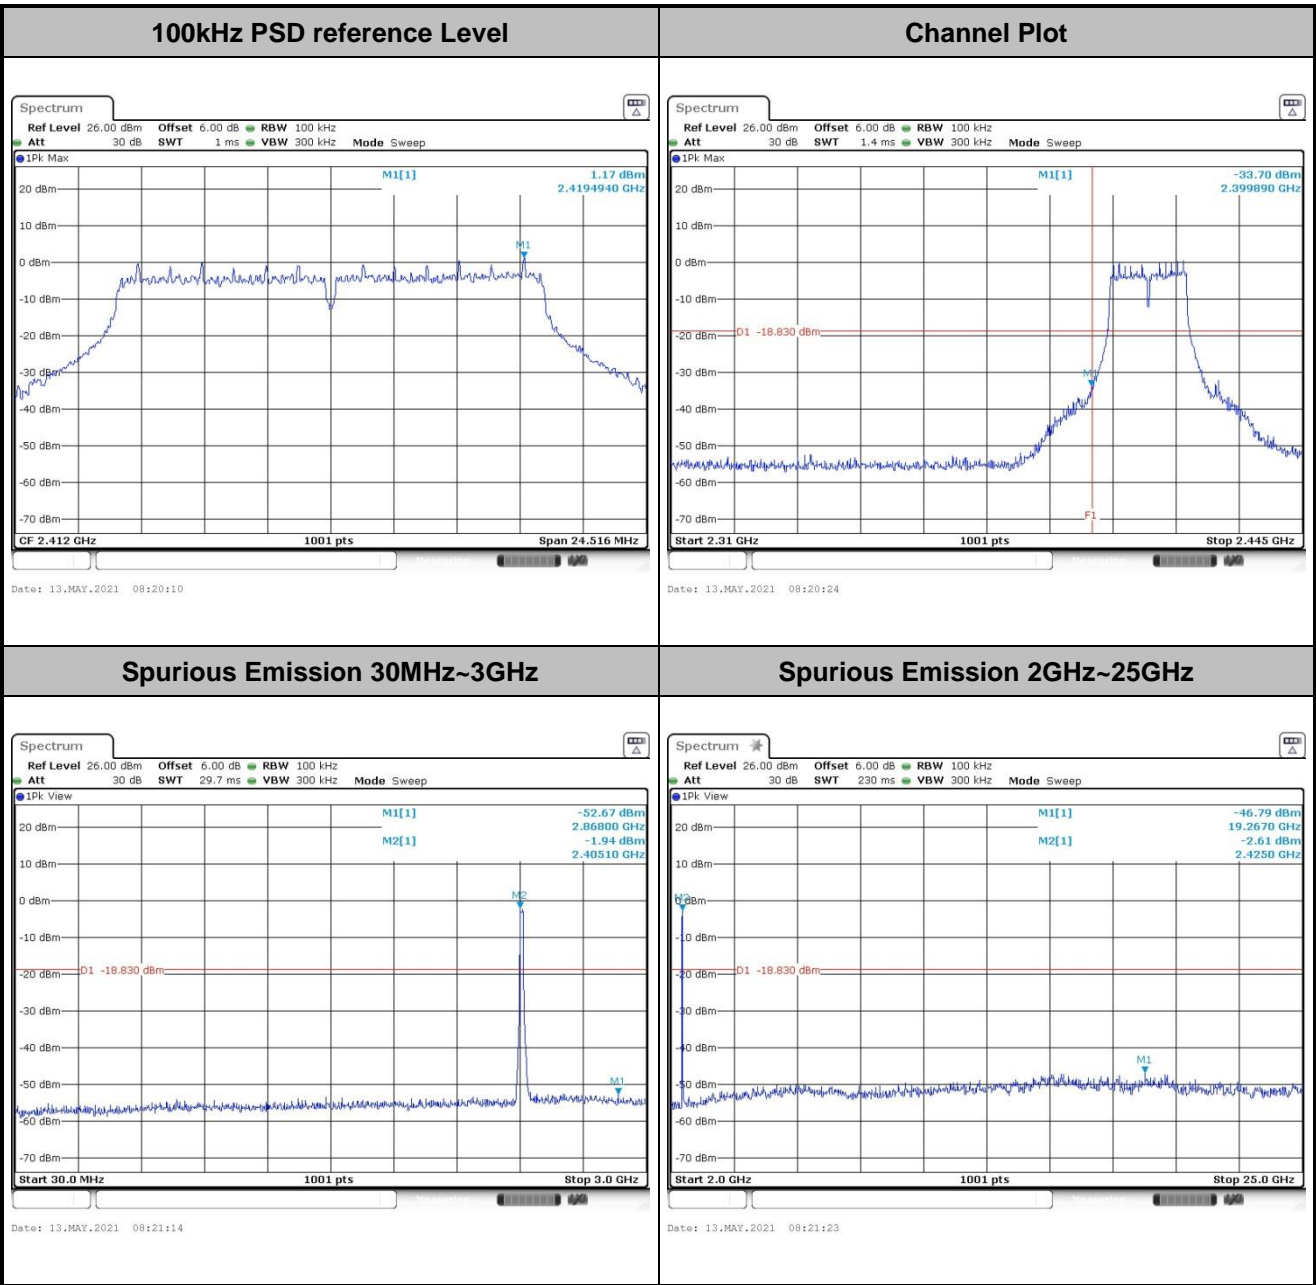




| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 06 |
|-------------|---------|----------------|----|

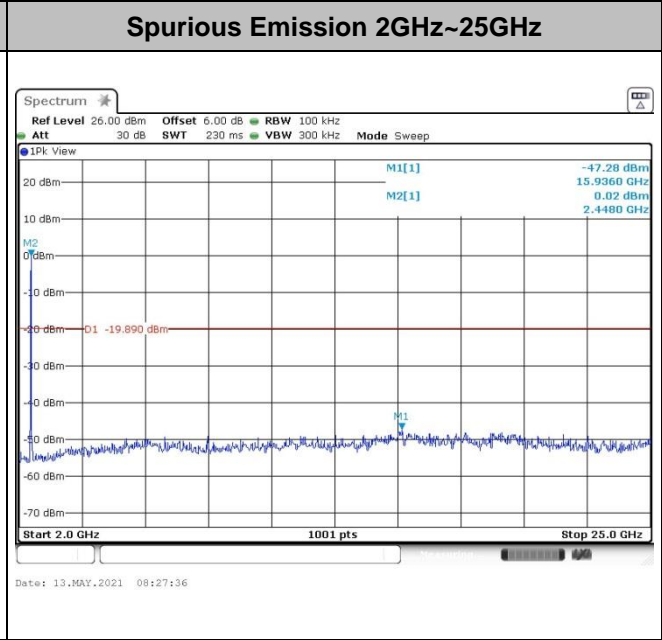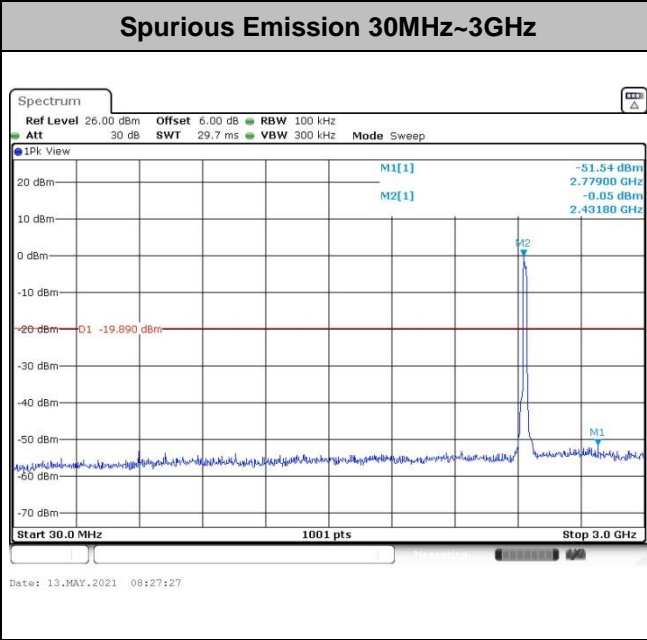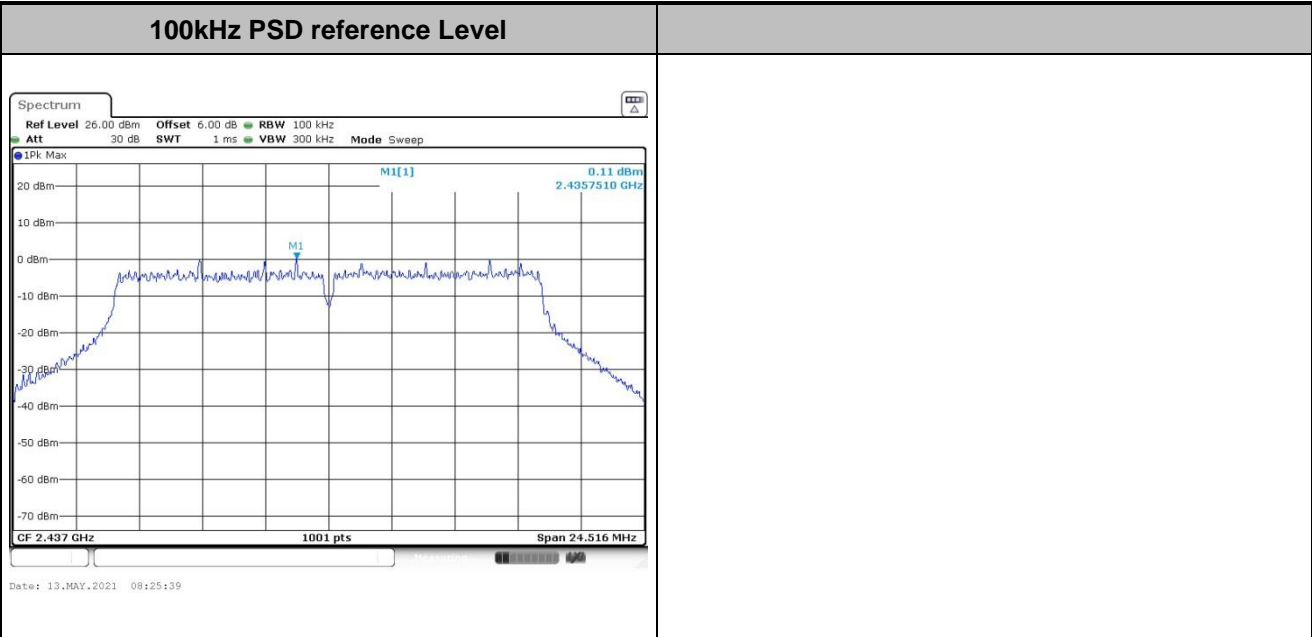




| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 11 |
|-------------|---------|----------------|----|

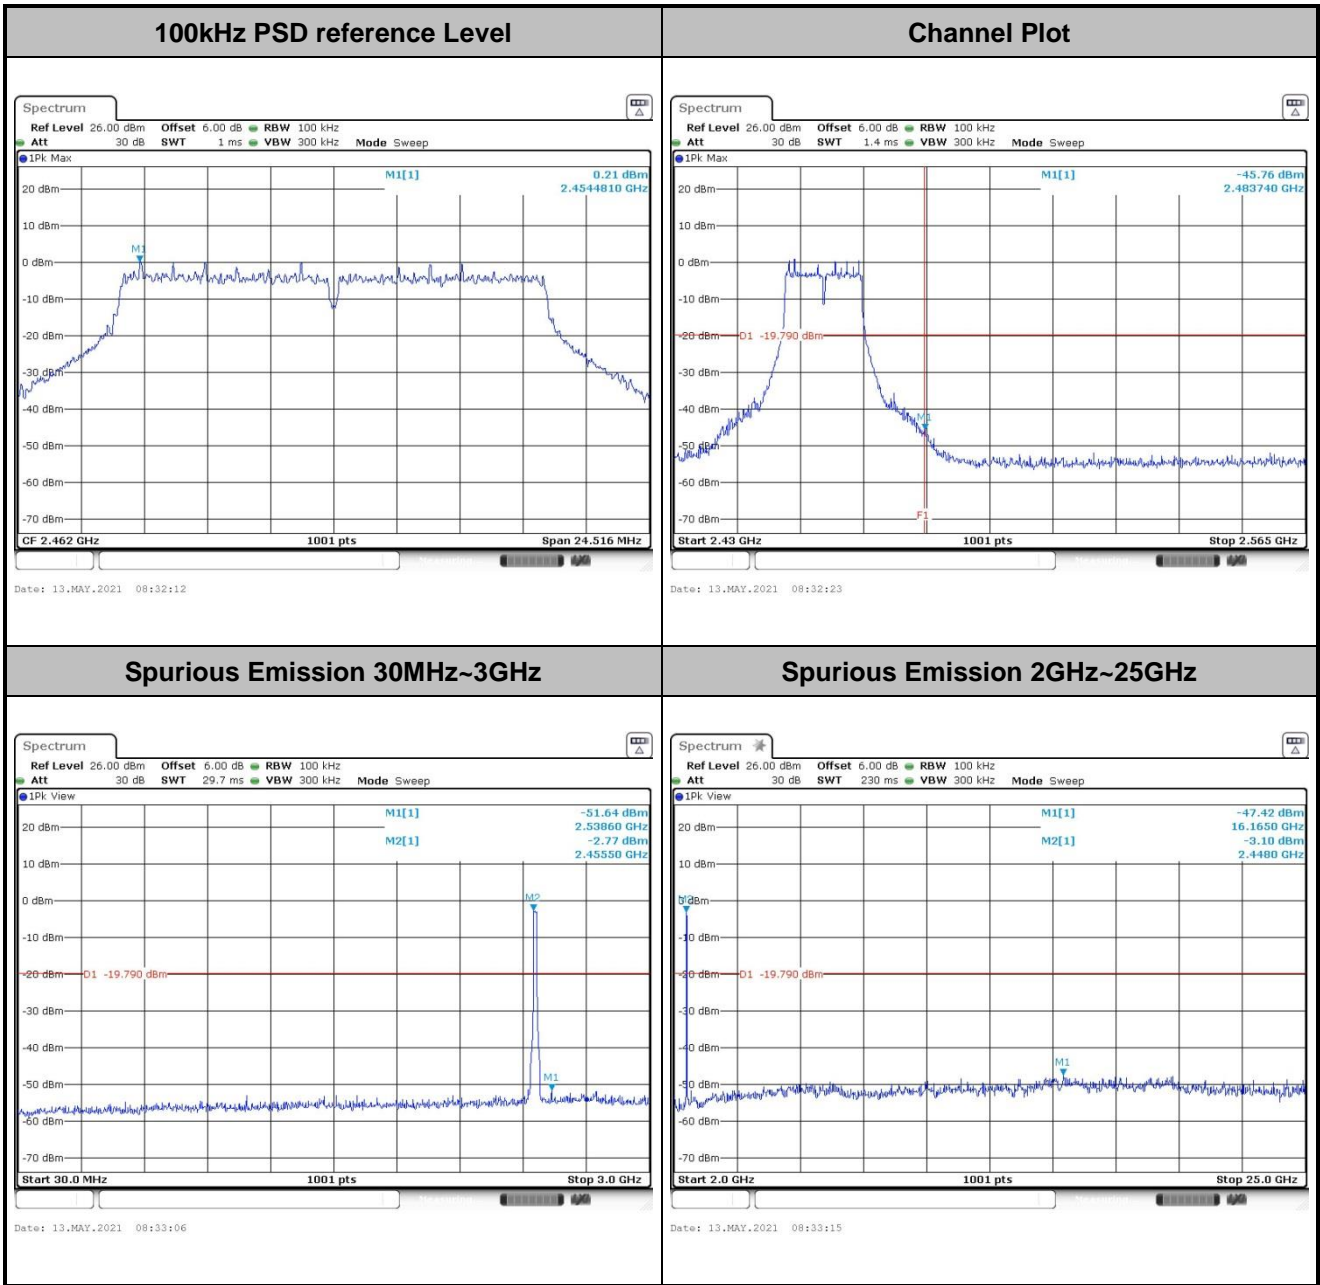



Number of TX = 2, Ant. 1 (Measured)


| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 01 |
|-------------|--------------|----------------|----|

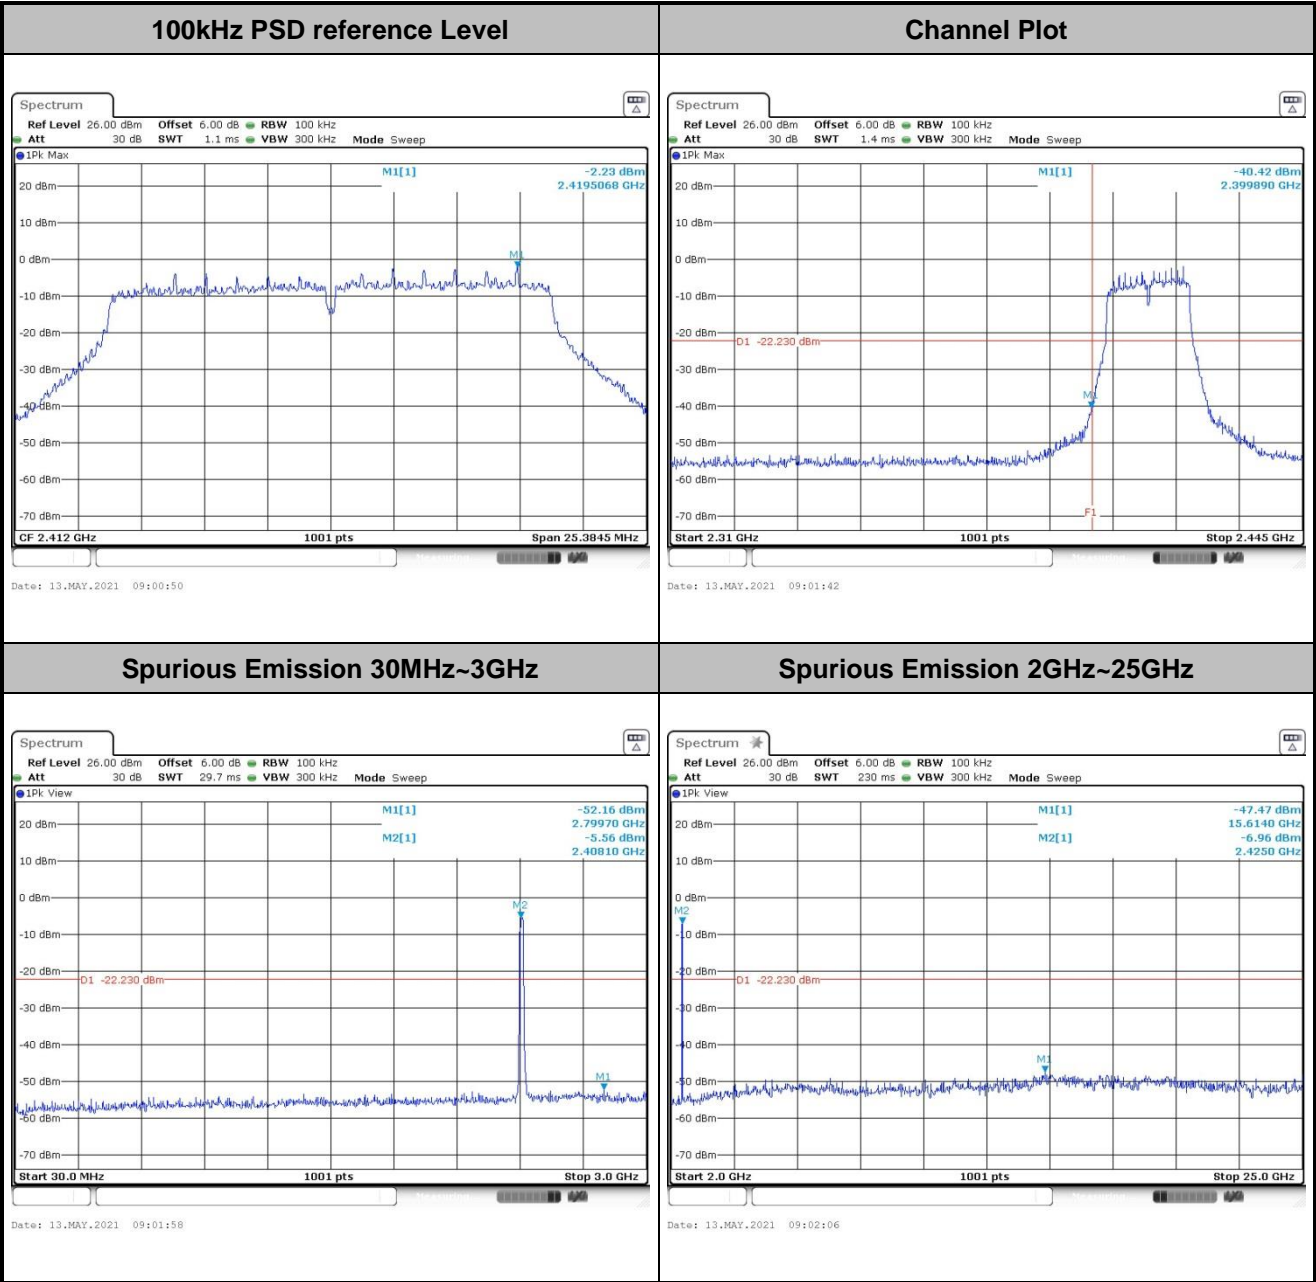




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 06 |
|-------------|--------------|----------------|----|


100kHz PSD reference Level

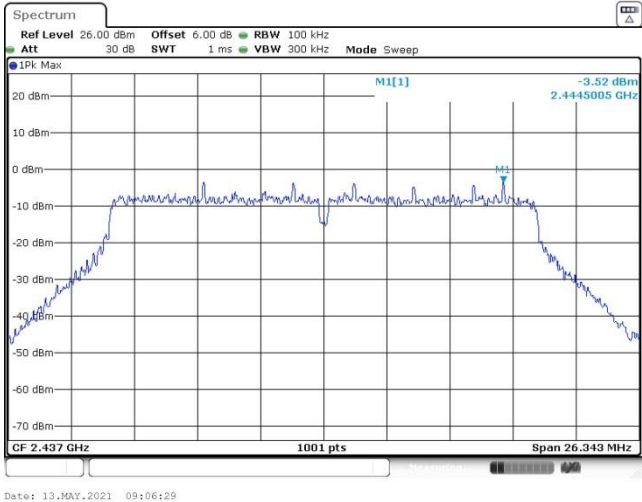

Spurious Emission 30MHz~3GHz

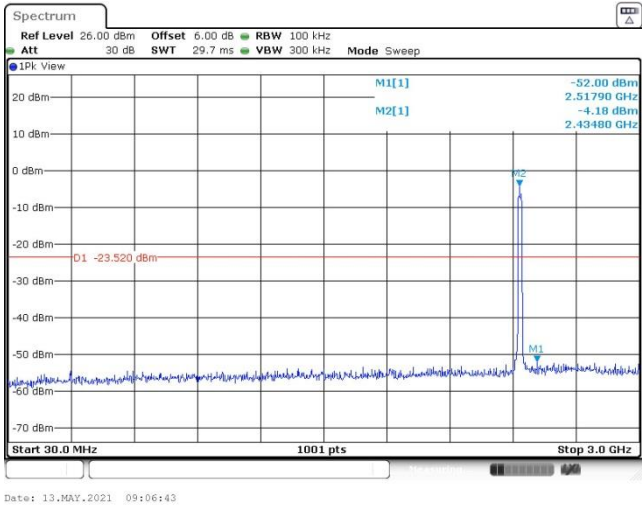


Spurious Emission 2GHz~25GHz

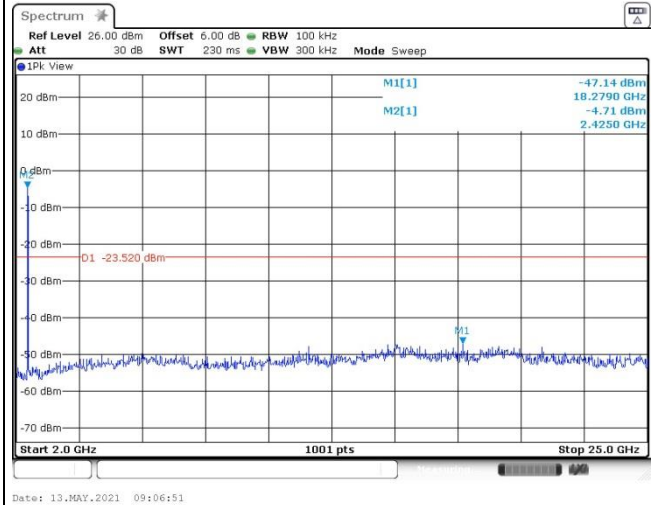




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 11 |
|-------------|--------------|----------------|----|

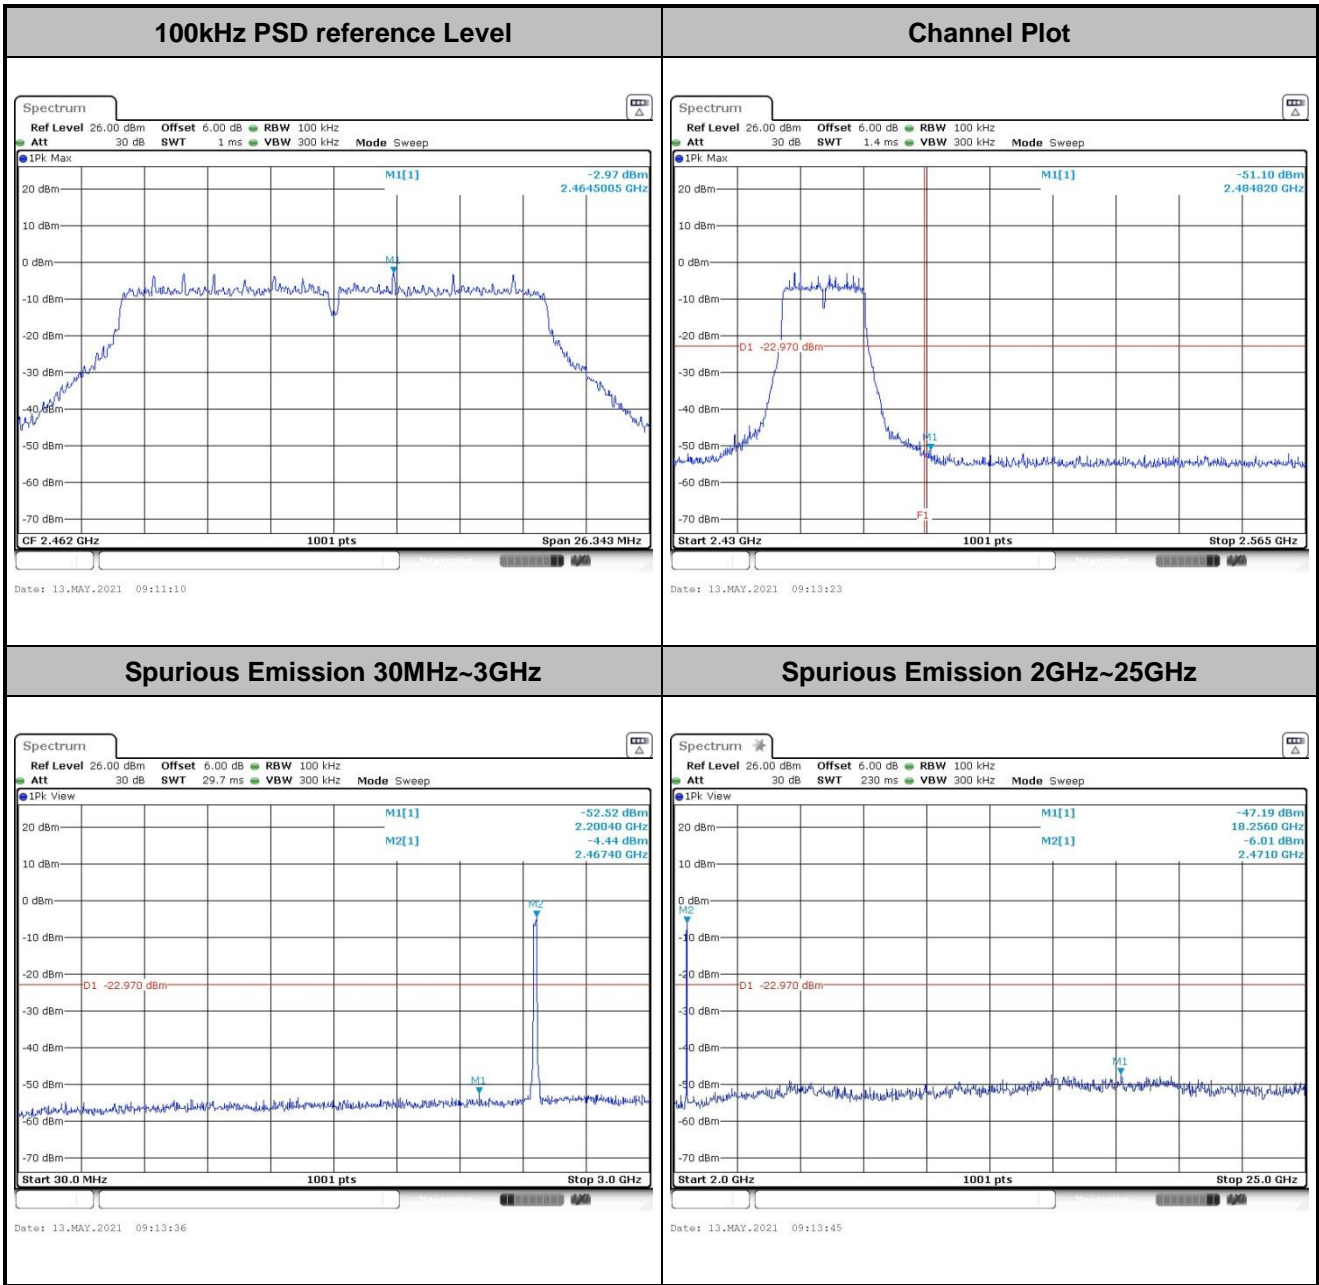






| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 03 |
|-------------|--------------|----------------|----|

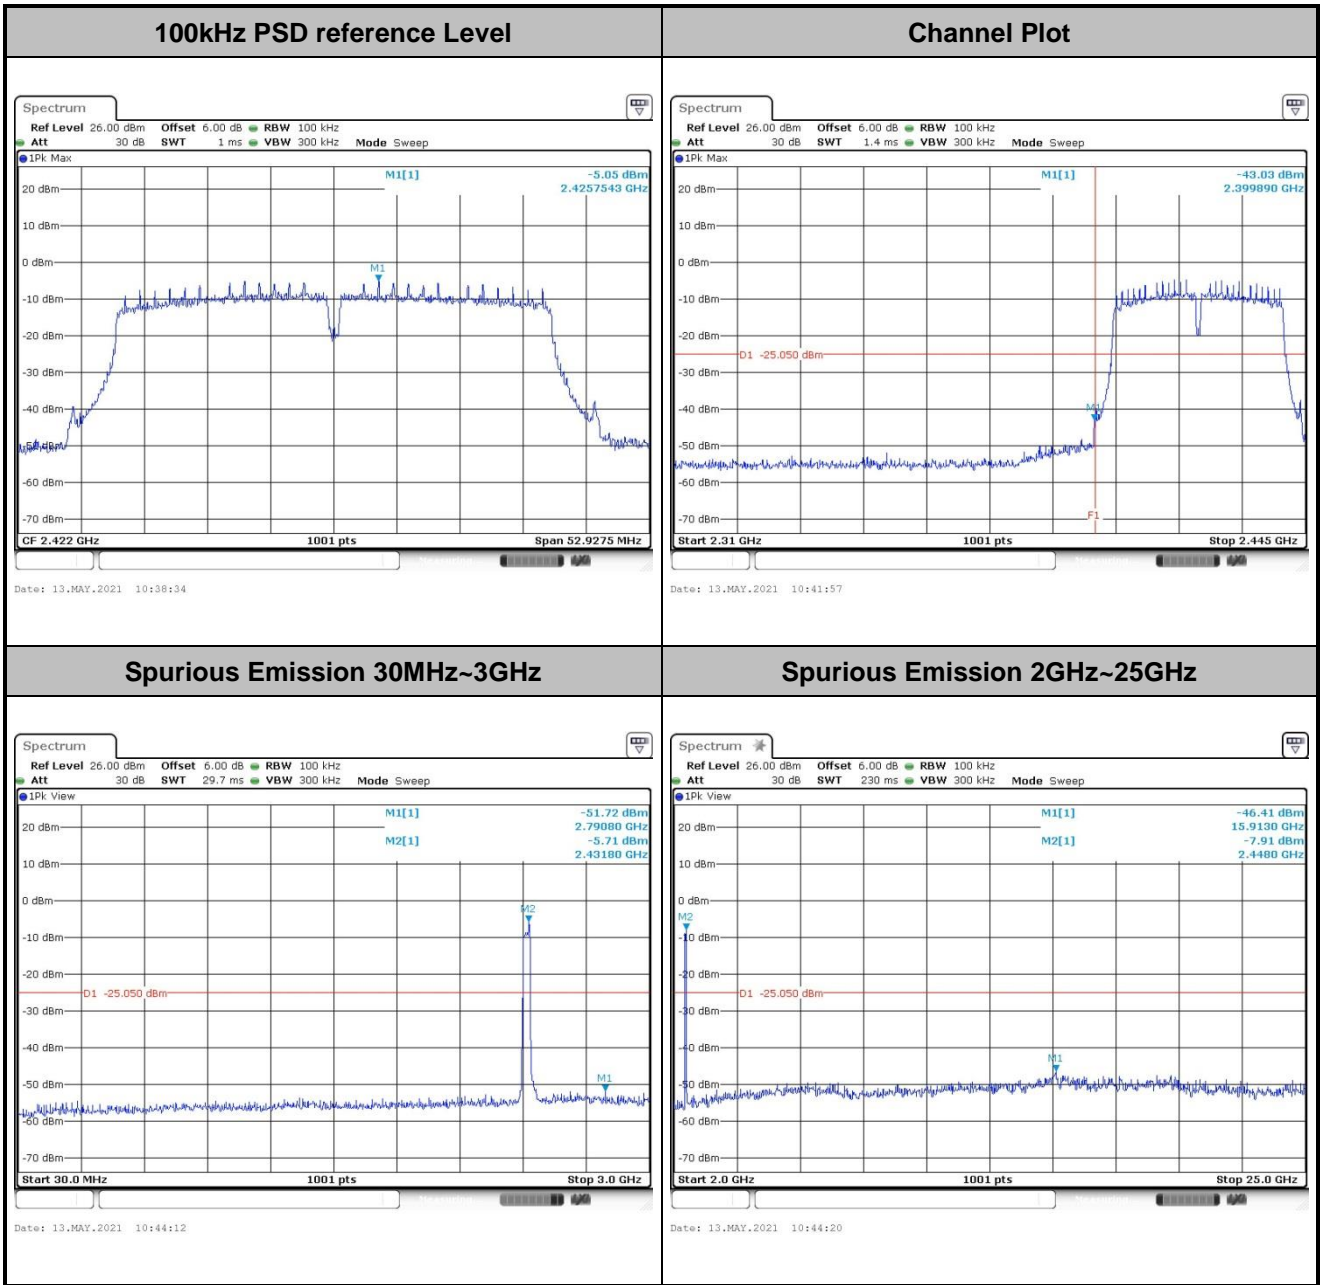




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 06 |
|-------------|--------------|----------------|----|

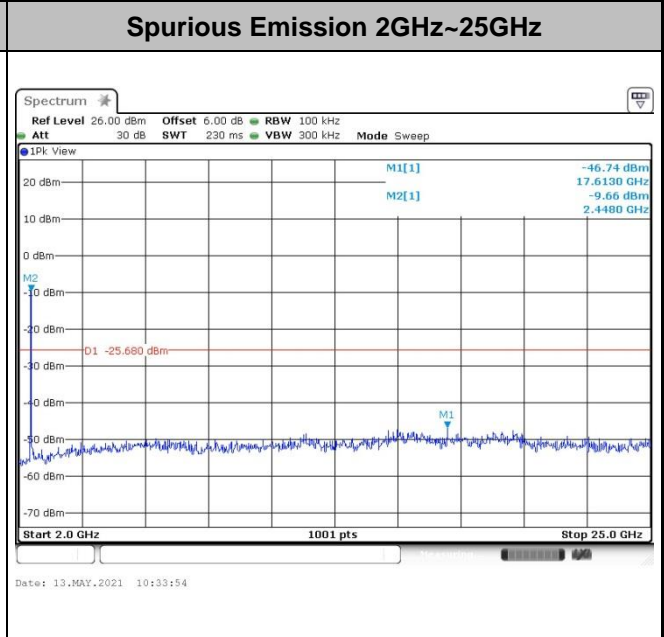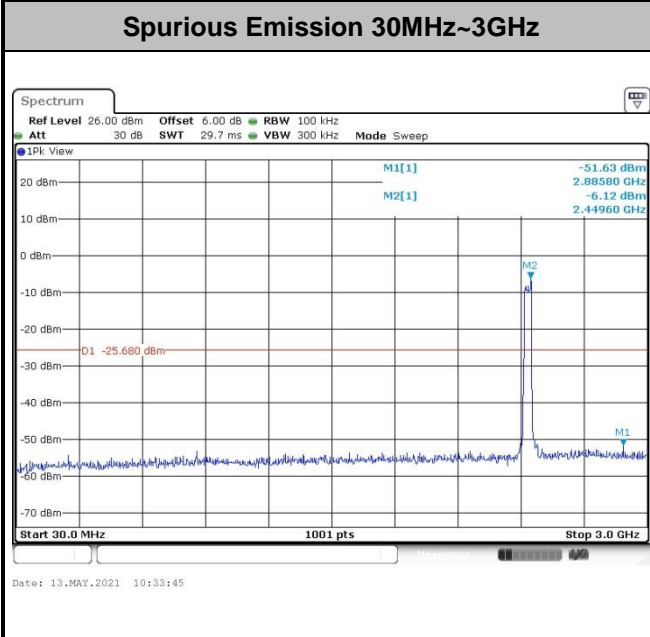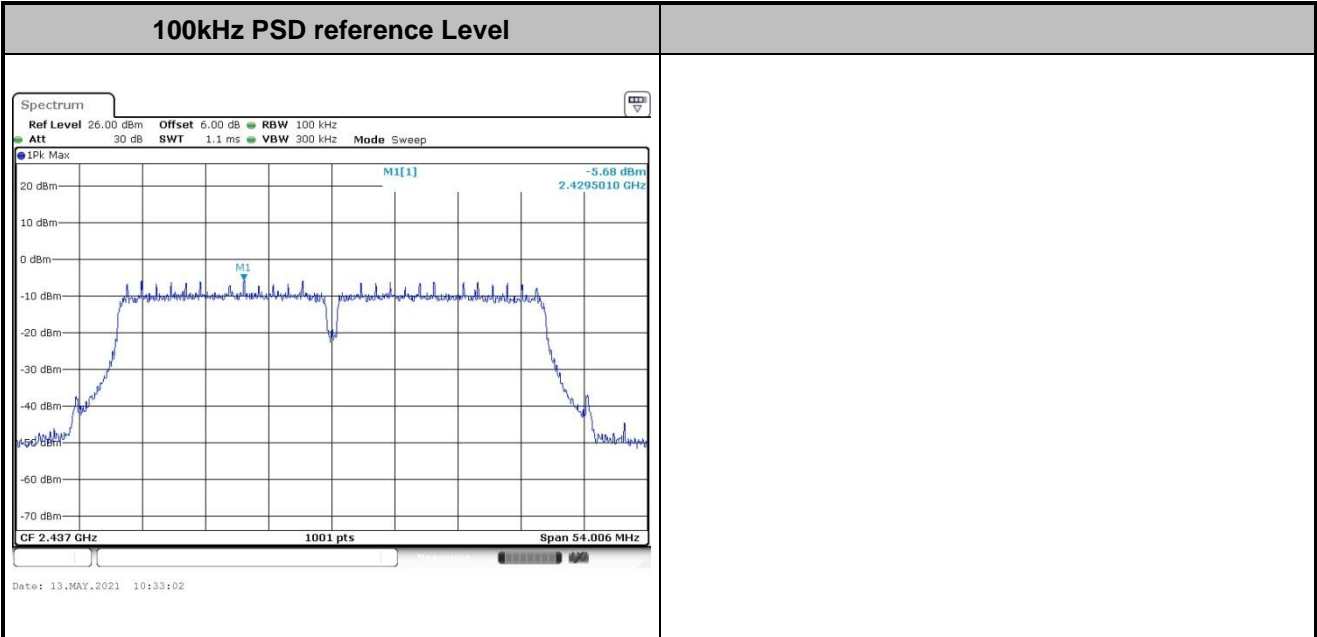





| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 09 |
|-------------|--------------|----------------|----|

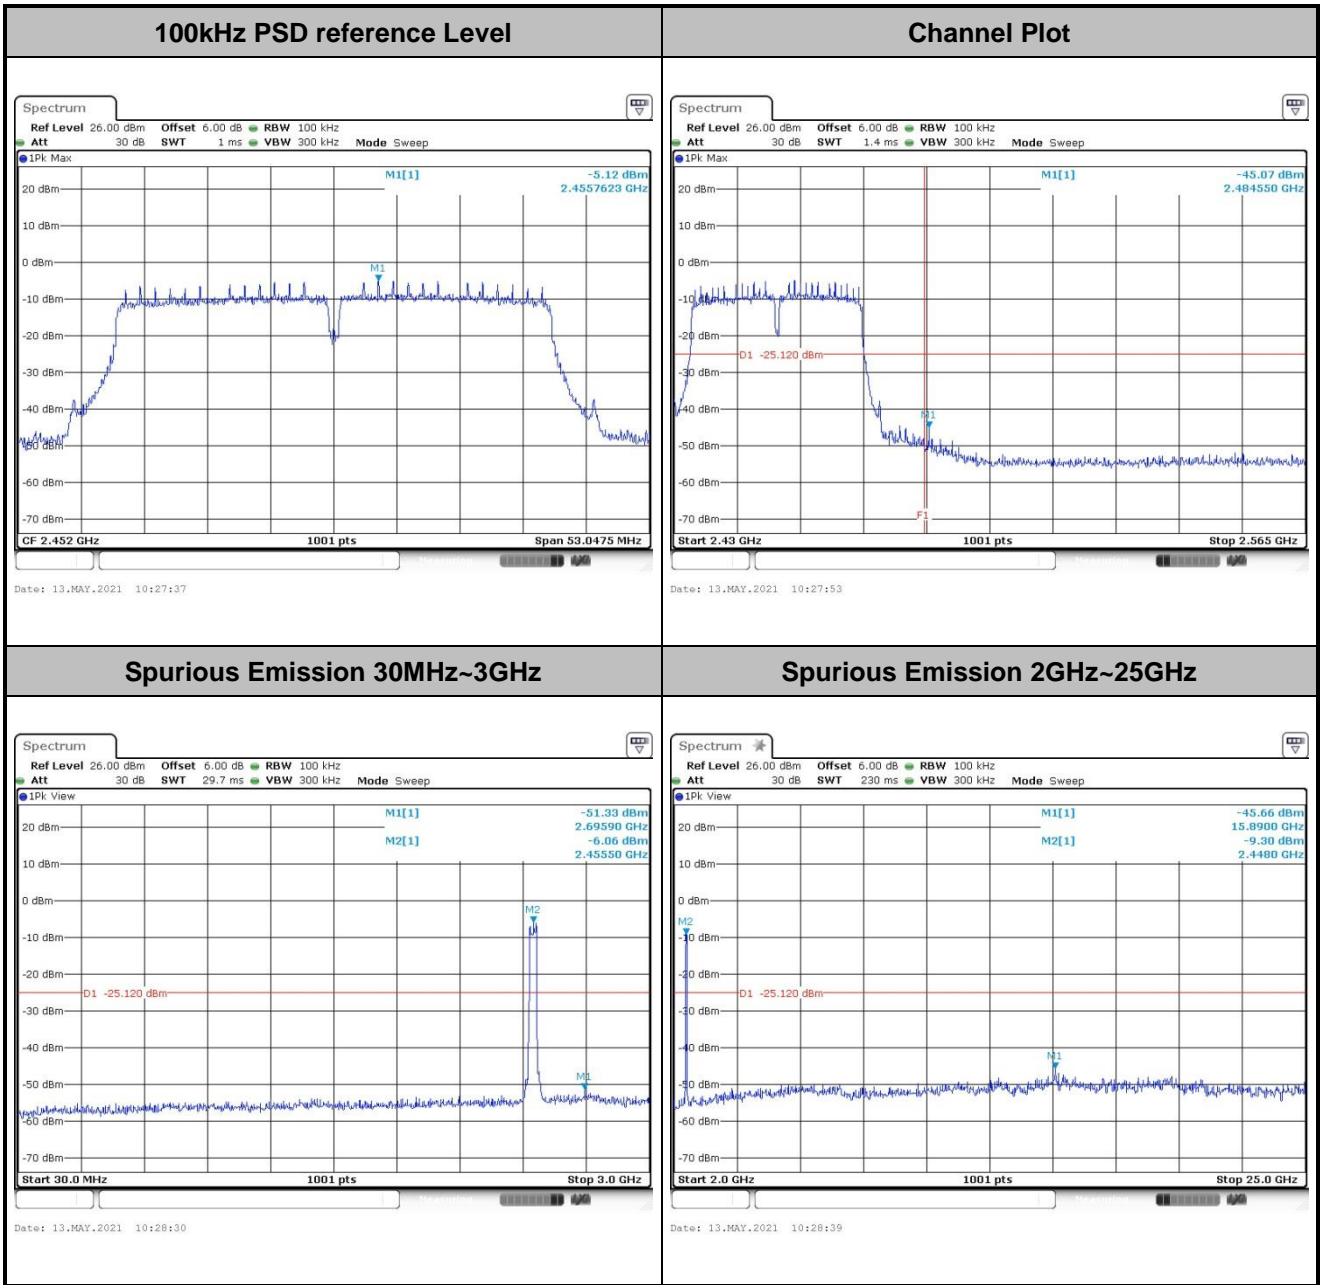






Number of TX = 2, Ant. 2 (Measured)

| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 01 |
|-------------|--------------|----------------|----|

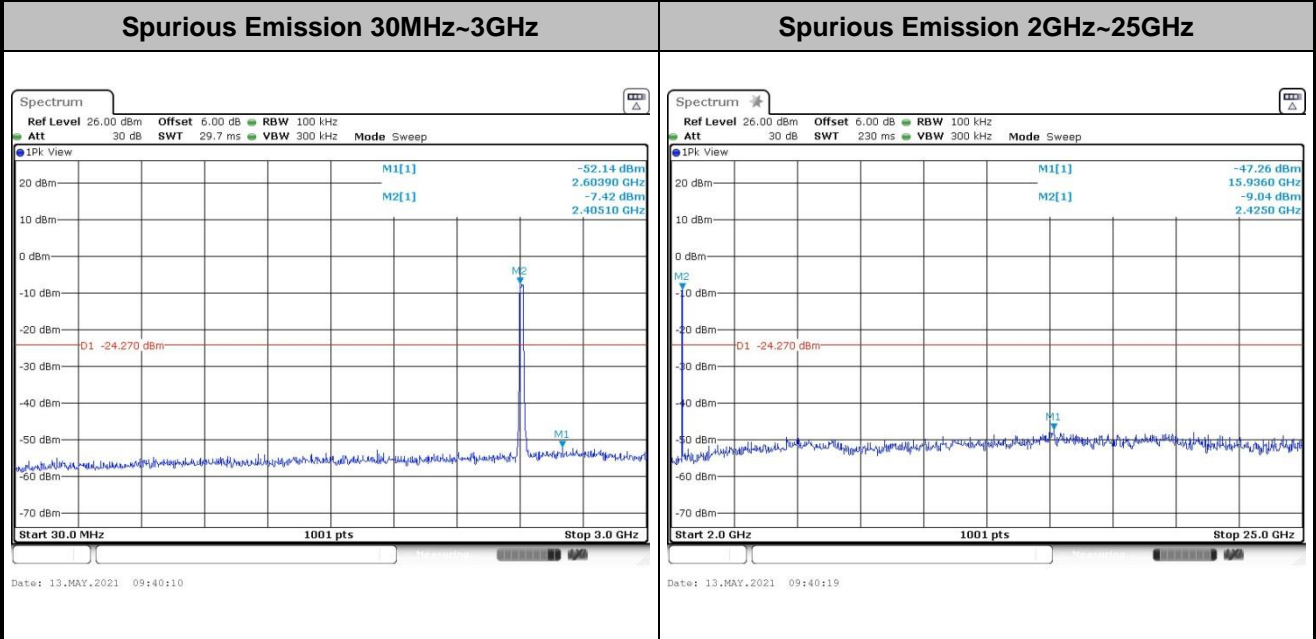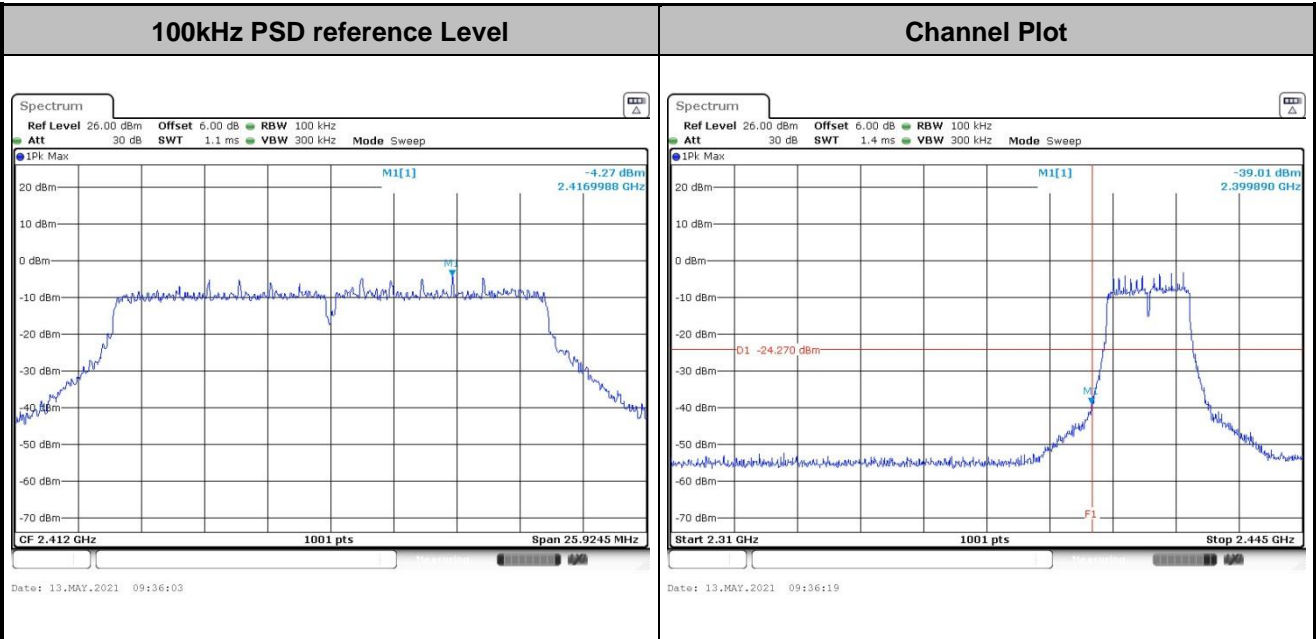




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 06 |
|-------------|--------------|----------------|----|

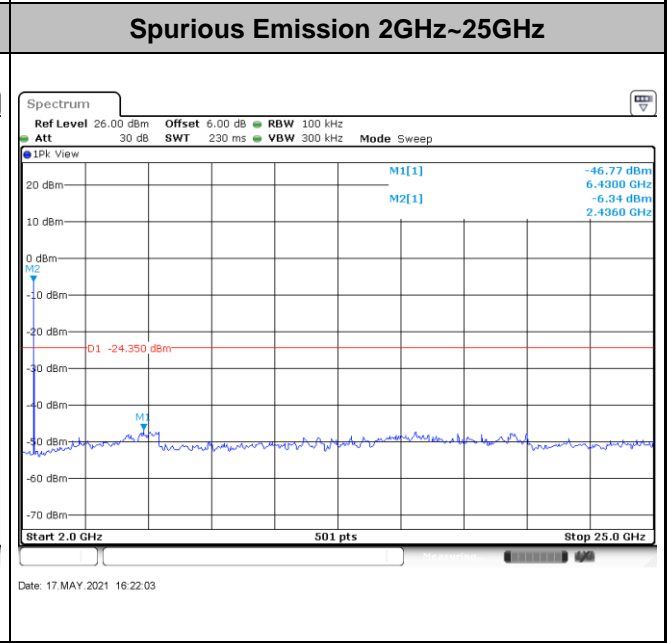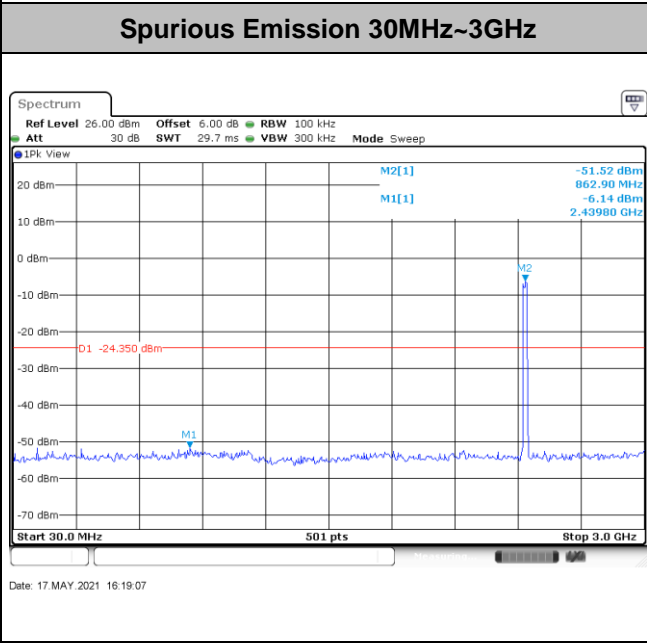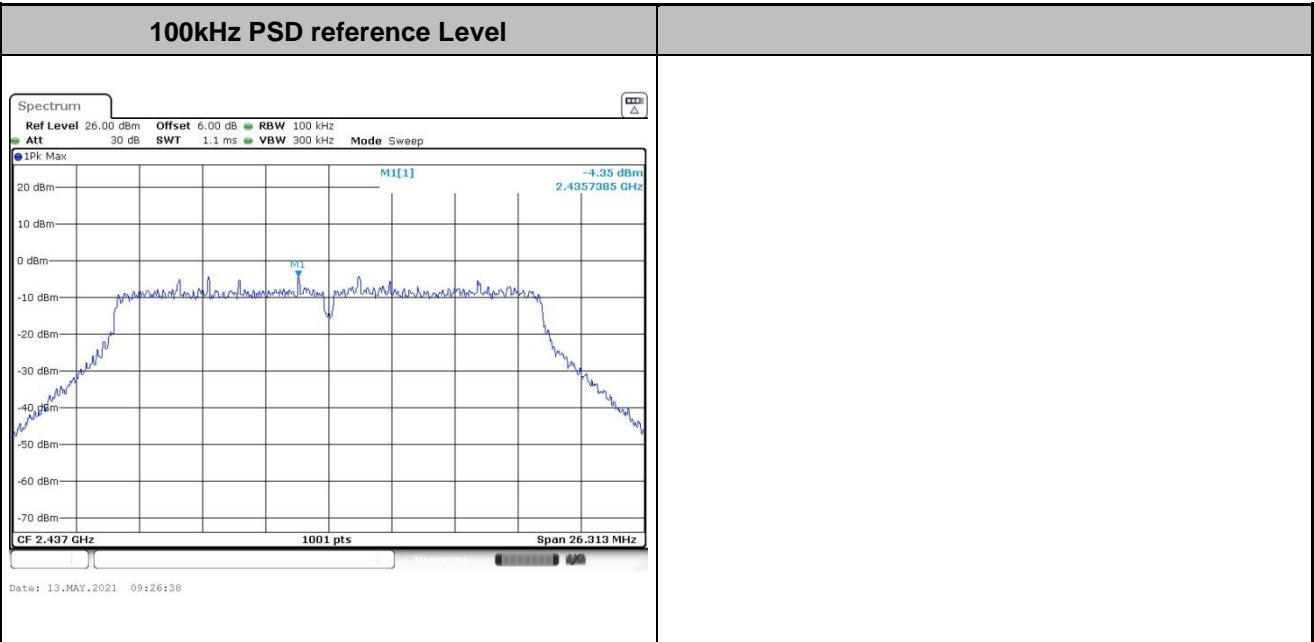




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 11 |
|-------------|--------------|----------------|----|

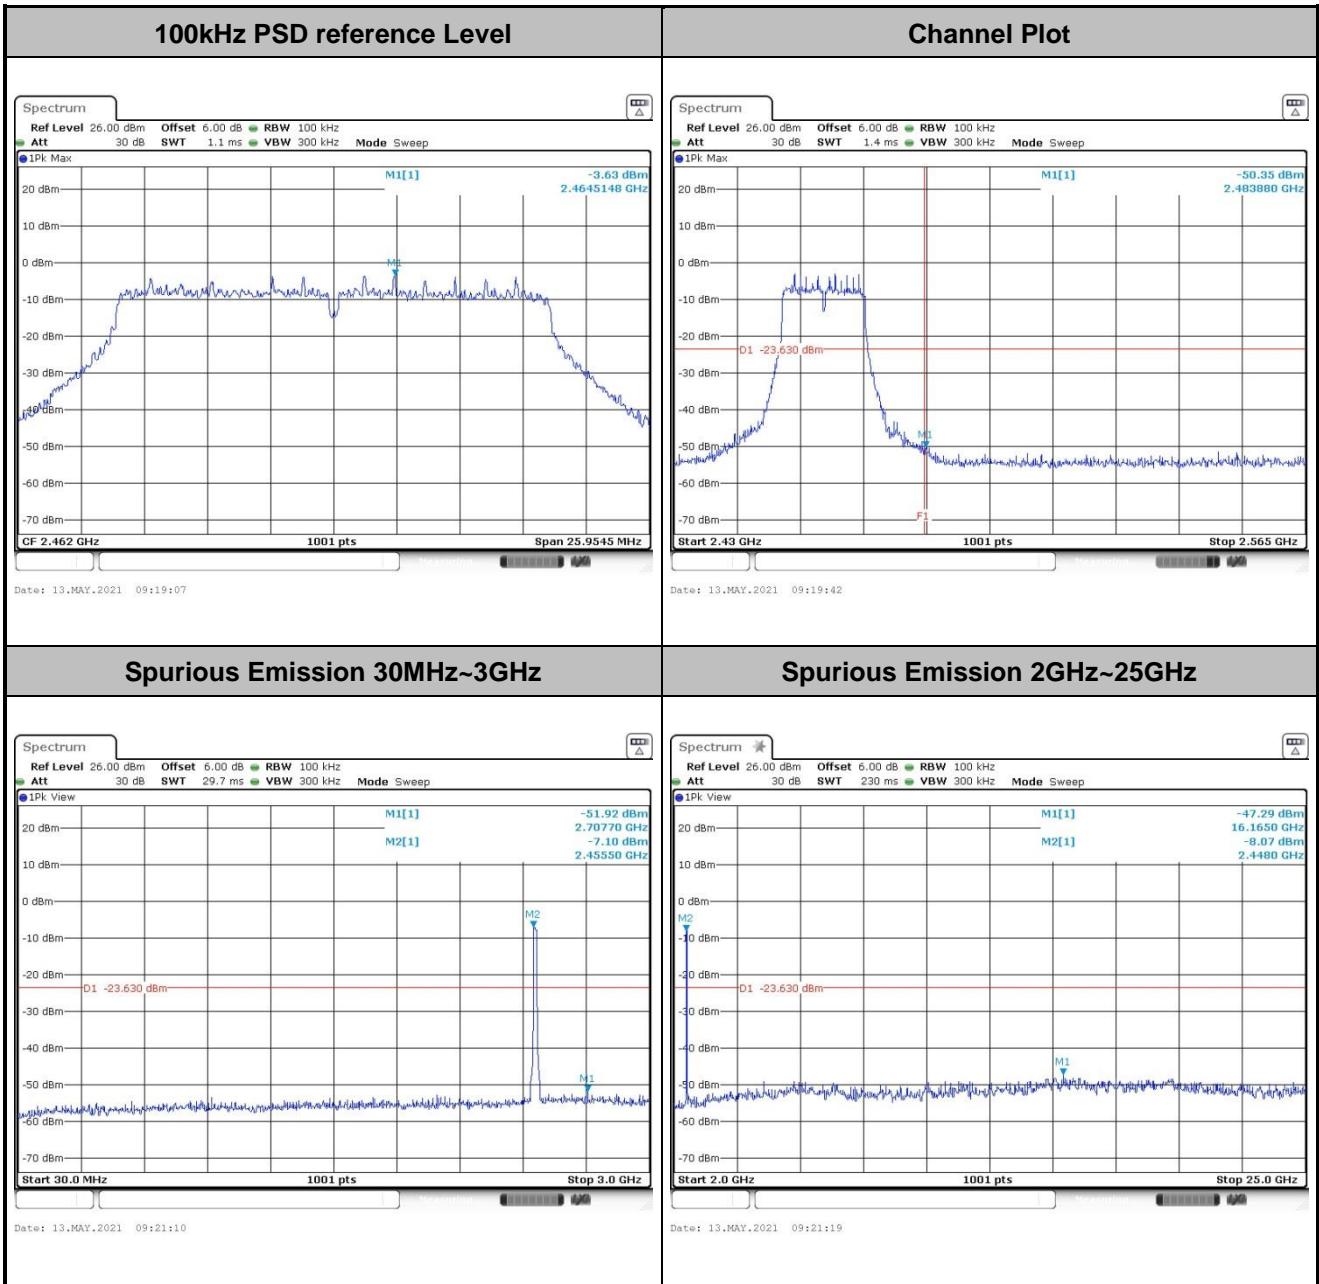






| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 03 |
|-------------|--------------|----------------|----|

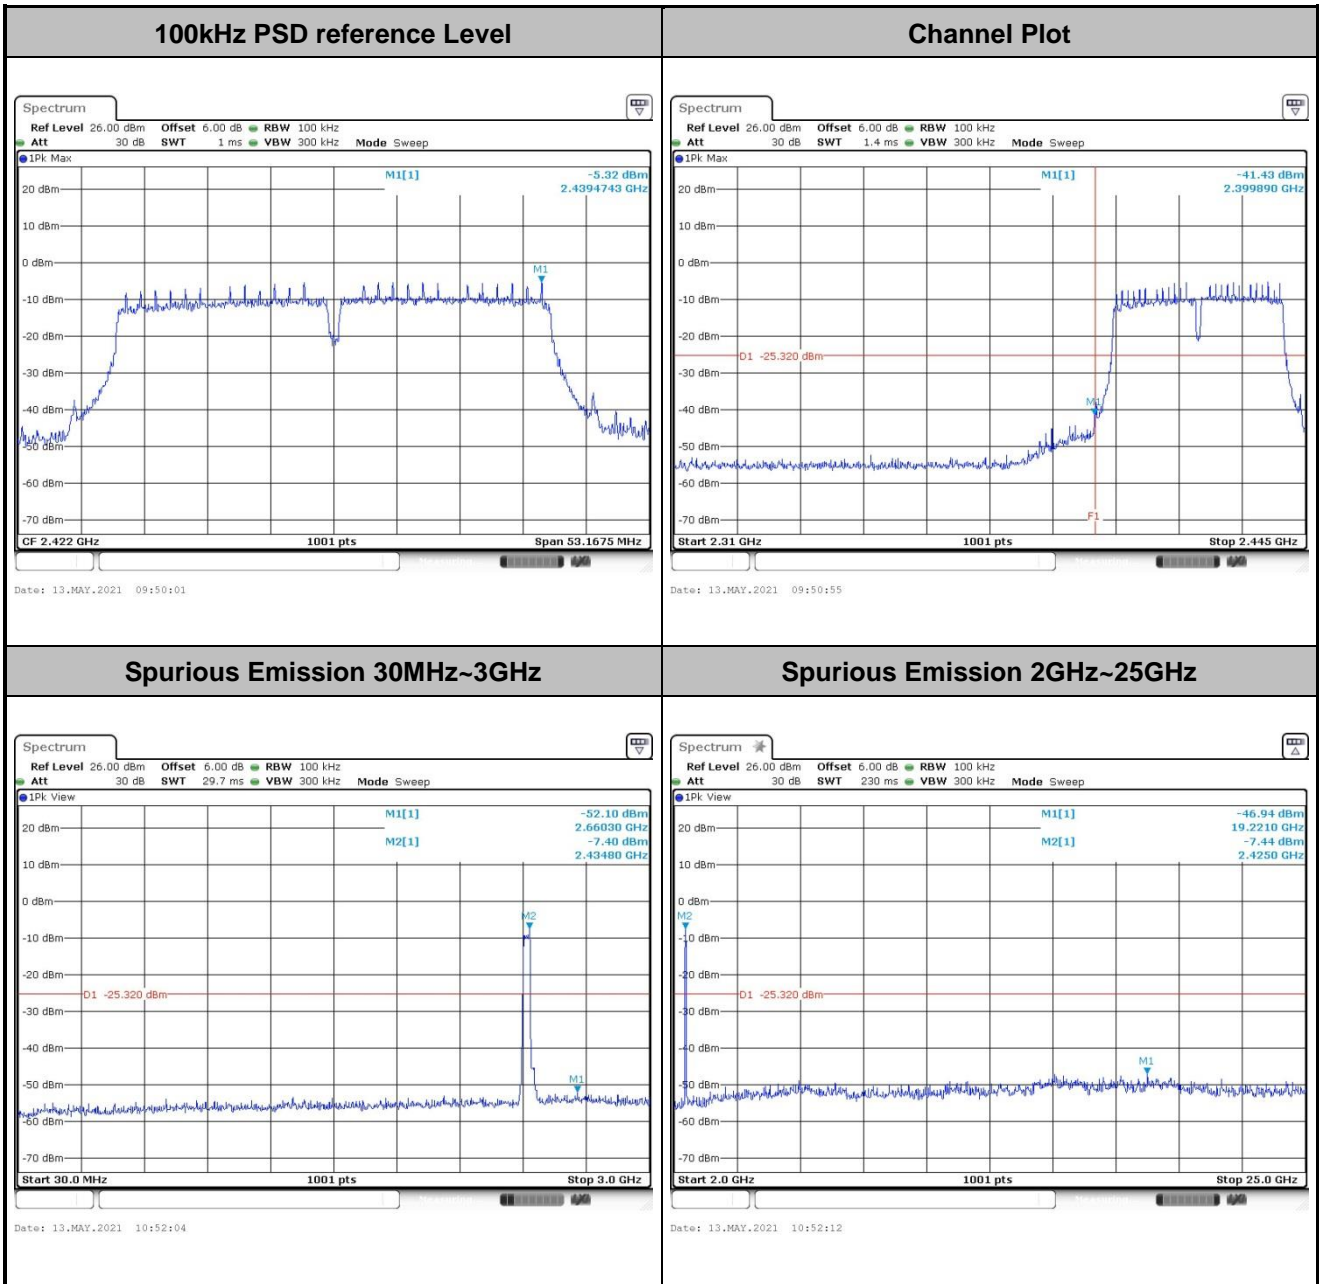




| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 06 |
|-------------|--------------|----------------|----|

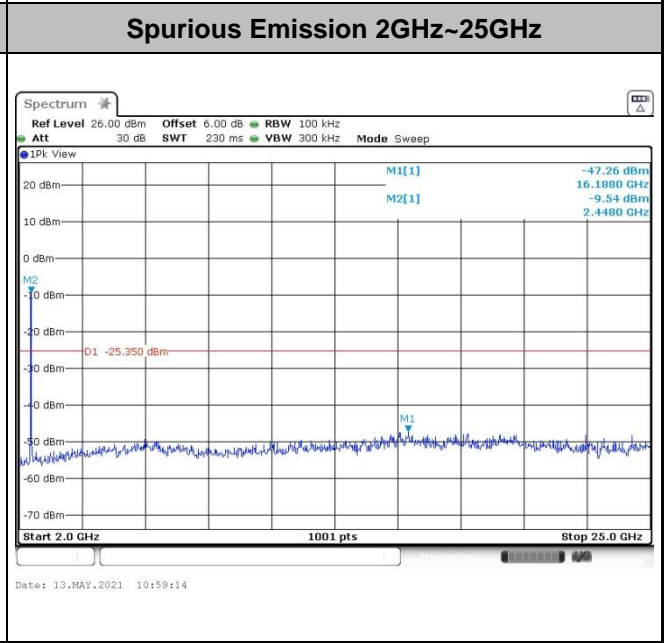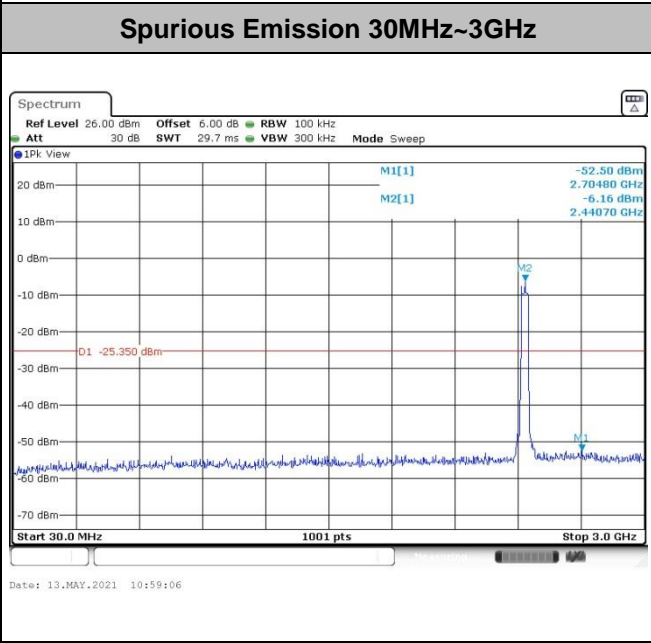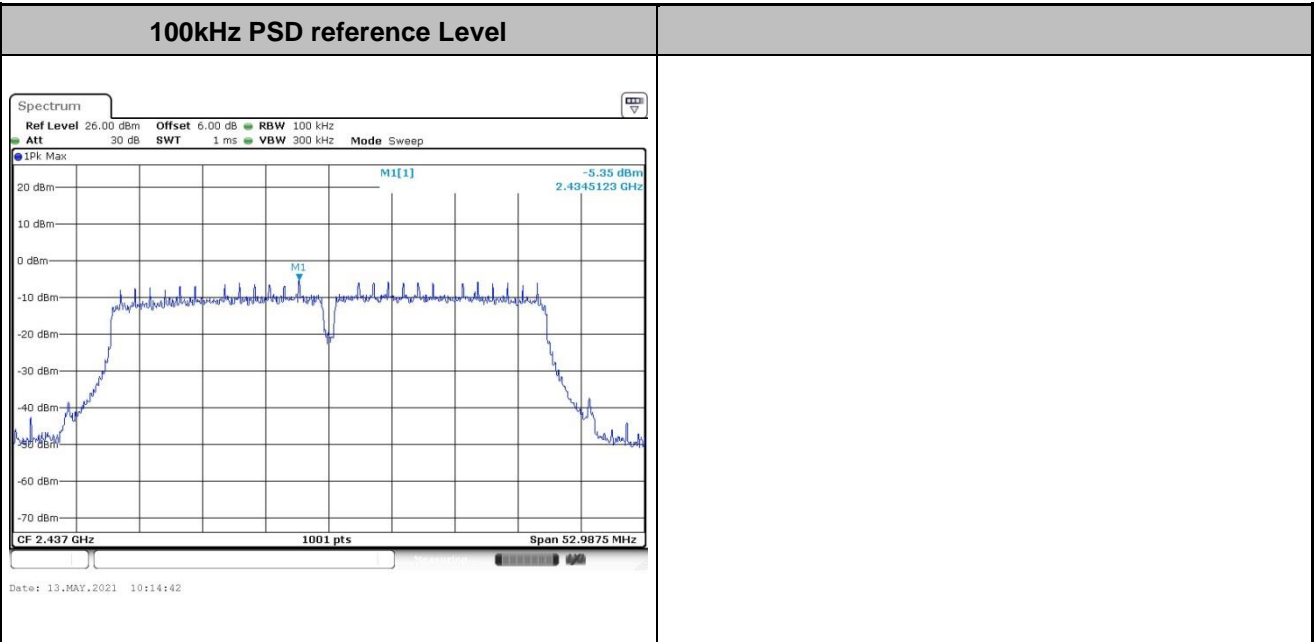



Test Mode : 802.11n HT40 Test Channel : 09

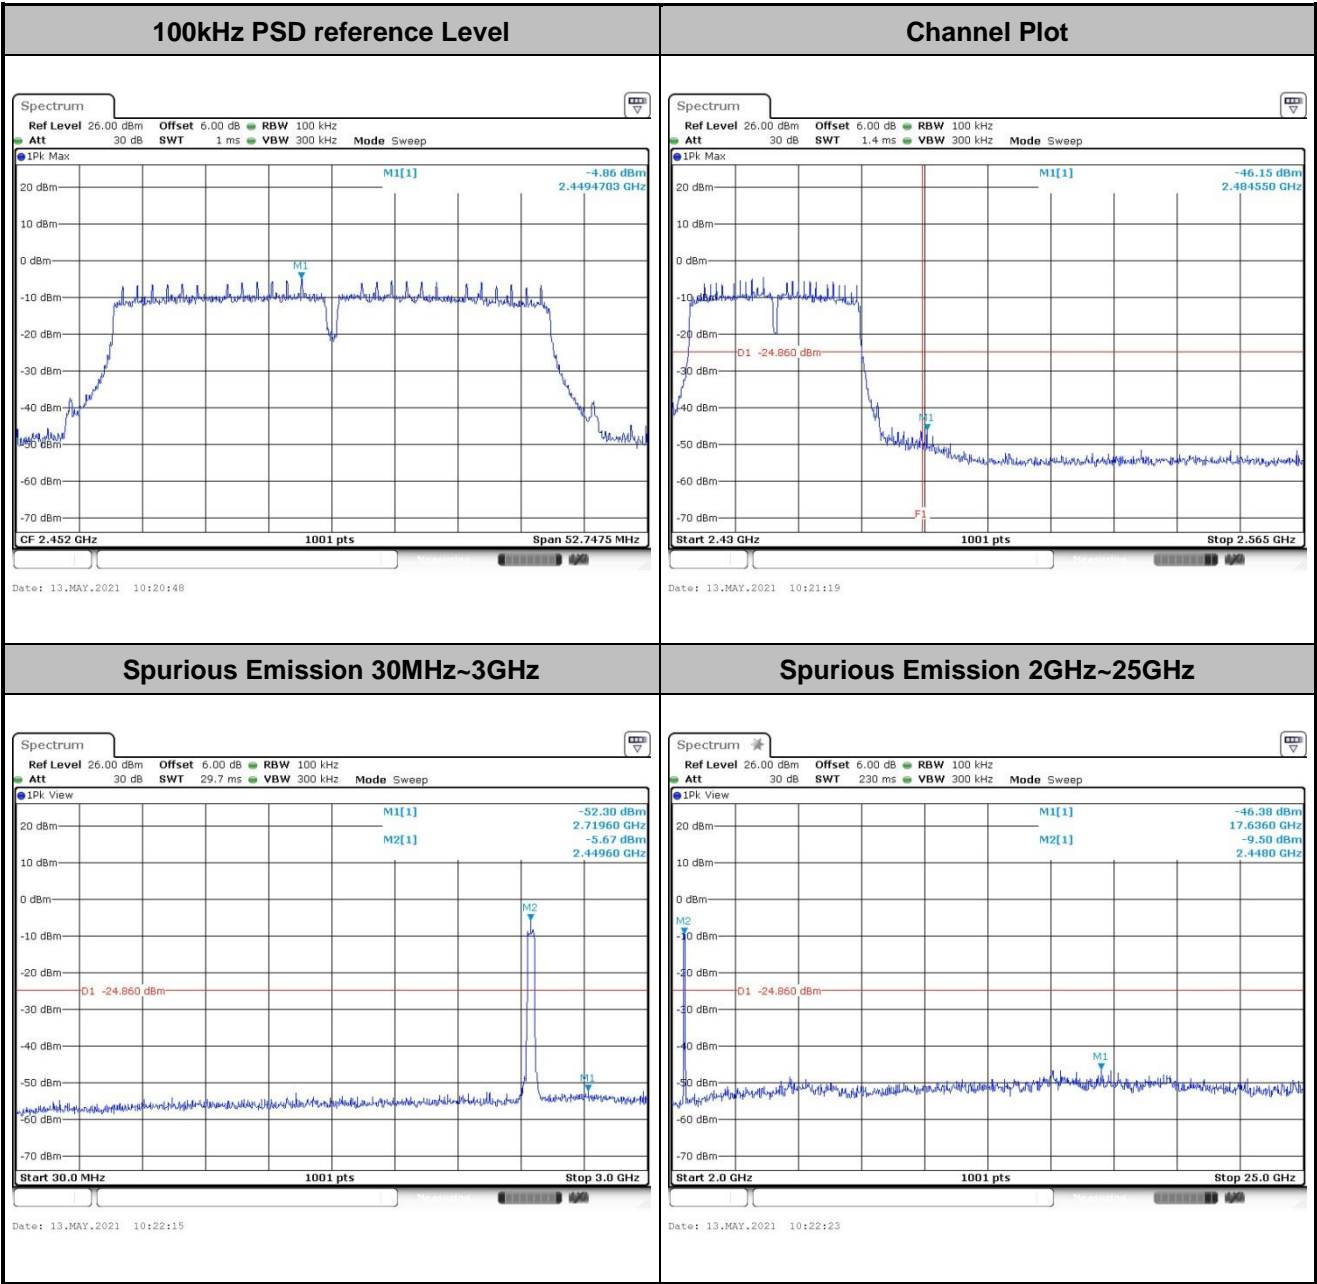



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

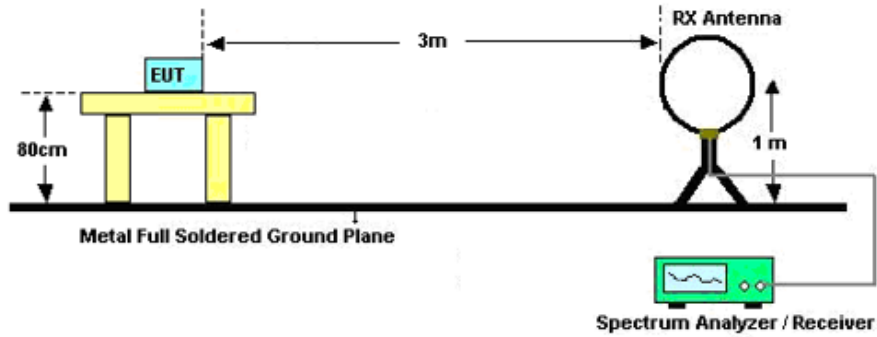

For radiated emissions from 30MHz to 1GHz

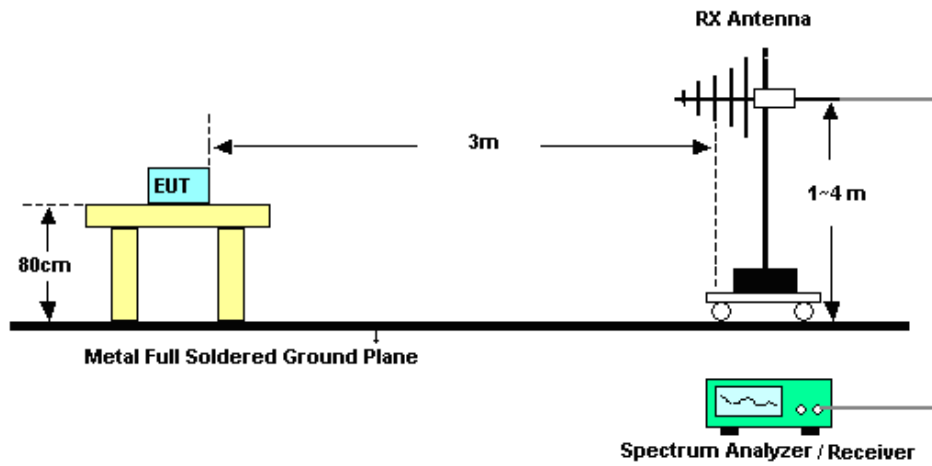

For radiated emissions above 1GHz

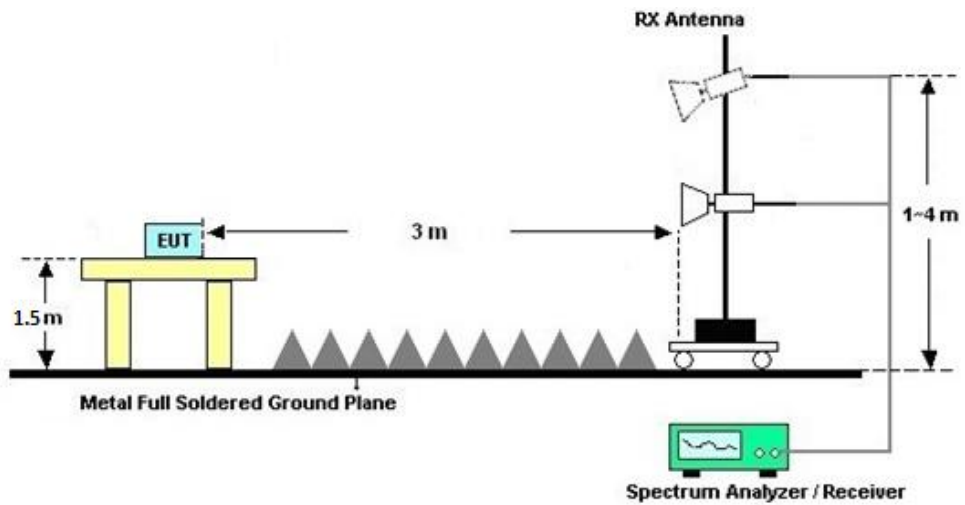



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|--------------------------------|------------------------------|-----------|
| | Quasi-Peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

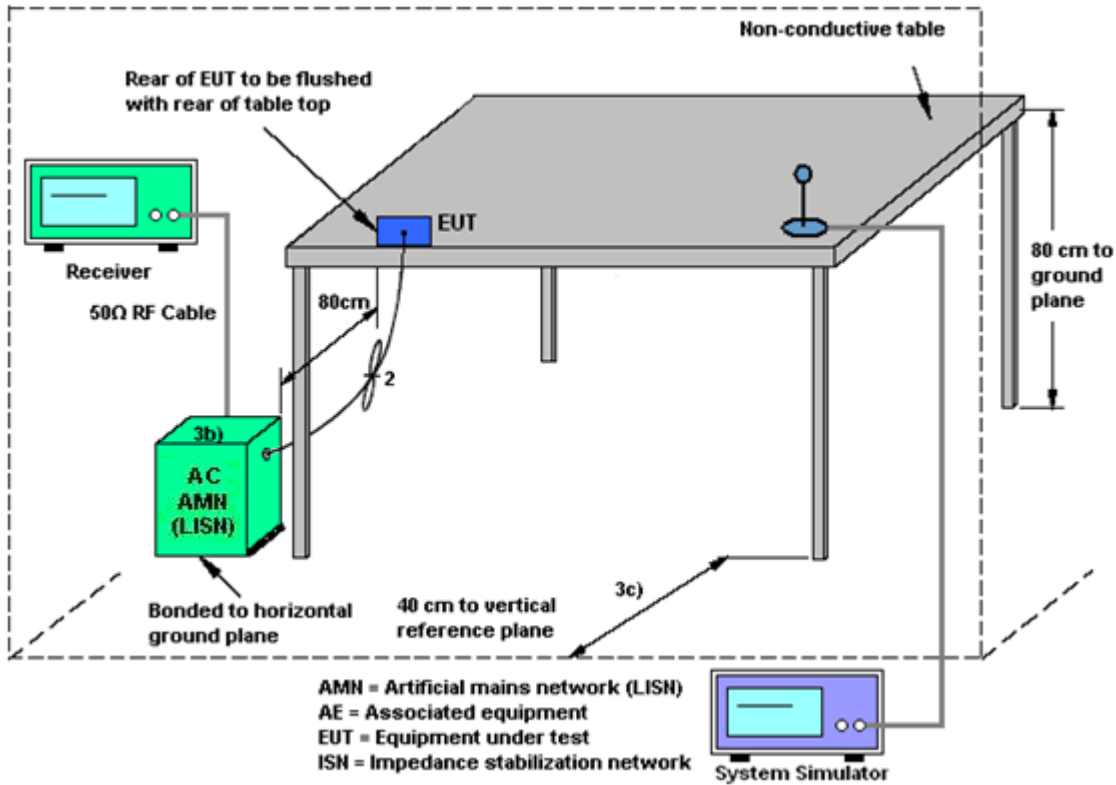

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

| <CDD Modes> | | | | | | |
|-------------|-----------------|-----------------|-----------------------------|---------------------------|-------------------------------------|-----------------------------------|
| | Ant. 1 (dBi) | Ant. 2 (dBi) | DG for Power (dBi) | DG for PSD (dBi) | Power Limit Reduction (dB) | PSD Limit Reduction (dB) |
| 2.4 GHz | 0.24 | -0.23 | 0.24 | 3.02 | 0.00 | 0.00 |

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---|--------------|----------------------------|------------------|----------------------------|------------------|-------------------------------|---------------|--------------------------|
| Spectrum Analyzer | R&S | FSV40 | 101040 | 10Hz~40GHz | Nov. 01, 2020 | May 13, 2021~ May 17, 2021 | Oct. 31, 2021 | Conducted (TH01-KS) |
| Pulse Power Sensor | Anritsu | MA2411B | 0917070 | 300MHz~40GHz | Jan. 07, 2021 | May 13, 2021~ May 17, 2021 | Jan. 06, 2022 | Conducted (TH01-KS) |
| Power Meter | Anritsu | ML2495A | 1005002 | 50MHz Bandwidth | Jan. 07, 2021 | May 13, 2021~ May 17, 2021 | Jan. 06, 2022 | Conducted (TH01-KS) |
| EMI Test Receiver | Keysight | N9038A | MY564000 04 | 3Hz~8.5GHz;M ax 30dBm | Oct. 17, 2020 | May 21, 2021 | Oct. 16, 2021 | Radiation (03CH05-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY551502 44 | 10Hz~44G,MAX 30dB | Apr. 13, 2021 | May 21, 2021 | Apr. 12, 2022 | Radiation (03CH05-KS) |
| Loop Antenna | R&S | HFH2-Z2 | 100321 | 9kHz~30MHz | Nov. 01, 2020 | May 21, 2021 | Oct. 31, 2021 | Radiation (03CH05-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 49922 | 30MHz-1GHz | May 30, 2020 | May 21, 2021 | May 29, 2021 | Radiation (03CH05-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 00218652 | 1GHz~18GHz | Apr. 24, 2021 | May 21, 2021 | Apr. 23, 2022 | Radiation (03CH05-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101115 | 18GHz~40GHz | Nov. 10, 2020 | May 21, 2021 | Nov. 09, 2021 | Radiation (03CH05-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz-1GHz | Apr. 13, 2021 | May 21, 2021 | Apr. 12, 2022 | Radiation (03CH05-KS) |
| Amplifier | MITEQ | EM18G40GG A | 060728 | 18~40GHz | Jan. 07, 2021 | May 21, 2021 | Jan. 06, 2022 | Radiation (03CH05-KS) |
| high gain Amplifier | MITEQ | AMF-7D-0010 1800-30-10P | 2012228 | 1Ghz-18Ghz | Oct. 17, 2020 | May 21, 2021 | Oct. 16, 2021 | Radiation (03CH05-KS) |
| Amplifier | Keysight | 83017A | MY532703 16 | 500MHz~26.5G Hz | Oct. 17, 2020 | May 21, 2021 | Oct. 16, 2021 | Radiation (03CH05-KS) |
| AC Power Source | Chroma | 61601 | F1040900 04 | N/A | NCR | May 21, 2021 | NCR | Radiation (03CH05-KS) |
| Turn Table | ChamPro | EM 1000-T | 060762-T | 0~360 degree | NCR | May 21, 2021 | NCR | Radiation (03CH05-KS) |
| Antenna Mast | ChamPro | EM 1000-A | 060762-A | 1 m~4 m | NCR | May 21, 2021 | NCR | Radiation (03CH05-KS) |
| EMI Receiver | R&S | ESCI7 | 100768 | 9kHz~7GHz; | Apr. 21, 2021 | Jun. 01, 2021 | Apr. 20, 2022 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 17, 2020 | Jun. 01, 2021 | Oct. 16, 2021 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060105 | 9kHz~30MHz | Apr. 13, 2021 | Jun. 01, 2021 | Apr. 12, 2022 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP00000 0811 | AC 0V~300V, 45Hz~1000Hz | Oct. 17, 2020 | Jun. 01, 2021 | Oct. 16, 2021 | Conduction (CO01-KS) |

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.94dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0dB |
|---|-------|



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|---------------------|--------------------|-------|----|
| Test Engineer: | Rise Liu/HeYong | Temperature: | 21~25 | °C |
| Test Date: | 2021/5/13~2021/5/17 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| 2.4GHz Band | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|-----------------------|-------|--------------|-------|--------------------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | | 6dB BW (MHz) | | 6dB BW Limit (MHz) | Pass/Fail |
| | | | | | Ant 1 | Ant 2 | Ant 1 | Ant 2 | | |
| 11b | 1Mbps | 1 | 1 | 2412 | 14.94 | - | 9.57 | - | 0.50 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | 15.23 | - | 10.01 | - | 0.50 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | 14.99 | - | 9.99 | - | 0.50 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | - | 18.03 | | 16.34 | 0.50 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | - | 18.08 | | 16.34 | 0.50 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | - | 17.93 | | 16.34 | 0.50 | Pass |
| HT20 | MCS0 | 2 | 1 | 2412 | 18.98 | 18.93 | 16.92 | 17.28 | 0.50 | Pass |
| HT20 | MCS0 | 2 | 6 | 2437 | 19.08 | 19.23 | 17.56 | 17.54 | 0.50 | Pass |
| HT20 | MCS0 | 2 | 11 | 2462 | 18.83 | 18.93 | 17.56 | 17.30 | 0.50 | Pass |
| HT40 | MCS0 | 2 | 3 | 2422 | 36.06 | 36.36 | 35.29 | 35.45 | 0.50 | Pass |
| HT40 | MCS0 | 2 | 6 | 2437 | 36.36 | 36.36 | 36.00 | 35.33 | 0.50 | Pass |
| HT40 | MCS0 | 2 | 9 | 2452 | 36.36 | 36.46 | 35.37 | 35.17 | 0.50 | Pass |

TEST RESULTS DATA
Peak Output Power

| 2.4GHz Band | | | | | | | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|----------------------------|-------|-------|-----------------------------|-------|----------|-------|------------------|-------|------------------------|-------|------------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak Conducted Power (dBm) | | | Conducted Power Limit (dBm) | | DG (dBi) | | EIRP Power (dBm) | | EIRP Power Limit (dBm) | | Pass /Fail |
| | | | | | Ant 1 | Ant 2 | SUM | Ant 1 | Ant 2 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | |
| 11b | 1Mbps | 1 | 1 | 2412 | 16.27 | 16.04 | - | 30.00 | 30.00 | 0.24 | -0.23 | 16.51 | 15.81 | 36.00 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | 16.01 | 16.48 | - | 30.00 | 30.00 | 0.24 | -0.23 | 16.25 | 16.25 | 36.00 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | 16.62 | 16.37 | - | 30.00 | 30.00 | 0.24 | -0.23 | 16.86 | 16.14 | 36.00 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | 21.49 | 21.67 | - | 30.00 | 30.00 | 0.24 | -0.23 | 21.73 | 21.44 | 36.00 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | 20.70 | 21.46 | - | 30.00 | 30.00 | 0.24 | -0.23 | 20.94 | 21.23 | 36.00 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | 21.64 | 21.68 | - | 30.00 | 30.00 | 0.24 | -0.23 | 21.88 | 21.45 | 36.00 | 36.00 | Pass |
| HT20 | MCS0 | 2 | 1 | 2412 | 19.07 | 18.14 | 21.64 | 30.00 | | 0.24 | | 21.88 | | 36.00 | | Pass |
| HT20 | MCS0 | 2 | 6 | 2437 | 18.24 | 18.15 | 21.21 | 30.00 | | 0.24 | | 21.45 | | 36.00 | | Pass |
| HT20 | MCS0 | 2 | 11 | 2462 | 18.65 | 18.41 | 21.54 | 30.00 | | 0.24 | | 21.78 | | 36.00 | | Pass |
| HT40 | MCS0 | 2 | 3 | 2422 | 19.24 | 19.10 | 22.18 | 30.00 | | 0.24 | | 22.42 | | 36.00 | | Pass |
| HT40 | MCS0 | 2 | 6 | 2437 | 19.25 | 19.01 | 22.14 | 30.00 | | 0.24 | | 22.38 | | 36.00 | | Pass |
| HT40 | MCS0 | 2 | 9 | 2452 | 19.31 | 19.26 | 22.30 | 30.00 | | 0.24 | | 22.54 | | 36.00 | | Pass |

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

| 2.4GHz Band | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|------------------|-------|-------------------------------|-------|-------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | | Average Conducted Power (dBm) | | |
| | | | | | Ant 1 | Ant 2 | Ant 1 | Ant 2 | SUM |
| 11b | 1Mbps | 1 | 1 | 2412 | 0.00 | 0.00 | 14.02 | 13.83 | - |
| 11b | 1Mbps | 1 | 6 | 2437 | 0.00 | 0.00 | 13.76 | 14.28 | |
| 11b | 1Mbps | 1 | 11 | 2462 | 0.00 | 0.00 | 14.39 | 14.12 | |
| 11g | 6Mbps | 1 | 1 | 2412 | 0.21 | 0.15 | 12.11 | 12.16 | |
| 11g | 6Mbps | 1 | 6 | 2437 | 0.21 | 0.15 | 11.98 | 12.28 | |
| 11g | 6Mbps | 1 | 11 | 2462 | 0.21 | 0.15 | 12.23 | 12.16 | |
| HT20 | MCS0 | 2 | 1 | 2412 | 0.34 | 0.46 | 9.03 | 7.36 | 11.29 |
| HT20 | MCS0 | 2 | 6 | 2437 | 0.34 | 0.46 | 8.04 | 7.45 | 10.77 |
| HT20 | MCS0 | 2 | 11 | 2462 | 0.34 | 0.46 | 8.62 | 7.57 | 11.14 |
| HT40 | MCS0 | 2 | 3 | 2422 | 0.65 | 0.68 | 8.46 | 7.58 | 11.05 |
| HT40 | MCS0 | 2 | 6 | 2437 | 0.65 | 0.68 | 8.53 | 7.74 | 11.16 |
| HT40 | MCS0 | 2 | 9 | 2452 | 0.65 | 0.68 | 8.46 | 7.95 | 11.22 |

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


| 2.4GHz Band | | | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|---------------------|--------|--------------|----------|-------|---------------------------|-------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm/3kHz) | | | DG (dBi) | | Peak PSD Limit (dBm/3kHz) | | Pass/Fail |
| | | | | | Ant 1 | Ant 2 | Worse + 3.01 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | |
| 11b | 1Mbps | 1 | 1 | 2412 | -11.58 | - | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | -11.77 | - | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | -10.96 | - | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | - | -16.82 | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | - | -16.76 | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | - | -16.23 | - | 0.24 | -0.23 | 8.00 | 8.00 | Pass |
| HT20 | MCS0 | 2 | 1 | 2412 | -18.27 | -20.03 | -15.26 | 3.02 | | 8.00 | | Pass |
| HT20 | MCS0 | 2 | 6 | 2437 | -19.15 | -19.24 | -16.14 | 3.02 | | 8.00 | | Pass |
| HT20 | MCS0 | 2 | 11 | 2462 | -18.76 | -19.19 | -15.75 | 3.02 | | 8.00 | | Pass |
| HT40 | MCS0 | 2 | 3 | 2422 | -20.43 | -20.81 | -17.42 | 3.02 | | 8.00 | | Pass |
| HT40 | MCS0 | 2 | 6 | 2437 | -21.04 | -21.42 | -18.03 | 3.02 | | 8.00 | | Pass |
| HT40 | MCS0 | 2 | 9 | 2452 | -20.39 | -20.23 | -17.22 | 3.02 | | 8.00 | | Pass |

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

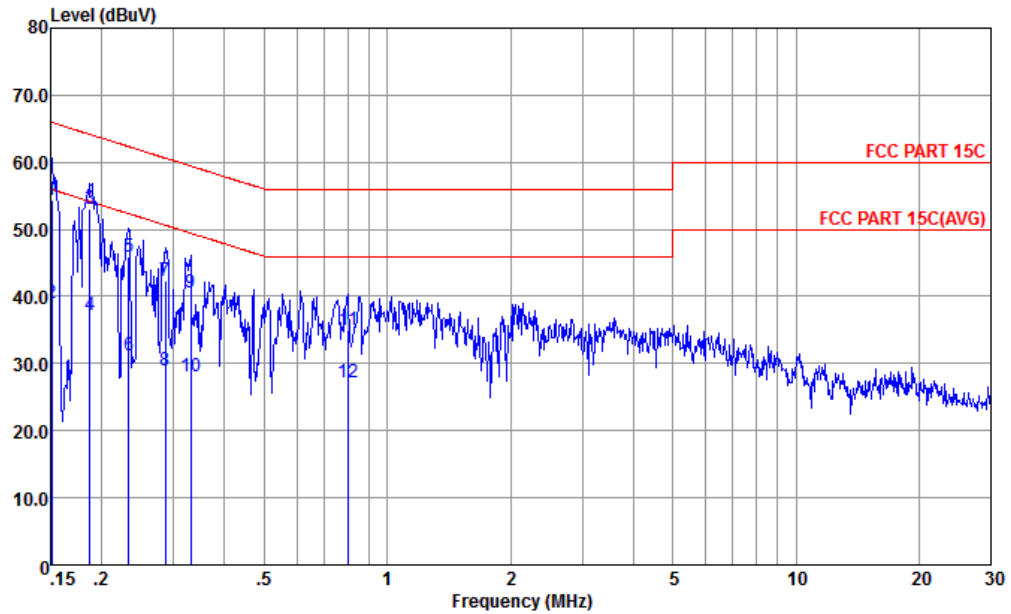


Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-L LINE

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.151 | 54.32 | -11.64 | 65.96 | 34.20 | 9.64 | 10.48 | QP |
| 2 | 0.151 | 39.02 | -16.94 | 55.96 | 18.90 | 9.64 | 10.48 | Average |
| 3 * | 0.187 | 52.93 | -11.22 | 64.15 | 32.90 | 9.64 | 10.39 | QP |
| 4 | 0.187 | 37.23 | -16.92 | 54.15 | 17.20 | 9.64 | 10.39 | Average |
| 5 | 0.233 | 45.89 | -16.46 | 62.35 | 25.91 | 9.64 | 10.34 | QP |
| 6 | 0.233 | 31.19 | -21.16 | 52.35 | 11.21 | 9.64 | 10.34 | Average |
| 7 | 0.286 | 42.25 | -18.38 | 60.63 | 22.30 | 9.64 | 10.31 | QP |
| 8 | 0.286 | 29.05 | -21.58 | 50.63 | 9.10 | 9.64 | 10.31 | Average |
| 9 | 0.330 | 40.54 | -18.90 | 59.44 | 20.61 | 9.64 | 10.29 | QP |
| 10 | 0.330 | 28.04 | -21.40 | 49.44 | 8.11 | 9.64 | 10.29 | Average |
| 11 | 0.804 | 35.02 | -20.98 | 56.00 | 15.10 | 9.68 | 10.24 | QP |
| 12 | 0.804 | 27.12 | -18.88 | 46.00 | 7.20 | 9.68 | 10.24 | Average |



| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

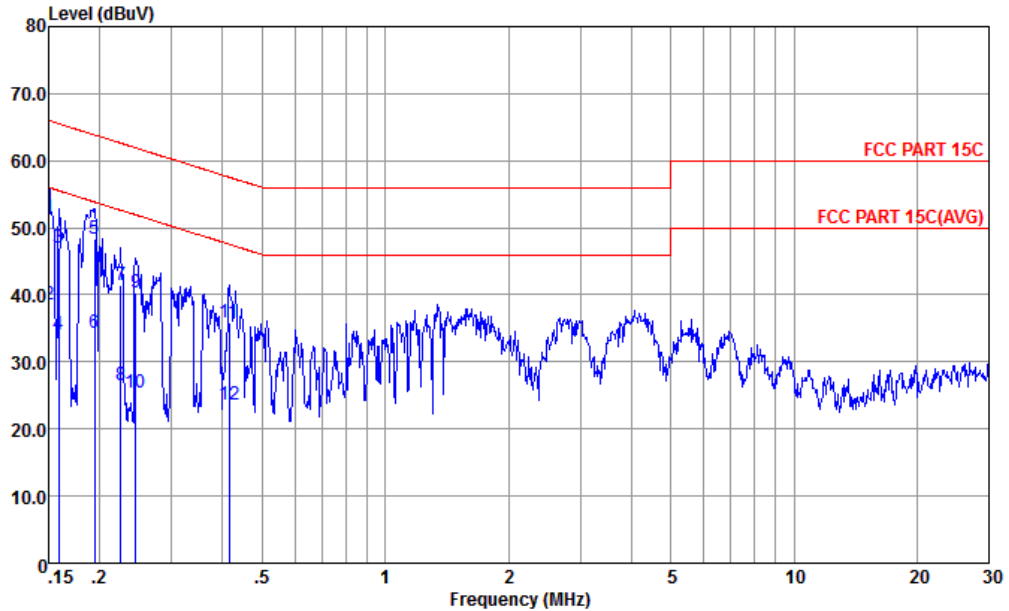

Site : CO01-KS
Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|------|-------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.150 | 51.48 | -14.52 | 66.00 | 31.20 | 9.80 | 10.48 | QP |
| 2 | 0.150 | 38.58 | -17.42 | 56.00 | 18.30 | 9.80 | 10.48 | Average |
| 3 | 0.159 | 47.07 | -18.45 | 65.52 | 26.79 | 9.82 | 10.46 | QP |
| 4 | 0.159 | 34.17 | -21.35 | 55.52 | 13.89 | 9.82 | 10.46 | Average |
| 5 | 0.194 | 48.46 | -15.38 | 63.84 | 28.21 | 9.88 | 10.37 | QP |
| 6 | 0.194 | 34.36 | -19.48 | 53.84 | 14.11 | 9.88 | 10.37 | Average |
| 7 | 0.226 | 41.41 | -21.20 | 62.61 | 21.20 | 9.86 | 10.35 | QP |
| 8 | 0.226 | 26.41 | -26.20 | 52.61 | 6.20 | 9.86 | 10.35 | Average |
| 9 | 0.246 | 40.37 | -21.54 | 61.91 | 20.19 | 9.84 | 10.34 | QP |
| 10 | 0.246 | 25.47 | -26.44 | 51.91 | 5.29 | 9.84 | 10.34 | Average |
| 11 | 0.415 | 35.81 | -21.74 | 57.55 | 15.80 | 9.75 | 10.26 | QP |
| 12 | 0.415 | 23.61 | -23.94 | 47.55 | 3.60 | 9.75 | 10.26 | Average |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b Ant 1 (Band Edge @ 3m)

| WIFI Ant. | Note | Frequency | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Ant Pos | Table Pos | Peak Avg. | Pol. |
|-----------------------------|---|-----------|------------|------------|------------|------------|----------------|------------|---------------|---------|-----------|-----------|---------|
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b CH 01 2412MHz | | 2389.04 | 56.62 | -17.38 | 74 | 48.48 | 32.2 | 7.59 | 31.65 | 156 | 150 | P | H |
| | | 2389.95 | 45.35 | -8.65 | 54 | 37.21 | 32.2 | 7.59 | 31.65 | 156 | 150 | A | H |
| | * | 2412 | 104.45 | - | - | 96.3 | 32.18 | 7.62 | 31.65 | 156 | 150 | P | H |
| | * | 2410 | 99.84 | - | - | 91.69 | 32.18 | 7.62 | 31.65 | 156 | 150 | A | H |
| | | 2368.63 | 56.21 | -17.79 | 74 | 48.16 | 32.15 | 7.56 | 31.66 | 389 | 297 | P | V |
| | | 2388.52 | 44.81 | -9.19 | 54 | 36.67 | 32.2 | 7.59 | 31.65 | 389 | 297 | A | V |
| | * | 2412 | 100.83 | - | - | 92.68 | 32.18 | 7.62 | 31.65 | 389 | 297 | P | V |
| | * | 2410 | 97.17 | - | - | 89.02 | 32.18 | 7.62 | 31.65 | 389 | 297 | A | V |
| 802.11b CH 11 2462MHz | * | 2462 | 104.63 | - | - | 96.4 | 32.13 | 7.7 | 31.6 | 100 | 154 | P | H |
| | * | 2460 | 100.36 | - | - | 92.13 | 32.13 | 7.7 | 31.6 | 100 | 154 | A | H |
| | | 2495.38 | 56.74 | -17.26 | 74 | 48.44 | 32.1 | 7.76 | 31.56 | 100 | 154 | P | H |
| | | 2483.5 | 45.61 | -8.39 | 54 | 37.34 | 32.12 | 7.73 | 31.58 | 100 | 154 | A | H |
| | * | 2462 | 97.79 | - | - | 89.56 | 32.13 | 7.7 | 31.6 | 377 | 324 | P | V |
| | * | 2460 | 94.02 | - | - | 85.79 | 32.13 | 7.7 | 31.6 | 377 | 324 | A | V |
| | | 2494.72 | 56.57 | -17.43 | 74 | 48.27 | 32.1 | 7.76 | 31.56 | 377 | 324 | P | V |
| | | 2486.26 | 45.12 | -8.88 | 54 | 36.85 | 32.12 | 7.73 | 31.58 | 377 | 324 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11b Ant 1 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11b CH 01, 802.11b CH 06, and 802.11b CH 11 at various frequencies (4824, 4872, 4926, 7308, 7386 MHz).

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz
WIFI 802.11g Ant 1 (Band Edge @ 3m)**

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11g CH 01 2412MHz | | 2389.82 | 61.2 | -12.8 | 74 | 53.06 | 32.2 | 7.59 | 31.65 | 158 | 147 | P | H |
| | ! | 2389.95 | 50.13 | -3.87 | 54 | 41.99 | 32.2 | 7.59 | 31.65 | 158 | 147 | A | H |
| | * | 2414 | 105.64 | - | - | 97.49 | 32.18 | 7.62 | 31.65 | 158 | 147 | P | H |
| | * | 2414 | 97.78 | - | - | 89.63 | 32.18 | 7.62 | 31.65 | 158 | 147 | A | H |
| | | 2389.69 | 56.68 | -17.32 | 74 | 48.54 | 32.2 | 7.59 | 31.65 | 386 | 331 | P | V |
| | | 2389.95 | 46.65 | -7.35 | 54 | 38.51 | 32.2 | 7.59 | 31.65 | 386 | 331 | A | V |
| | * | 2416 | 102.8 | - | - | 94.63 | 32.18 | 7.62 | 31.63 | 386 | 331 | P | V |
| | * | 2418 | 95.02 | - | - | 86.85 | 32.18 | 7.62 | 31.63 | 386 | 331 | A | V |
| 802.11g CH 11 2462MHz | * | 2460 | 103.11 | - | - | 94.88 | 32.13 | 7.7 | 31.6 | 100 | 129 | P | H |
| | * | 2460 | 94.29 | - | - | 86.06 | 32.13 | 7.7 | 31.6 | 100 | 129 | A | H |
| | | 2483.68 | 57.52 | -16.48 | 74 | 49.25 | 32.12 | 7.73 | 31.58 | 100 | 129 | P | H |
| | | 2483.5 | 46.96 | -7.04 | 54 | 38.69 | 32.12 | 7.73 | 31.58 | 100 | 129 | A | H |
| | * | 2456 | 101.29 | - | - | 93.06 | 32.13 | 7.7 | 31.6 | 332 | 320 | P | V |
| | * | 2456 | 93.49 | - | - | 85.26 | 32.13 | 7.7 | 31.6 | 332 | 320 | A | V |
| | | 2484.34 | 57.65 | -16.35 | 74 | 49.38 | 32.12 | 7.73 | 31.58 | 332 | 320 | P | V |
| | | 2483.5 | 47.05 | -6.95 | 54 | 38.78 | 32.12 | 7.73 | 31.58 | 332 | 320 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11g Ant 1 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11g CH 01 2412MHz | | 4824 | 50.36 | -23.64 | 74 | 65.03 | 34.31 | 11.06 | 60.04 | 300 | 0 | P | H |
| | | 4824 | 54.51 | -19.49 | 74 | 69.18 | 34.31 | 11.06 | 60.04 | 304 | 116 | P | V |
| | | 4824 | 41.73 | -12.27 | 54 | 56.4 | 34.31 | 11.06 | 60.04 | 304 | 116 | A | V |
| 802.11g CH 06 2437MHz | | 4872 | 46.48 | -27.52 | 74 | 61.13 | 34.34 | 11.04 | 60.03 | 300 | 0 | P | H |
| | | 7308 | 43.53 | -30.47 | 74 | 54.62 | 35.94 | 13.48 | 60.51 | 300 | 0 | P | H |
| | | 4872 | 47.78 | -26.22 | 74 | 62.43 | 34.34 | 11.04 | 60.03 | 300 | 360 | P | V |
| 802.11g CH 11 2462MHz | | 4926 | 44.93 | -29.07 | 74 | 59.56 | 34.36 | 11.03 | 60.02 | 300 | 0 | P | H |
| | | 7386 | 43.55 | -30.45 | 74 | 54.61 | 35.92 | 13.55 | 60.53 | 300 | 0 | P | H |
| | | 4926 | 48.19 | -25.81 | 74 | 62.82 | 34.36 | 11.03 | 60.02 | 300 | 360 | P | V |
| | | 7386 | 45.6 | -28.4 | 74 | 56.66 | 35.92 | 13.55 | 60.53 | 300 | 360 | P | V |
| Remark | <ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



WIFI 802.11b Ant 2 (Band Edge @ 3m)

| WIFI Ant. 2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11b CH 01 2412MHz | | 2369.67 | 55.75 | -18.25 | 74 | 47.7 | 32.15 | 7.56 | 31.66 | 299 | 141 | P | H |
| | | 2389.69 | 44.66 | -9.34 | 54 | 36.52 | 32.2 | 7.59 | 31.65 | 299 | 141 | A | H |
| | * | 2412 | 99.24 | - | - | 91.09 | 32.18 | 7.62 | 31.65 | 299 | 141 | P | H |
| | * | 2414 | 95.39 | - | - | 87.24 | 32.18 | 7.62 | 31.65 | 299 | 141 | A | H |
| | | 2340.81 | 56.32 | -17.68 | 74 | 48.43 | 32.06 | 7.5 | 31.67 | 387 | 76 | P | V |
| | | 2388.65 | 44.56 | -9.44 | 54 | 36.42 | 32.2 | 7.59 | 31.65 | 387 | 76 | A | V |
| | * | 2412 | 96.4 | - | - | 88.25 | 32.18 | 7.62 | 31.65 | 387 | 76 | P | V |
| | * | 2414 | 93.08 | - | - | 84.93 | 32.18 | 7.62 | 31.65 | 387 | 76 | A | V |
| 802.11b CH 11 2462MHz | * | 2462 | 99.19 | - | - | 90.96 | 32.13 | 7.7 | 31.6 | 174 | 164 | P | H |
| | * | 2464 | 94.83 | - | - | 86.6 | 32.13 | 7.7 | 31.6 | 174 | 164 | A | H |
| | | 2496.16 | 56.61 | -17.39 | 74 | 48.31 | 32.1 | 7.76 | 31.56 | 174 | 164 | P | H |
| | | 2490.4 | 45.12 | -8.88 | 54 | 36.84 | 32.1 | 7.76 | 31.58 | 174 | 164 | A | H |
| | * | 2462 | 96.29 | - | - | 88.06 | 32.13 | 7.7 | 31.6 | 376 | 90 | P | V |
| | * | 2464 | 91.95 | - | - | 83.72 | 32.13 | 7.7 | 31.6 | 376 | 90 | A | V |
| | | 2494.66 | 56.98 | -17.02 | 74 | 48.68 | 32.1 | 7.76 | 31.56 | 376 | 90 | P | V |
| | | 2490.76 | 44.93 | -9.07 | 54 | 36.65 | 32.1 | 7.76 | 31.58 | 376 | 90 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11b Ant 2 (Harmonic @ 3m)

| WIFI Ant. 2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11b CH 01 2412MHz | | 4824 | 46.49 | -27.51 | 74 | 61.16 | 34.31 | 11.06 | 60.04 | 300 | 0 | P | H |
| | | 9648 | 50.31 | -24.28 | 74.59 | 58.84 | 36.89 | 15.53 | 60.95 | 100 | 360 | P | H |
| | | 4824 | 50.28 | -23.72 | 74 | 64.95 | 34.31 | 11.06 | 60.04 | 300 | 360 | P | V |
| | | 9648 | 50.8 | -18.81 | 69.61 | 59.33 | 36.89 | 15.53 | 60.95 | 100 | 0 | P | V |
| 802.11b CH 06 2437MHz | | 4872 | 47.38 | -26.62 | 74 | 62.03 | 34.34 | 11.04 | 60.03 | 300 | 0 | P | H |
| | | 7308 | 43.72 | -30.28 | 74 | 54.81 | 35.94 | 13.48 | 60.51 | 300 | 0 | P | H |
| | | 4872 | 48.75 | -25.25 | 74 | 63.4 | 34.34 | 11.04 | 60.03 | 300 | 360 | P | V |
| | | 7308 | 44.05 | -29.95 | 74 | 55.14 | 35.94 | 13.48 | 60.51 | 300 | 360 | P | V |
| 802.11b CH 11 2462MHz | | 4926 | 46.7 | -27.3 | 74 | 61.33 | 34.36 | 11.03 | 60.02 | 300 | 0 | P | H |
| | | 7386 | 43.31 | -30.69 | 74 | 54.37 | 35.92 | 13.55 | 60.53 | 300 | 0 | P | H |
| | | 4926 | 49.87 | -24.13 | 74 | 64.5 | 34.36 | 11.03 | 60.02 | 300 | 360 | P | V |
| | | 7386 | 43.09 | -30.91 | 74 | 54.15 | 35.92 | 13.55 | 60.53 | 300 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11g Ant 2 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and CH 11 (2462MHz), and a Remark section.



**2.4GHz 2400~2483.5MHz
WIFI 802.11g Ant 2 (Harmonic @ 3m)**

| WIFI Ant. 2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11g CH 01 2412MHz | | 4824 | 43.46 | -30.54 | 74 | 58.13 | 34.31 | 11.06 | 60.04 | 300 | 0 | P | H |
| | | 4824 | 46.72 | -27.28 | 74 | 61.39 | 34.31 | 11.06 | 60.04 | 300 | 360 | P | V |
| 802.11g CH 06 2437MHz | | 4872 | 47.61 | -26.39 | 74 | 62.26 | 34.34 | 11.04 | 60.03 | 300 | 0 | P | H |
| | | 7308 | 43.14 | -30.86 | 74 | 54.23 | 35.94 | 13.48 | 60.51 | 300 | 0 | P | H |
| | | 4872 | 49.02 | -24.98 | 74 | 63.67 | 34.34 | 11.04 | 60.03 | 300 | 360 | P | V |
| | | 7308 | 43.32 | -30.68 | 74 | 54.41 | 35.94 | 13.48 | 60.51 | 300 | 360 | P | V |
| 802.11g CH 11 2462MHz | | 4926 | 43.06 | -30.94 | 74 | 57.69 | 34.36 | 11.03 | 60.02 | 300 | 0 | P | H |
| | | 7386 | 43.09 | -30.91 | 74 | 54.15 | 35.92 | 13.55 | 60.53 | 300 | 0 | P | H |
| | | 4926 | 46.69 | -27.31 | 74 | 61.32 | 34.36 | 11.03 | 60.02 | 300 | 360 | P | V |
| | | 7386 | 43.3 | -30.7 | 74 | 54.36 | 35.92 | 13.55 | 60.53 | 300 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 Ant 1+2 (Band Edge @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-------------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT20 CH 01 2412MHz | | 2389.43 | 57.39 | -16.61 | 74 | 49.25 | 32.2 | 7.59 | 31.65 | 155 | 117 | P | H |
| | | 2389.56 | 47.21 | -6.79 | 54 | 39.07 | 32.2 | 7.59 | 31.65 | 155 | 117 | A | H |
| | * | 2414 | 102.94 | - | - | 94.79 | 32.18 | 7.62 | 31.65 | 155 | 117 | P | H |
| | * | 2414 | 94.56 | - | - | 86.41 | 32.18 | 7.62 | 31.65 | 155 | 117 | A | H |
| | | 2374.74 | 56.85 | -17.15 | 74 | 48.8 | 32.15 | 7.56 | 31.66 | 315 | 305 | P | V |
| | | 2389.82 | 45.88 | -8.12 | 54 | 37.74 | 32.2 | 7.59 | 31.65 | 315 | 305 | A | V |
| | * | 2410 | 97.47 | - | - | 89.32 | 32.18 | 7.62 | 31.65 | 315 | 305 | P | V |
| | * | 2414 | 89.36 | - | - | 81.21 | 32.18 | 7.62 | 31.65 | 315 | 305 | A | V |
| 802.11n HT20 CH 11 2462MHz | * | 2456 | 101.34 | - | - | 93.11 | 32.13 | 7.7 | 31.6 | 100 | 137 | P | H |
| | * | 2460 | 92.52 | - | - | 84.29 | 32.13 | 7.7 | 31.6 | 100 | 137 | A | H |
| | | 2495.38 | 57.14 | -16.86 | 74 | 48.84 | 32.1 | 7.76 | 31.56 | 100 | 137 | P | H |
| | | 2483.98 | 46.1 | -7.9 | 54 | 37.83 | 32.12 | 7.73 | 31.58 | 100 | 137 | A | H |
| | * | 2458 | 95.64 | - | - | 87.41 | 32.13 | 7.7 | 31.6 | 376 | 307 | P | V |
| | * | 2454 | 87.27 | - | - | 79.04 | 32.13 | 7.7 | 31.6 | 376 | 307 | A | V |
| | | 2498.62 | 56.81 | -17.19 | 74 | 48.51 | 32.1 | 7.76 | 31.56 | 376 | 307 | P | V |
| | 2484.7 | 45.64 | -8.36 | 54 | 37.37 | 32.12 | 7.73 | 31.58 | 376 | 307 | A | V | |
| Remark | <ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 Ant 1+2 (Harmonic @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT20 CH 01 2412MHz | | 4824 | 43.54 | -30.46 | 74 | 58.21 | 34.31 | 11.06 | 60.04 | 300 | 0 | P | H |
| | | 4824 | 48.18 | -25.82 | 74 | 62.85 | 34.31 | 11.06 | 60.04 | 300 | 360 | P | V |
| 802.11n HT20 CH 06 2437MHz | | 4872 | 41.93 | -32.07 | 74 | 56.58 | 34.34 | 11.04 | 60.03 | 300 | 0 | P | H |
| | | 7308 | 43.62 | -30.38 | 74 | 54.71 | 35.94 | 13.48 | 60.51 | 300 | 0 | P | H |
| | | 4872 | 42.56 | -31.44 | 74 | 57.21 | 34.34 | 11.04 | 60.03 | 300 | 360 | P | V |
| | | 7308 | 44 | -30 | 74 | 55.09 | 35.94 | 13.48 | 60.51 | 300 | 360 | P | V |
| 802.11n HT20 CH 11 2462MHz | | 4926 | 41.71 | -32.29 | 74 | 56.34 | 34.36 | 11.03 | 60.02 | 300 | 0 | P | H |
| | | 7386 | 42.83 | -31.17 | 74 | 53.89 | 35.92 | 13.55 | 60.53 | 300 | 0 | P | H |
| | | 4926 | 43.24 | -30.76 | 74 | 57.87 | 34.36 | 11.03 | 60.02 | 300 | 360 | P | V |
| | | 7386 | 43.52 | -30.48 | 74 | 54.58 | 35.92 | 13.55 | 60.53 | 300 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 Ant 1+2 (Band Edge @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT40 CH 03 2422MHz | | 2388.26 | 57.62 | -16.38 | 74 | 49.48 | 32.2 | 7.59 | 31.65 | 100 | 118 | P | H |
| | ! | 2389.95 | 48.39 | -5.61 | 54 | 40.25 | 32.2 | 7.59 | 31.65 | 100 | 118 | A | H |
| | * | 2426 | 99.98 | - | - | 91.8 | 32.17 | 7.64 | 31.63 | 100 | 118 | P | H |
| | * | 2424 | 91.32 | - | - | 83.14 | 32.17 | 7.64 | 31.63 | 100 | 118 | A | H |
| | | 2493.28 | 56.37 | -17.63 | 74 | 48.07 | 32.1 | 7.76 | 31.56 | 100 | 118 | P | H |
| | | 2486.32 | 45.84 | -8.16 | 54 | 37.57 | 32.12 | 7.73 | 31.58 | 100 | 118 | A | H |
| | | 2354.98 | 57.48 | -16.52 | 74 | 49.51 | 32.11 | 7.53 | 31.67 | 379 | 287 | P | V |
| | | 2388.91 | 45.99 | -8.01 | 54 | 37.85 | 32.2 | 7.59 | 31.65 | 379 | 287 | A | V |
| | * | 2426 | 95.95 | - | - | 87.77 | 32.17 | 7.64 | 31.63 | 379 | 287 | P | V |
| | * | 2424 | 87.4 | - | - | 79.22 | 32.17 | 7.64 | 31.63 | 379 | 287 | A | V |
| | | 2497.78 | 56.23 | -17.77 | 74 | 47.93 | 32.1 | 7.76 | 31.56 | 379 | 287 | P | V |
| | | 2486.5 | 45.9 | -8.1 | 54 | 37.63 | 32.12 | 7.73 | 31.58 | 379 | 287 | A | V |
| 802.11n HT40 CH 09 2452MHz | | 2369.02 | 56.59 | -17.41 | 74 | 48.54 | 32.15 | 7.56 | 31.66 | 118 | 117 | P | H |
| | | 2389.82 | 45.63 | -8.37 | 54 | 37.49 | 32.2 | 7.59 | 31.65 | 118 | 117 | A | H |
| | * | 2456 | 97.86 | - | - | 89.63 | 32.13 | 7.7 | 31.6 | 118 | 117 | P | H |
| | * | 2454 | 89.87 | - | - | 81.64 | 32.13 | 7.7 | 31.6 | 118 | 117 | A | H |
| | | 2487.16 | 58.22 | -15.78 | 74 | 49.95 | 32.12 | 7.73 | 31.58 | 118 | 117 | P | H |
| | ! | 2483.74 | 48 | -6 | 54 | 39.73 | 32.12 | 7.73 | 31.58 | 118 | 117 | A | H |
| | | 2384.62 | 56.48 | -17.52 | 74 | 48.42 | 32.15 | 7.56 | 31.65 | 372 | 291 | P | V |
| | | 2388.91 | 45.62 | -8.38 | 54 | 37.48 | 32.2 | 7.59 | 31.65 | 372 | 291 | A | V |
| | * | 2438 | 94.53 | - | - | 86.32 | 32.15 | 7.67 | 31.61 | 372 | 291 | P | V |
| | * | 2448 | 86.35 | - | - | 78.14 | 32.15 | 7.67 | 31.61 | 372 | 291 | A | V |
| | 2485.18 | 58.5 | -15.5 | 74 | 50.23 | 32.12 | 7.73 | 31.58 | 372 | 291 | P | V | |
| | 2483.5 | 46.7 | -7.3 | 54 | 38.43 | 32.12 | 7.73 | 31.58 | 372 | 291 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 Ant 1+2 (Harmonic @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|---------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n | | 4842 | 41.54 | -32.46 | 74 | 56.2 | 34.32 | 11.05 | 60.03 | 300 | 0 | P | H |
| HT40 | | 7266 | 43.07 | -30.93 | 74 | 54.19 | 35.94 | 13.45 | 60.51 | 300 | 0 | P | H |
| CH 03 | | 4842 | 42.64 | -31.36 | 74 | 57.3 | 34.32 | 11.05 | 60.03 | 300 | 360 | P | V |
| 2422MHz | | 7266 | 43.62 | -30.38 | 74 | 54.74 | 35.94 | 13.45 | 60.51 | 300 | 360 | P | V |
| 802.11n | | 4872 | 41.35 | -32.65 | 74 | 56 | 34.34 | 11.04 | 60.03 | 300 | 0 | P | H |
| HT40 | | 7308 | 42.99 | -31.01 | 74 | 54.08 | 35.94 | 13.48 | 60.51 | 300 | 0 | P | H |
| CH 06 | | 4872 | 41.78 | -32.22 | 74 | 56.43 | 34.34 | 11.04 | 60.03 | 300 | 360 | P | V |
| 2437MHz | | 7308 | 43.44 | -30.56 | 74 | 54.53 | 35.94 | 13.48 | 60.51 | 300 | 360 | P | V |
| 802.11n | | 4902 | 42.68 | -31.32 | 74 | 57.32 | 34.35 | 11.03 | 60.02 | 300 | 0 | P | H |
| HT40 | | 7356 | 43.33 | -30.67 | 74 | 54.4 | 35.93 | 13.52 | 60.52 | 300 | 0 | P | H |
| CH 09 | | 4902 | 43.45 | -30.55 | 74 | 58.09 | 34.35 | 11.03 | 60.02 | 300 | 360 | P | V |
| 2452MHz | | 7356 | 43.3 | -30.7 | 74 | 54.37 | 35.93 | 13.52 | 60.52 | 300 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |