


Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)
 Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0
 835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Cube 5x5x7
 SAR (1g): 0.424 mW/g, SAR (10g): 0.163 mW/g

Body SAR - Back of LCD Display (Closed) - Antenna Parallel to Planar Phantom (Stowed Position)
 0.0 cm Separation Distance from Back of LCD Display to Planar Phantom
 Itronix IX260 Rugged Laptop PC
 with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card
 Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card
 Cellular CDMA Mode
Simultaneous Transmit with co-located DSSS WLAN Card
 Channel 363 [835.89 MHz]
 Conducted Power: 23.0 dBm
 Ambient Temp: 22.2°C; Fluid Temp: 22.0°C
 Date Tested: November 01, 2002


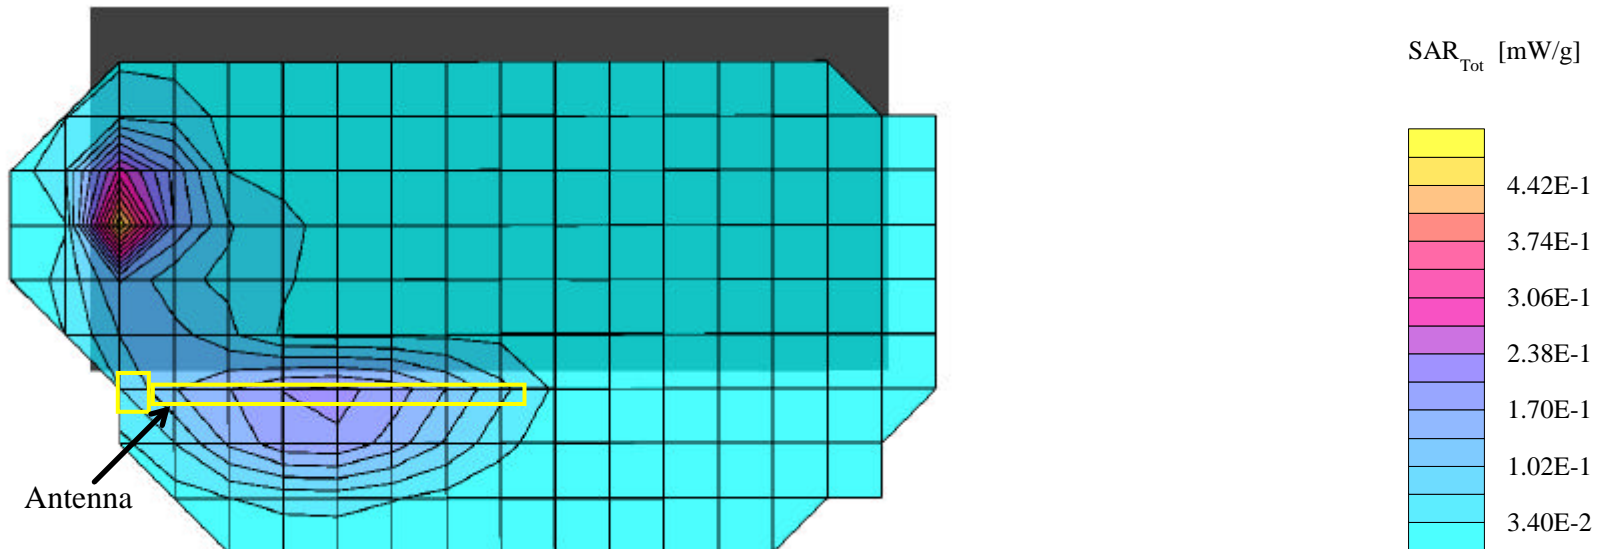


Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)
Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0
835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Body SAR - Back of LCD Display (Closed) - Antenna Parallel to Planar Phantom (Stowed Position)
0.0 cm Separation Distance from Back of LCD Display to Planar Phantom
Itronix IX260 Rugged Laptop PC
with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card
Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card
Cellular CDMA Mode
Simultaneous Transmit with co-located DSSS WLAN Card
Channel 363 [835.89 MHz]
Conducted Power: 23.0 dBm
Ambient Temp: 22.2°C; Fluid Temp: 22.0°C
Date Tested: November 01, 2002


Coarse scan to show Left Half of LCD Display (Back Side)

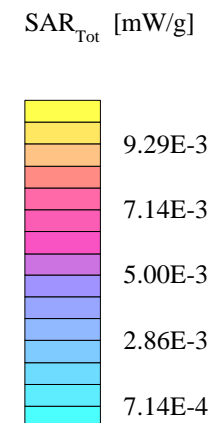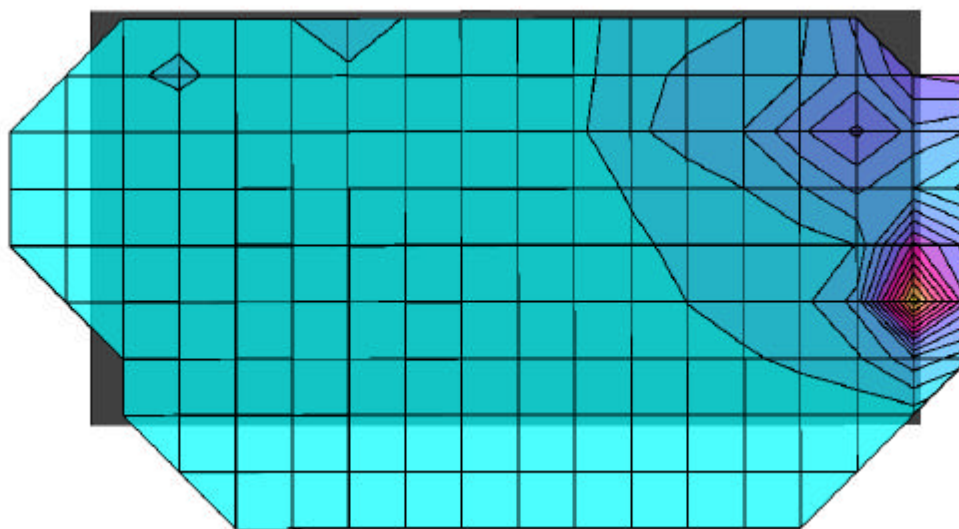

Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)
 Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0
 835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Cube 5x5x7
 SAR (1g): 0.401 mW/g, SAR (10g): 0.154 mW/g


Body SAR - Back of LCD Display (Closed) - Antenna Perpendicular to Planar Phantom (180°)
 0.0 cm Separation Distance from Back of LCD Display to Planar Phantom
 Itronix IX260 Rugged Laptop PC
 with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card
 Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card
 Cellular CDMA Mode
Simultaneous Transmit with co-located DSSS WLAN Card
 Channel 363 [835.89 MHz]
 Conducted Power: 23.0 dBm
 Ambient Temp: 22.2°C; Fluid Temp: 22.0°C
 Date Tested: November 01, 2002

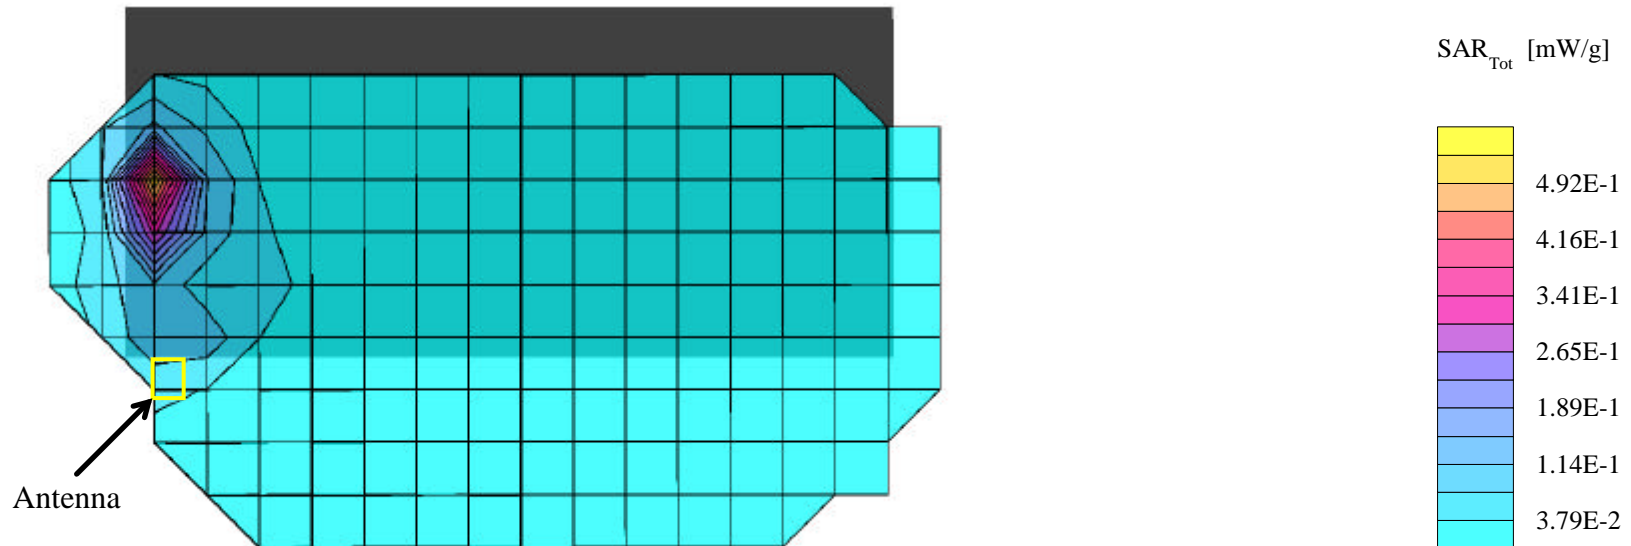

Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)
 Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0
 835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Cube 5x5x7
 SAR (1g): 0.0047 mW/g, SAR (10g): 0.0024 mW/g

Body SAR - Bottom of Laptop PC (LCD Display Closed) - Antenna Parallel to Planar Phantom (Stowed Position)
 0.0 cm Separation Distance from Bottom of Laptop PC to Planar Phantom
 Itronix IX260 Rugged Laptop PC
 with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card
 Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card
 Cellular CDMA Mode
Simultaneous Transmit with co-located DSSS WLAN Card
 Channel 363 [835.89 MHz]
 Conducted Power: 23.0 dBm
 Ambient Temp: 22.2°C; Fluid Temp: 22.0°C
 Date Tested: November 01, 2002

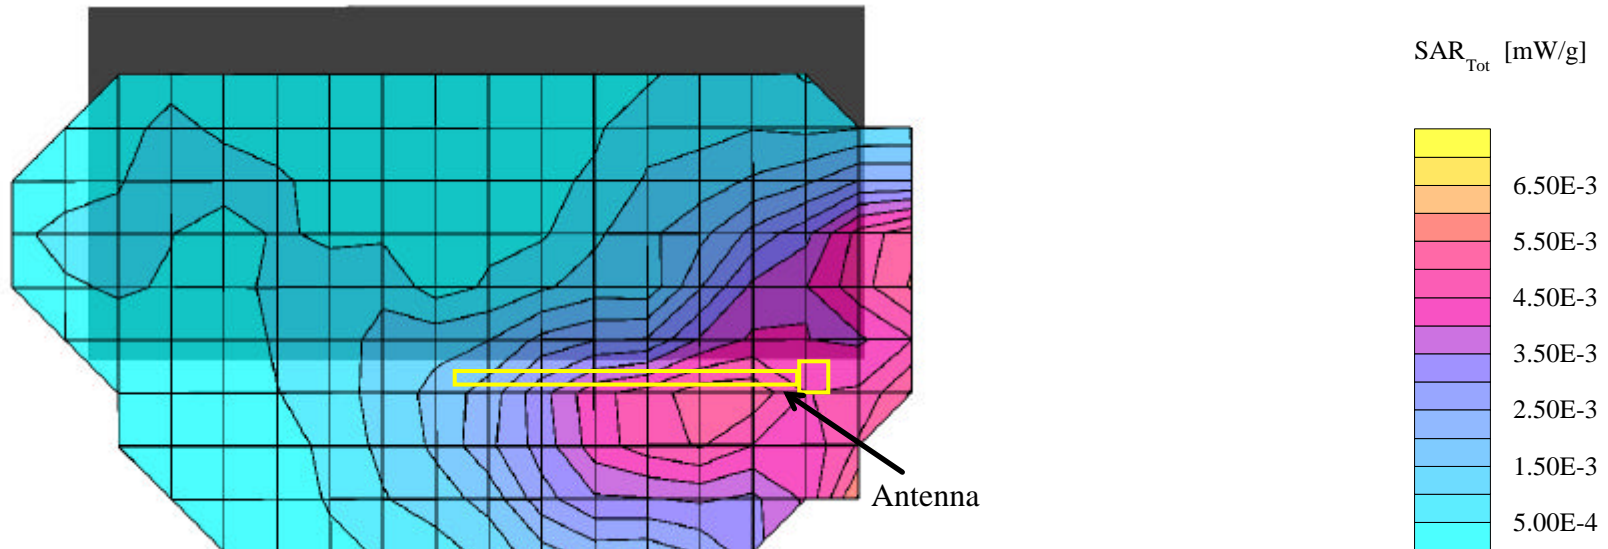

Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)

Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0

835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Cube 5x5x7

SAR (1g): 0.0197 mW/g, SAR (10g): 0.0123 mW/g

Body SAR - Bottom of Laptop PC (LCD Display Closed) - Antenna Perpendicular to Planar Phantom (Extended Position)

0.0 cm Separation Distance from Bottom of Laptop PC to Planar Phantom

Itronix IX260 Rugged Laptop PC

with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card

Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card

Cellular CDMA Mode


Simultaneous Transmit with co-located DSSS WLAN Card

Channel 363 [835.89 MHz]

Conducted Power: 23.0 dBm

Ambient Temp: 22.2°C; Fluid Temp: 22.0°C

Date Tested: November 01, 2002

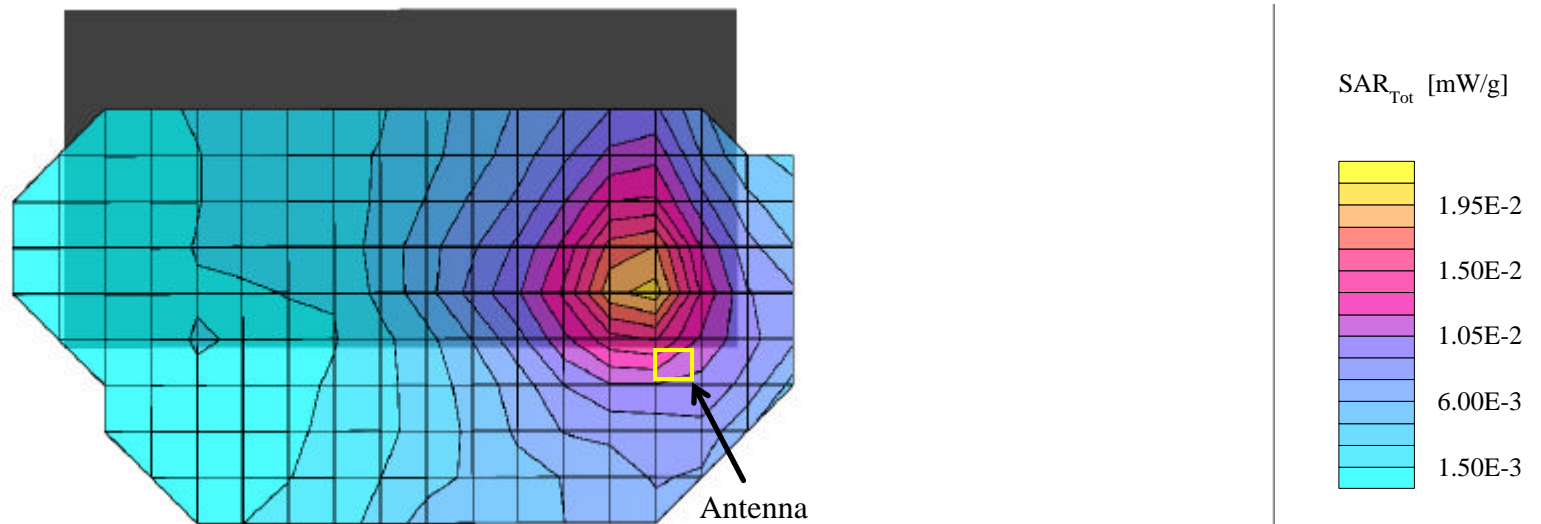

Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)

Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0

835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Body SAR - Bottom of Laptop PC (LCD Display Closed) - Antenna Perpendicular to Planar Phantom (Extended Position)

0.0 cm Separation Distance from Bottom of Laptop PC to Planar Phantom

Itronix IX260 Rugged Laptop PC

with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card

Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card

Cellular CDMA Mode

Simultaneous Transmit with co-located DSSS WLAN Card


Channel 363 [835.89 MHz]

Conducted Power: 23.0 dBm


Ambient Temp: 22.2°C; Fluid Temp: 22.0°C

Date Tested: November 01, 2002

Coarse scan to show Left Half of Bottom Side

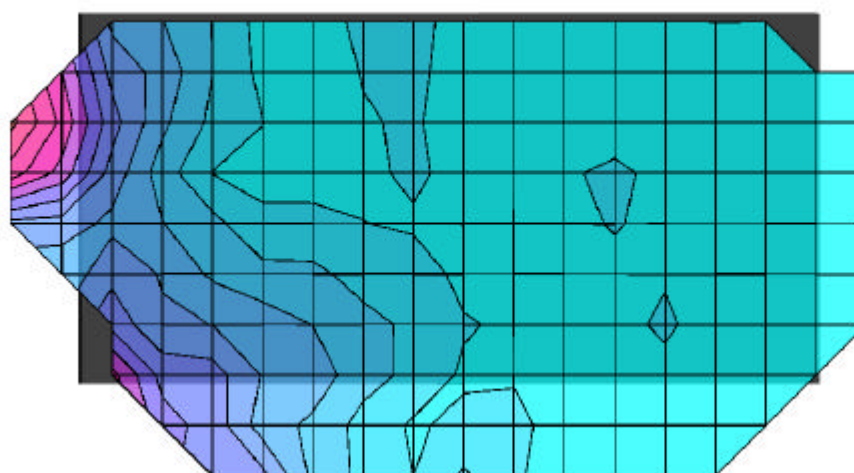


SAR_{Tot} [mW/g]



Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (90°,0°)
Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0
835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 0.0790 mW/g, SAR (10g): 0.0499 mW/g

Body SAR - Right Side of LCD Display (Closed) - Antenna Parallel to Planar Phantom (Stowed Position)
1.5 cm Separation Distance from Antenna to Planar Phantom
Itronix IX260 Rugged Laptop PC
with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card
Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card
Cellular CDMA Mode
Simultaneous Transmit with co-located DSSS WLAN Card
Channel 363 [835.89 MHz]
Conducted Power: 23.0 dBm
Ambient Temp: 22.2°C; Fluid Temp: 22.0°C
Date Tested: November 01, 2002

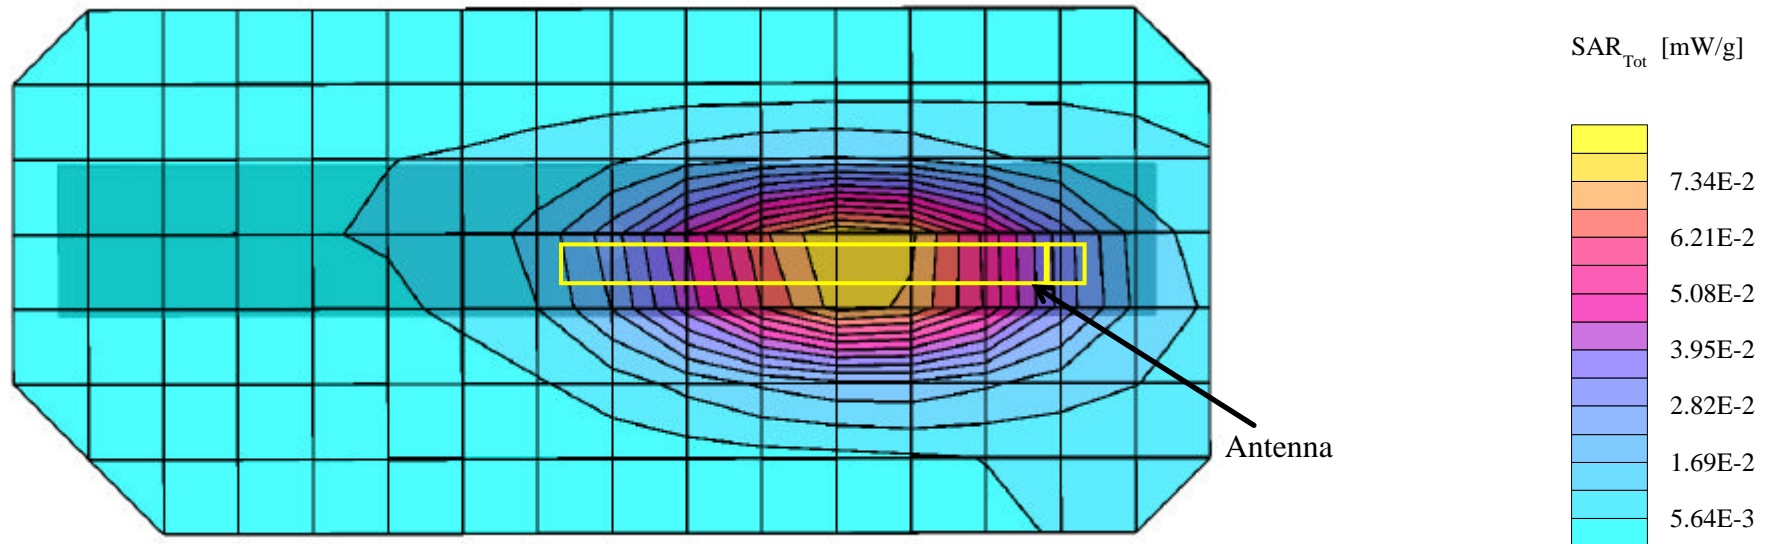

Itronix Corporation FCC ID: KBCIX260AC555-MPI

SAM Phantom; Flat Section; Position: (0°,0°)

Probe: ET3DV6 - SN1387; ConvF(6.30,6.30,6.30); Crest factor: 1.0

835 MHz Muscle: $\sigma = 0.96$ mho/m $\epsilon_r = 53.3$ $\rho = 1.00$ g/cm³

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Cube 5x5x7

SAR (1g): 0.207 mW/g, SAR (10g): 0.135 mW/g

Body SAR - Right Side of LCD Display (Closed) - Antenna Parallel to Planar Phantom (Extended Position)

1.5 cm Separation Distance from Antenna to Planar Phantom

Itronix IX260 Rugged Laptop PC

with Sierra Wireless AirCard 555 PCS/Cellular CDMA Modem Card

Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card

Cellular CDMA Mode

Simultaneous Transmit with co-located DSSS WLAN Card

Channel 363 [835.89 MHz]

Conducted Power: 23.0 dBm

Ambient Temp: 22.2°C; Fluid Temp: 22.0°C

Date Tested: November 01, 2002

