EXHIBIT 6 - TEST: AC CONDUCTED EMISSIONS

Applicant:	ITRONIX, Corporation		
Model:	IX260 Rugged Laptop with Aircard 555 Dual band GPRS radio modem co- located with WLAN & Bluetooth Intentional Radiators		
Minimum Standard Specified:	Part 15.107 (a) 15.207(a)		
Test Results:	Equipment complies with the limit with all three transmitter active transmitting.		

QP Detector Limit

Frequency MHz	QP Co	ond. Limit
0.15 – 0.5*	66 to	56 dBuV
0.5 to 5	56	dBuV
5 to 30	60	dBuV

* Decreases with the logarithm of the frequency.

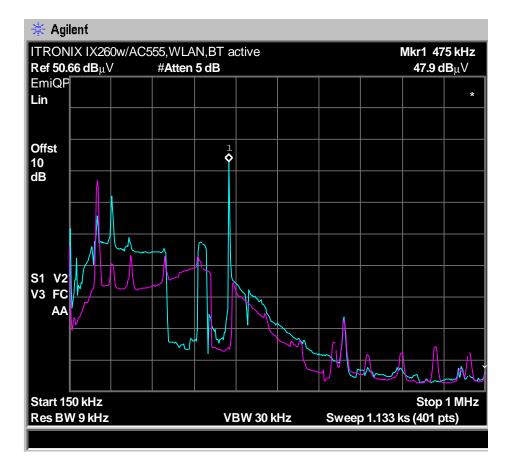


EXHIBIT 6 - TEST: AC CONDUCTED EMISSIONS

Applicant:	ITRONIX, Corporation		
Model:	IX260 Rugged Laptop with Aircard 555 Dual band GPRS radio modem co- located with WLAN & Bluetooth Intentional Radiators		
Minimum Standard Specified:	Part 15.107 (a) 15.207(a)		

Test Results:

Fait 15.107 (a) 15.207(a)

Equipment complies with the limit with all three transmitter active transmitting.

Average Detector Limit

Frequency MHz	Avg.	<u>Cond. Limit</u>
0.15 – 0.5*	56 to	46 dBuV
0.5 to 5	46	dBuV
5 to 30	50	dBuV
-t-		

* Decreases with the logarithm of the frequency.

