	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## ELECTROMAGNETIC COMPATIBILITY

### **EMC TEST REPORT**

**FCC 47 CFR PART 22 SUBPART H  
FCC 47 CFR PART 24 SUBPART E**

FOR

**ITRONIX CORPORATION**

**MODEL: IX260PLUSAC860**

**IX260+ SERIES RUGGED LAPTOP PC  
WITH INTERNAL  
DUAL-BAND GSM/GPRS/EDGE/UMTS PCMCIA MODEM  
UTILIZING AN  
EXTERNAL SWIVEL DIPOLE ANTENNA  
AND  
VEHICLE-MOUNT ANTENNA WITH CRADLE**

**FCC ID: KBCIX260PLUSAC860**

Test Report Serial No.


**061506KBC-T756-E24G**


Test Report Revision No.

**Revision 1.0 (Initial Release)**

Test Location

**Celltech Compliance Testing & Engineering Lab  
(Celltech Labs Inc.)  
1955 Moss Court  
Kelowna, BC  
Canada  
V1Y 9L3**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 51

 <b>Celltech</b> Testing and Engineering Services Lab	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## DECLARATION OF COMPLIANCE

<b>Test Location</b>	<b>CELLTECH LABS INC.</b> Testing and Engineering Services 1955 Moss Court Kelowna, BC Canada V1Y 9L3				<b>Company Information</b>	<b>ITRONIX CORPORATION</b> 12825 E. Mirabeau Parkway Spokane Valley, WA 99216 United States			
<b>Phone:</b>	250-448-7047		<b>Fax:</b>	250-448-7048					
<b>E-mail:</b>	info@celltechlabs.com		<b>Web site:</b>	www.celltechlabs.com					
<b>Lab Registration No.(s):</b>	FCC:	714830		IC:	IC 3874				
<b>Rule Part(s):</b>	FCC:	§2; §22H; §24E		IC:	RSS-132 Issue 2, RSS-133 Issue 3				
<b>Device Classification:</b>	FCC:	PCS Licensed Transmitter (PCB)		IC:	800 MHz Cellular Telephones Employing New Technologies 2 GHz Personal Communication Services				
<b>Device Identification:</b>	FCC:	KBCIX260PLUSAC860							
<b>Device Description:</b>	Rugged Laptop PC			<b>Device Model(s):</b>	IX260PLUSAC860				
<b>Internal Transmitter Type:</b>	Sierra Wireless Model: AirCard 860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem								
<b>Transmit Frequency Range(s):</b>	GSM/GPRS/EDGE	Cellular Band	824.2 - 848.8 MHz		PCS Band	1850.2 - 1909.8 MHz			
	UMTS	Cellular Band	826.4 - 846.6 MHz		PCS Band	1852.4 - 1907.5 MHz			
<b>Receive Frequency Range(s):</b>	GSM/GPRS/EDGE	Cellular Band	869.2 - 893.8 MHz		PCS Band	1930.2 - 1989.8 MHz			
	UMTS	Cellular Band	871.4 - 891.6 MHz		PCS Band	1932.4 - 1987.5 MHz			
<b>Maximum RF Conducted Output Power Measured:</b>	GPRS	Cellular Band	32.28 dBm	1.69 Watts	PCS Band	28.63 dBm	0.729 Watts		
	EDGE	Cellular Band	26.89 dBm	0.489 Watts	PCS Band	25.73 dBm	0.374 Watts		
	UMTS	Cellular Band	24.00 dBm	0.251 Watts	PCS Band	23.00 dBm	0.200 Watts		
<b>Max. ERP/EIRP Measured:</b>	Dipole Antenna	GPRS	Cellular	26.16 dBm	0.413 Watts	PCS	32.24 dBm	1.68 Watts	
		EDGE	Cellular	23.87 dBm	0.244 Watts	PCS	32.72 dBm	1.87 Watts	
		UMTS	Cellular	21.62 dBm	0.145 Watts	PCS	28.32 dBm	0.679 Watts	
	Vehicle Antenna	GPRS	Cellular	6.44 dBm	0.004 Watts	PCS	15.07 dBm	0.032 Watts	
		EDGE	Cellular	4.24 dBm	0.003 Watts	PCS	13.36 dBm	0.022 Watts	
		UMTS	Cellular	-6.18 dBm	0.0002 Watts	PCS	15.96 dBm	0.039 Watts	
<b>GSM Multislot Class:</b>	Class 10	2 Uplink Slots		Max. Source-Based Time-Averaged Duty Cycle:			25%		
<b>GSM Power Class:</b>	GPRS 850:	1	GPRS 1900:	1	EDGE 850:	E2	EDGE 1900:	E2	
<b>WCDMA Power Class:</b>	UMTS 850:	3	UMTS 1900:	3	Transmit Duty Cycle:		100%		
<b>WCDMA Uplink Channels:</b>	1 DPCCH Channel				1 DPDCCH Channel				
<b>Modulation Type(s):</b>	GPRS: GMSK			EDGE: 8-PSK		UMTS: WCDMA			
<b>Antenna Type(s) Tested:</b>	External Swivel Dipole		Itronix Corporation			Model: IX260+			
	External Vehicle-Mount		MaxRad, Inc.			P/N: WMLPVDB800/1900			
<b>Internal Battery Options:</b>	Lithium-ion		11.1 V, 6.6 Ah	Model: P16D-M	11.1 V, 6.0 Ah	Model: A2121-2			
<b>Power Source(s) Tested:</b>	AC Power Adapter			90 Watt		Model: ADP-90AB			


This wireless device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Rule Parts 2, 22H, 24E; Industry Canada RSS-132 Issue 2, RSS 133 Issue 3; and ANSI TIA/EIA-603-C-2004.


I attest to the accuracy of the data. All measurements reported herein were performed by me or were under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

**Test Report Approved By:**

**Spencer Watson**  
EMC Manager  
Celltech Labs Inc.

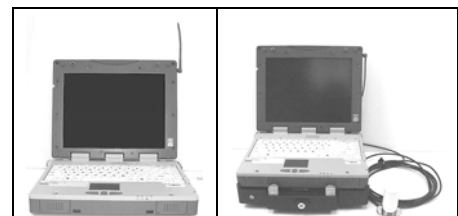

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	 A GENERAL DYNAMICS COMPANY
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## TABLE OF CONTENTS


1.0 SCOPE.....	5
2.0 REFERENCES .....	5
2.1 Normative References .....	5
3.0 TERMS AND DEFINITIONS .....	6
4.0 FACILITIES AND ACCREDITATIONS .....	7
5.0 GENERAL INFORMATION.....	7
5.1 Applicant Information .....	7
5.2 DUT Description .....	7
5.3 Mode(s) of Operation Tested .....	8
5.4 Configuration Description.....	9
6.0 PASS/FAIL CRITERIA.....	9
APPENDICES .....	10
Appendix A - Conducted RF Output Power Measurement .....	11
Appendix B - Effective Radiated Power / Effective Isotropic Radiated Power Measurement.....	15
Appendix C - Radiated Spurious Emissions Measurement.....	26
Appendix D - Maximum Permissible Exposure Calculation .....	37
END OF DOCUMENT .....	51

## FIGURES

Figure A.6-1 - Setup Drawing.....	13
Figure B.6-1 - Setup Drawing.....	16
Figure C.6-1 - Setup Drawing .....	27

## PHOTOGRAPHS

Photograph B.7-1 - Bilog Receive Antenna with DUT Swivel Dipole Antenna Configuration.....	17
Photograph B.7-2 - Horn Receive Antenna with DUT Swivel Dipole Antenna Configuration.....	17
Photograph B.7-3 - Dipole Substitution Setup .....	17
Photograph B.7-4 - Horn Substitution Setup.....	17
Photograph B.7-5 - Bilog Receive Antenna with DUT Vehicle-Mount Antenna Configuration .....	18
Photograph B.7-6 - Horn Receive Antenna with DUT Vehicle-Mount Antenna Configuration .....	18
Photograph B.7-7 - Dipole Substitution Setup .....	18
Photograph B.7-8 - Horn Substitution Setup.....	18

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## TEST SUMMARY

**Referenced Standard(s): FCC CFR Title 47 Parts 2, 22 & 24**

Appendix	Test Description	Procedure Reference	Limit Reference	Test Start Date	Test End Date	Result
A	Conducted RF Output Power	FCC 97-114, §2.1046	N/A	25Apr06	25Apr06	N/A
B	Effective Radiated Power Effective Isotropic Radiated Power	ANSI/TIA/EIA-603-C	§22.913 §24.232(b)	21Jun06	11Jul06	Pass
C	Radiated Spurious Emissions	ANSI/TIA/EIA-603-C	§22.917 (a), §24.238 (a)	12Jul06	27Jul06	Pass
D	Maximum Permissible Exposure	FCC CFR 47 § 2.1091 IEEE Std C95.1-1999	\$1.1310 Table 1 (b)	27Jun06	27Jun06	Pass



**Referenced Standard(s): IC RSS-132 Issue 2 & RSS-133 Issue 3**


A	Conducted RF Output Power	ANSI/TIA/EIA-603-C	N/A	25Apr06	25Apr06	N/A
B	Effective Radiated Power Effective Isotropic Radiated Power	ANSI/TIA/EIA-603-C	RSS-132 §4.4 RSS-133 §6.4	21Jun06	11Jul06	Pass
C	Radiated Spurious Emissions	ANSI/TIA/EIA-603-C	RSS-132 §4.5 RSS-133 §6.5	12Jul06	27Jul06	Pass
D	Maximum Permissible Exposure	RSS-102 Issue 2	Safety Code 6 2.2.1(a) Table 5	27Jun06	27Jun06	Pass


## REVISION LOG

Revision	Description	Implemented By	Implementation Date
1.0	Initial Release	Jonathan Hughes	August 22, 2006

## SIGNATORIES

Prepared By:		August 09, 2006
Name/Title:	Spencer Watson / EMC Manager	Date
Reviewed By:		August 22, 2006
Name/Title:	Jonathan Hughes / General Manager	Date

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	


## 1.0 SCOPE


This report outlines the measurements made and results collected during electromagnetic emissions testing of the Itronix Corporation Model: IX260PLUSAC860 Rugged Laptop PC utilizing the Sierra Wireless AirCard 860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem. The PCMCIA Modem was connected to an external swivel dipole antenna located on the upper right side edge of the LCD display. The DUT also has provision for an optional vehicle cradle utilizing a MaxRad vehicle-mount antenna. Measurement results were obtained for both antenna configurations and are presented in this report. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication Commission Code of Federal Regulations Title 47 Parts 2, 22 Subpart H, and 24 Subpart E; and Industry Canada Radio Standards Specification RSS-132 Issue 2, and RSS-133 Issue 3.

## 2.0 REFERENCES

### 2.1 Normative References


ANSI/ISO 17025:1999	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4:2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IEEE/ANSI Std C95.1:1999	American National Standard Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields
ANSI/TIA/EIA-603-C:2004	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
CFR Title 47 Part 2:2005	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR Title 47 Part 22:2005	Code of Federal Regulations Title 47: Telecommunication Part 22: Public Mobile Services
CFR Title 47 Part 24:2005	Code of Federal Regulations Title 47: Telecommunication Part 24: Personal Communication Services
IC Spectrum Management & Telecommunications Policy	Radio Standards Specification RSS-102 Issue 2 - Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) RSS-132 Issue 2 - 800 MHz Cellular Telephones Employing New Technologies RSS-133 Issue 3 - 2 GHz Personal Communication Services RSS-212 Issue 1 (Provisional) - Test Facilities & Test Methods for Radio Equipment RSS-Gen Issue 1 - General Requirements and Information for the Certification of Radiocommunication Equipment SRSP-503 Issue 6 - Technical Requirements for Cellular Radiotelephone Systems Operating in the Bands 824 - 849 MHz and 869 - 894 MHz


<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### 3.0 TERMS AND DEFINITIONS

AV	Average
CDMA	Code Division Multiple Access
CFR	Code of Federal Regulations
dB	decibel
dBm	dB referenced to 1 mW
dBuV	dB referenced to 1 uV
DUT	Device under Test
dBc	dB down from carrier
EBW	Emission Bandwidth
EDGE	Enhanced Data Rates for GSM Evolution
EIRP	Effective Isotropic Radiated Power
EMC	Electromagnetic Compatibility
ERP	Effective Radiated Power
FCC	Federal Communication Commission
FHSS	Frequency Hopping Spread Spectrum
GSM	Global Systems for Mobile Communication
GPRS	General Packet Radio Service
HP	Hewlett Packard
HPF	High Pass Filter
Hpol	Horizontal Polarization
Hz	Hertz
IC	Industry Canada
kHz	kilohertz
LNA	Low Noise Amplifier
m	meter
MHz	Megahertz
Mbps	megabits per second
na	not applicable
n/a	not available
PK	Peak
PPSD	Peak Power Spectral Density
QP	Quasi-peak
RBW	Resolution Bandwidth
R&S	Rohde & Schwarz
RSS	Radio Standard Specification
SA	Spectrum Analyzer
UMTS	Universal Mobile Telecommunications System
VBW	Video Bandwidth
Vpol	Vertical Polarization
WCDMA	Wide CDMA

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

#### 4.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 1955 Moss Court, Kelowna, British Columbia, Canada, V1Y 9L3. The radiated and conducted emissions sites conform with the requirements set forth in ANSI C63.4 and are filed and listed with the FCC under Registration Number 714830 and Industry Canada under File Number IC 3874.

#### 5.0 GENERAL INFORMATION

##### 5.1 Applicant Information

<b>Company Name:</b>	Itronix Corporation
<b>Address:</b>	12825 E. Mirabeau Parkway
	Spokane Valley, WA 99216
	United States


##### 5.2 DUT Description

The DUT consisted of the IX260+ Rugged Laptop PC utilizing the internal Sierra Wireless AirCard 860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem connected to an external swivel dipole antenna located on the upper right side edge of the LCD display. The DUT also utilizes an optional vehicle cradle for operation with a vehicle-mounted MaxRad dipole antenna and a 17-foot attached cable.


<b>Device:</b>	IX260+ Rugged Laptop PC		
<b>Model:</b>	IX260PLUSAC860	<b>Serial Number:</b>	ZZGEG4196ZZ6467
<b>Identifier(s):</b>	<b>FCC ID:</b>	KBCIX260PLUSAC860	
<b>Battery Options:</b>	Lithium-ion	11.1 V, 6.6 Ah Model: P16D-M	11.1 V, 6.0 Ah Model: A2121-2
<b>Power Source Tested:</b>	Delta Electronics 90 Watt AC-DC Power Supply (Model ADP-90AB Rev B)		
<b>Accessories Tested:</b>	IX260+ Vehicle Cradle	P/N: 60-0134-003	Serial No.: ZZCWA5024ZM0212

<b>Internal Transmitter:</b>	Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem		
<b>Manufacturer/Model:</b>	Sierra Wireless AirCard 860	<b>Serial Number:</b>	357806000465210
<b>Rule Part(s) Tested:</b>	<b>FCC:</b>	§2.1091; §22.913, §22.917; §24.232(b), §24.238	
	<b>IC:</b>	RSS-132 Issue 2, RSS-133 Issue 3	
<b>Device Classification(s):</b>	<b>FCC:</b>	PCS Licensed Transmitter (PCB)	
	<b>IC:</b>	800 MHz Cellular Telephones employing New Technologies (RSS-132)	
		2 GHz Personal Communication Services (RSS-133)	

<b>Antenna Type 1:</b>	External Swivel Dipole Antenna	<b>Antenna Type 2:</b>	MaxRad Vehicle-Mount
<b>Model:</b>	IX260+	<b>Part No.:</b>	WMLPVDB800/1900
<b>Gain:</b>	+2.6 dBi	<b>Gain:</b>	+ 3 dBi

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 51



	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### 5.3 Mode(s) of Operation Tested

Of the three modes, GPRS, EDGE and UMTS, GPRS and EDGE were considered similar in modulation type, channel frequency and relative power level. G-TEM measurements were made in all three modes of operation and the worst case for GPRS and EDGE was chosen for prescan measurements.

#### 5.3.1 Dual-Band GPRS

Customer supplied software was used to set the GPRS mode to the appropriate channel and power level for the specific measurement. Between GPRS and EDGE modes, GPRS was found to have higher radiated emissions when tested in a G-TEM and therefore prescan measurements were made with the GPRS modem set to each of the low, mid and high channels in each band. Final measurements were made of all significant emissions. The following settings were used for each channel.

##### 5.3.1.1 Cellular GPRS

<b>Transmit Frequency Range:</b>	824.2 - 848.8 MHz Ch. 128 (824.200 MHz), Ch. 190 (836.600 MHz) & Ch. 251 (848.800 MHz)
<b>Power Gain Settings:</b>	The proprietary Sierra Wireless Procomm Plus test script was utilized to set the RF output power to maximum
<b>Modulation Type:</b>	GMSK

##### 5.3.1.2 PCS GPRS


<b>Transmit Frequency Range:</b>	1850.2 - 1909.8 MHz Ch. 512 (1850.2 MHz), Ch. 661 (1880.0) & Ch. 810 (1909.8 MHz)
<b>Power Gain Settings:</b>	The proprietary Sierra Wireless Procomm Plus test script was utilized to set the RF output power to maximum
<b>Modulation Type:</b>	GMSK

#### 5.3.2 Dual-Band EDGE


Customer supplied software was used to set the EDGE mode to the appropriate channel and power level for the specific measurement. Of GPRS and EDGE, GPRS was found to have higher radiated emissions when tested in a G-TEM and therefore prescan measurements were not made in EDGE mode. The following settings were used for each channel during G-TEM testing and all other tests performed.

##### 5.3.2.1 Cellular EDGE

<b>Transmit Frequency Range:</b>	824.2 - 848.8 MHz Ch. 128 (824.200 MHz), Ch. 190 (836.600 MHz) & Ch. 251 (848.800 MHz)
<b>Power Gain Settings:</b>	The proprietary Sierra Wireless Procomm Plus test script was utilized to set the RF output power to maximum
<b>Modulation Type:</b>	8-PSK

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 51



	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### 5.3.2.2 PCS EDGE

<b>Transmit Frequency Range:</b>	1850.2 - 1909.8 MHz Ch. 512 (1850.2 MHz), Ch. 661 (1880.0 MHz) & Ch. 810 (1909.8 MHz)
<b>Power Gain Settings:</b>	The proprietary Sierra Wireless Procomm Plus test script was utilized to set the RF output power to maximum
<b>Modulation Type:</b>	8-PSK

### 5.3.3 Dual-Band UMTS

The Anritsu MT8820A Radio Communications Test Set was used to set the UMTS mode to the appropriate channel and power level for the specific measurement via air-link. Prescan measurements were made with the UMTS mode set to the low, mid and high channels for each band. Final measurements were made of all significant emissions. The following settings were used for each channel.

#### 5.3.3.1 Cellular UMTS

<b>Transmit Frequency Range:</b>	826.4 - 846.6 MHz Ch. 4132 (826.4 MHz), Ch. 4182 (836.4 MHz) & Ch. 4233 (846.6 MHz)
<b>Power Gain Settings:</b>	The maximum output power setting was established using the Anritsu 8820A Radio Communications Test Set in "All Up Bits" power control mode
<b>Modulation Type:</b>	WCDMA

#### 5.3.3.2 PCS UMTS

<b>Transmit Frequency Range:</b>	1852.4 - 1907.5 MHz Ch. 9262 (1852.4 MHz), Ch. 9400 (1880.0 MHz) & Ch. 9538 (1907.5 MHz)
<b>Power Gain Settings:</b>	The maximum output power setting was established using the Anritsu 8820A Radio Communications Test Set in "All Up Bits" power control mode
<b>Modulation Type:</b>	WCDMA

## 5.4 Configuration Description


The DUT was configured, as described by the client as being representative of what would be delivered to a final customer. Because the swivel dipole antenna orientation could be user configured, prescan evaluations were made to determine the configuration that resulted in the highest emissions. A "horizontal, pointing forward" orientation (facing user) was used for both cellular and PCS bands. More specific details may be included in each appendix.


### 5.4.1 Configuration Justification

The DUT was tested in a configuration described by the client as being typical of normal use. The system could be utilized as a standalone Laptop PC as well as installed in a vehicle cradle utilizing the vehicle-mount antenna. Both configurations were investigated and the results reported herein.


## 6.0 PASS/FAIL CRITERIA


Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. A DUT is considered to have passed the requirements, if the data collected during the described measurement procedure is no greater than the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## APPENDICES

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## Appendix A - Conducted RF Output Power Measurement

### A.1 REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §2.1046 (a)
<b>Procedure Reference</b>	FCC 97-114

### A.2 LIMITS

#### A.2.1 FCC CFR 47

FCC CFR 47 §2.1046 (a)	For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedures to give the values of current and voltage on the circuit elements specified in §2.1033(c) (8).
------------------------	--

\*ERP and EIRP limits are specified in Appendix B.


### A.3 ENVIRONMENTAL CONDITIONS


<b>Temperature</b>	25 +/- 5 °C
<b>Humidity</b>	40 +/- 10 %
<b>Barometric Pressure</b>	101 +/- 3 kPa

### A.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00110	Gigatronics	8652A	Power Meter	12Apr06	12Apr07
00011	Gigatronics	80701A	Power Sensor	03Feb06	03Feb07
00012	Gigatronics	80701A	Power Sensor	12Sept05	12Sept06
00102	Pasternack	PE7015-3010	30 dB Attenuator	n/a*	n/a*
00208	Anritsu	MT8820A	Radio Communications Test Set	06Jun06	06Jun07
00078	Pasternack	PE2214-20	Directional Coupler 1-18 GHz	n/a*	n/a*


\*Verified with power meter prior to use

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### A.5 MEASUREMENT EQUIPMENT SETUP


<b>Measurement Equipment Connections</b>	The equipment was connected as shown in the setup drawing in A.6.
<b>Measurement Equipment Settings - GPRS and EDGE</b>	Power Meter Settings: Mode - BAP Frequency compensation set for carrier frequency Offset set appropriately for attenuator characteristics
<b>Measurement Procedure - GPRS and EDGE</b>	The RF conducted output power levels for both PCS and cellular bands in both GPRS and EDGE modes were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in burst average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the transmitter output port and the power sensor input. The proprietary Sierra Wireless Procomm Plus test script was used to set the DUT to transmit at maximum output power level as described in section 5.3 of this report. All subsequent tests were performed using the same device setup procedures.
<b>Measurement Equipment Settings - UMTS</b>	Power Meter Settings: Mode - MAP Frequency compensation set for carrier frequency Offset set appropriately for attenuator characteristics
<b>Measurement Procedure - UMTS</b>	The RF conducted output power levels for both PCS and cellular bands were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in modulated average power mode. An offset was entered into the power meter to correct for the losses of the directional coupler and cable installed between the transmitter output port and the power sensor input. The Anritsu Radio Communications Test Set was utilized to set the DUT to transmit at maximum output power level as described in section 5.3 of this report. All subsequent tests were performed using the device setup procedures.
<b>PROCEDURES USED TO ESTABLISH TEST SIGNAL (UMTS)</b>	<p>The following settings were used to configure the Anritsu MT8820A Communications Test Set:</p> <p><b>Instrument Information</b></p> <p>Application: WCDMA Standard: MX88200B 4.41 #003 Scenario: MX882050A Serial Number: 6200241241</p> <p><b>Call Parameters</b></p> <p>Preset: 3GPP Test Loop Mode: Mode 1 Channel Coding: Reference Measurement Channel 12.2 kbps DTCH Data Pattern: PN9 Power Control Algorithm: Algorithm 1 TPC Step size: 1dB Power Control Bit Pattern: All-Up Bits UL Channel: 9262 / 9400 / 9538 4132 / 4182 / 4233 DL Channel: 9662 / 9800 / 9938 4357 / 4407 / 4458</p>

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 51

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	


## A.6 SETUP DRAWING

Figure A.6-1 - Setup Drawing  
GPRS & EDGE Conducted Power Measurements

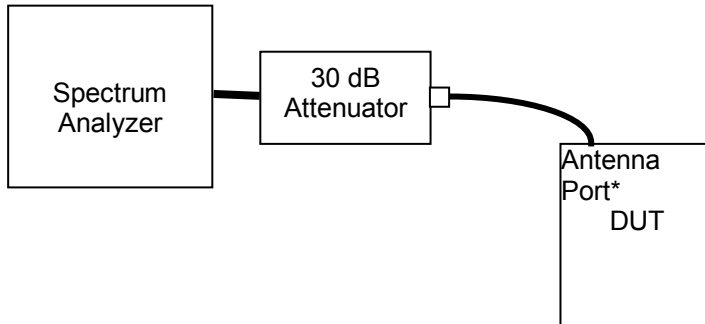


\*measurement made/referenced at PCMCIA card antenna connector port

Figure A.6-2 - Setup Drawing  
UMTS Conducted Power Measurements

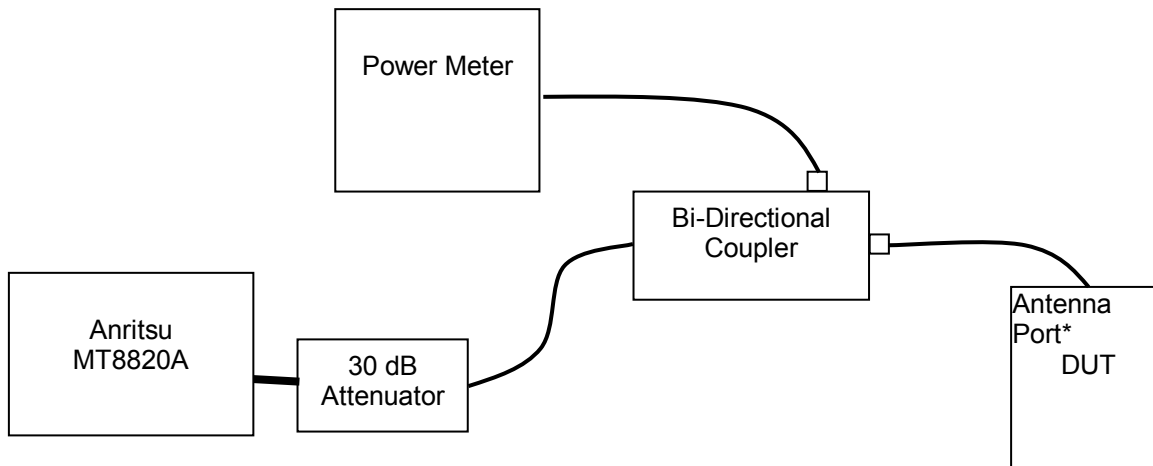

\*measurement made/referenced at PCMCIA card antenna connector port

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### A.7 DUT OPERATING DESCRIPTION

Power measurements were made in the cellular and PCS bands, with the DUT set appropriately as described in section 5.3.

### A.8 TEST RESULTS

Mode	Channel	Frequency	Conducted Power	
Cellular GPRS	128	824.2 MHz	+31.75 dBm	1.50 Watts
	190	836.6 MHz	+31.84 dBm	1.53 Watts
	251	848.8 MHz	+32.28 dBm	1.69 Watts
Cellular EDGE	128	824.2 MHz	+26.68 dBm	0.466 Watts
	190	836.6 MHz	+26.89 dBm	0.489 Watts
	251	848.8 MHz	+26.72 dBm	0.470 Watts
Cellular UMTS	4132	826.4 MHz	+23.80 dBm	0.240 Watts
	4182	836.4 MHz	+23.90 dBm	0.245 Watts
	4233	846.6 MHz	+24.00 dBm	0.251 Watts
PCS GPRS	512	1850.2 MHz	+28.42 dBm	0.695 Watts
	661	1880.0 MHz	+28.63 dBm	0.729 Watts
	810	1909.8 MHz	+28.54 dBm	0.714 Watts
PCS EDGE	512	1850.2 MHz	+25.53 dBm	0.357 Watts
	661	1880.0 MHz	+25.73 dBm	0.374 Watts
	810	1909.8 MHz	+25.55 dBm	0.359 Watts
PCS UMTS	9262	1852.4 MHz	+22.33 dBm	0.171 Watts
	9400	1880.0 MHz	+23.00 dBm	0.200 Watts
	9538	1907.5 MHz	+22.70 dBm	0.186 Watts

### A.9 PASS/FAIL

There is no pass/fail criterion for this measurement.

### A.10 SIGN-OFF


I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.




Spencer Watson  
EMC Manager  
Celltech Labs Inc.

April 25, 2006

Date

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## Appendix B - Effective Radiated Power / Effective Isotropic Radiated Power Measurement

### B.1 REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §22.913 (a), FCC CFR 47 §24.232 (b)
<b>Procedure Reference</b>	ANSI/TIA/EIA-603-C

### B.2 LIMITS

#### B.2.1 FCC CFR 47


FCC CFR 47 §22.913 (a)	(a) <i>Maximum ERP. .... The ERP of mobile transmitters and auxiliary transmitters must not exceed 7 Watts.</i>
FCC CFR 47 §24.232 (b)	(b) <i>Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.</i>

### B.3 ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	25 +/- 5 °C
<b>Humidity</b>	40 +/- 10 %
<b>Barometric Pressure</b>	101 +/- 3 kPa

### B.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00072	EMCO	2075	Mini-mast	n/a	n/a
00073	EMCO	2080	Turn Table	n/a	n/a
00071	EMCO	2090	Multi-Device Controller	n/a	n/a
00050	Chase	CBL-6111A	Bilog Antenna	04Apr06	04Apr07
00055	EMCO	3121C	Dipole Antenna	04Apr06	04Apr07
00034	ETS	3115	Double Ridged Guide Horn	11Aug05	11Aug07
00035	ETS	3115	Double Ridged Guide Horn	03Apr06	03Apr08
00161	Waveline	899	Standard Gain Horn Antenna	n/a	n/a
00051	HP	8566B	Spectrum Analyzer RF Section	04Apr06	04Apr07
00049	HP	85650A	Quasi-peak Adapter	04Apr06	04Apr07
00047	HP	85685A	RF Preselector	05Apr06	05Apr07
00048	Gore	65474	Microwave Cable	16Aug05	16Aug06
00006	R & S	SMR 20	Signal Generator (10MHz-40GHz)	06Apr06	06Apr07
00114	Amplifier Research	DC7154	Directional Coupler (0.8-4.2 GHz)	n/a	n/a
00078	Pasternack	PE2214-20	Directional Coupler (1-18 GHz)	n/a	n/a
00106	Amplifier Research	5S1G4	Power Amplifier (5W, 800MHz-4.2GHz)	n/a	n/a
00041	Amplifier Research	10W1000C	Power Amplifier (0.5 – 1 GHz)	n/a	n/a
00110	Gigatronics	8652A	Power Meter	12Apr06	12Apr07
00011	Gigatronics	80701A	Power Sensor	03Feb06	03Feb07
00208	Anritsu	MT8820A	Radio Communication Test Set	06Jun06	06Jun07

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 51




<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.5 MEASUREMENT EQUIPMENT SETUP

<b>MEASUREMENT EQUIPMENT CONNECTIONS</b>	For the field strength measurements, the measurement equipment was connected as shown in B.6. A number of antennas were used to cover the applicable frequency range tested. The ranges in which each antenna was used are as follows. For the final substitutions, the DUT was replaced with the appropriate antenna and fed from a CW signal source sufficient to replicate the received field strength of the emission being investigated.			
	Frequency Range	RX Antenna	TX Antenna	
	30 MHz - 1GHz	Bilog	Dipole	
	1 GHz - 18 GHz	ETS 3115 Horn	ETS 3115 Horn	
<b>MEASUREMENT EQUIPMENT SETTINGS</b>	For the spurious out-of-band emissions, the spectrum analyzer was set to the following settings:			
	Mode	RBW	VBW	Detector
		kHz	kHz	
	Cellular	100	300	Peak
PCS	1000	1000	Peak	

### B.6 SETUP DRAWING

Figure B.6-1 - Setup Drawing

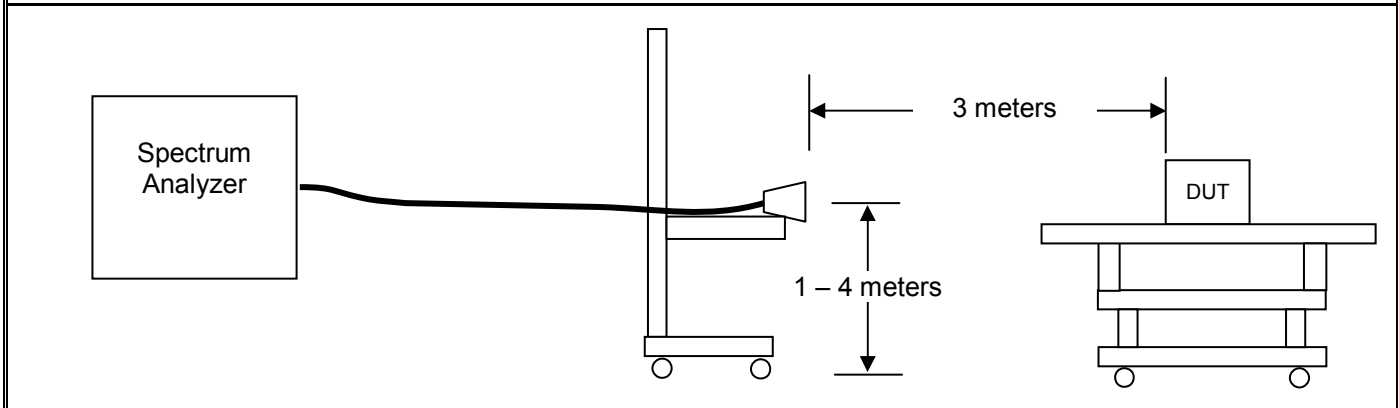

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.7 SETUP PHOTOGRAPHS


Photograph B.7-1 - Bilog Receive Antenna with DUT Swivel Dipole Antenna Configuration



Photograph B.7-2 - Horn Receive Antenna with DUT Swivel Dipole Antenna Configuration



Photograph B.7-3 - Dipole Substitution Setup

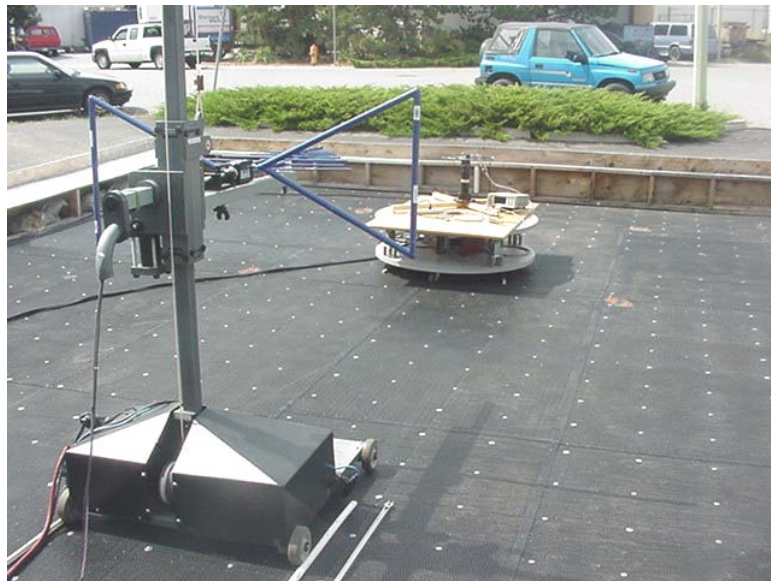

Photograph B.7-4 - Horn Substitution Setup





<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### SETUP PHOTOGRAPHS (CONTINUED)

Photograph B.7-5 - Bilog Receive Antenna with DUT Vehicle-Mount Antenna Configuration



Photograph B.7-6 - Horn Receive Antenna with DUT Vehicle-Mount Antenna Configuration



Photograph B.7-7 - Dipole Substitution Setup




Photograph B.7-8 - Horn Substitution Setup



### B.8 DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high channels transmitting in each of the modulation types for both the cellular and PCS bands at maximum power level as described in Appendix A. Each antenna configuration (External Swivel Dipole and Vehicle-Mount) was evaluated.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## B.9 TEST RESULTS

### B.9.1 Carrier Levels (Attached Swivel Dipole Antenna)

#### B.9.1.1 Cellular GPRS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 21-Jun-06  
**Test End Date:** 21-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable GPRS Cellular Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	128	824.2000	128.92	102.40	26.86	-1.45	38.45	7.00	13.04	PASS	25.41	347.82
Antenna Horiz	None	V	3	128	824.2000	126.02	99.50	27.36	-1.45	38.45	7.00	12.54	PASS	25.91	390.27
Antenna Horiz	None	H	3	190	836.6000	129.16	102.30	27.15	-1.35	38.45	7.00	12.65	PASS	25.80	380.43
Antenna Horiz	None	V	3	190	836.6000	125.76	98.90	27.01	-1.35	38.45	7.00	12.79	PASS	25.66	368.37
Antenna Horiz	None	H	3	251	848.8000	129.32	102.20	27.34	-1.25	38.45	7.00	12.36	PASS	26.09	406.48
Antenna Horiz	None	V	3	251	848.8000	125.92	98.80	27.41	-1.25	38.45	7.00	12.29	PASS	26.16	413.09

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

#### B.9.1.2 PCS GPRS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 21-Jun-06  
**Test End Date:** 21-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable GPRS PCS Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	512	1850.2000	128.71	95.90	23.23	8.72	33.01	2.00	1.06	PASS	31.95	1566.84
Antenna Horiz	None	V	3	512	1850.2000	123.11	90.30	16.76	8.72	33.01	2.00	7.53	PASS	25.48	353.20
Antenna Horiz	None	H	3	661	1880.0000	123.67	90.70	18.05	8.76	33.01	2.00	6.20	PASS	26.81	479.29
Antenna Horiz	None	V	3	661	1880.0000	115.37	82.40	8.98	8.76	33.01	2.00	15.27	PASS	17.74	59.37
Antenna Horiz	None	H	3	810	1909.8000	127.54	94.40	23.45	8.79	33.01	2.00	0.77	PASS	32.24	1675.62
Antenna Horiz	None	V	3	810	1909.8000	119.44	86.30	14.00	8.79	33.01	2.00	10.22	PASS	22.79	190.18

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## B.9.2 Carrier Levels (Attached Swivel Dipole Antenna)

### B.9.2.1 Cellular EDGE Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 21-Jun-06  
**Test End Date:** 21-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable EDGE Cellular Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	128	824.2000	127.12	100.60	25.05	-1.45	38.45	7.00	14.85	PASS	23.60	229.28
Antenna Horiz	None	V	3	128	824.2000	122.12	95.60	23.42	-1.45	38.45	7.00	16.48	PASS	21.97	157.53
Antenna Horiz	None	H	3	190	836.6000	127.16	100.30	25.11	-1.35	38.45	7.00	14.69	PASS	23.76	237.84
Antenna Horiz	None	V	3	190	836.6000	123.06	96.20	24.25	-1.35	38.45	7.00	15.55	PASS	22.90	195.11
Antenna Horiz	None	H	3	251	848.8000	127.12	100.00	25.12	-1.25	38.45	7.00	14.58	PASS	23.87	243.80
Antenna Horiz	None	V	3	251	848.8000	122.62	95.50	24.13	-1.25	38.45	7.00	15.57	PASS	22.88	194.11

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

### B.9.2.2 PCS EDGE Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 21-Jun-06  
**Test End Date:** 21-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable EDGE PCS Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	512	1850.2000	129.31	96.50	23.83	8.72	33.01	2.00	0.46	PASS	32.55	1798.97
Antenna Horiz	None	V	3	512	1850.2000	120.91	88.10	14.45	8.72	33.01	2.00	9.84	PASS	23.17	207.50
Antenna Horiz	None	H	3	661	1880.0000	128.37	95.40	23.96	8.76	33.01	2.00	0.29	PASS	32.72	1868.96
Antenna Horiz	None	V	3	661	1880.0000	120.57	87.60	14.74	8.76	33.01	2.00	9.51	PASS	23.50	223.67
Antenna Horiz	None	H	3	810	1909.8000	122.54	89.40	18.41	8.79	33.01	2.00	5.81	PASS	27.20	525.02
Antenna Horiz	None	V	3	810	1909.8000	114.64	81.50	9.07	8.79	33.01	2.00	15.15	PASS	17.86	61.12

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.9.3 Carrier Levels (Attached Swivel Dipole Antenna)

#### B.9.3.1 Cellular UMTS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 26-Jun-06  
**Test End Date:** 26-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable WCDMA Cellular Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	4132	826.4000	124.26	97.70	22.10	-1.43	38.45	7.00	17.78	PASS	20.67	116.71
Antenna Horiz	None	V	3	4132	826.4000	117.16	90.60	18.32	-1.43	38.45	7.00	21.56	PASS	16.89	48.88
Antenna Horiz	None	H	3	4182	836.4000	124.56	97.70	22.37	-1.35	38.45	7.00	17.43	PASS	21.02	126.51
Antenna Horiz	None	V	3	4182	836.4000	117.66	90.80	18.85	-1.35	38.45	7.00	20.95	PASS	17.50	56.25
Antenna Horiz	None	H	3	4233	846.6000	124.89	97.80	22.89	-1.27	38.45	7.00	16.83	PASS	21.62	145.30
Antenna Horiz	None	V	3	4233	846.6000	117.39	90.30	18.93	-1.27	38.45	7.00	20.79	PASS	17.66	58.38

**Note:**  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

#### B.9.3.2 PCS UMTS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 26-Jun-06  
**Test End Date:** 26-Jun-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Portable WCDMA PCS Band Radiated Carrier Power Levels</b>															
Antenna Horiz	None	H	3	9262	1852.4000	124.42	91.60	18.96	8.72	33.01	2.00	3.82	PASS	27.68	586.53
Antenna Horiz	None	V	3	9262	1852.4000	115.92	83.10	9.18	8.72	33.01	2.00	12.32	PASS	17.90	61.70
Antenna Horiz	None	H	3	9400	1880.0000	122.77	89.80	17.40	8.76	33.01	2.00	5.47	PASS	26.16	412.67
Antenna Horiz	None	V	3	9400	1880.0000	113.97	81.00	7.58	8.76	33.01	2.00	14.27	PASS	16.34	43.01
Antenna Horiz	None	H	3	9538	1907.5000	123.62	90.50	19.53	8.79	33.01	2.00	4.62	PASS	28.32	679.05
Antenna Horiz	None	V	3	9538	1907.5000	115.02	81.90	9.47	8.79	33.01	2.00	13.22	PASS	18.26	66.97

**Note:**  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	 A GENERAL DYNAMICS COMPANY
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 51





<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.9.4 Carrier Levels (MaxRad Vehicle-Mount Antenna)

#### B.9.4.1 Cellular GPRS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile GPRS Cellular Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	128	824.2000	100.12	73.60	1.03	-1.45	38.45	7.00	38.87	PASS	-0.42	0.91
N/A	Vehicle Cradle	V	3	128	824.2000	104.62	78.10	4.61	-1.45	38.45	7.00	35.29	PASS	3.16	2.07
N/A	Vehicle Cradle	H	3	190	836.6000	98.76	71.90	-0.64	-1.35	38.45	7.00	40.44	PASS	-1.99	0.63
N/A	Vehicle Cradle	V	3	190	836.6000	105.66	78.80	6.11	-1.35	38.45	7.00	33.69	PASS	4.76	2.99
N/A	Vehicle Cradle	H	3	251	848.8000	100.82	73.70	2.55	-1.25	38.45	7.00	37.15	PASS	1.30	1.35
N/A	Vehicle Cradle	V	3	251	848.8000	107.02	79.90	7.69	-1.25	38.45	7.00	32.01	PASS	6.44	4.41

**Note:**  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

#### B.9.4.2 PCS GPRS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile GPRS PCS Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	512	1850.2000	96.11	63.30	-7.67	8.72	33.01	2.00	31.96	PASS	1.05	1.27
N/A	Vehicle Cradle	V	3	512	1850.2000	102.21	69.40	-3.03	8.72	33.01	2.00	27.32	PASS	5.69	3.71
N/A	Vehicle Cradle	H	3	661	1880.0000	97.97	65.00	-7.45	8.76	33.01	2.00	31.70	PASS	1.31	1.35
N/A	Vehicle Cradle	V	3	661	1880.0000	108.57	75.60	2.18	8.76	33.01	2.00	22.07	PASS	10.94	12.41
N/A	Vehicle Cradle	H	3	810	1909.8000	103.24	70.10	-2.52	8.79	33.01	2.00	26.74	PASS	6.27	4.24
N/A	Vehicle Cradle	V	3	810	1909.8000	113.34	80.20	6.28	8.79	33.01	2.00	17.94	PASS	15.07	32.15

**Note:**  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	 <small>A GENERAL DYNAMICS COMPANY</small>
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 51





<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.9.5 Carrier Levels (MaxRad Vehicle-Mount Antenna)

#### B.9.5.1 Cellular EDGE Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile EDGE Cellular Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	128	824.2000	96.72	70.20	-2.33	-1.45	38.45	7.00	42.23	PASS	-3.78	0.42
N/A	Vehicle Cradle	V	3	128	824.2000	101.72	75.20	1.74	-1.45	38.45	7.00	38.16	PASS	0.29	1.07
N/A	Vehicle Cradle	H	3	190	836.6000	95.86	69.00	-2.48	-1.35	38.45	7.00	42.28	PASS	-3.83	0.41
N/A	Vehicle Cradle	V	3	190	836.6000	103.96	77.10	4.41	-1.35	38.45	7.00	35.39	PASS	3.06	2.02
N/A	Vehicle Cradle	H	3	251	848.8000	97.02	69.90	-1.25	-1.25	38.45	7.00	40.95	PASS	-2.50	0.56
N/A	Vehicle Cradle	V	3	251	848.8000	104.82	77.70	5.49	-1.25	38.45	7.00	34.21	PASS	4.24	2.65

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

#### B.9.5.2 PCS EDGE Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile EDGE PCS Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	512	1850.2000	93.21	60.40	-12.62	8.72	33.01	2.00	36.91	PASS	-3.90	0.41
N/A	Vehicle Cradle	V	3	512	1850.2000	101.91	69.10	-4.82	8.72	33.01	2.00	29.11	PASS	3.90	2.45
N/A	Vehicle Cradle	H	3	661	1880.0000	97.27	64.30	-7.15	8.76	33.01	2.00	31.40	PASS	1.61	1.45
N/A	Vehicle Cradle	V	3	661	1880.0000	107.07	74.10	0.68	8.76	33.01	2.00	23.57	PASS	9.44	8.78
N/A	Vehicle Cradle	H	3	810	1909.8000	102.44	69.30	-1.93	8.79	33.01	2.00	26.15	PASS	6.86	4.85
N/A	Vehicle Cradle	V	3	810	1909.8000	110.14	77.00	4.57	8.79	33.01	2.00	19.65	PASS	13.36	21.69

Note:

Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	 A GENERAL DYNAMICS COMPANY
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### B.9.6 Carrier Levels (MaxRad Vehicle-Mount Antenna)

#### B.9.6.1 Cellular UMTS Carrier Levels



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC22.913  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Limit		Margin dB	Pass/ Fail	Measured ERP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile WCDMA Cellular Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	4132	826.4000	89.06	62.50	-10.04	-1.43	38.45	7.00	49.92	PASS	-11.47	0.07
N/A	Vehicle Cradle	V	3	4132	826.4000	92.46	65.90	-7.56	-1.43	38.45	7.00	47.44	PASS	-8.99	0.13
N/A	Vehicle Cradle	H	3	4182	836.4000	88.56	61.70	-9.81	-1.35	38.45	7.00	49.61	PASS	-11.16	0.08
N/A	Vehicle Cradle	V	3	4182	836.4000	93.16	66.30	-6.37	-1.35	38.45	7.00	46.17	PASS	-7.72	0.17
N/A	Vehicle Cradle	H	3	4233	846.6000	89.39	62.30	-8.84	-1.27	38.45	7.00	48.56	PASS	-10.11	0.10
N/A	Vehicle Cradle	V	3	4233	846.6000	94.39	67.30	-4.91	-1.27	38.45	7.00	44.63	PASS	-6.18	0.24

Note:  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

#### B.9.6.2 PCS UMTS Carrier Levels




**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860  
**Standard:** FCC24.232b  
**Test Start Date:** 11-Jul-06  
**Test End Date:** 11-Jul-06

Configuration		Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Limit		Margin dB	Pass/ Fail	Measured EIRP Carrier Level	
Orientation	Accessory									dBm	Watts			dBm	milliWatts
<b>Mobile WCDMA PCS Band Radiated Carrier Power Levels</b>															
N/A	Vehicle Cradle	H	3	9262	1852.4000	92.52	59.70	-12.92	8.72	33.01	2.00	35.72	PASS	-4.20	0.38
N/A	Vehicle Cradle	V	3	9262	1852.4000	101.22	68.40	-5.52	8.72	33.01	2.00	27.02	PASS	3.20	2.09
N/A	Vehicle Cradle	H	3	9400	1880.0000	95.97	63.00	-8.45	8.76	33.01	2.00	32.27	PASS	0.31	1.07
N/A	Vehicle Cradle	V	3	9400	1880.0000	106.97	74.00	0.58	8.76	33.01	2.00	21.27	PASS	9.34	8.58
N/A	Vehicle Cradle	H	3	9538	1907.5000	100.82	67.70	-3.23	8.79	33.01	2.00	27.42	PASS	5.56	3.60
N/A	Vehicle Cradle	V	3	9538	1907.5000	112.72	79.60	7.17	8.79	33.01	2.00	15.52	PASS	15.96	39.44

Note:  
 Measured ERP Carrier Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)  
 The DUT was measured in 3 orientations with respect to the receive antenna, only the orientation with the highest Radiated Power results is shown here.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	 A GENERAL DYNAMICS COMPANY
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 24 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

**B.10 PASS/FAIL**

In reference to the results outlined in B.9, the DUT passes the requirements as stated in the reference standards.


**B.11 SIGN-OFF**


I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Spencer Watson  
EMC Manager  
Celltech Labs Inc.

July 12, 2006  
Date

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## Appendix C - Radiated Spurious Emissions Measurement

### C.1 REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §22.917(a), FCC CFR 47 §24.238(a)
<b>Procedure Reference</b>	ANSI/TIA/EIA-603-C

### C.2 LIMITS

#### C.2.1 FCC CFR 47


FCC CFR 47 §22.917 & §24.238	(a) <i>Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.</i>
------------------------------	---

### C.3 ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	25 +/- 5 °C
<b>Humidity</b>	40 +/- 10 %
<b>Barometric Pressure</b>	101 +/- 3 kPa

### C.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00072	EMCO	2075	Mini-mast	n/a	n/a
00073	EMCO	2080	Turn Table	n/a	n/a
00071	EMCO	2090	Multi-Device Controller	n/a	n/a
00050	Chase	CBL-6111A	Bilog Antenna	04Apr06	04Apr07
00055	EMCO	3121C	Dipole Antenna	04Apr06	04Apr07
00034	ETS	3115	Double Ridged Guide Horn	11Aug05	11Aug07
00035	ETS	3115	Double Ridged Guide Horn	03Apr06	03Apr08
00161	Waveline	899	Standard Gain Horn Antenna	n/a	n/a
00051	HP	8566B	Spectrum Analyzer RF Section	04Apr06	04Apr07
00049	HP	85650A	Quasi-peak Adapter	04Apr06	04Apr07
00047	HP	85685A	RF Preselector	05Apr06	05Apr07
00048	Gore	65474	Microwave Cable	16Aug05	16Aug06
00115	Miteq	J54-00102600-35-5A	LNA	18Apr06	18Apr07
00006	R & S	SMR 20	Signal Generator (10MHz-40GHz)	06Apr06	06Apr07
00114	Amplifier Research	DC7154	Directional Coupler (0.8-4.2 GHz)	n/a	n/a
00078	Pasternack	PE2214-20	Directional Coupler (1-18 GHz)	n/a	n/a
00106	Amplifier Research	5S1G4	Power Amplifier (5W, 800MHz-4.2GHz)	n/a	n/a
00041	Amplifier Research	10W1000C	Power Amplifier (0.5 – 1 GHz)	n/a	n/a
00110	Gigatronics	8652A	Power Meter	12Apr06	12Apr07
00011	Gigatronics	80701A	Power Sensor	03Feb06	03Feb07
00208	Anritsu	MT8820A	Radio Communication Analyzer	06Jun06	06Jun07


<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 51

### C.5 MEASUREMENT EQUIPMENT SETUP

<b>MEASUREMENT EQUIPMENT CONNECTIONS</b>	For the field strength measurements, the measurement equipment was connected as shown in C.6. A number of antennas were used to cover the applicable frequency range tested. The ranges in which each antenna was used are shown below. For the final substitutions, the DUT was replaced with the appropriate antenna and fed from a CW signal source sufficient to replicate the received field strength of the emission being investigated.			
	Frequency Range	RX Antenna	TX Antenna	
	30 MHz - 1GHz	Bilog	Dipole	
	1 GHz - 18 GHz	ETS 3115 Horn	ETS 3115 Horn	
	18 GHz - 20 GHz	Waveline 899 Horn	Waveline 899 Horn	
<b>MEASUREMENT EQUIPMENT SETTINGS</b>	For the spurious out-of-band emissions, the spectrum analyzer was set to the following settings:			
	Mode	RBW	VBW	Detector
		kHz	kHz	
	Cellular < 1 GHz	100	300	Peak*
	Cellular > 1 GHz	1000	1000	Peak*
	PCS	1000	1000	Peak*
*Where the peak emission exceeded the average limit, an average measurement was made using video averaging				

### C.6 SETUP DRAWING

Figure C.6-1 - Setup Drawing

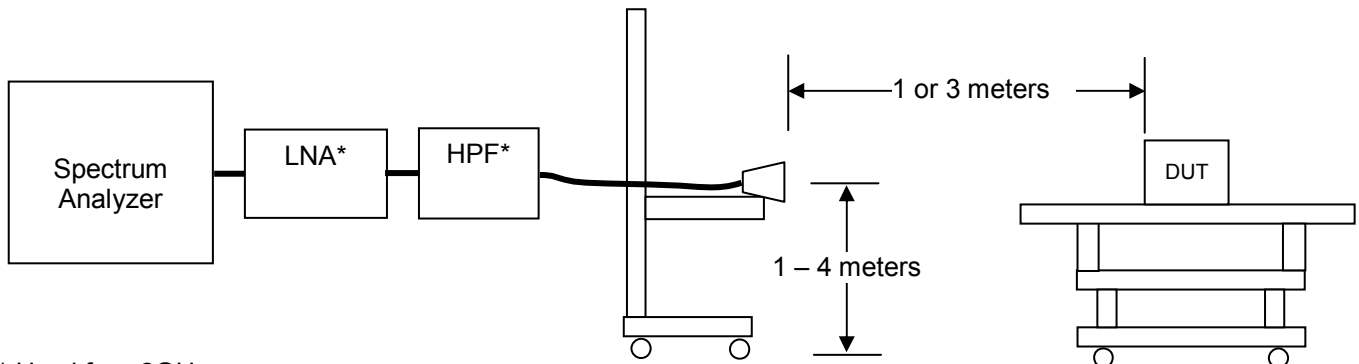

\* Used for >2GHz

### C.7 DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high channels transmitting in each of the modulation types for both the cellular and PCS bands at maximum power level as described in Appendix A. Each antenna configuration (External Swivel Dipole and Vehicle-Mount) was evaluated.



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8 TEST RESULTS

The spurious measurements detailed in this section are referenced to the carrier levels set forth in Appendix B of this report:

#### C.8.1 Spurious Emissions (Attached Swivel Dipole Antenna)

##### C.8.1.1 Cellular GPRS Spurious Emissions



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC22.917  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	128	1648.61	65.11	33.50	n/a	n/a	n/a	84.4*	19.3*	PASS*
H	3	none	128	1648.26	42.81	11.20	n/a	n/a	n/a	84.4*	41.6*	PASS*
H	3	none	128	2472.43	67.37	55.30	n/a	n/a	n/a	84.4*	17.0*	PASS*
H	3	none	128	2472.60	41.07	29.00	n/a	n/a	n/a	84.4*	43.3*	PASS*
H	3	none	128	3296.53	36.99	30.10	n/a	n/a	n/a	84.4*	47.4*	PASS*
H	3	none	190	1674.06	69.85	38.10	n/a	n/a	n/a	84.4*	14.5*	PASS*
H	3	none	190	1673.91	44.55	12.80	n/a	n/a	n/a	84.4*	39.8*	PASS*
H	3	none	190	2510.84	69.31	57.10	n/a	n/a	n/a	84.4*	15.1*	PASS*
H	3	none	190	2511.00	40.71	28.50	n/a	n/a	n/a	84.4*	43.7*	PASS*
H	3	none	190	3348.29	38.87	31.80	n/a	n/a	n/a	84.4*	45.5*	PASS*
H	3	none	251	1697.68	71.92	40.00	n/a	n/a	n/a	84.4*	12.4*	PASS*
H	3	none	251	1697.50	45.32	13.40	n/a	n/a	n/a	84.4*	39.0*	PASS*
H	3	none	251	2546.58	63.71	51.30	n/a	n/a	n/a	84.4*	20.7*	PASS*
H	3	none	251	2546.52	39.41	27.00	n/a	n/a	n/a	84.4*	45.0*	PASS*
H	3	none	251	3395.51	38.32	31.10	n/a	n/a	n/a	84.4*	46.0*	PASS*
V	3	none	128	1649.27	53.72	22.10	n/a	n/a	n/a	84.4*	30.7*	PASS*
V	3	none	128	2472.34	65.77	53.70	n/a	n/a	n/a	84.4*	18.6*	PASS*
V	3	none	128	2472.55	41.17	29.10	n/a	n/a	n/a	84.4*	43.2*	PASS*
V	3	none	128	3296.80	39.40	32.50	n/a	n/a	n/a	84.4*	45.0*	PASS*
V	3	none	190	1674.15	62.25	30.50	n/a	n/a	n/a	84.4*	22.1*	PASS*
V	3	none	190	1673.94	42.25	10.50	n/a	n/a	n/a	84.4*	42.1*	PASS*
V	3	none	190	2510.88	67.61	55.40	n/a	n/a	n/a	84.4*	16.8*	PASS*
V	3	none	190	2510.88	40.21	28.00	n/a	n/a	n/a	84.4*	44.2*	PASS*
V	3	none	190	3347.89	43.07	36.00	n/a	n/a	n/a	84.4*	41.3*	PASS*
V	3	none	251	1697.50	61.92	30.00	n/a	n/a	n/a	84.4*	22.4*	PASS*
V	3	none	251	1697.50	42.42	10.50	n/a	n/a	n/a	84.4*	41.9*	PASS*
V	3	none	251	2546.55	67.21	54.80	n/a	n/a	n/a	84.4*	17.2*	PASS*
V	3	none	251	2546.32	40.51	28.10	n/a	n/a	n/a	84.4*	43.9*	PASS*
V	3	none	251	3395.42	38.72	31.50	n/a	n/a	n/a	84.4*	45.6*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8.1.2 PCS GPRS Spurious Emissions



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC24.238  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dB	dBm	dBm or dBuV/m*	dB	
H	3	none	512	3700.16	43.11	34.60	n/a	n/a	n/a	82.2*	39.1*	PASS*
H	3	none	512	5550.31	45.69	31.60	n/a	n/a	n/a	82.2*	36.5*	PASS*
H	1	none	512	7400.80	50.50	39.98	n/a	n/a	n/a	91.8*	41.3*	PASS*
H	3	none	661	3759.73	43.09	34.50	n/a	n/a	n/a	82.2*	39.1*	PASS*
H	3	none	661	5639.73	43.75	29.60	n/a	n/a	n/a	82.2*	38.5*	PASS*
H	1	none	661	7520.00	50.71	39.81	n/a	n/a	n/a	91.8*	41.1*	PASS*
H	3	none	810	3819.80	44.83	35.90	n/a	n/a	n/a	82.2*	37.4*	PASS*
H	3	none	810	5729.44	49.51	35.50	n/a	n/a	n/a	82.2*	32.7*	PASS*
H	1	none	810	7639.20	50.24	39.23	n/a	n/a	n/a	91.8*	41.5*	PASS*
V	3	none	512	3700.19	43.51	35.00	n/a	n/a	n/a	82.2*	38.7*	PASS*
V	3	none	512	5550.60	45.09	31.00	n/a	n/a	n/a	82.2*	37.1*	PASS*
V	1	none	512	7401.00	50.23	39.71	n/a	n/a	n/a	91.8*	41.5*	PASS*
V	3	none	661	3759.99	44.49	35.90	n/a	n/a	n/a	82.2*	37.7*	PASS*
V	3	none	661	5640.00	44.35	30.20	n/a	n/a	n/a	82.2*	37.9*	PASS*
V	1	none	661	7510.90	51.48	40.60	n/a	n/a	n/a	91.8*	40.3*	PASS*
V	3	none	810	3819.59	42.93	34.00	n/a	n/a	n/a	82.2*	39.3*	PASS*
V	3	none	810	5729.58	51.71	37.70	n/a	n/a	n/a	82.2*	30.5*	PASS*
V	1	none	810	7639.60	54.31	43.30	n/a	n/a	n/a	91.8*	37.5*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860		
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem						
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 51





<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8.1.3 Cellular UMTS Spurious Emissions



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC22.917  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	4132	1651.81	65.43	33.80	n/a	n/a	n/a	84.4*	18.9*	PASS*
H	3	none	4132	1651.81	45.83	14.20	n/a	n/a	n/a	84.4*	38.5*	PASS*
H	3	none	4132	2478.63	64.69	52.60	n/a	n/a	n/a	84.4*	19.7*	PASS*
H	3	none	4132	2478.63	44.19	32.10	n/a	n/a	n/a	84.4*	40.2*	PASS*
H	3	none	4132	3296.53	37.99	31.10	n/a	n/a	n/a	84.4*	46.4*	PASS*
H	3	none	4182	1673.06	67.95	36.20	n/a	n/a	n/a	84.4*	16.4*	PASS*
H	3	none	4182	1672.91	47.35	15.60	n/a	n/a	n/a	84.4*	37.0*	PASS*
H	3	none	4182	2510.84	65.31	53.10	n/a	n/a	n/a	84.4*	19.1*	PASS*
H	3	none	4182	2511.00	42.51	30.30	n/a	n/a	n/a	84.4*	41.9*	PASS*
H	3	none	4182	3345.60	37.56	30.50	n/a	n/a	n/a	84.4*	46.8*	PASS*
H	3	none	4233	1694.68	66.40	34.50	n/a	n/a	n/a	84.4*	18.0*	PASS*
H	3	none	4233	1694.50	51.30	19.40	n/a	n/a	n/a	84.4*	33.1*	PASS*
H	3	none	4233	2546.58	61.51	49.10	n/a	n/a	n/a	84.4*	22.9*	PASS*
H	3	none	4233	2546.52	41.61	29.20	n/a	n/a	n/a	84.4*	42.8*	PASS*
H	3	none	4233	3386.40	36.82	29.60	n/a	n/a	n/a	84.4*	47.6*	PASS*
V	3	none	4132	1649.27	52.62	21.00	n/a	n/a	n/a	84.4*	31.8*	PASS*
V	3	none	4132	2480.23	62.39	50.30	n/a	n/a	n/a	84.4*	22.0*	PASS*
V	3	none	4132	2480.23	47.89	35.80	n/a	n/a	n/a	84.4*	36.5*	PASS*
V	3	none	4132	3305.60	37.21	30.30	n/a	n/a	n/a	84.4*	47.2*	PASS*
V	3	none	4182	1673.15	61.65	29.90	n/a	n/a	n/a	84.4*	22.7*	PASS*
V	3	none	4182	1672.94	50.35	18.60	n/a	n/a	n/a	84.4*	34.0*	PASS*
V	3	none	4182	2510.88	60.91	48.70	n/a	n/a	n/a	84.4*	23.5*	PASS*
V	3	none	4182	2510.88	44.51	32.30	n/a	n/a	n/a	84.4*	39.9*	PASS*
V	3	none	4182	3345.60	39.96	32.90	n/a	n/a	n/a	84.4*	44.4*	PASS*
V	3	none	4233	1694.30	63.00	31.10	n/a	n/a	n/a	84.4*	21.4*	PASS*
V	3	none	4233	1694.40	50.60	18.70	n/a	n/a	n/a	84.4*	33.8*	PASS*
V	3	none	4233	2541.55	64.29	51.90	n/a	n/a	n/a	84.4*	20.1*	PASS*
V	3	none	4233	2541.32	42.59	30.20	n/a	n/a	n/a	84.4*	41.8*	PASS*
V	3	none	4233	3386.40	37.42	30.20	n/a	n/a	n/a	84.4*	47.0*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 30 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8.1.4 PCS UMTS Spurious Emissions



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC24.238  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	9262	3704.56	42.09	33.60	n/a	n/a	n/a	82.2*	40.1*	PASS*
H	3	none	9262	5556.80	46.83	32.60	n/a	n/a	n/a	82.2*	35.4*	PASS*
H	1	none	9262	7409.60	50.52	39.97	n/a	n/a	n/a	91.8*	41.2*	PASS*
H	3	none	9400	3759.43	44.09	35.50	n/a	n/a	n/a	82.2*	38.1*	PASS*
H	3	none	9400	5639.33	44.75	30.60	n/a	n/a	n/a	82.2*	37.5*	PASS*
H	1	none	9400	7520.00	51.66	40.76	n/a	n/a	n/a	91.8*	40.1*	PASS*
H	3	none	9538	3816.80	45.80	36.90	n/a	n/a	n/a	82.2*	36.4*	PASS*
H	3	none	9538	5724.44	50.50	36.50	n/a	n/a	n/a	82.2*	31.7*	PASS*
H	1	none	9538	7630.00	51.13	40.13	n/a	n/a	n/a	91.8*	40.6*	PASS*
V	3	none	9262	3703.19	44.50	36.00	n/a	n/a	n/a	82.2*	37.7*	PASS*
V	3	none	9262	5556.10	46.41	32.20	n/a	n/a	n/a	82.2*	35.8*	PASS*
V	1	none	9262	7409.60	50.77	40.22	n/a	n/a	n/a	91.8*	41.0*	PASS*
V	3	none	9400	3759.99	43.49	34.90	n/a	n/a	n/a	82.2*	38.7*	PASS*
V	3	none	9400	5640.00	45.35	31.20	n/a	n/a	n/a	82.2*	36.9*	PASS*
V	1	none	9400	7520.00	51.14	40.24	n/a	n/a	n/a	91.8*	40.6*	PASS*
V	3	none	9538	3816.59	42.90	34.00	n/a	n/a	n/a	82.2*	39.3*	PASS*
V	3	none	9538	5724.08	51.69	37.70	n/a	n/a	n/a	82.2*	30.5*	PASS*
V	1	none	9538	7630.00	51.06	40.06	n/a	n/a	n/a	91.8*	40.7*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## C.8.2 Spurious Emissions (Vehicle-Mount Antenna)

### C.8.2.1 Cellular GPRS Spurious Emissions (Mobile)



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC22.917  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	128	1648.40	52.31	20.70	n/a	n/a	n/a	84.4*	32.1*	PASS*
H	3	none	128	2472.60	54.17	42.10	n/a	n/a	n/a	84.4*	30.2*	PASS*
H	3	none	128	3296.80	37.90	31.00	n/a	n/a	n/a	84.4*	46.5*	PASS*
H	3	none	190	1673.20	53.95	22.20	n/a	n/a	n/a	84.4*	30.4*	PASS*
H	3	none	190	2510.85	51.51	39.30	n/a	n/a	n/a	84.4*	32.9*	PASS*
H	3	none	190	3346.40	37.86	30.80	n/a	n/a	n/a	84.4*	46.5*	PASS*
H	3	none	251	1697.60	53.22	21.30	n/a	n/a	n/a	84.4*	31.1*	PASS*
H	3	none	251	2546.07	51.01	38.60	n/a	n/a	n/a	84.4*	33.4*	PASS*
H	3	none	251	3395.20	36.92	29.70	n/a	n/a	n/a	84.4*	47.4*	PASS*
V	3	none	128	1648.40	53.51	21.90	n/a	n/a	n/a	84.4*	30.9*	PASS*
V	3	none	128	2472.88	52.47	40.40	n/a	n/a	n/a	84.4*	31.9*	PASS*
V	3	none	128	3297.03	38.90	32.00	n/a	n/a	n/a	84.4*	45.5*	PASS*
V	3	none	190	1673.20	65.15	33.40	n/a	n/a	n/a	84.4*	19.2*	PASS*
V	3	none	190	1673.20	46.15	14.40	n/a	n/a	n/a	84.4*	38.2*	PASS*
V	3	none	190	2510.88	52.91	40.70	n/a	n/a	n/a	84.4*	31.5*	PASS*
V	3	none	190	3347.79	38.07	31.00	n/a	n/a	n/a	84.4*	46.3*	PASS*
V	3	none	251	1697.65	64.52	32.60	n/a	n/a	n/a	84.4*	19.8*	PASS*
V	3	none	251	1697.65	46.12	14.20	n/a	n/a	n/a	84.4*	38.2*	PASS*
V	3	none	251	2546.39	54.31	41.90	n/a	n/a	n/a	84.4*	30.1*	PASS*
V	3	none	251	3395.40	38.12	30.90	n/a	n/a	n/a	84.4*	46.2*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

**C.8.2.2 PCS GPRS Spurious Emissions (Mobile)**



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC24.238  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	512	3700.40	48.01	39.50	n/a	n/a	n/a	82.2*	34.2*	PASS*
H	3	none	512	5550.60	54.09	40.00	n/a	n/a	n/a	82.2*	28.1*	PASS*
H	1	none	512	7400.55	52.92	42.40	n/a	n/a	n/a	91.8*	38.8*	PASS*
H	3	none	661	3760.00	47.69	39.10	n/a	n/a	n/a	82.2*	34.5*	PASS*
H	3	none	661	5640.00	52.25	38.10	n/a	n/a	n/a	82.2*	30.0*	PASS*
H	1	none	661	7520.50	52.46	41.56	n/a	n/a	n/a	91.8*	39.3*	PASS*
H	3	none	810	3819.60	48.33	39.40	n/a	n/a	n/a	82.2*	33.9*	PASS*
H	3	none	810	5729.85	53.61	39.60	n/a	n/a	n/a	82.2*	28.6*	PASS*
H	1	none	810	7639.50	54.45	43.44	n/a	n/a	n/a	91.8*	37.3*	PASS*
V	3	none	512	3700.29	47.11	38.60	n/a	n/a	n/a	82.2*	35.1*	PASS*
V	3	none	512	5550.60	54.69	40.60	n/a	n/a	n/a	82.2*	27.5*	PASS*
V	1	none	512	7401.20	55.58	45.06	n/a	n/a	n/a	91.8*	36.2*	PASS*
V	3	none	661	3760.00	47.99	39.40	n/a	n/a	n/a	82.2*	34.2*	PASS*
V	3	none	661	5640.00	53.65	39.50	n/a	n/a	n/a	82.2*	28.6*	PASS*
V	1	none	661	7520.25	53.64	42.74	n/a	n/a	n/a	91.8*	38.1*	PASS*
V	3	none	810	3819.12	47.72	38.80	n/a	n/a	n/a	82.2*	34.5*	PASS*
V	3	none	810	5729.55	56.21	42.20	n/a	n/a	n/a	82.2*	26.0*	PASS*
V	1	none	810	7639.50	56.45	45.44	n/a	n/a	n/a	91.8*	35.3*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8.2.3 Cellular UMTS Spurious Emissions (Mobile)



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC22.917  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	4132	1652.80	53.03	21.40	n/a	n/a	n/a	84.4*	31.3*	PASS*
H	3	none	4132	2478.80	60.39	48.30	n/a	n/a	n/a	84.4*	24.0*	PASS*
H	3	none	4132	3305.60	45.51	38.60	n/a	n/a	n/a	84.4*	38.9*	PASS*
H	3	none	4182	1672.80	51.35	19.60	n/a	n/a	n/a	84.4*	33.0*	PASS*
H	3	none	4182	2509.20	51.30	39.10	n/a	n/a	n/a	84.4*	33.1*	PASS*
H	3	none	4182	3345.60	46.56	39.50	n/a	n/a	n/a	84.4*	37.8*	PASS*
H	3	none	4233	1693.20	52.89	21.00	n/a	n/a	n/a	84.4*	31.5*	PASS*
H	3	none	4233	2539.80	51.78	39.40	n/a	n/a	n/a	84.4*	32.6*	PASS*
H	3	none	4233	3386.40	45.92	38.70	n/a	n/a	n/a	84.4*	38.5*	PASS*
V	3	none	4132	1652.80	53.43	21.80	n/a	n/a	n/a	84.4*	30.9*	PASS*
V	3	none	4132	2477.14	59.08	47.00	n/a	n/a	n/a	84.4*	25.3*	PASS*
V	3	none	4132	3305.60	45.51	38.60	n/a	n/a	n/a	84.4*	38.9*	PASS*
V	3	none	4182	1669.73	56.33	24.60	n/a	n/a	n/a	84.4*	28.0*	PASS*
V	3	none	4182	2509.20	52.60	40.40	n/a	n/a	n/a	84.4*	31.8*	PASS*
V	3	none	4182	3345.60	45.96	38.90	n/a	n/a	n/a	84.4*	38.4*	PASS*
V	3	none	4233	1691.04	55.57	23.70	n/a	n/a	n/a	84.4*	28.8*	PASS*
V	3	none	4233	2539.80	54.08	41.70	n/a	n/a	n/a	84.4*	30.3*	PASS*
V	3	none	4233	3386.40	45.92	38.70	n/a	n/a	n/a	84.4*	38.5*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860		
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem						
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 51



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.8.2.4 PCS UMTS Spurious Emissions (Mobile)



**Project Number:** 756  
**Company:** Itronix  
**Product:** IX260+ with AC860

**Standard:** FCC24.238  
**Test Start Date:** 24-Jul-06  
**Test End Date:** 27-Jul-06

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Maximized SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Emission Level	Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	9262	3704.80	47.39	38.90	n/a	n/a	n/a	82.2*	34.8*	PASS*
H	3	none	9262	5557.20	55.04	40.80	n/a	n/a	n/a	82.2*	27.2*	PASS*
H	1	none	9262	7409.60	50.68	40.13	n/a	n/a	n/a	91.8*	41.1*	PASS*
H	3	none	9400	3760.00	46.39	37.80	n/a	n/a	n/a	82.2*	35.8*	PASS*
H	3	none	9400	5640.00	53.75	39.60	n/a	n/a	n/a	82.2*	28.5*	PASS*
H	1	none	9400	7520.00	50.70	39.80	n/a	n/a	n/a	91.8*	41.1*	PASS*
H	3	none	9538	3817.69	52.61	43.70	n/a	n/a	n/a	82.2*	29.6*	PASS*
H	3	none	9538	5722.50	54.09	40.10	n/a	n/a	n/a	82.2*	28.1*	PASS*
H	1	none	9538	7630.00	51.17	40.17	n/a	n/a	n/a	91.8*	40.6*	PASS*
V	3	none	9262	3704.80	47.49	39.00	n/a	n/a	n/a	82.2*	34.7*	PASS*
V	3	none	9262	5557.20	53.34	39.10	n/a	n/a	n/a	82.2*	28.9*	PASS*
V	1	none	9262	7409.60	49.98	39.43	n/a	n/a	n/a	91.8*	41.8*	PASS*
V	3	none	9400	3760.00	48.19	39.60	n/a	n/a	n/a	82.2*	34.0*	PASS*
V	3	none	9400	5640.00	54.05	39.90	n/a	n/a	n/a	82.2*	28.2*	PASS*
V	1	none	9400	7520.00	50.99	40.09	n/a	n/a	n/a	91.8*	40.8*	PASS*
V	3	none	9538	3817.68	57.31	48.40	n/a	n/a	n/a	82.2*	24.9*	PASS*
V	3	none	9538	5722.50	53.09	39.10	n/a	n/a	n/a	82.2*	29.1*	PASS*
V	1	none	9538	7630.00	51.08	40.08	n/a	n/a	n/a	91.8*	40.7*	PASS*

\*The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### C.9 PASS/FAIL

In reference to the results shown in C.8, the DUT passes the requirements as stated in the reference standards as follows:

FCC 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC 24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### C.10 SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.


Spencer Watson  
EMC Manager  
Celltech Labs Inc.

July 28, 2006

Date

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 51



	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## Appendix D - Maximum Permissible Exposure Calculation

### D.1 REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47§1.1310 IEEE Std C95.1-1999
<b>Procedure Reference</b>	FCC CFR 47§2.1091

### D.2 LIMITS

FCC CFR 47§1.1310 Table 1(b)	Frequency	Power Density
	300 - 1500 MHz	f/1500 mW/cm <sup>2</sup>
	1500 - 100,000 MHz	1.0 mW/cm <sup>2</sup>

### D.3 ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	na
<b>Humidity</b>	na
<b>Barometric Pressure</b>	na

### D.4 MEASUREMENT EQUIPMENT SETUP

<b>MEASUREMENT EQUIPMENT CONNECTIONS</b>	The results described herein were determined by calculations, so no measurement equipment was used. The power measurements for each radio used in these calculations were made as described in Appendix A of this report.
<b>MEASUREMENT EQUIPMENT SETTINGS</b>	n/a

### D.5 DUT OPERATING DESCRIPTION

<b>Dual-Band GPRS</b>	The maximum GPRS RF conducted output power in each band used for these calculations was measured on Channel 251 for Cellular and Channel 661 for PCS.
<b>Dual-Band EDGE</b>	The maximum EDGE RF conducted output power in each band used for these calculations was measured on Channel 190 for Cellular and Channel 661 for PCS.
<b>Dual-Band UMTS</b>	The maximum UMTS RF conducted output power in each band used for these calculations was measured on Channel 4233 for Cellular and Channel 9400 for PCS.

Test Report Serial No.:	061506KBC-T756-E24G	Report Issue Date:	August 22, 2006
Date(s) of Evaluation:	June 21 - July 27, 2006	Report Revision No.:	Revision 1.0
Test Standard(s):	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
Test Lab Registration(s):	FCC Lab Registration #714830	Industry Canada Lab File #3874	

## D.6 TEST RESULTS

### D.6.1 Calculations:

#### Swivel Dipole Antenna (Max. Measured Conducted Power - Cellular GPRS Mode)

Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

S= power density  
P= power input to the antenna  
G= power gain of the antenna in the direction of interest relative to an isotropic radiator  
R= distance to the center of radiation of the antenna  
SL= power density limit

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Ratio of Time On versus Total Transmit Time 0.25

Choose  
↓  
Occupational/Controlled   
General Population/Uncontrolled   
Tx Frequency: 848.80 (MHz)  
Maximum Peak Power at Antenna Input Terminal: 32.28 (dBm)  
Source-Based Time-Average Factor: -6.02 (dB)  
Antenna gain: 2.60 (dBi)

SL= 0.57 (mW/cm<sup>2</sup>)  
P= 422.6102 (mW)  
G= 1.82 (numeric)

R = 10.40 (cm)

S (mw/cm<sup>2</sup>)  
at 20cm

0.15282675

#### Formulae:

$$S = \frac{PG}{4\pi R^2}$$

where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$$R = \sqrt{\frac{P}{4\pi S}}$$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))

Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

Company:	Itronix Corporation	FCC ID:	KBCIX260PLUSAC860	Model(s):	IX260PLUSAC860	
DUT Type:	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 51

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.2 Calculations:

**Swivel Dipole Antenna (Max. Measured Conducted Power - PCS GPRS Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 0.25

Choose

Occupational/Controlled   
 General Population/Uncontrolled

ENTER

Tx Frequency: 1880.00 (MHz)  
 Maximum Peak Power at Antenna Input Terminal: 28.63 (dBm)  
 Source-Based Time-Average Factor: -6.02 (dB)  
 Antenna gain: 2.60 (dBi)

**SL**= 1.00 (mW/cm<sup>2</sup>)  
**P**= 182.3644 (mW)  
**G**= 1.82 (numeric)

**R = 5.14 (cm)**

**S (mw/cm<sup>2</sup>)  
at 20cm**

0.065947658

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 $R = \sqrt{\frac{PG}{4\pi S}}$  P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.3 Calculations:

**Swivel Dipole Antenna (Max. Measured Conducted Power - Cellular EDGE Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

*Equation from page 18*

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 0.25

Choose

Occupational/Controlled   
 General Population/Uncontrolled

ENTER

Tx Frequency: 836.60 (MHz)  
 Maximum Peak Power at Antenna Input Terminal: 26.89 (dBm)  
 Source-Based Time-Average Factor: -6.02 (dB)  
 Antenna gain: 2.60 (dBi)

**SL**= 0.56 (mW/cm<sup>2</sup>)  
**P**= 122.1631 (mW)  
**G**= 1.82 (numeric)

**R = 5.63 (cm)**

**S (mw/cm<sup>2</sup>)  
 at 20cm**  
 0.044177321

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 $R = \sqrt{\frac{PG}{4\pi S}}$  P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

Test Report Serial No.:	061506KBC-T756-E24G	Report Issue Date:	August 22, 2006
Date(s) of Evaluation:	June 21 - July 27, 2006	Report Revision No.:	Revision 1.0
Test Standard(s):	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
Test Lab Registration(s):	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.4 Calculations:

**Swivel Dipole Antenna (Max. Measured Conducted Power - PCS EDGE Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

**Equation from page 18**

$$S = \frac{PG}{4\pi R^2}$$

S= power density  
P= power input to the antenna  
G= power gain of the antenna in the direction of interest relative to an isotropic radiator

$$R = \sqrt{\frac{PG}{4\pi S}}$$

R= distance to the center of radiation of the antenna  
SL= power density limit

Ratio of Time On versus Total Transmit Time 0.25

Choose

Occupational/Controlled   
General Population/Uncontrolled

ENTER

Tx Frequency: 1880.00 (MHz)  
Maximum Peak Power at Antenna Input Terminal: 25.73 (dBm)  
Source-Based Time-Average Factor: -6.02 (dB)  
Antenna gain: 2.60 (dBi)

SL= 1.00 (mW/cm<sup>2</sup>)  
P= 93.5276 (mW)  
G= 1.82 (numeric)

**R = 3.68 (cm)**

**S (mw/cm<sup>2</sup>)  
at 20cm**

0.033822007

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

Test Report Serial No.:	061506KBC-T756-E24G	Report Issue Date:	August 22, 2006
Date(s) of Evaluation:	June 21 - July 27, 2006	Report Revision No.:	Revision 1.0
Test Standard(s):	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
Test Lab Registration(s):	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.5 Calculations:

**Swivel Dipole Antenna (Max. Measured Conducted Power - Cellular UMTS Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

S= power density  
P= power input to the antenna  
G= power gain of the antenna in the direction of interest relative to an isotropic radiator  
R= distance to the center of radiation of the antenna  
SL= power density limit

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Ratio of Time On versus Total Transmit Time 1.00

Choose

Occupational/Controlled   
General Population/Uncontrolled

ENTER

Tx Frequency: 846.60 (MHz)  
Maximum Peak Power at Antenna Input Terminal: 24.00 (dBm)  
Source-Based Time-Average Factor: 0.00 (dB)  
Antenna gain: 2.60 (dBi)

SL= 0.56 (mW/cm<sup>2</sup>)  
P= 251.1886 (mW)  
G= 1.82 (numeric)

**R = 8.03 (cm)**

S (mw/cm<sup>2</sup>)  
at 20cm  
0.090836286

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.6 Calculations:

**Swivel Dipole Antenna (Max. Measured Conducted Power - PCS UMTS Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 1.00

Choose

Occupational/Controlled  
 General Population/Uncontrolled

Tx Frequency: 1880.00 (MHz)  
 Maximum Peak Power at Antenna Input Terminal: 23.00 (dBm)  
 Source-Based Time-Average Factor: 0.00 (dB)  
 Antenna gain: 2.60 (dBi)

**SL**= 1.00 (mW/cm<sup>2</sup>)  
**P**= 199.5262 (mW)  
**G**= 1.82 (numeric)

**R = 5.38 (cm)**

**S (mw/cm<sup>2</sup>)  
 at 20cm**  
 0.072153826

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna  
 $R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.7 Calculations:

**Vehicle-Mount Antenna (Max. Measured Conducted Power - Cellular GPRS Mode)**

Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 0.25

**Choose**

↓

Occupational/Controlled

General Population/Uncontrolled

ENTER

↓

Tx Frequency:	848.80	(MHz)
Maximum Peak Power at Antenna Input Terminal:	32.28	(dBm)
Source-Based Time-Average Factor:	-6.02	(dB)
Antenna gain and Cable Loss:	1.11	(dBi)

**SL**= 0.57 (mW/cm<sup>2</sup>)  
**P**= 422.6102 (mW)  
**G**= 1.29 (numeric)

**R = 8.76 (cm)**

**S (mw/cm<sup>2</sup>) at 20cm**  
0.108442464

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna

$R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))



<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

### D.6.8 Calculations:

#### Vehicle-Mount Antenna (Max. Measured Conducted Power - PCS GPRS Mode)

**Prediction of MPE Limit**  
OET Bulletin 65, Edition 97-01

*Equation from page 18*

$$S = \frac{PG}{4\pi R^2}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 0.25

Choose



ENTER



Occupational/Controlled   
General Population/Uncontrolled

Tx Frequency: 1880.00 (MHz)

Maximum Peak Power at Antenna Input Terminal: 28.63 (dBm)

Source-Based Time-Average Factor: -6.02 (dB)

Antenna gain and Cable Loss: 0.20 (dBi)

**SL**= 1.00 (mW/cm<sup>2</sup>)

**P**= 182.3644 (mW)

**G**= 1.05 (numeric)

**R = 3.90 (cm)**

**S (mw/cm<sup>2</sup>)**  
**at 20cm**

0.037948916

#### Formulae:

$$S = \frac{PG}{4\pi R^2}$$

where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))

Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.9 Calculations:

**Vehicle-Mount Antenna (Max. Measured Conducted Power - Cellular EDGE Mode)**

Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

S= power density  
P= power input to the antenna  
G= power gain of the antenna in the direction of interest relative to an isotropic radiator  
R= distance to the center of radiation of the antenna  
SL= power density limit

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Ratio of Time On versus Total Transmit Time 0.25

Choose

Occupational/Controlled

General Population/Uncontrolled

Tx Frequency: 836.60 (MHz)

Maximum Peak Power at Antenna Input Terminal: 26.89 (dBm)

Source-Based Time-Average Factor: -6.02 (dB)

Antenna gain and Cable Loss: 1.11 (dBi)

SL= 0.56 (mW/cm<sup>2</sup>)

P= 122.1631 (mW)

G= 1.29 (numeric)

**R = 4.74 (cm)**

S (mw/cm<sup>2</sup>)  
at 20cm

0.031347245

**Formulae:**

$$S = \frac{PG}{4\pi R^2}$$

where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.10 Calculations:

**Vehicle-Mount Antenna (Max. Measured Conducted Power - PCS EDGE Mode)**

**Prediction of MPE Limit**  
OET Bulletin 65, Edition 97-01

Equation from page 18

$$S = \frac{PG}{4\pi R^2}$$

S= power density  
P= power input to the antenna  
G= power gain of the antenna in the direction of interest relative to an isotropic radiator  
R= distance to the center of radiation of the antenna  
SL= power density limit

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Ratio of Time On versus Total Transmit Time 0.25

**Choose**

↓

Occupational/Controlled

General Population/Uncontrolled

ENTER

↓

Tx Frequency: 1880.00 (MHz)

Maximum Peak Power at Antenna Input Terminal: 25.73 (dBm)

Source-Based Time-Average Factor: -6.02 (dB)

Antenna gain and Cable Loss: 0.20 (dBi)

SL= 1.00 (mW/cm<sup>2</sup>)

P= 93.5276 (mW)

G= 1.05 (numeric)

**R = 2.79 (cm)**

**S (mw/cm<sup>2</sup>)**  
**at 20cm**

0.019462534

**Formulae:**

$$S = \frac{PG}{4\pi R^2}$$

where: S = Power Density Limit  
P = Power Output of the Device  
G = Numeric Antenna Gain  
R = Distance from Antenna

$$R = \sqrt{\frac{PG}{4\pi S}}$$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.11 Calculations:

**Vehicle-Mount Antenna (Max. Measured Conducted Power - Cellular UMTS Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

*Equation from page 18*

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 1.00

Choose

- Occupational/Controlled
- General Population/Uncontrolled

ENTER

Tx Frequency: 846.60 (MHz)

Maximum Peak Power at Antenna Input Terminal: 24.00 (dBm)

Source-Based Time-Average Factor: 0.00 (dB)

Antenna gain and Cable Loss: 1.11 (dBi)

**SL**= 0.56 (mW/cm<sup>2</sup>)

**P**= 251.1886 (mW)

**G**= 1.29 (numeric)

**R = 6.76 (cm)**

**S (mw/cm<sup>2</sup>)  
at 20cm**

0.064455409

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna

$R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

D.6.12 Calculations:

**Vehicle-Mount Antenna (Max. Measured Conducted Power - PCS UMTS Mode)**

**Prediction of MPE Limit  
OET Bulletin 65, Edition 97-01**

*Equation from page 18*

$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{PG}{4\pi S}}$$

**S**= power density  
**P**= power input to the antenna  
**G**= power gain of the antenna in the direction of interest relative to an isotropic radiator  
**R**= distance to the center of radiation of the antenna  
**SL**= power density limit

Ratio of Time On versus Total Transmit Time 1.00

Choose

Occupational/Controlled   
 General Population/Uncontrolled

ENTER

Tx Frequency: 1880.00 (MHz)  
 Maximum Peak Power at Antenna Input Terminal: 23.00 (dBm)  
 Source-Based Time-Average Factor: 0.00 (dB)  
 Antenna gain and Cable Loss: 0.20 (dBi)

**SL**= 1.00 (mW/cm<sup>2</sup>)  
**P**= 199.5262 (mW)  
**G**= 1.05 (numeric)

**R = 4.08 (cm)**


**S (mw/cm<sup>2</sup>)  
at 20cm**

0.041520193

**Formulae:**

$S = \frac{PG}{4\pi R^2}$  where: S = Power Density Limit  
 P = Power Output of the Device  
 G = Numeric Antenna Gain  
 R = Distance from Antenna  
 $R = \sqrt{\frac{PG}{4\pi S}}$

Source-Based Time-Average Factor = 10 \* log (Time On / (Time On + Time Off))  
 Power Output of the Device (W) = 10 \* log (RF Output Power (dBm) + Source-Based Time Average Factor (dB))

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

**D.7 PASS/FAIL**

In reference to the results outlined in D6 the DUT passes the requirements as stated in the reference standards as follows:  
 1) The DUT must comply with the minimum spacing requirement of 20 cm to ensure an exposure of not more than f/1500 mW/cm<sup>2</sup> for frequencies between 300 and 1500 MHz and 1 mW/cm<sup>2</sup> for frequencies between 1500 and 100,000 MHz.


**D.8 SIGN-OFF**


I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

*Spencer Watson*


Spencer Watson  
 EMC Manager  
 Celltech Labs Inc.

June 27, 2006  
 Date

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 50 of 51

	<b>Test Report Serial No.:</b>	061506KBC-T756-E24G	<b>Report Issue Date:</b>	August 22, 2006
	<b>Date(s) of Evaluation:</b>	June 21 - July 27, 2006	<b>Report Revision No.:</b>	Revision 1.0
	<b>Test Standard(s):</b>	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
	<b>Test Lab Registration(s):</b>	FCC Lab Registration #714830	Industry Canada Lab File #3874	

**END OF DOCUMENT**

<b>Company:</b>	Itronix Corporation	<b>FCC ID:</b>	KBCIX260PLUSAC860	<b>Model(s):</b>	IX260PLUSAC860	
<b>DUT Type:</b>	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 51 of 51