

## DECLARATION OF COMPLIANCE FCC PART 90 EMC MEASUREMENTS

<p><b><u>Test Lab</u></b></p> <p><b>CELLTECH LABS INC.</b>          Testing and Engineering Services          1955 Moss Court          Kelowna, B.C.          Canada V1Y 9L3          Phone: 250-448-7047          Fax: 250-448-7046          e-mail: info@celltechlabs.com          web site: www.celltechlabs.com</p>	<p><b><u>Applicant Information</u></b></p> <p><b>ITRONIX CORPORATION</b>          801 South Stevens Street          Spokane, WA 99210</p>																																		
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><b>FCC Rule Part(s):</b></td> <td><b>47 CFR §90, §2</b></td> </tr> <tr> <td><b>IC Rule Part(s):</b></td> <td><b>RSS-119 Issue 6</b></td> </tr> <tr> <td><b>Test Procedure(s):</b></td> <td><b>FCC 47 CFR §90, §2; ANSI TIA/EIA-603-A-2001</b></td> </tr> <tr> <td><b>FCC Device Classification:</b></td> <td><b>Licensed Non-Broadcast Station Transmitter (TNB)</b></td> </tr> <tr> <td><b>IC Device Classification:</b></td> <td><b>Land Mobile Radio Transmitter</b></td> </tr> <tr> <td><b>Device Type:</b></td> <td><b>Rugged Laptop PC with RIM 902 Mobitex Radio Modem (co-located with Cisco MPI-350 Mini-PCI 2.4GHz DSSS WLAN Card) with Dipole Antenna, WLAN Antenna, (3) Mobile Antennas, &amp; Vehicle Cradle KBCIX260MPIRIM902</b></td> </tr> <tr> <td><b>FCC ID:</b></td> <td><b>IX260</b></td> </tr> <tr> <td><b>Model(s):</b></td> <td><b>IX260</b></td> </tr> <tr> <td><b>Tx Frequency Range:</b></td> <td><b>896.0 - 901.0 MHz</b></td> </tr> <tr> <td><b>Rx Frequency Range:</b></td> <td><b>935.0 - 941.0 MHz</b></td> </tr> <tr> <td><b>Max. RF Output Power:</b></td> <td><b>2.30 Watts ERP (Itronix Swivel Dipole Antenna Model: IX260) 0.452 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z563) 0.794 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z567) 1.06 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z573)</b></td> </tr> <tr> <td><b>Max. Conducted Power Tested:</b></td> <td><b>33.1 dBm (Mobitex) / 21.2 dBm (WLAN)</b></td> </tr> <tr> <td><b>Modulation:</b></td> <td><b>GMSK</b></td> </tr> <tr> <td><b>Emission Designator(s):</b></td> <td><b>12K8F1D</b></td> </tr> <tr> <td><b>Frequency Tolerance(s):</b></td> <td><b>± 0.00015 %</b></td> </tr> <tr> <td><b>Antenna Types:</b></td> <td><b>Itronix IX260 External Swivel Dipole (Mobitex) Rangestar 100929 802.11b Surface-Mount (WLAN) MaxRad Z563 Mobile Vehicle-Mount - Unity Gain (Mobitex only) MaxRad Z567 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only) MaxRad Z573 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only)</b></td> </tr> <tr> <td><b>Power Supply:</b></td> <td><b>11.1V Lithium-ion Battery, 6.0Ah (Model: A2121-2) 12V Vehicle Battery (Vehicle-Mount Antennas)</b></td> </tr> </table>		<b>FCC Rule Part(s):</b>	<b>47 CFR §90, §2</b>	<b>IC Rule Part(s):</b>	<b>RSS-119 Issue 6</b>	<b>Test Procedure(s):</b>	<b>FCC 47 CFR §90, §2; ANSI TIA/EIA-603-A-2001</b>	<b>FCC Device Classification:</b>	<b>Licensed Non-Broadcast Station Transmitter (TNB)</b>	<b>IC Device Classification:</b>	<b>Land Mobile Radio Transmitter</b>	<b>Device Type:</b>	<b>Rugged Laptop PC with RIM 902 Mobitex Radio Modem (co-located with Cisco MPI-350 Mini-PCI 2.4GHz DSSS WLAN Card) with Dipole Antenna, WLAN Antenna, (3) Mobile Antennas, &amp; Vehicle Cradle KBCIX260MPIRIM902</b>	<b>FCC ID:</b>	<b>IX260</b>	<b>Model(s):</b>	<b>IX260</b>	<b>Tx Frequency Range:</b>	<b>896.0 - 901.0 MHz</b>	<b>Rx Frequency Range:</b>	<b>935.0 - 941.0 MHz</b>	<b>Max. RF Output Power:</b>	<b>2.30 Watts ERP (Itronix Swivel Dipole Antenna Model: IX260) 0.452 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z563) 0.794 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z567) 1.06 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z573)</b>	<b>Max. Conducted Power Tested:</b>	<b>33.1 dBm (Mobitex) / 21.2 dBm (WLAN)</b>	<b>Modulation:</b>	<b>GMSK</b>	<b>Emission Designator(s):</b>	<b>12K8F1D</b>	<b>Frequency Tolerance(s):</b>	<b>± 0.00015 %</b>	<b>Antenna Types:</b>	<b>Itronix IX260 External Swivel Dipole (Mobitex) Rangestar 100929 802.11b Surface-Mount (WLAN) MaxRad Z563 Mobile Vehicle-Mount - Unity Gain (Mobitex only) MaxRad Z567 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only) MaxRad Z573 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only)</b>	<b>Power Supply:</b>	<b>11.1V Lithium-ion Battery, 6.0Ah (Model: A2121-2) 12V Vehicle Battery (Vehicle-Mount Antennas)</b>
<b>FCC Rule Part(s):</b>	<b>47 CFR §90, §2</b>																																		
<b>IC Rule Part(s):</b>	<b>RSS-119 Issue 6</b>																																		
<b>Test Procedure(s):</b>	<b>FCC 47 CFR §90, §2; ANSI TIA/EIA-603-A-2001</b>																																		
<b>FCC Device Classification:</b>	<b>Licensed Non-Broadcast Station Transmitter (TNB)</b>																																		
<b>IC Device Classification:</b>	<b>Land Mobile Radio Transmitter</b>																																		
<b>Device Type:</b>	<b>Rugged Laptop PC with RIM 902 Mobitex Radio Modem (co-located with Cisco MPI-350 Mini-PCI 2.4GHz DSSS WLAN Card) with Dipole Antenna, WLAN Antenna, (3) Mobile Antennas, &amp; Vehicle Cradle KBCIX260MPIRIM902</b>																																		
<b>FCC ID:</b>	<b>IX260</b>																																		
<b>Model(s):</b>	<b>IX260</b>																																		
<b>Tx Frequency Range:</b>	<b>896.0 - 901.0 MHz</b>																																		
<b>Rx Frequency Range:</b>	<b>935.0 - 941.0 MHz</b>																																		
<b>Max. RF Output Power:</b>	<b>2.30 Watts ERP (Itronix Swivel Dipole Antenna Model: IX260) 0.452 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z563) 0.794 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z567) 1.06 Watts ERP (MaxRad Vehicle-Mount Antenna Model: Z573)</b>																																		
<b>Max. Conducted Power Tested:</b>	<b>33.1 dBm (Mobitex) / 21.2 dBm (WLAN)</b>																																		
<b>Modulation:</b>	<b>GMSK</b>																																		
<b>Emission Designator(s):</b>	<b>12K8F1D</b>																																		
<b>Frequency Tolerance(s):</b>	<b>± 0.00015 %</b>																																		
<b>Antenna Types:</b>	<b>Itronix IX260 External Swivel Dipole (Mobitex) Rangestar 100929 802.11b Surface-Mount (WLAN) MaxRad Z563 Mobile Vehicle-Mount - Unity Gain (Mobitex only) MaxRad Z567 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only) MaxRad Z573 Mobile Vehicle-Mount - 5 dBd Gain (Mobitex only)</b>																																		
<b>Power Supply:</b>	<b>11.1V Lithium-ion Battery, 6.0Ah (Model: A2121-2) 12V Vehicle Battery (Vehicle-Mount Antennas)</b>																																		

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §90, §2, Industry Canada RSS-119 Issue 6, and ANSI TIA/EIA-603-A-2001.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



**Russell Pipe**  
**Senior Compliance Technologist**  
**Celltech Labs Inc.**



<b>TABLE OF CONTENTS</b>		
<b>1.1</b>	<b>SCOPE</b>	<b>3</b>
<b>2.1</b>	<b>GENERAL INFORMATION - §2.1033(a)</b>	<b>3</b>
	<b>MEASUREMENT PROCEDURES</b>	<b>4</b>
<b>3.1</b>	<b>RF Output Power - §2.1046</b>	<b>4</b>
<b>4.1</b>	<b>Spurious Emissions at Antenna Terminal - §2.1051</b>	<b>4</b>
<b>5.1</b>	<b>Occupied Bandwidth - §90.209; §90.210(j); §2.1049</b>	<b>4</b>
<b>6.1</b>	<b>Field Strength of Spurious Radiation - §2.1053</b>	<b>5</b>
<b>7.1</b>	<b>Effective Radiated Power Output - §90.635; §2.1046</b>	<b>5</b>
<b>8.1</b>	<b>Radiated Measurement Test Setup</b>	<b>5</b>
<b>9.1</b>	<b>Frequency Stability - §90.213; §2.1055</b>	<b>6</b>
	<b>TEST DATA</b>	<b>7</b>
<b>10.1</b>	<b>Effective Radiated Power Output - §90.635; §2.1046</b>	<b>7</b>
<b>11.1</b>	<b>Field Strength of Spurious Radiation - §2.1053</b>	<b>8-12</b>
<b>12.1</b>	<b>Frequency Stability - §90.213; §2.1055</b>	<b>13</b>
<b>13.1</b>	<b>TEST EQUIPMENT</b>	<b>14</b>
<b>14.1</b>	<b>CONCLUSION</b>	<b>15</b>
	<b>APPENDIX A - TEST PLOTS</b>	<b>16</b>
	<b>APPENDIX B - RADIATED TEST SETUP PHOTOGRAPHS</b>	<b>17</b>

## FCC PART 90 EMC MEASUREMENT REPORT

### 1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission and Industry Canada.

### 2.1 GENERAL INFORMATION - §2.1033(a)

<b><u>APPLICANT</u></b>				
<b>ITRONIX CORPORATION</b> 801 South Stevens Street Spokane, WA 99210				
<b>FCC ID</b>	KBCIX260MPIRIM902			
<b>Model(s)</b>	IX260			
<b>Serial No.</b>	Pre-production unit			
<b>EUT Type</b>	Rugged Laptop PC with RIM 902 Mobitex Radio Modem (co-located with Cisco MPI-350 Mini-PCI 2.4GHz DSSS WLAN Card) with Dipole Antenna, WLAN Antenna, (3) Vehicle-Mount Antennas, & Cradle			
<b>FCC Rule Part(s)</b>	47 CFR §90, §2			
<b>IC Rule Part(s)</b>	RSS-119 Issue 6			
<b>FCC Classification</b>	Licensed Non-Broadcast Station Transmitter (TNB)			
<b>IC Classification</b>	Land Mobile Radio Transmitter			
<b>Tx Frequency Range</b>	896.0 - 901.0 MHz			
<b>Rx Frequency Range</b>	935.0 - 941.0 MHz			
<b>Antenna Types</b>	<b>Model Number</b>	<b>Type / Description</b>	<b>Max. RF Output Power (Watts)</b>	<b>Length (inches)</b>
	IX260	External Swivel Dipole (Mobitex)	2.30 (ERP)	4.7
	100929	802.11b Surface-Mount (WLAN)	0.372 (EIRP)	1.1
	Z563	Unity Gain Mobile Vehicle-Mount	0.452 (ERP)	3.0
	Z567	5 dBd Gain Mobile Vehicle-Mount	0.794 (ERP)	22.0
Z573	5 dBd Gain Mobile Vehicle-Mount	1.06 (ERP)	31.5	
<b>Max. RF Conducted Output Power Tested</b>	33.1 dBm (Mobitex) / 21.2 dBm (WLAN)			
<b>Emission Designator</b>	12K8F1D			
<b>Frequency Tolerance</b>	± 0.00015 %			
<b>Modulation</b>	GMSK			
<b>Modes Tested</b>	Unmodulated Carrier, Modulated Carrier			
<b>Power Supply</b>	11.1V Lithium-ion Battery, 6.0Ah (Model: A2121-2) 12V Vehicle Battery (Vehicle-Mount Antennas)			

## MEASUREMENT PROCEDURES

### 3.1 RF OUTPUT POWER MEASUREMENT - §2.1046

The peak conducted power levels were measured at the RIM 902 Mobitex radio modem RF port with a Gigatronics 8652A Universal Power Meter in burst average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed in test mode using the RIM 902 Mobitex test software installed in the Laptop PC with the internal transmitter in modulated carrier mode (25% duty cycle) at a full rated power. All subsequent tests were performed using the same power measurement procedures.

Conducted Power Measurement	
Frequency (MHz)	Peak Power (dBm)
896.0	33.1
901.0	33.1

### 4.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

The EUT was placed in test mode using the RIM 902 Mobitex radio modem test software installed in the Laptop PC with the internal transmitter in modulated carrier mode (25% duty cycle) at a full rated power. The level of the carrier and the various conducted spurious frequencies were measured using a calibrated spectrum analyzer. The resolution bandwidth and video bandwidth were set to 1MHz. The spectrum was scanned from 10MHz to 20GHz at the low, mid, and high channels. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The reported emissions were below the specified limit of -13dBm. The test results are shown in Appendix A.

### 5.1 OCCUPIED BANDWIDTH - §90.209; §90.210(j); §2.1049

The EUT was placed in test mode using the RIM 902 Mobitex test software installed in the Laptop PC with the internal transmitter in unmodulated and modulated carrier mode (25% duty cycle) at a full rated power. The antenna output terminal of the EUT was connected to the 50Ω input of the spectrum analyzer through a matched 30dB attenuator. The resolution bandwidth and video bandwidth were set to 300 Hz. The test results are shown in Appendix A.

#### **A. UNMODULATED CARRIER**

33.1 dBm conducted power with a 30 dB matched attenuator and coaxial cable with a total loss of 0.2 dB.

#### **B. INTERNAL MODULATION**

100% of the in-band modulation is below the specified mask per 90.210(j).

§90.210(j) Emission Mask - 896-901MHz (Mobitex)		
FREQUENCY (MHz)	FORMULA	LIMIT (dBc)
-26500	50+10 log (P)	- 53
-0.0115	157 log (f <sub>d</sub> / 5.3)	- 53
-0.0095	157 log (f <sub>d</sub> / 5.3) or 103 log (f <sub>d</sub> / 3.9)	- 39.8
-0.0062	103 log (f <sub>d</sub> / 3.9) or 53 log (f <sub>d</sub> / 2.5)	- 21.1
-0.0025	53 log (f <sub>d</sub> / 2.5)	0.0
0.0025	53 log ((f <sub>d</sub> / 2.5)	0.0
0.0062	103 log (f <sub>d</sub> / 3.9) or 53 log (f <sub>d</sub> / 2.5)	- 21.1
0.0095	157 log (f <sub>d</sub> / 5.3) or 103 log (f <sub>d</sub> / 3.9)	- 39.8
0.0115	157 log (f <sub>d</sub> / 5.3)	- 53
26500	50+10 log (P)	- 53

**MEASUREMENT PROCEDURES (Cont.)**


**6.1 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053**

Radiated spurious emissions were measured on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001. The EUT was placed in test mode using the RIM 902 Mobitex test software installed in the Laptop PC with the internal transmitter in modulated carrier mode (25% duty cycle) at a full rated power. For the simultaneous transmit tests with the co-located WLAN card, the WLAN was set to maximum conducted power (21.2 dBm) at the low channel (2412 MHz), with a modulated DSSS signal, using the right side internal antenna (the WLAN EIRP measurement results showed the low channel as the maximum EIRP – please refer to EIRP measurement data in the Part 15.247 test report for the Cisco MPI-350 Mini-PCI DSSS WLAN Card submitted simultaneously with this application). The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level. A standard gain horn antenna was substituted in place of the EUT. A modulated signal was fed through a directional coupler to the antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The antenna feed point was then connected to a calibrated power meter and the power was adjusted to read the same power at the coupler port previously recorded, to account for any mismatch in impedance which may occur at the horn antenna. The conducted power at the antenna feed point was then recorded. The forward conducted power for the horn antenna was determined by measuring the power at the horn antenna feed point and reproducing the coupler power previously measured. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain. All spurious emissions from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier were investigated. The test data is shown on pages 8-11.

**7.1 EFFECTIVE RADIATED POWER OUTPUT - §90.635; §2.1046**

ERP measurements were performed using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001 on a 3-meter open area test site. The EUT was placed in test mode using the RIM 902 Mobitex test software installed in the Laptop PC with the internal transmitter in modulated carrier mode (25% duty cycle) at a full rated power. For the simultaneous transmit tests with the co-located WLAN card, the WLAN was set to maximum conducted power (21.2 dBm) at the low channel (2412 MHz), with a modulated DSSS signal, using the right side internal antenna (the WLAN EIRP measurement results showed the low channel as the maximum EIRP – please refer to EIRP measurement data in the Part 15.247 test report for the Cisco MPI-350 Mini-PCI DSSS WLAN Card submitted simultaneously with this application). The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A half-wave dipole was substituted in place of the EUT. A modulated signal with the same bandwidth as the EUT was generated, amplified, and fed through a directional coupler. The height and direction of the dipole was adjusted in order to give the field of maximum intensity. The power to the dipole was adjusted in order to give the same field strength reading as previously recorded for the EUT. The power at the coupler port was recorded at this point. The feed point for the dipole was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The ERP level was determined by adding the dipole forward conducted power and the dipole gain in dB. For readings above 1GHz the above method is repeated using a standard gain horn antenna. The test data is shown on page 7.

**8.1 RADIATED POWER MEASUREMENT TEST SETUP**

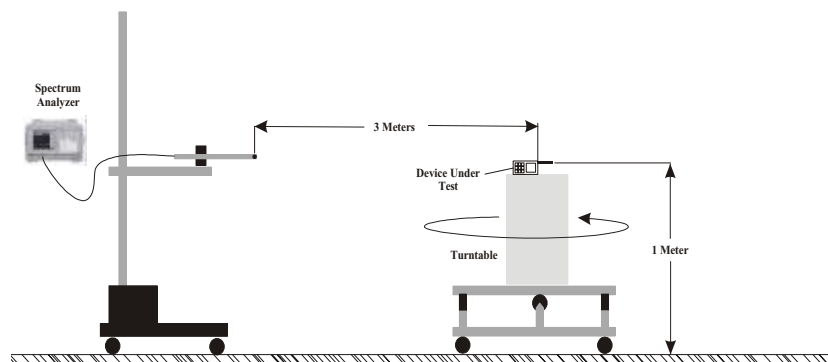

**Figure 1. Radiated Power Measurement Test Setup Diagram**

## MEASUREMENT PROCEDURES (Cont.)

### 9.1 FREQUENCY STABILITY - §90.213; §2.1055

The minimum frequency stability for the 896-901MHz frequency band must be 1.5 parts per million (ppm). The EUT was placed in test mode using the RIM 902 Mobitex test software installed in the Laptop PC with the internal transmitter in modulated carrier mode (25% duty cycle). An HP 53181A Frequency Counter was used to measure the error in the fundamental frequency. The transmitter was set to maximum power at the center frequency of the transmit band. The EUT was evaluated inside the ESPEC ECT-2 environmental chamber. The test data is shown on page 12.

#### MEASUREMENT METHOD:

The frequency stability of the transmitter was measured by:

1. Temperature:

The temperature was varied from -30°C to +60°C at intervals no more than 10°C throughout the temperature range in the environmental chamber. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to each frequency measurement.

2. Primary Supply Voltage:

The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

#### TIME PERIOD AND PROCEDURE:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C, the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +60°C, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

**TEST DATA**

**10.1 EFFECTIVE RADIATED POWER OUTPUT - §90.635; §2.1046**

EFFECTIVE RADIATED POWER OUTPUT TEST DATA									
Modem(s) Transmitting	Antenna(s) Model / Type	Freq. Tuned	EUT Conducted Power	Maximum Field Strength of EUT	Antenna Polariz.	Dipole Gain	Dipole Forward Conducted Power	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
		MHz	dBm	dBm	H/V	dBd	dBm	dBm	Watts
Mobitex & WLAN	IX260 Dipole	896.0	33.1	-7.20	V	-0.94	29.06	28.12	0.649
	WLAN Internal (Right Side)	2412	21.2						
Mobitex & WLAN	IX260 Dipole	901.0	33.1	-8.71	V	-0.94	28.06	27.12	0.515
	WLAN Internal (Right Side)	2412	21.2						
Mobitex only	IX260 Dipole	896.0	33.1	-5.44	V	-0.84	34.45	33.61	2.30
Mobitex only	IX260 Dipole	901.0	33.1	-5.21	V	-0.84	33.20	32.36	1.72
Mobitex only	IX260 Dipole	896.0	33.1	-3.70	H	-0.84	33.02	32.18	1.65
Mobitex only	IX260 Dipole	901.0	33.1	-3.40	H	-0.84	32.57	31.73	1.49
Mobitex only	Z563 Unity Gain	896.0	33.1	-10.34	V	-0.94	26.77	25.83	0.383
Mobitex only	Z563 Unity Gain	901.0	33.1	-9.08	V	-0.94	27.49	26.55	0.452
Mobitex only	Z567 5dBd Gain	896.0	33.1	-7.17	V	-0.94	29.88	28.94	0.783
Mobitex only	Z567 5dBd Gain	901.0	33.1	-6.65	V	-0.94	29.94	29.00	0.794
Mobitex only	Z573 5dBd Gain	896.0	33.1	-5.98	V	-0.94	31.18	30.24	1.06
Mobitex only	Z573 5dBd Gain	901.0	33.1	-5.96	V	-0.94	30.61	29.67	0.927

Note(s):

1. Alternate receive dipole antennas were used during the ERP tests and therefore different dipole gains are listed.

**TEST DATA (Cont.)**

**11.1 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053**

**External Swivel Dipole Antenna**

Operating Frequency (MHz): 896.0  
 Channel: 481 (Low)  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 33.61  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 53.61 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1792.0	-62.22	-29.33	6.6	V	-22.73	-24.87	58.48
2688.0	-69.63	-31.83	7.8	V	-24.03	-26.17	59.78
3584.0	-75.75	-39.17	7.8	V	-31.37	-33.51	67.12
4480.0	-76.56	-38.54	8.6	V	-29.94	-32.08	65.69
5376.0	-76.51	-40.15	8.5	V	-31.65	-33.79	67.40
6272.0	-75.62	-37.74	9.4	V	-28.34	-30.48	64.09
7168.0	-72.91	-35.03	9.2	V	-25.83	-27.97	61.58
8064.0	-73.00	-35.17	9.2	V	-25.97	-28.11	61.72
8960.0	-72.97	-36.76	9.1	V	-27.66	-29.80	63.41

Operating Frequency (MHz): 901.0  
 Channel: 870 (High)  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 32.36  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 52.36 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1802.0	-63.42	-30.53	6.7	V	-23.83	-25.97	58.33
2703.0	-71.08	-33.28	7.8	V	-25.48	-27.62	59.98
3604.0	-75.22	-38.64	7.8	V	-30.84	-32.98	65.34
4505.0	-77.41	-39.39	8.6	V	-30.79	-32.93	65.29
5406.0	-77.45	-41.09	8.5	V	-32.59	-34.73	67.09
6307.0	-76.67	-38.79	9.4	V	-29.39	-31.53	63.89
7208.0	-73.50	-35.62	9.2	V	-26.42	-28.56	60.92
8109.0	-74.28	-36.45	9.2	V	-27.25	-29.39	61.75
9010.0	-74.55	-38.34	9.1	V	-29.24	-31.38	63.74



**TEST DATA (Cont.)**

**Co-located Mobitex External Swivel Dipole Antenna & WLAN Internal Antenna (Right Side)**

Operating Frequency (MHz): 896.0  
 Channel: 481  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 28.12  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 48.12 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1792.0	-62.46	-29.57	6.6	V	-22.97	-25.11	53.23
2688.0	-69.98	-32.18	7.8	V	-24.38	-26.52	54.64
3584.0	-76.03	-39.45	7.8	V	-31.65	-33.79	61.91
4480.0	-76.79	-38.77	8.6	V	-30.17	-32.31	60.43
5376.0	-77.91	-41.55	8.5	V	-33.05	-35.19	63.31
6272.0	-76.38	-38.50	9.4	V	-29.10	-31.24	59.36
7168.0	-71.77	-33.89	9.2	V	-24.69	-26.83	54.95
8064.0	-72.65	-34.82	9.2	V	-25.62	-27.76	55.88
8960.0	-74.87	-38.66	9.1	V	-29.56	-31.70	59.82

Operating Frequency (MHz): 901.0  
 Channel: 870 (High)  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 27.12  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 47.12 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1802.0	-63.06	-30.17	6.7	V	-23.47	-25.61	52.73
2703.0	-70.04	-32.24	7.8	V	-24.44	-26.58	53.70
3604.0	-76.70	-40.12	7.8	V	-32.32	-34.46	61.58
4505.0	-78.32	-40.30	8.6	V	-31.70	-33.84	60.96
5406.0	-75.83	-39.47	8.5	V	-30.97	-33.11	60.23
6307.0	-76.33	-38.45	9.4	V	-29.05	-31.19	58.31
7208.0	-72.27	-34.39	9.2	V	-25.19	-27.33	54.45
8109.0	-74.23	-36.40	9.2	V	-27.20	-29.34	56.46
9010.0	-74.81	-38.60	9.1	V	-29.50	-31.64	58.76

## TEST DATA (Cont.)

### Mobile Vehicle Mount Antenna (MaxRad Z563)

**Operating Frequency (MHz):** 896.0  
**Channel:** 481 (Low)  
**EUT Conducted Pwr. (dBm):** 33.1  
**Measured ERP (dBm):** 25.83  
**Modulation:** Modulated Carrier  
**Distance:** 3 Meters  
**Limit:** 50 + 10 log (W) = 45.83 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1792.0	-66.17	-33.28	6.6	V	-26.68	-28.82	54.65
2688.0	-72.24	-34.44	7.8	V	-26.64	-28.78	54.61
3584.0	-74.32	-37.74	7.8	V	-29.94	-32.08	57.91
4480.0	-77.37	-39.35	8.6	V	-30.75	-32.89	58.72
5376.0	-76.82	-40.46	8.5	V	-31.96	-34.10	59.93
6272.0	-76.43	-38.55	9.4	V	-29.15	-31.29	57.12
7168.0	-72.33	-34.45	9.2	V	-25.25	-27.39	53.22
8064.0	-72.40	-34.57	9.2	V	-25.37	-27.51	53.34
8960.0	-74.05	-37.84	9.1	V	-28.74	-30.88	56.71

**Operating Frequency (MHz):** 901.0  
**Channel:** 870 (High)  
**EUT Conducted Pwr. (dBm):** 33.1  
**Measured ERP (dBm):** 26.55  
**Modulation:** Modulated Carrier  
**Distance:** 3 Meters  
**Limit:** 50 + 10 log (W) = 46.55 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1802.00	-65.33	-32.44	6.7	V	-25.74	-27.88	54.43
2703.00	-71.74	-33.94	7.8	V	-26.14	-28.28	54.83
3604.00	-75.99	-39.41	7.8	V	-31.61	-33.75	60.30
4505.00	-77.35	-39.33	8.6	V	-30.73	-32.87	59.42
5406.00	-77.29	-40.93	8.5	V	-32.43	-34.57	61.12
6307.00	-76.08	-38.20	9.4	V	-28.80	-30.94	57.49
7208.00	-72.31	-34.43	9.2	V	-25.23	-27.37	53.92
8109.00	-73.69	-35.86	9.2	V	-26.66	-28.80	55.35
9010.00	-73.47	-37.26	9.1	V	-28.16	-30.30	56.85

**TEST DATA (Cont.)**

**Mobile Vehicle Mount Antenna (MaxRad Z567)**

Operating Frequency (MHz): 896.0  
 Channel: 481 (Low)  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 28.94  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 45.83 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1792.0	-70.09	-37.20	6.6	V	-30.60	-32.74	61.68
2688.0	-73.60	-35.80	7.8	V	-28.00	-30.14	59.08
3584.0	-75.82	-39.24	7.8	V	-31.44	-33.58	62.52
4480.0	-76.39	-38.37	8.6	V	-29.77	-31.91	60.85
5376.0	-77.02	-40.66	8.5	V	-32.16	-34.30	63.24
6272.0	-76.71	-38.83	9.4	V	-29.43	-31.57	60.51
7168.0	-72.45	-34.57	9.2	V	-25.37	-27.51	56.45
8064.0	-73.75	-35.92	9.2	V	-26.72	-28.86	57.80
8960.0	-75.47	-39.26	9.1	V	-30.16	-32.30	61.24

Operating Frequency (MHz): 901.0  
 Channel: 870 (High)  
 EUT Conducted Pwr. (dBm): 33.1  
 Measured ERP (dBm): 29.00  
 Modulation: Modulated Carrier  
 Distance: 3 Meters  
 Limit: 50 + 10 log (W) = 49.00 dBc

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1802.0	-69.92	-37.03	6.7	V	-30.33	-32.47	61.47
2703.0	-74.06	-36.26	7.8	V	-28.46	-30.60	59.60
3604.0	-76.62	-40.04	7.8	V	-32.24	-34.38	63.38
4505.0	-76.17	-38.15	8.6	V	-29.55	-31.69	60.69
5406.0	-76.74	-40.38	8.5	V	-31.88	-34.02	63.02
6307.0	-76.29	-38.41	9.4	V	-29.01	-31.15	60.15
7208.0	-73.13	-35.25	9.2	V	-26.05	-28.19	57.19
8109.0	-73.96	-36.13	9.2	V	-26.93	-29.07	58.07
9010.0	-74.48	-38.27	9.1	V	-29.17	-31.31	60.31

## TEST DATA (Cont.)

### Mobile Vehicle Mount Antenna (MaxRad Z573)

**Operating Frequency (MHz):** 896.0  
**Channel:** 481 (Low)  
**EUT Conducted Pwr. (dBm):** 33.1  
**Measured ERP (dBm):** 30.24  
**Modulation:** Modulated Carrier  
**Distance:** 3 Meters  
**Limit:**  $50 + 10 \log (W) = 50.24 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1792.0	-70.53	-37.64	6.6	V	-31.04	-33.18	63.42
2688.0	-74.95	-37.15	7.8	V	-29.35	-31.49	61.73
3584.0	-77.09	-40.51	7.8	V	-32.71	-34.85	65.09
4480.0	-78.11	-40.09	8.6	V	-31.49	-33.63	63.87
5376.0	-76.41	-40.05	8.5	V	-31.55	-33.69	63.93
6272.0	-77.29	-39.41	9.4	V	-30.01	-32.15	62.39
7168.0	-73.07	-35.19	9.2	V	-25.99	-28.13	58.37
8064.0	-73.54	-35.71	9.2	V	-26.51	-28.65	58.89
8960.0	-75.44	-39.23	9.1	V	-30.13	-32.27	62.51

**Operating Frequency (MHz):** 901.0  
**Channel:** 870 (High)  
**EUT Conducted Pwr. (dBm):** 33.1  
**Measured ERP (dBm):** 29.67  
**Modulation:** Modulated Carrier  
**Distance:** 3 Meters  
**Limit:**  $50 + 10 \log (W) = 49.67 \text{ dBc}$


Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1802.0	-70.09	-37.20	6.7	V	-30.50	-32.64	62.31
2703.0	-74.50	-36.70	7.8	V	-28.90	-31.04	60.71
3604.0	-75.67	-39.09	7.8	V	-31.29	-33.43	63.10
4505.0	-76.63	-38.61	8.6	V	-30.01	-32.15	61.82
5406.0	-76.86	-40.50	8.5	V	-32.00	-34.14	63.81
6307.0	-75.56	-37.68	9.4	V	-28.28	-30.42	60.09
7208.0	-73.53	-35.65	9.2	V	-26.45	-28.59	58.26
8109.0	-72.93	-35.10	9.2	V	-25.90	-28.04	57.71
9010.0	-74.40	-38.19	9.1	V	-29.09	-31.23	60.90

**TEST DATA (Cont.)**

**12.1 FREQUENCY STABILITY - §90.213; §2.1055**

Carrier Frequency (MHz): 899.0  
 Channel: 721  
 Modulation: Modulated Carrier  
 Deviation Limit (PPM): 1.5

Temperature (°C)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	6.0	-91.78	-0.102	1.5	-1.5
-30	100	6.0	-107.96	-0.120	1.5	-1.5
-20	100	6.0	-105.27	-0.117	1.5	-1.5
-10	100	6.0	-101.46	-0.113	1.5	-1.5
0	100	6.0	-82.47	-0.092	1.5	-1.5
+10	100	6.0	-77.38	-0.086	1.5	-1.5
+20	100	6.0	-85.22	-0.095	1.5	-1.5
+30	100	6.0	-45.28	-0.050	1.5	-1.5
+40	100	6.0	-57.83	-0.064	1.5	-1.5
+50	100	6.0	-86.21	-0.096	1.5	-1.5
+60	100	6.0	-102.94	-0.115	1.5	-1.5
+20	Battery Endpoint	4.0	-98.46	-0.110	1.5	-1.5

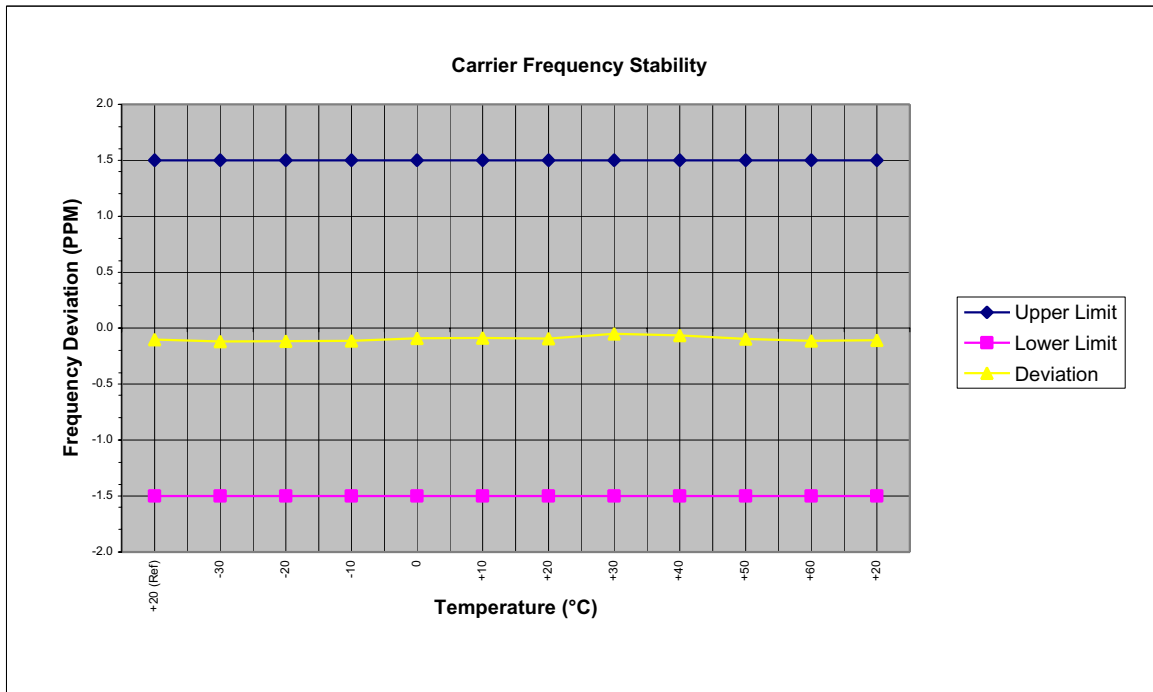

## 13.1 TEST EQUIPMENT

TEST EQUIPMENT LIST			
Equipment Type	Model	Serial No.	Calibration Due Date
HP Signal Generator	8648D (9kHz-4.0GHz)	3847A00611	Feb 2004
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	835537/022	Nov 2003
Gigatronics Power Meter	8652A	1835272	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833535	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833542	Feb 2004
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	26235	N/A
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	3123A00587	N/A
Network Analyzer	HP 8753E (30kHz-3GHz)	US38433013	Feb 2004
Frequency Counter	HP 53181A (3GHz)	3736A05175	May 2004
DC Power Supply	HP E3611A	KR83015294	N/A
Multi-Device Controller	EMCO 2090	9912-1484	N/A
Mini Mast	EMCO 2075	0001-2277	N/A
Turntable	EMCO 2080-1.2/1.5	0002-1002	N/A
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6267	Oct 2003
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6276	Oct 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-239	Sept 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-240	Sept 2003
Roberts Dipoles	Compliance Design (2 sets) 3121C		June 2004
Spectrum Analyzer	HP 8594E	3543A02721	Feb 2004
Spectrum Analyzer	HP E4408B	US39240170	Nov 2003
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	16297	N/A
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	0510154-B	Feb 2004

Test Report S/N:	061003-388KBC
Test Date(s):	June 12-13, 2003
Test Type:	FCC Part 90 EMC Measurements

## 14.1 CONCLUSION

The data in this measurement report shows that the ITRONIX CORPORATION Model: IX260 Rugged Laptop PC FCC ID: KBCIX260MPIRIM902 with RIM 902 Mobitex Radio Modem, external dipole antenna, and (3) vehicle-mount antennas, co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card and internal 802.11b surface-mount dual antenna, complies with the requirements of FCC Rule Parts §90, and §2.


Test Report S/N:	061003-388KBC
Test Date(s):	June 12-13, 2003
Test Type:	FCC Part 90 EMC Measurements

**APPENDIX A - TEST PLOTS**



hp 13:09:16 Jul 1, 2003

IX260 RIM 902M COND SPURS 896 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 2.488 GHz  
Ref 33 dBm Atten 15 dB -22.06 dBm

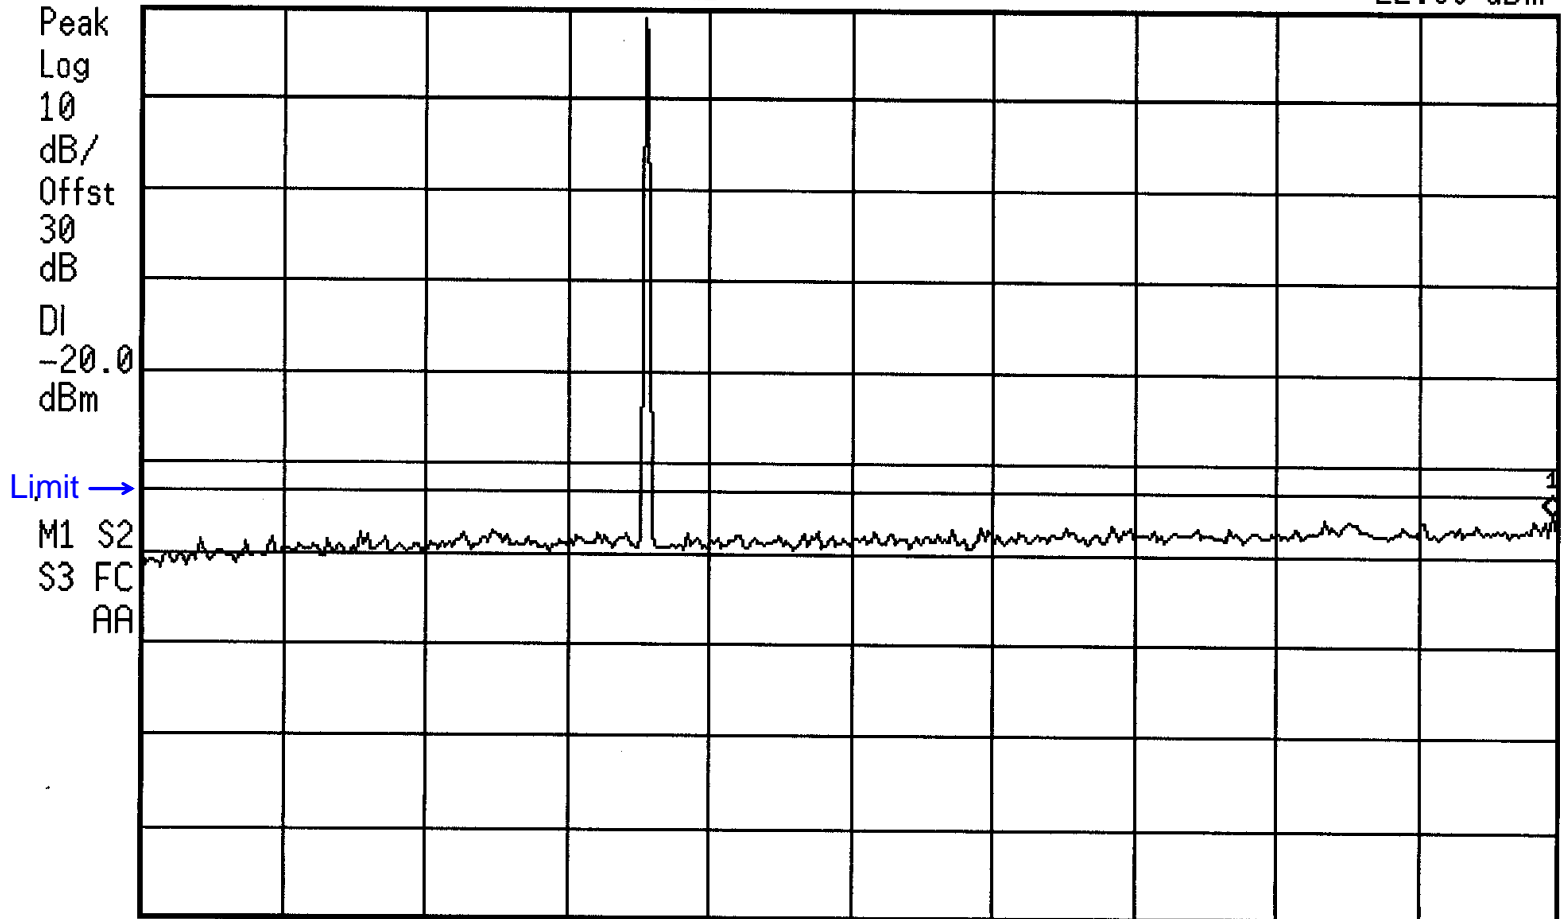

Start 10 MHz  
\*Res BW 1 MHz

\*VBW 1 MHz

Stop 2.5 GHz  
Sweep 6.225 ms




13:17:13 Jul 1, 2003

IX260 RIM 902M COND SPURS 896 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 2.988 GHz

Ref 33 dBm

Atten 15 dB

-24.37 dBm

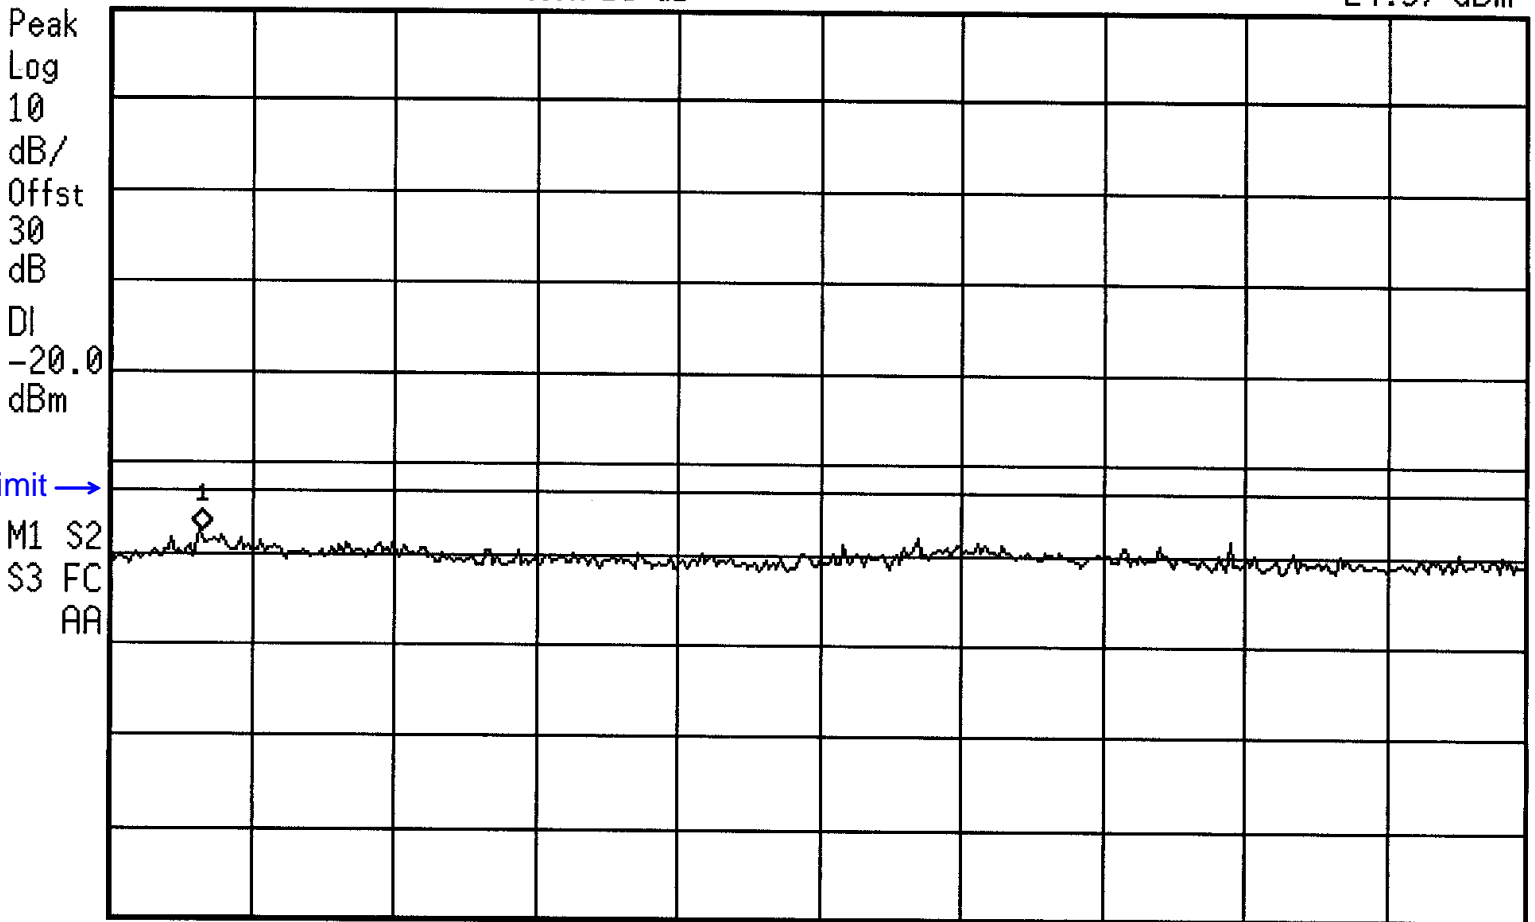

Limit →

M1 S2  
S3 FC  
AA

Start 2.5 GHz  
\*Res BW 1 MHz


\*VBW 1 MHz

Stop 10 GHz  
Sweep 18.75 ms



13:06:23 Jul 1, 2003

IX260 RIM 902M COND SPURS 896 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 13.70 GHz  
Ref 33 dBm Atten 15 dB -23.07 dBm

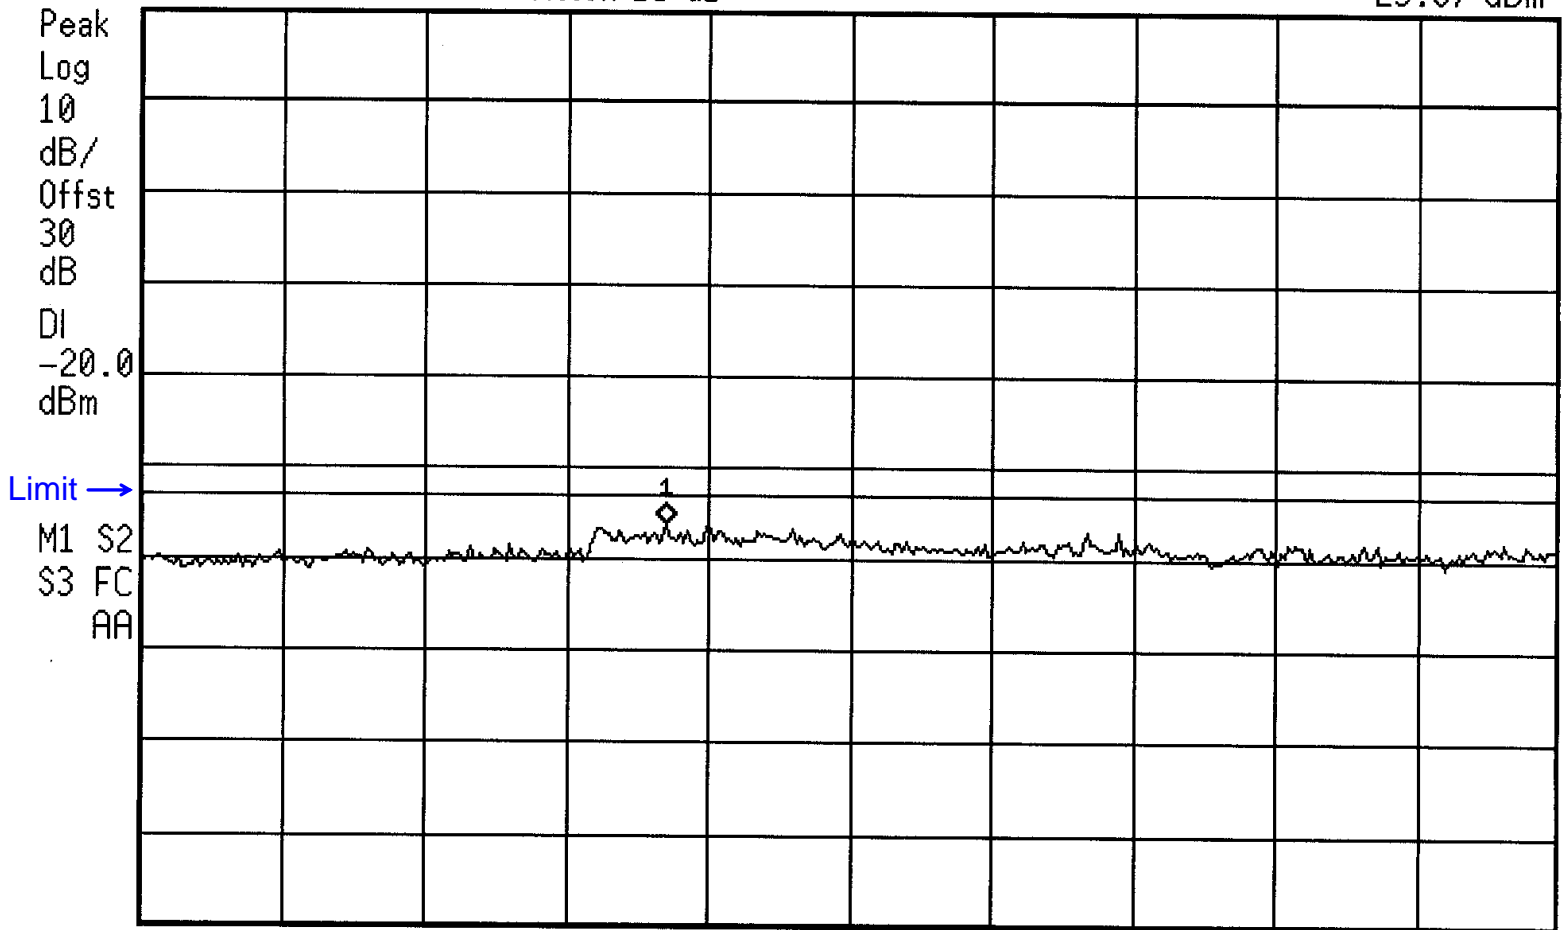

Start 10 GHz  
\*Res BW 1 MHz


\*VBW 1 MHz

Stop 20 GHz  
Sweep 100 ms



13:12:37 Jul 1, 2003

IX260 RIM 902M COND SPURS 901 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 2.369 GHz  
Ref 33 dBm Atten 15 dB -23.2 dBm

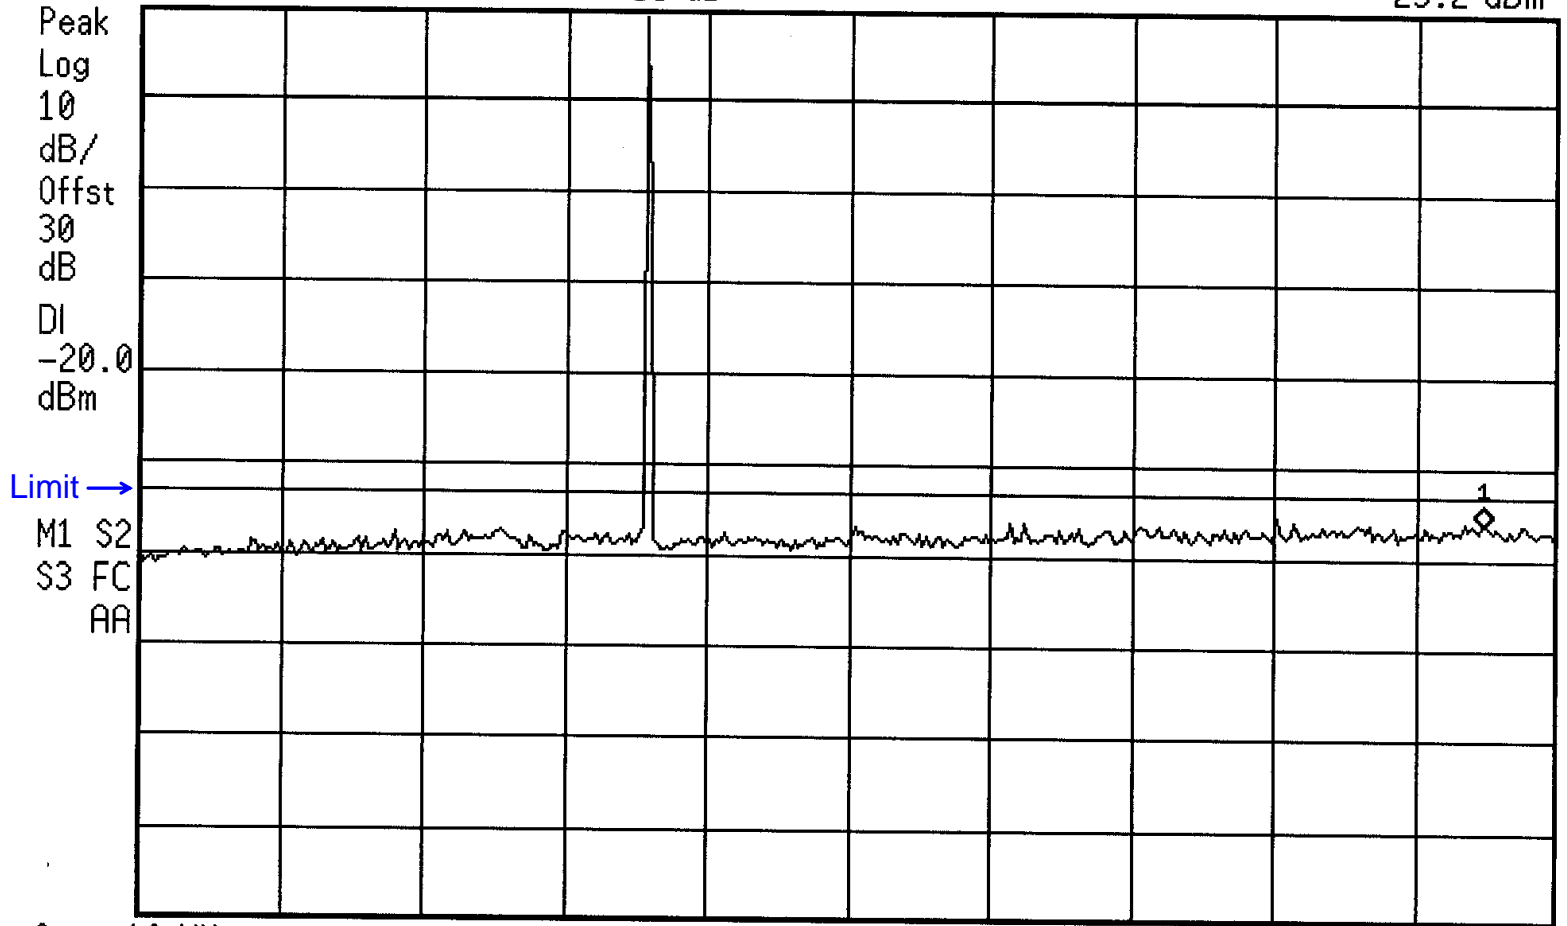


Start 10 MHz  
\*Res BW 1 MHz

\*VBW 1 MHz

Stop 2.5 GHz  
Sweep 6.225 ms

hp 13:13:35 Jul 1, 2003

IX260 RIM 902M COND SPURS 901 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 3.100 GHz  
Ref 33 dBm Atten 15 dB -25.06 dBm

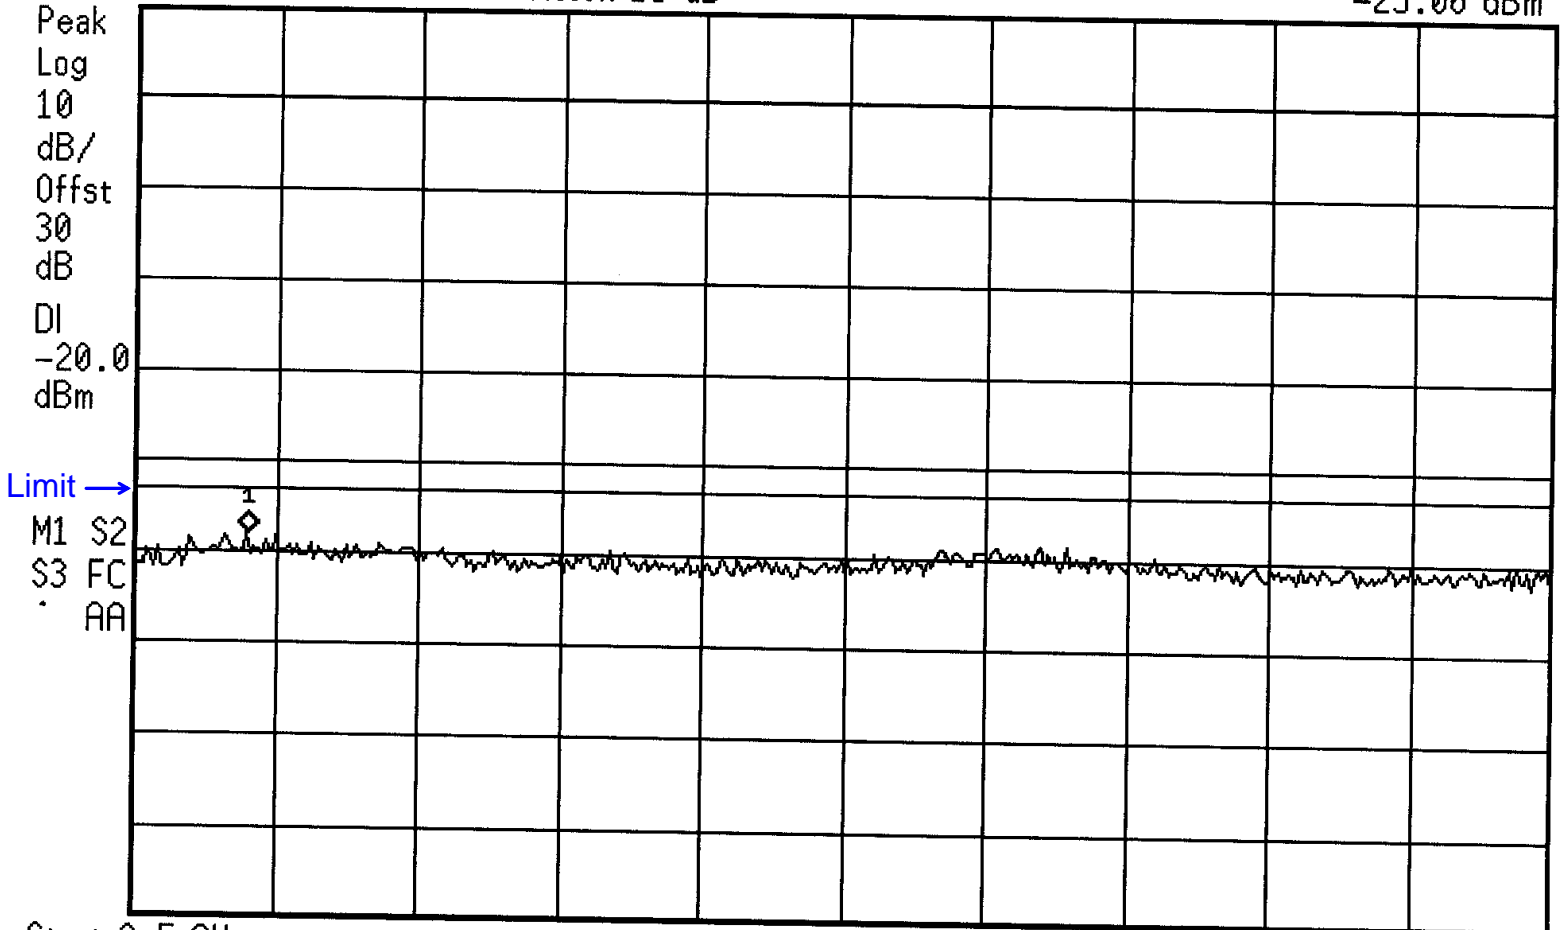


Start 2.5 GHz Stop 10 GHz  
\*Res BW 1 MHz \*VBW 1 MHz Sweep 18.75 ms



13:14:37 Jul 1, 2003

IX260 RIM 902M COND SPURS 901 MHz Itronix Corp. FCC ID: KBCIX260MPIRIM902 Mkr1 13.48 GHz  
Ref 33 dBm Atten 15 dB -23.25 dBm

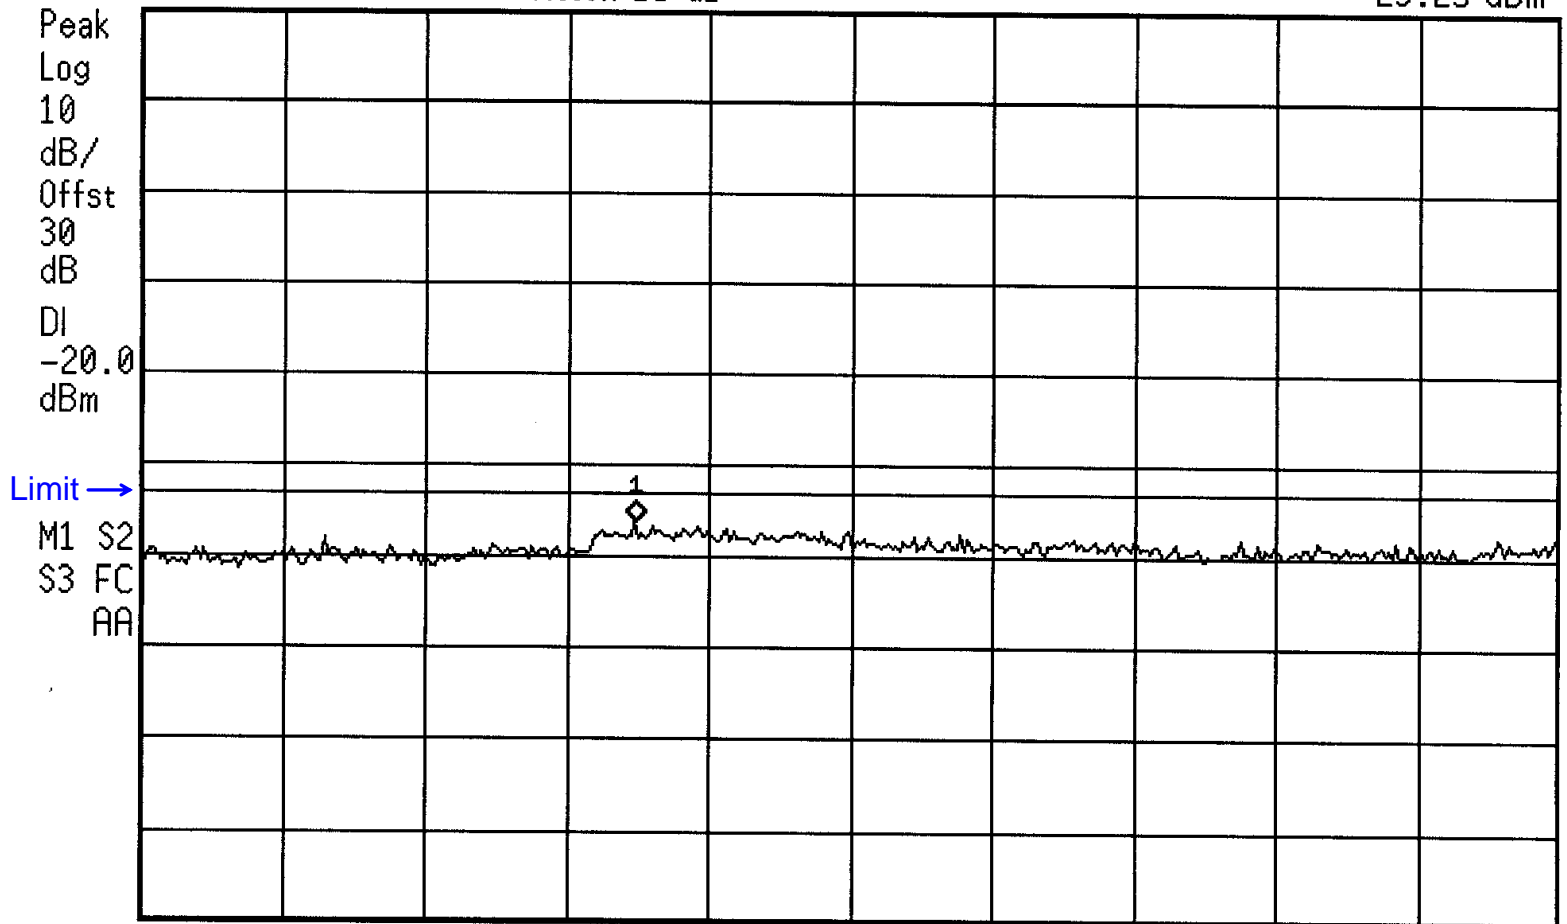

Start 10 GHz  
\*Res BW 1 MHz


\*VBW 1 MHz

Stop 20 GHz  
Sweep 100 ms

01:33:57 JUN 11, 2003

IX260 RIM902M OCCUPIED BANDWIDTH UNMODULATED

REF 33.0 dBm AT 20 dB

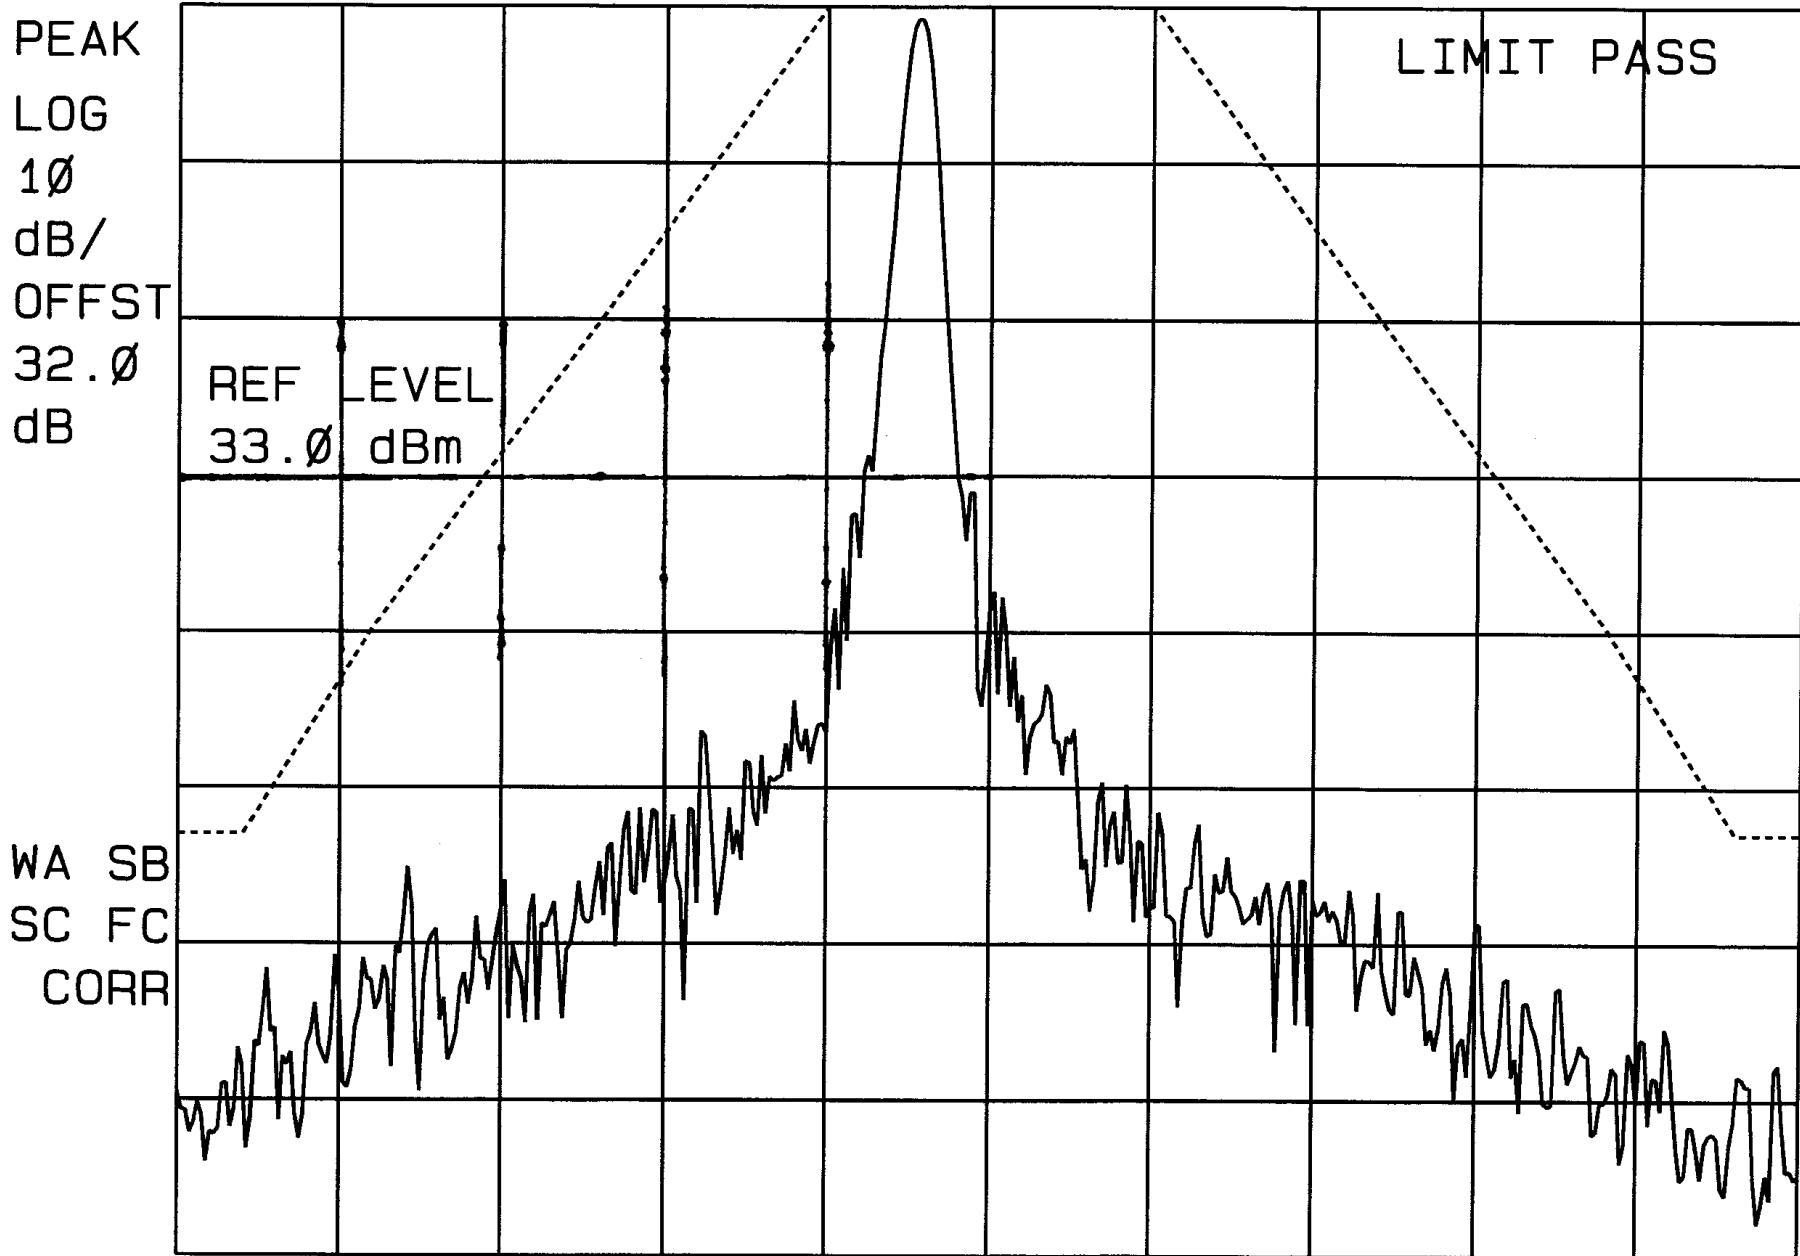

CENTER 899.00000 MHz

SPAN 25.00 kHz

#RES BW 300 Hz

VBW 300 Hz


SWP 1.00 sec

01:48:57 JUN 11, 2003

IX260 RIM902M OCCUPIED BANDWIDTH MODULATED

REF 33.0 dBm

AT 20 dB

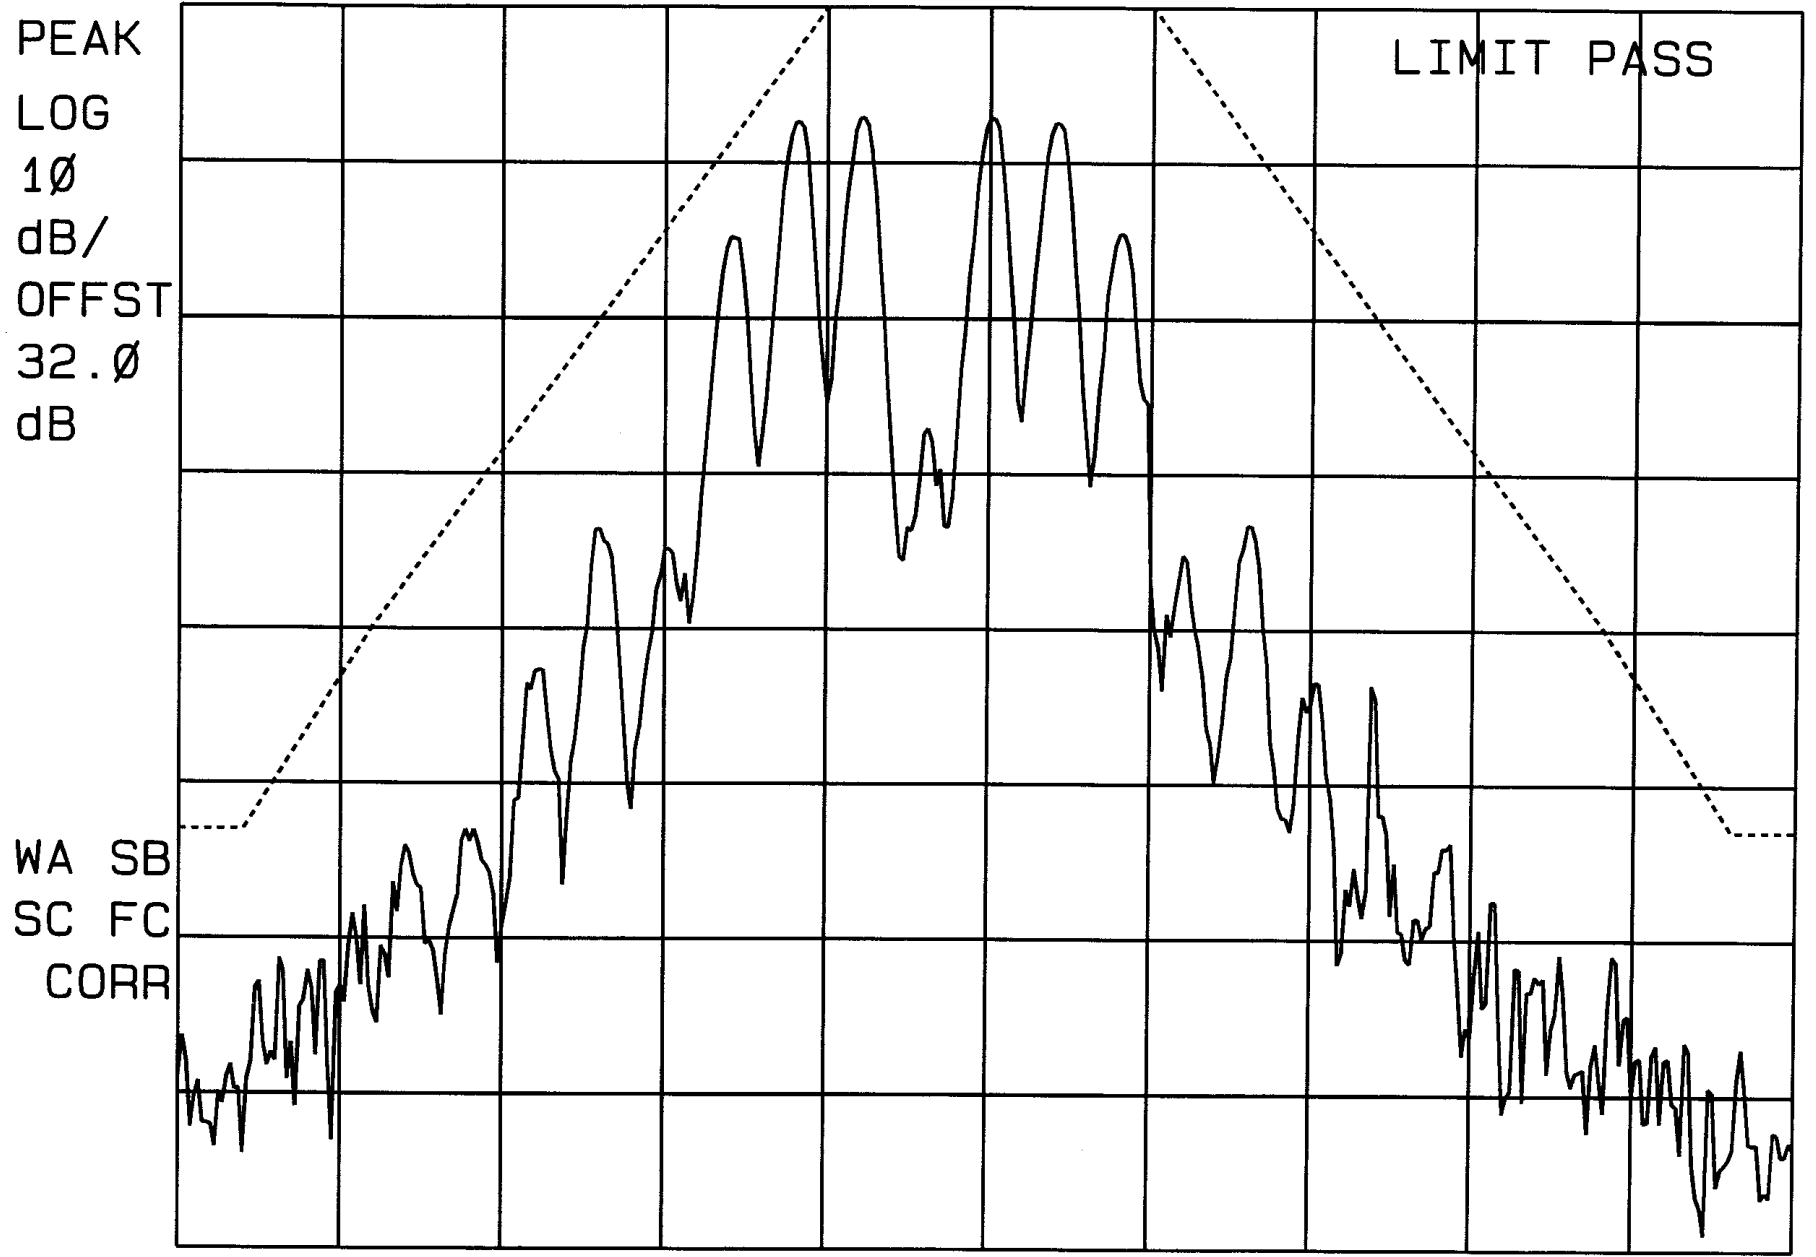

CENTER 899.00000 MHz

SPAN 25.00 kHz

#RES BW 300 Hz

VBW 300 Hz

SWP 1.00 sec