

REV.	REF.	DESCRIPTION	INPUT BY	DATE
A	2390	Release	S. HOUCK	02/18/02



NOTICE OF PROPRIETARY INFORMATION


Information contained herein is proprietary and is the property of Itronix Corporation. Where furnished with a proposal, the recipient shall use it solely to evaluate the proposal. Where furnished to a customer, it shall be used solely for purposes of inspection, installation, or maintenance. Where furnished to a supplier, it shall be used solely in the performance of work contracted by this company. The information shall not be used or disclosed by the recipient for any other purpose whatsoever.

APPROVALS		ITRONIX CORPORATION S. 801 STEVENS AVE. P.O. BOX 0179 SPOKANE, WA 99210-0179
ORIGINATOR David McLean	DATE 11/02/01	PART DESCRIPTION: VEHICLE ANTENNA, MOBILE, 2.4GHZ, MAXC SERIES
ENGINEERING	DATE	
CHECKER	DATE	
MANUFACTURING JOHN HENNESSY	DATE 04-16-02	Drawing Number 46-0107-000
		PAGE 1 OF 3

- 1.0 **DESCRIPTION:**
Mobile Antenna, 2.4GHz, ISM.
- 2.0 **APPLICABLE DOCUMENTS AND REFERENCES:**
MANUFACTURER'S SPECIFICATION: MaxRad Website:
<http://www.maxrad.com/>
- 3.0 **MECHANICAL REQUIREMENTS:**
- 3.1 Height (For Reference Only): -001: 5.25"
-002: 7.5"
- 3.2 Radiator Material: Stainless steel with a bright finish (MAXC) or with black finish (BMAXC).
- 3.3 Antenna Base: Molded polymer with a plated brass insert and a spring-loaded, brass contact pin ((B)MAXC models)
- 3.4 Mounting (For Reference Only): Custom Mounts Itronix p/n 46-0103-XXX and 46-0104-XXX. Others available from Maxrad.
- 3.5 Rod Ferrule: 5/16" – 24 thread: bright or black chrome plated brass
- 3.6 Weight: -001: 0.12 lbs.
-002: 0.16 lbs.
- 4.0 **ELECTRICAL REQUIREMENTS:**
- 4.1 VSWR: <1.5:1
- 4.2 Nominal Impedance: 50Ω
- 4.3 Antenna Type: Collinear array
- 4.4 Operating Frequency Range: 2.4 to 2.4835 GHz
- 4.5 Factory Tuned Frequency: 2.45 GHz
- 4.6 Gain: -001: 3dBi
-002: 5dBi
- 4.7 Maximum Power: 100 W
- 5.0 **ENVIRONMENTAL REQUIREMENTS:**
- 5.1 Temperature: -40°C to +85°C
- 5.2 Humidity: 0% to 100% Relative Humidity
- 6.0 **SAFETY REQUIREMENTS:** N/A
- 7.0 **MARKING REQUIREMENTS:**
The bulk shipping container must bear the Manufacturer's name and part number.
- 8.0 **PACKAGING REQUIREMENTS:**
Packaging of components shall be such that no damage will occur to the component during shipment.
- 9.0 **ACCEPTABILITY REQUIREMENTS:**
These units must meet inspection requirements. The antenna bag should contain the BMAX molded polymer base, a plated spring-loaded contact pin, and a 0.100" diameter stainless steel whip antenna.

10.0 **MANUFACTURER AND MANUFACTURER'S PART NUMBER:**
 See Section 9.0 for a list of parts included.

Part Number	Manufacturer	Manufacturer's Part Number
46-0107-001	MaxRad	MAXC24503 BMAXC24503
46-0107-002	MaxRad	MAXC24505 BMAXC24505

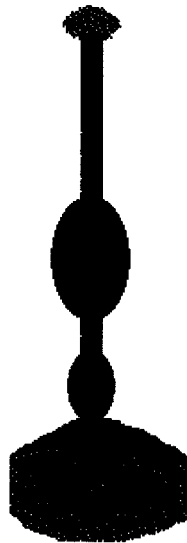

D46\PICT\107_1.TIF

Figure 1: 46-0107-001 Antenna Likeness (For Reference Only)



D46\PICT\107_2.TIF

Figure 2: 46-0107-002 Antenna Likeness (For Reference Only)