

B.7 SETUP PHOTOGRAPHS


Photograph B.7-1 - Bilog Receive Antenna with DUT Swivel Dipole Antenna Configuration



Photograph B.7-2 - Horn Receive Antenna with DUT Swivel Dipole Antenna Configuration



Photograph B.7-3 - Dipole Substitution Setup

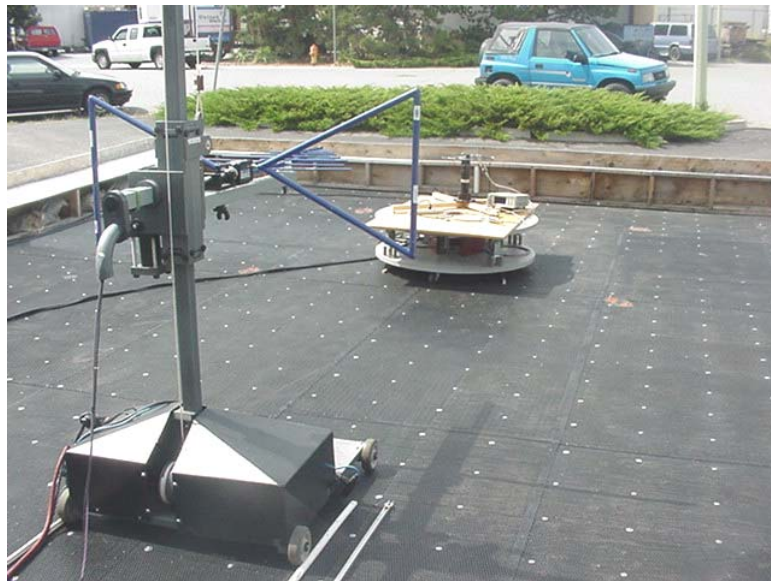

Photograph B.7-4 - Horn Substitution Setup



Test Report Serial No.:	061506KBC-T758-E24G	Report Issue Date:	August 25, 2006
Date(s) of Evaluation:	June 21 - July 27, 2006	Report Revision No.:	Revision 1.0
Test Standard(s):	FCC 47 CFR §2, §22H, §24E	Industry Canada RSS-132, RSS-133	
Test Lab Registration(s):	FCC Lab Registration #714830	Industry Canada Lab File #3874	

SETUP PHOTOGRAPHS (CONTINUED)

Photograph B.7-5 - Bilog Receive Antenna with DUT Vehicle-Mount Antenna Configuration



Photograph B.7-6 - Horn Receive Antenna with DUT Vehicle-Mount Antenna Configuration



Photograph B.7-7 - Dipole Substitution Setup




Photograph B.7-8 - Horn Substitution Setup



B.8 DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high channels transmitting in each of the modulation types for both the cellular and PCS bands at maximum power level as described in Appendix A. Each antenna configuration (External Swivel Dipole and Vehicle-Mount) was evaluated.

Company:	Itronix Corporation	FCC ID:	KBCIX260PNL3AC860	Model(s):	IX260PNL3AC860	
DUT Type:	Laptop PC with Sierra Wireless AC860 Dual-Band GSM/GPRS/EDGE/UMTS PCMCIA Modem					
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 51