

## 6.6. FREQUENCY STABILITY @ FCC 2.1055 & 90.213

### 6.6.1. Limits @ FCC 90.213

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.213 for specification details.

FREQUENCY RANGE (MHz)	FIXED & BASE STATIONS (ppm)	MOBILE STATIONS (ppm)
896-901	0.1	$\leq 2$ W 1.5


### 6.6.2. Method of Measurements

Refer to Exhibit 8, § 8.3 of this report for measurement details

### 6.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird	..	...	DC – 22 GHz
Temperature & Humidity Chamber	Tenney	T5	9723B	-40° to +60° C range

### 6.6.4. Test Arrangement

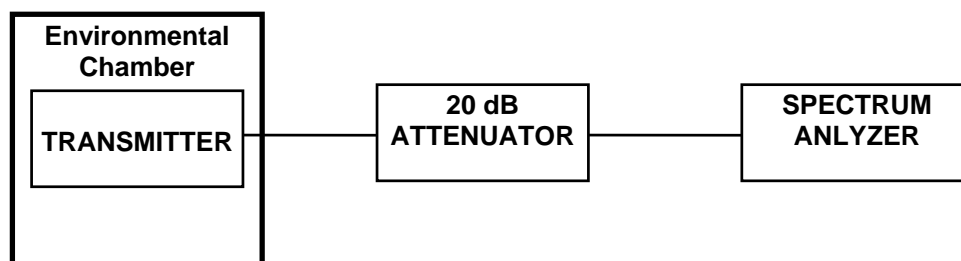

### 6.6.5. Test Data

<b>Product Name:</b>	<b>Boomer-III Mobitex Wireless OEM Modem Module</b>
<b>Model No.:</b>	<b>BM3-900M</b>
<b>Center Frequency:</b>	896 MHz
<b>Full Power Level:</b>	33 dBm
<b>Frequency Tolerance Limit:</b>	$\pm 1.5$ ppm or $\pm 1344$ Hz at 896 MHz
<b>Max. Frequency Tolerance Measured:</b>	-0.73 ppm or -662 Hz
<b>Input Voltage Rating:</b>	3.8 VDC

CENTER FREQUENCY & RF POWER OUTPUT VARIATION			
Ambient Temperature (°C)	Supply Voltage (Nominal)	Supply Voltage (85% of Nominal)	Supply Voltage (115% of Nominal)
	3.8 Volts	3.2 Volts	4.4 Volts
	Hz	Hz	Hz
-30	515	N/A	N/A
-25	233	N/A	N/A
-20	-304	N/A	N/A
-15	-614	N/A	N/A
-10	-662	N/A	N/A
-5	-586	N/A	N/A
0	-456	N/A	N/A
+5	-273	N/A	N/A
+10	-166	N/A	N/A
+15	-79	N/A	N/A
+20	-6	+14	+22
+25	-7	N/A	N/A
+30	-56	N/A	N/A
+35	-75	N/A	N/A
+45	-64	N/A	N/A
+50	-3	N/A	N/A
+55	55	N/A	N/A
+60	185	N/A	N/A

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: WTP015QFCC90  
 October 01, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)