



**FCC CFR47 PART 22 SUBPART H  
AND PART 24 SUBPART E  
CERTIFICATION**

**TEST REPORT  
FOR**

**EXPRESS MINI-PCI USB WIRELESS CDMA MODEM MODULE**

**MODEL NUMBER: MC5720**

**FCC ID: N7N-MC5720**

**REPORT NUMBER: 05U3389-1**

**ISSUE DATE: MAY 02, 2005**

*Prepared for*  
**SIERRA WIRELESS  
2290 COSMOS CT.  
CARLSBAD CALIFORNIA 92009  
U.S.A**

*Prepared by*  
**COMPLIANCE ENGINEERING SERVICES, INC.  
d.b.a.  
COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**  
**LAB CODE:200065-0**

Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
-------------	------------------	-------------------

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT .....	6
5.2. MAXIMUM OUTPUT POWER .....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE .....	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. OCCUPIED BANDWIDTH .....	10
7.2. RF POWER OUTPUT.....	17
7.3. SPURIOUS EMISSION AT ANTENNA TERMINAL.....	20
7.4. FIELD STRENGTH OF SPURIOUS EMISSION .....	35
7.5. MAXIMUM PERMISSIBLE EXPOSURE .....	40
7.6. FREQUENCY STABILITY.....	43
<b>8. SETUP PHOTOS.....</b>	<b>47</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SIERRA WIRELESS  
2290 COSMOS CT.  
CARLSBAD CALIFORNIA 92009  
U.S.A

**EUT DESCRIPTION:** EXPRESS MINI-PCI USB WIRELESS CDMA MODEM MODULE

**MODEL:** MC5720

**SERIAL NUMBER:** 10505

**DATE TESTED:** APRIL 25 TO 28, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22 SUBPART H	NO NON-COMPLIANCE NOTED
FCC PART 24 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



---

THU CHAN  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

---

VIEN TRAN  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603A (2001), ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15 and FCC CFR 47 Part 22H and 24E.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a dual band 800 / 1900MHz Express Mini-PCI USB Wireless CDMA Modem Module.

The module is manufactured by Flextronics Mfg. (HK) Ltd.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted average and peak output powers as follows:

824 to 849 MHz Authorized Band

Frequency Range (MHz)	Modulation	Conducted Average Power (dBm)	Conducted Average Power (mW)	Conducted Peak Power (dBm)	Conducted Peak Power (mW)
824.7 - 848.31	CDMA	25.58	361.41	29.84	963.83

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	Conducted Average Power (dBm)	Conducted Average Power (mW)	Conducted Peak Power (dBm)	Conducted Peak Power (mW)
1851.25 - 1908.75	PCS	25.72	373.25	29.65	922.57

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Monopole 2x antenna, with a maximum allowed gain of 4.65 dBi for Cellular band and 3.35 dBi for PCS band.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was SPR  
The test utility software used during testing was rev 2.00.3

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at mid-channel 836.5 MHz for 800 MHz and mid-channel 1880.0 MHz. for 1900 MHz.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
DC Power Supply	HP	E3610A	NA	NA


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	NA
2	DC	1	DC	Un-shielded	0.5m	NA


### TEST SETUP

The EUT is installed as a stand-alone device during the tests. The Wireless Communication test set exercised the EUT.

### CONDUCTED TEST SETUP DIAGRAM

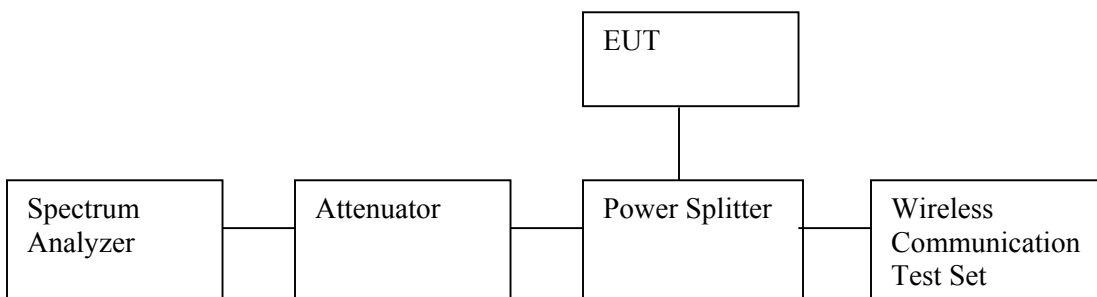

**RADIATED TEST SETUP DIAGRAM**

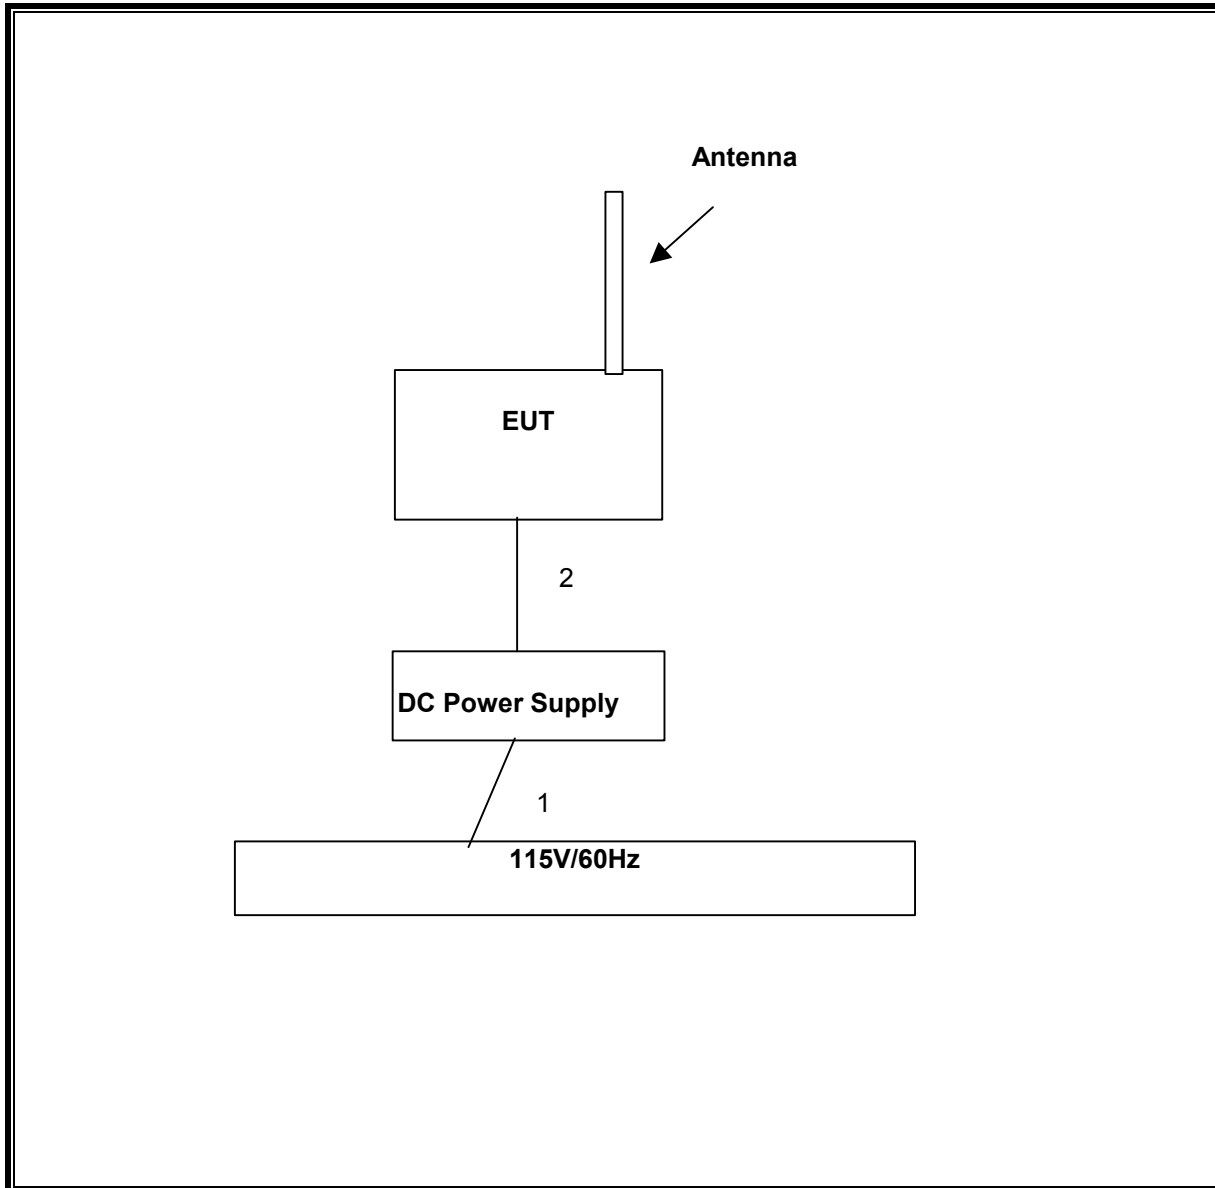



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
SA Display Section 2	HP	85662A	2816A16696	5/24/05
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/24/05
SA RF Section, 1.5 GHz	HP	85680B	2814A04227	2/22/05
Preamplifier, 1300MHz	HP	8447D	2944A06833	8/17/05
30MHz--- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	9/22/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	9/12/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	9/12/05
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	8/17/05
Wireless Communication Test Set	Agilent	8960 Series10	GB43344480	9/3/05
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/06
Dipole	EMCO	3121C-DB2	22435	3/25/06
Signal Generator 2 -40 GHz	R & S	SMP04	DE 34210	5/2/05
Signal Generator, 1024 MHz	R & S	SMY01	DE 12311	4/11/06
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/06
DC Power Supply	HP	E3610A	N/A	NCR
Power Splitter	HP	11667B	N/A	N/A
Spectrum Analyzer	HP	E4446A	US42510266	08/25/05

## 7. LIMITS AND RESULTS

### 7.1. OCCUPIED BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the -26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal -26 dB bandwidth function is utilized.

#### RESULTS

No non-compliance noted:


#### 800MHZ CELL CDMA Modulation


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	824.7	1.363
Middle	836.5	1.392
High	848.3	1.372


#### 1900MHz PCS Modulation

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	1851.25	1.400
Middle	1880	1.415
High	1908.75	1.406


**800MHz CELL CDMA 26 dB BANDWIDTH**

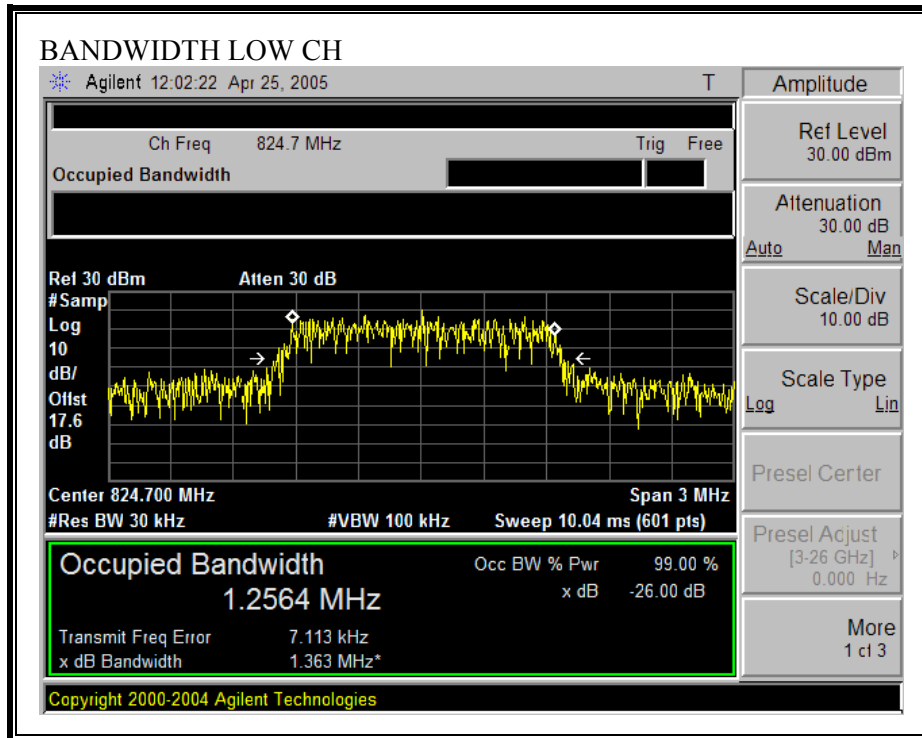


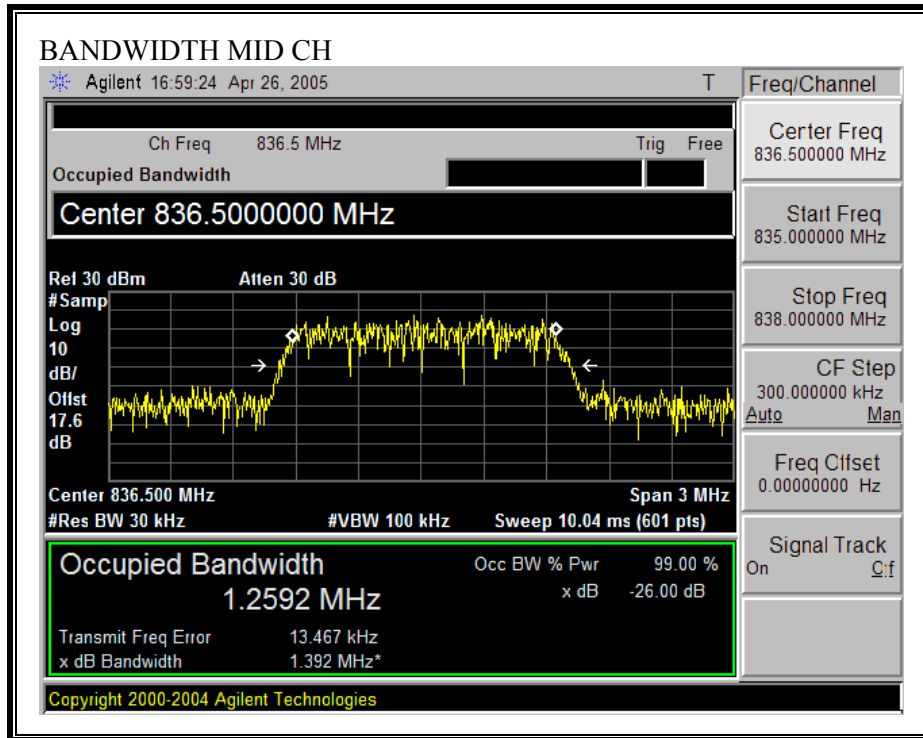


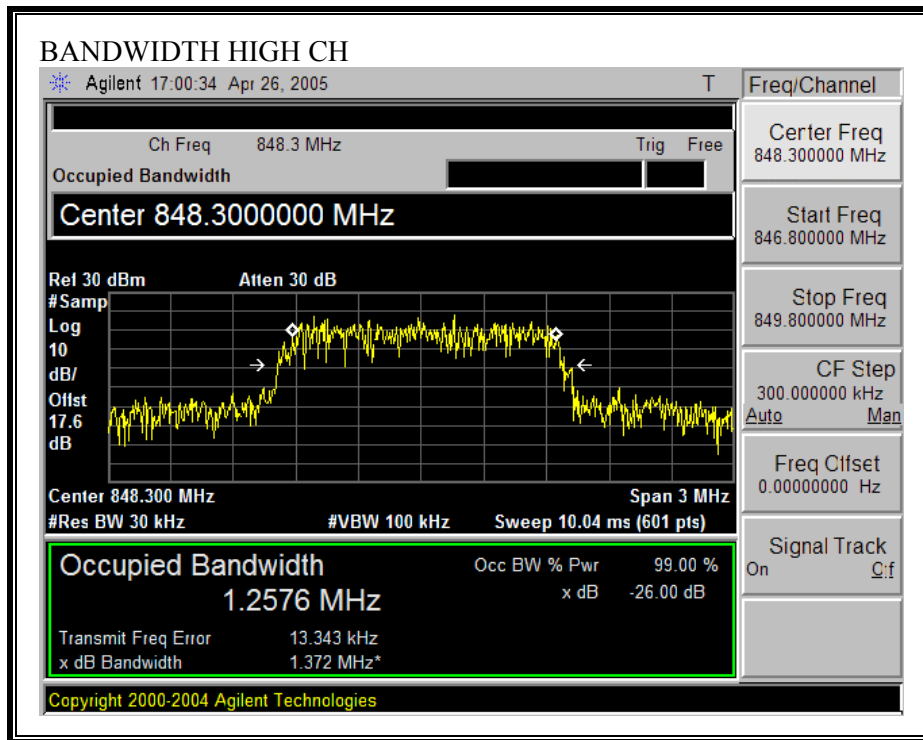

**1900MHz PCS CDMA 26 dB BANDWIDTH**

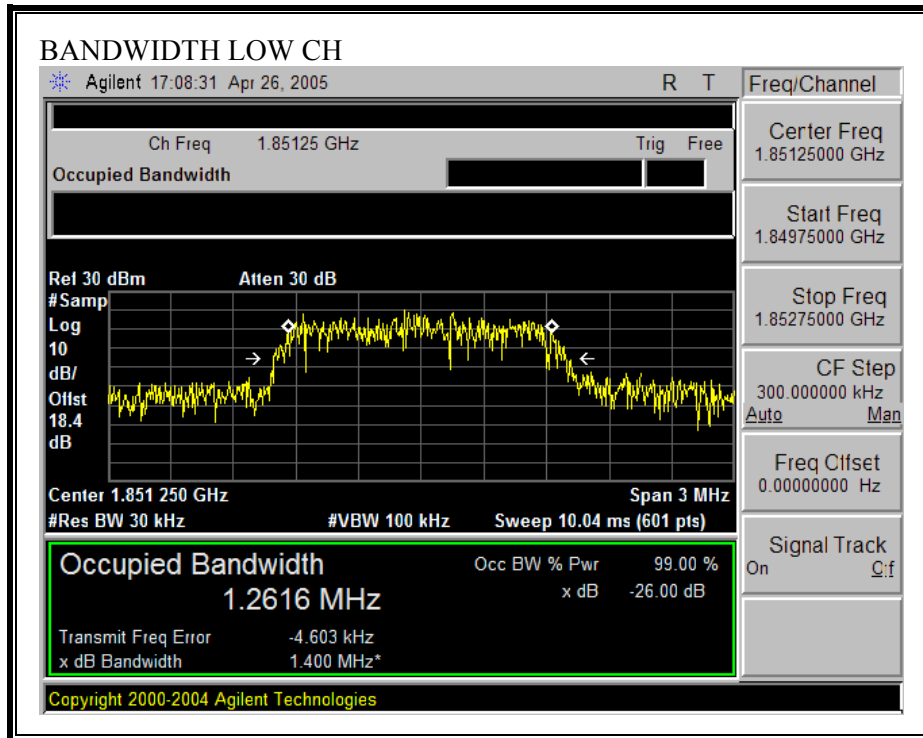

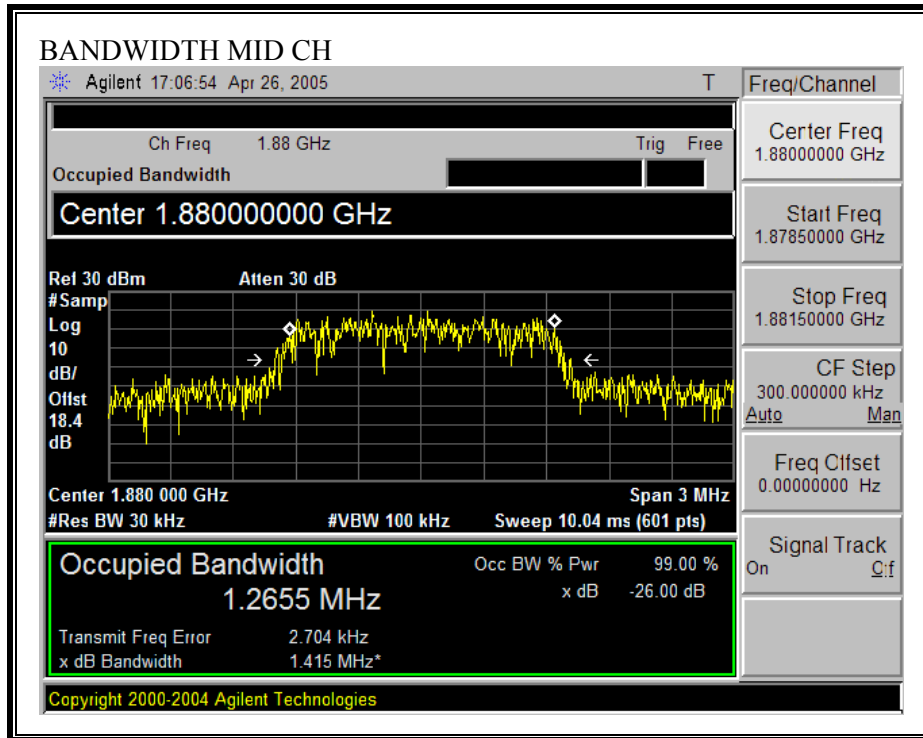

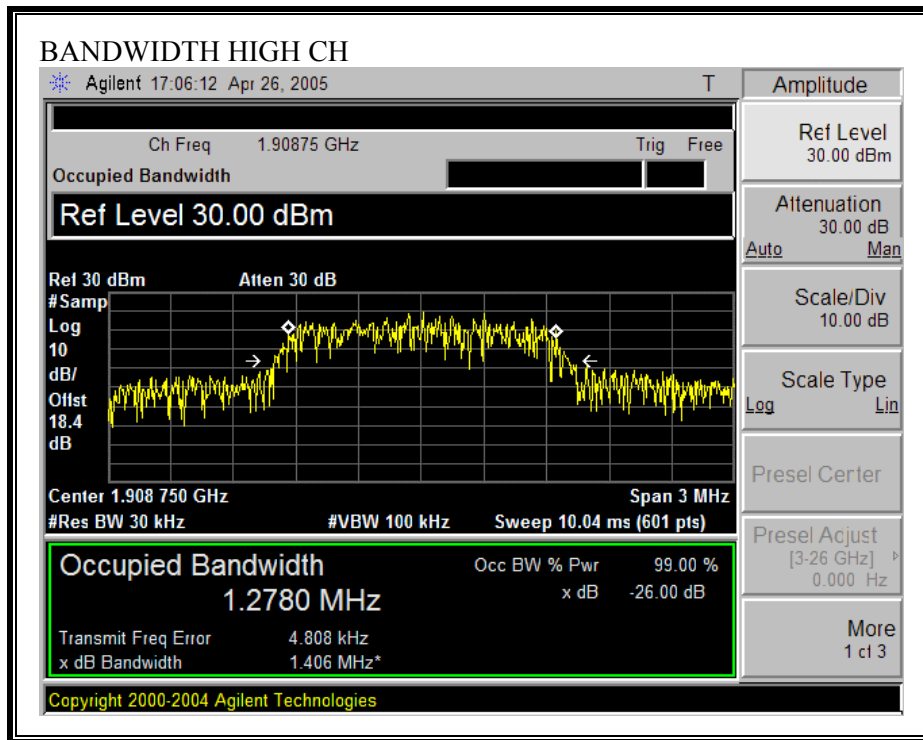



## 7.2. RF POWER OUTPUT

### LIMIT

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.  
24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17  
The transmitter output is connected to the spectrum analyzer.

### RESULTS

No non-compliance noted.

#### 800 MHz CELL CDMA Modulation

Channel	Frequency (MHz)	ERP Peak Power (dBm)	ERP Peak Power (mW)
Low	824.7	26.70	467.74
Middle	836.5	27.20	524.81
High	848.3	26.40	436.52

#### 1900 MHz PCS CDMA Modulation

Channel	Frequency (MHz)	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low	1851.25	31.60	1445.44
Middle	1880.00	32.30	1698.24
High	1908.75	29.40	870.96

NOTE: RBW=VBW=3MHz.

**CDMA Output Power (ERP)**

04/27/05 <b>High Frequency Substitution Measurement</b> Compliance Certification Services, Morgan Hill 5m Chamber Site  Test Engr: Vien Tran Project #:05U3389 Company:Sierra Wireless EUT Descip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module EUT M/N: MC5720 Test Target:FCC 22 / RSS-129 Mode Oper:Tx, 800MHz Band Fundamental Substitution_Worst Case  Test Equipment: <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">Bilog Antenna</div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">Cable</div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">Pre-amplifer 8447D</div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">5m Chamber Sunol Bilog ▾</div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">5m Chamber Cable ▾</div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;"></div> <div style="border: 1px solid black; padding: 2px; background-color: #e0f7fa;">ERP ▾</div> </div>									
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch</b>									
824.70	96.9	V	23.5	0.8	0.0	22.7	38.5	-15.8	
824.70	99.2	H	27.5	0.8	0.0	26.7	38.5	-11.8	
<b>Mid Ch</b>									
836.50	101.6	V	27.8	0.6	0.0	27.2	38.5	-11.3	
836.50	97.3	H	25.6	0.6	0.0	25.0	38.5	-13.5	
<b>High Ch</b>									
848.30	96.7	Y	23.5	0.8	0.0	22.7	38.5	-15.8	
848.30	98.9	H	27.2	0.8	0.0	26.4	38.5	-12.1	

NOTE: RBW=VBW=3MHz

**PCS Output Power (EIRP)**

04/27/05 **High Frequency Substitution Measurement**  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: Vien Tran  
 Project #:05U3389  
 Company:Sierra Wireless  
 EUT Descrip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module  
 EUT M/N: MC5720  
 Test Target:FCC 24 / RSS-133  
 Mode Oper:Tx, 1900MHz Band\_Fundamental Substitution (EIRP)

**Test Equipment:**

EMCO Horn 1-18GHz      Horn > 18GHz      Limit  
 T73; S/N: 6717 @3m      EIRP

Hi Frequency Cables  
 (2 ft)     (2 ~ 3 ft)     (4 ~ 6 ft)     (12 ft)

Pre-amplifer 1-26GHz      Pre-amplifer 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>LOW CH</b>										
1.851	100.3	V	25.2	1.4	7.8	5.7	31.6	33.0	-1.4	
1.851	96.8	H	19.2	1.4	7.8	5.7	25.7	33.0	-7.3	
<b>MID CH</b>										
1.880	100.6	V	25.8	1.4	7.9	5.7	32.3	33.0	-0.7	
1.880	94.0	H	17.4	1.4	7.9	5.7	23.9	33.0	-9.1	
<b>HI CH</b>										
1.909	98.3	V	22.8	1.4	7.9	5.8	29.4	33.0	-3.6	
1.909	93.8	H	17.2	1.4	7.9	5.8	23.8	33.0	-9.2	

NOTE: RBW=VBW=3MHz

### **7.3. SPURIOUS EMISSION AT ANTENNA TERMINAL**

#### **LIMIT**

§22.917 (e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### **TEST PROCEDURE**


ANSI / TIA / EIA 603 Clause 3.2.12, FCC 22.917 (h), & FCC 24.238 (b)

#### **RESULTS**


No non-compliance noted.

### 800MHz CELL CDMA MODULATION RESULTS


#### CDMA Modulation: Low Channel, Out-Of-Band Emissions

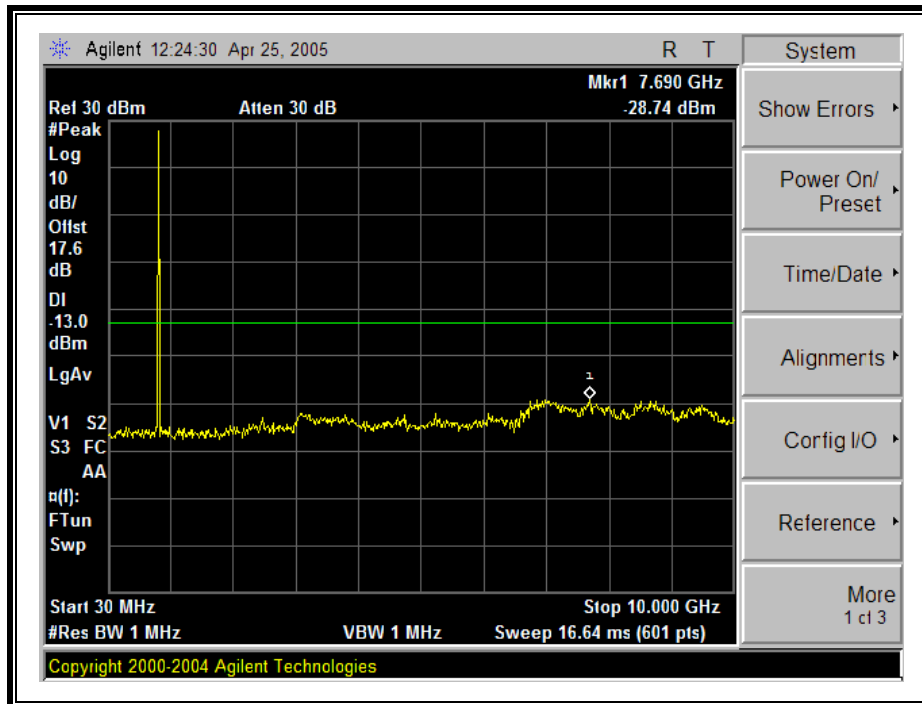


**CDMA Modulation: Mid Channel, Out-Of-Band Emissions**

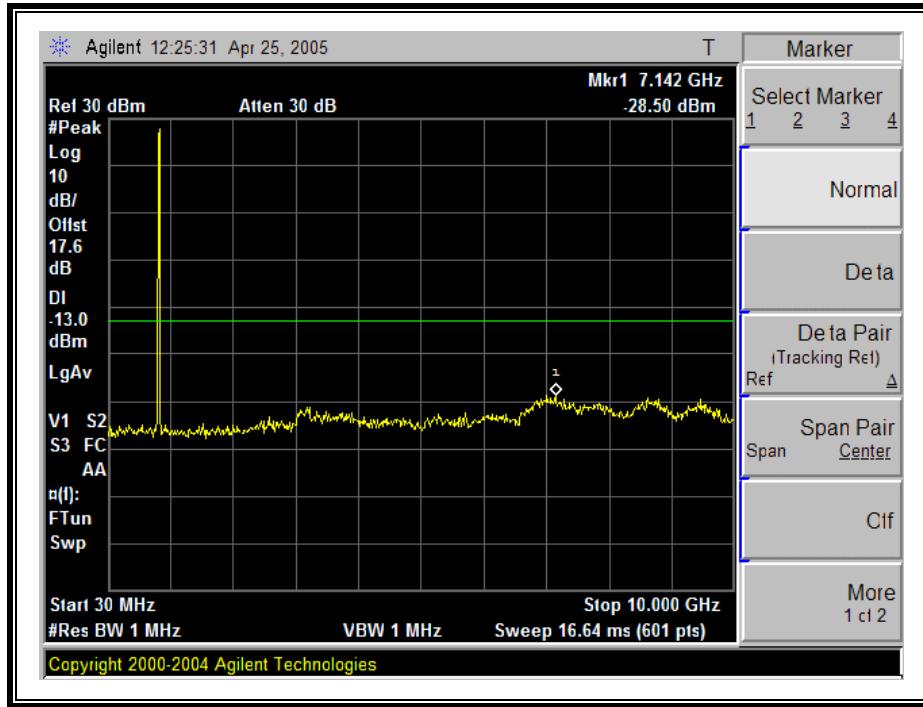

**CDMA Modulation: High Channel, Out-Of-Band Emissions**

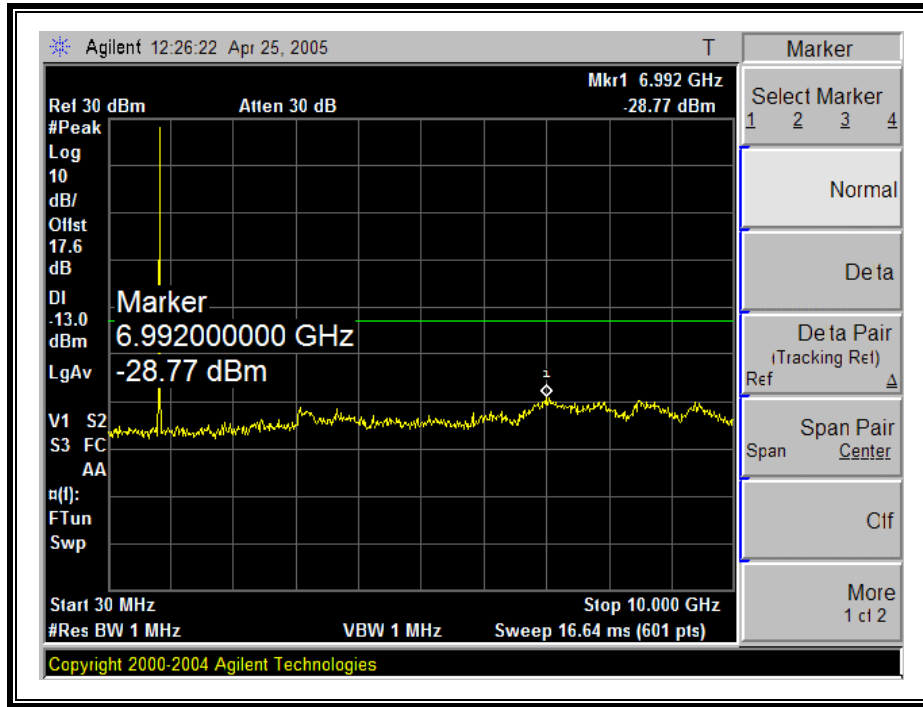


**800MHz CELL CDMA Modulation: Low Channel Band Edge**

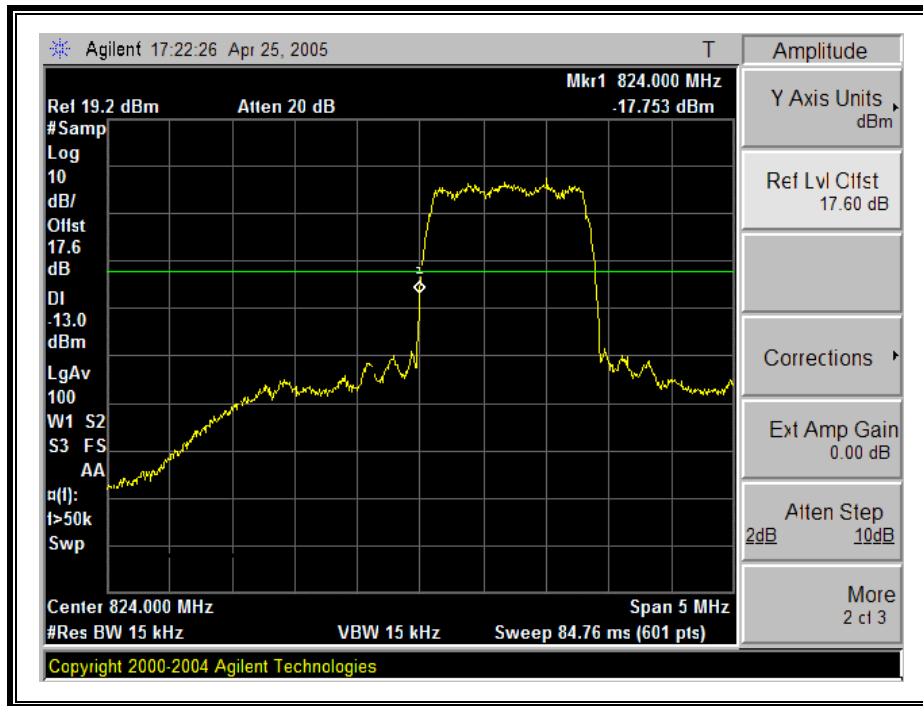




**800MHZ CELL CDMA Modulation: High Channel Band Edge**

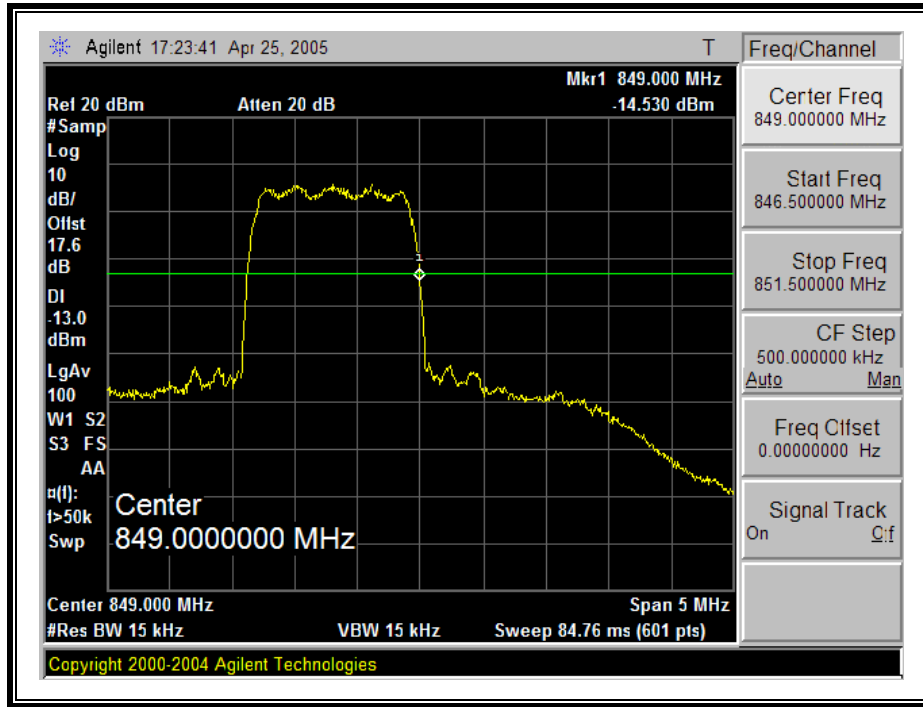


**800MHZ CELL CDMA Mobile Emissions in Base Frequency Range**

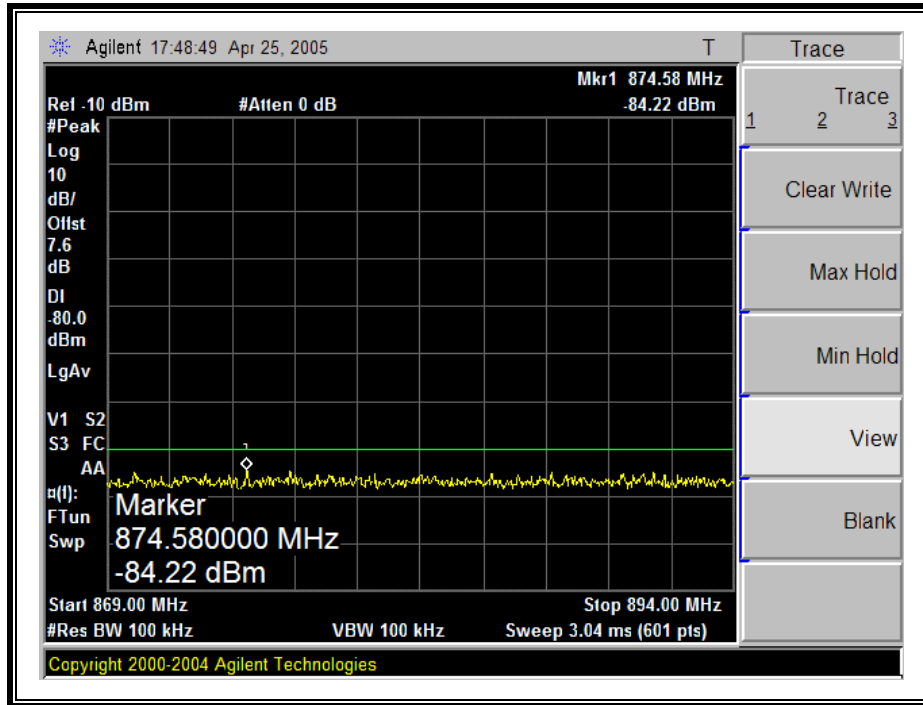


### 1900MHZ PCS CDMA MODULATION RESULTS


#### PCS CDMA Modulation: Low Channel Out-Of-Band Emissions – 30 MHz to 2.5 GHz

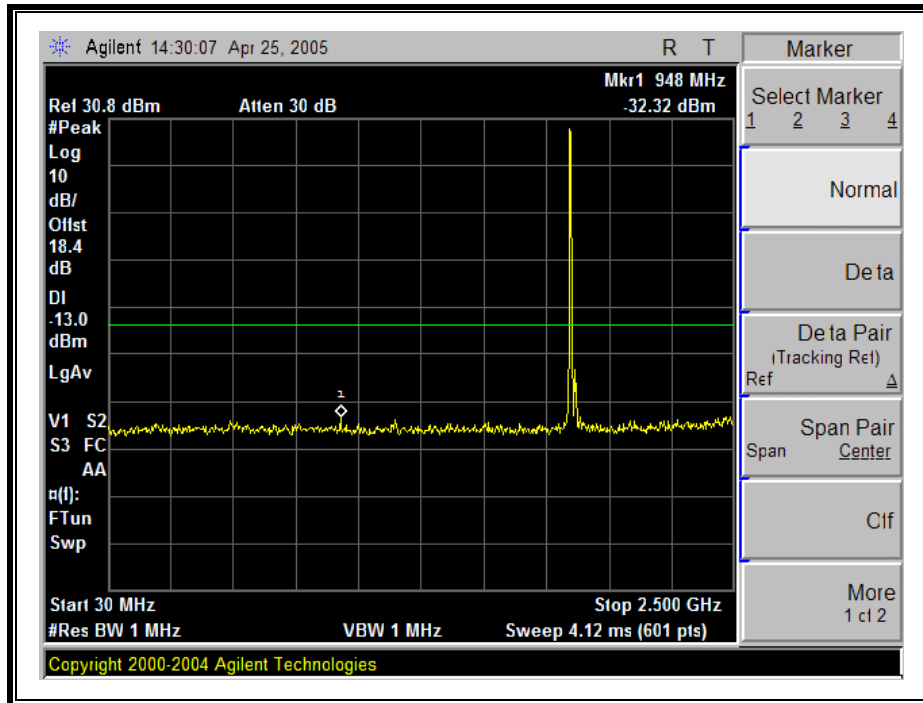


**PCS CDMA Modulation: Low Channel Out-Of-Band Emissions – 2.5 GHz to 20 GHz**

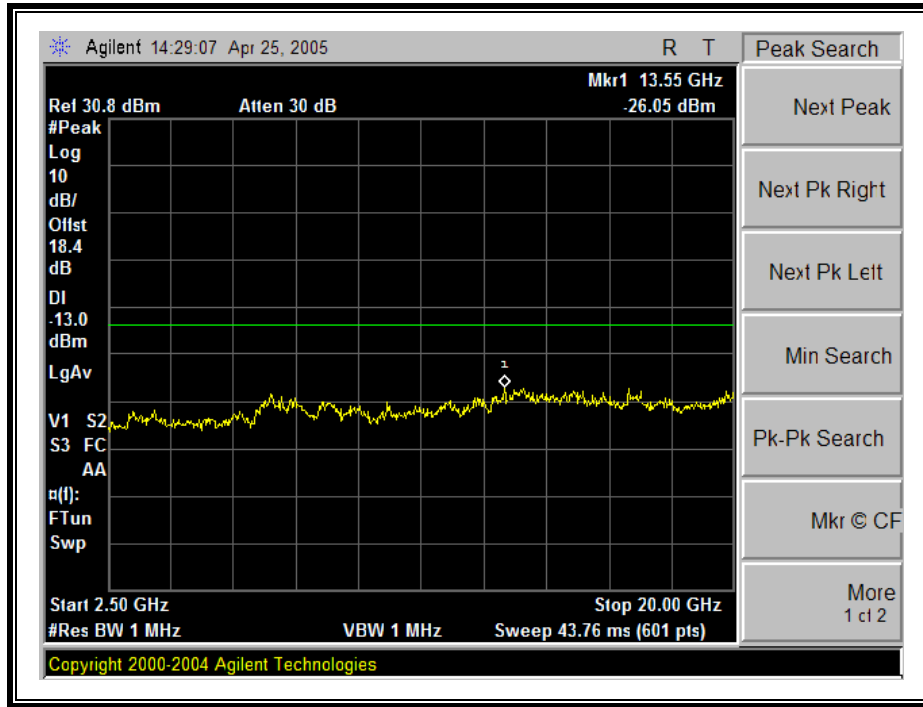


**PCS CDMA Modulation: Mid Channel Out-Of-Band Emissions – 30 MHz to 2.5 GHz**

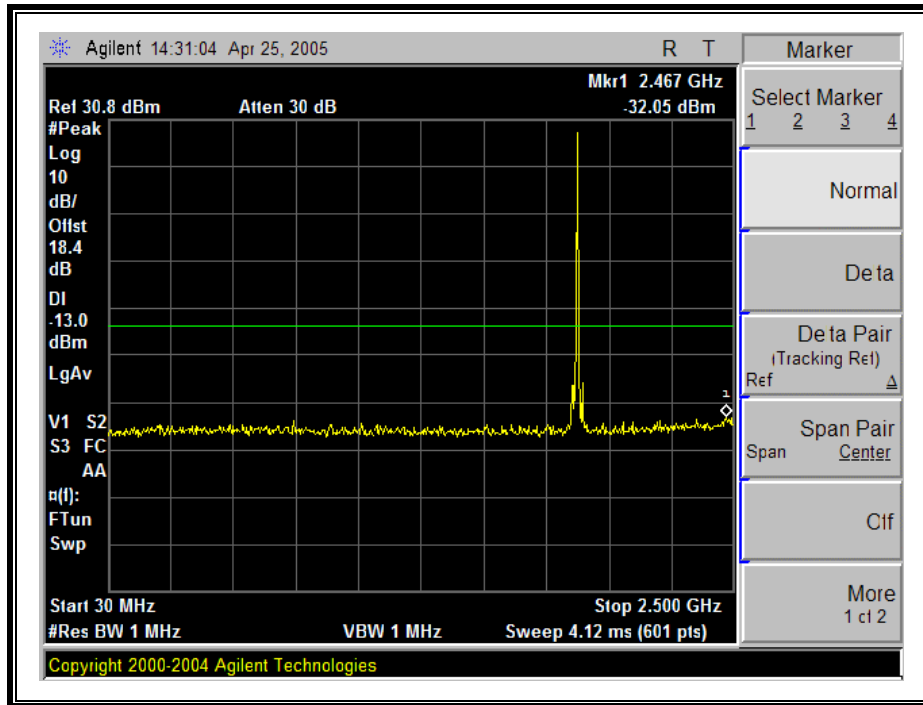


**PCS CDMA Modulation: Mid Channel Out-Of-Band Emissions 2.5 GHz to 20 GHz**

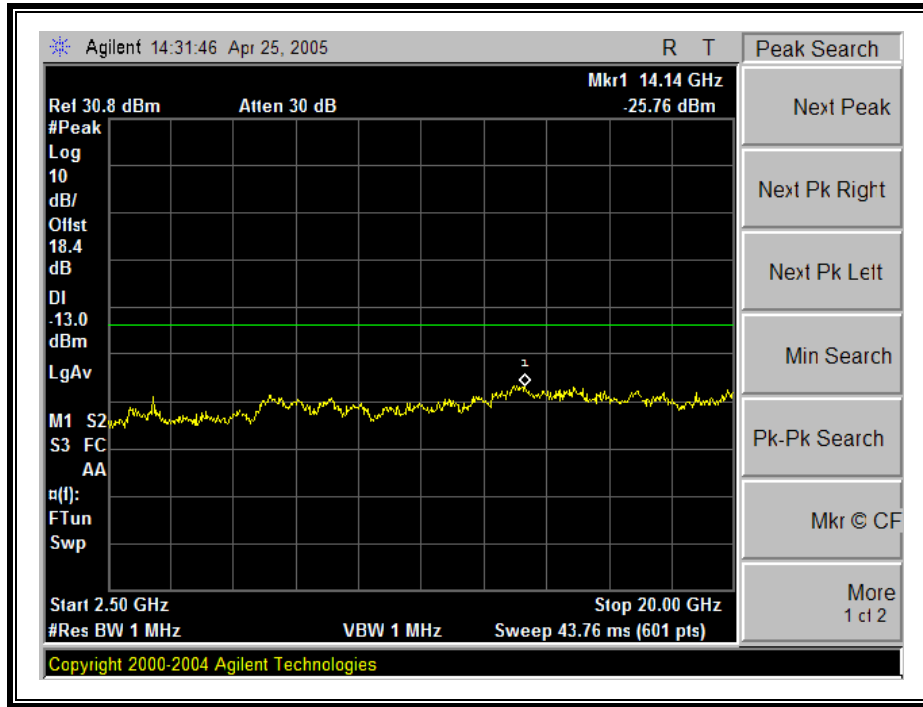

**PCS CDMA Modulation: High Channel Out-Of-Band Emissions – 30 MHz to 2.5 GHz**

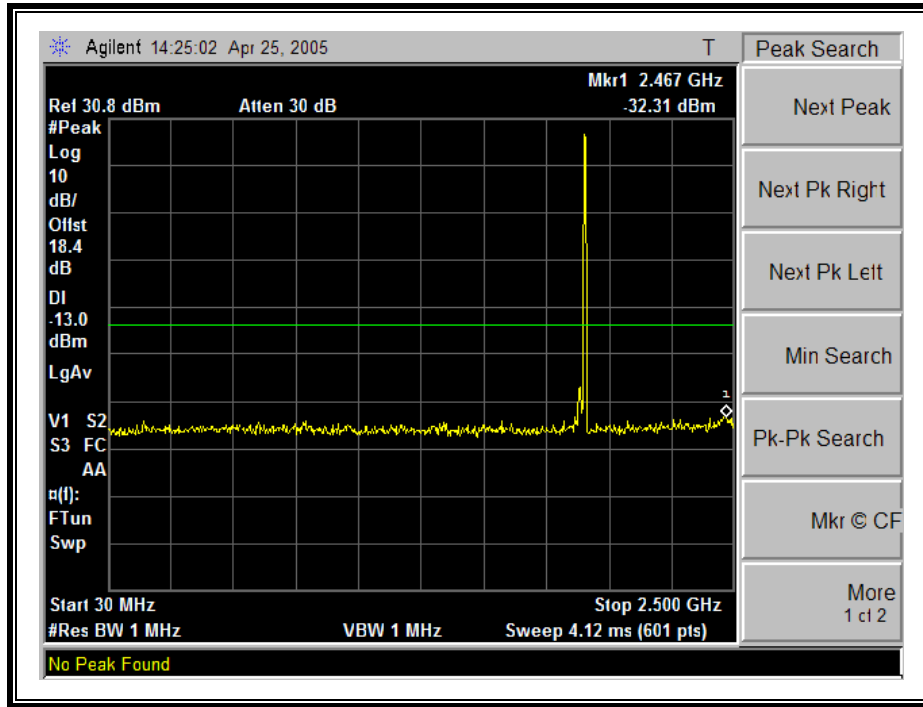


**PCS CDMA Modulation: High Channel Out-Of-Band Emissions – 2.5 GHz to 20 GHz**

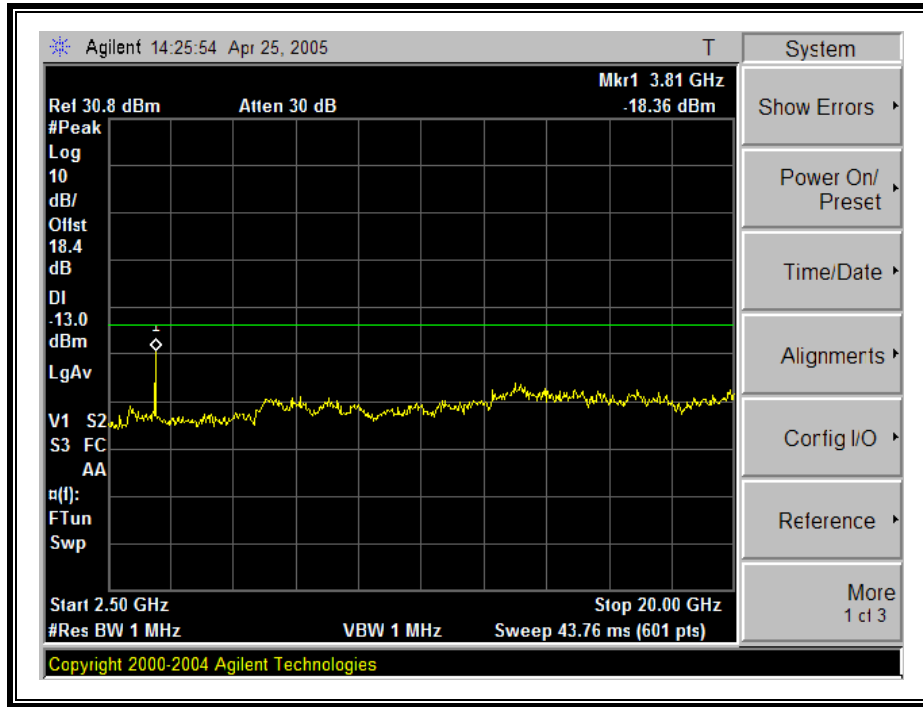




**PCS CDMA Modulation: Low Channel Band Edge**

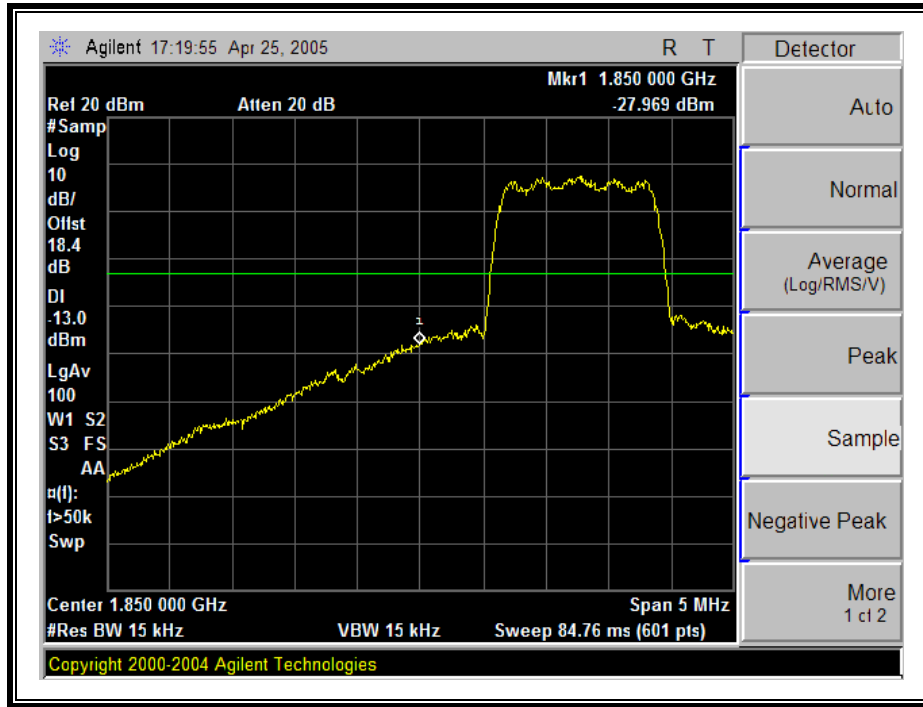

**PCS CDMA Modulation: High Channel Band Edge**

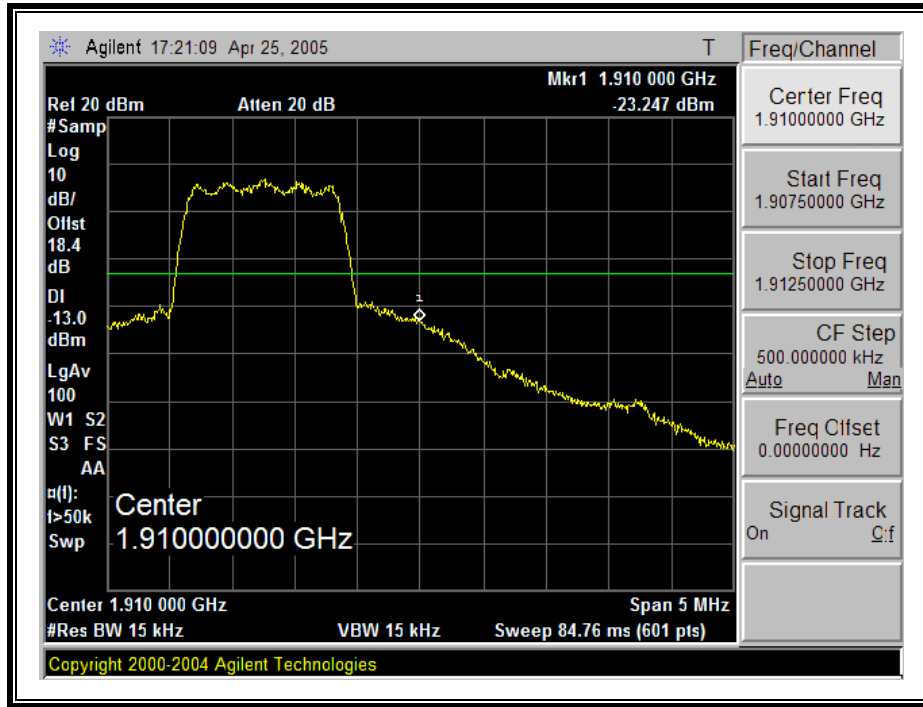

## **7.4. FIELD STRENGTH OF SPURIOUS EMISSION**

### **LIMIT**

§22.917 (e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.12, FCC 22.917 (h), & FCC 24.238 (b)

### **RESULTS**

No non-compliance noted.

**800MHz Band CDMA Spurious & Harmonic (ERP), 30-1000MHz**

04/27/05    30 - 1000MHz Substitution Measurement										
Compliance Certification Services, Morgan Hill 5m Chamber Site										
Test Engr: Vien Tran										
Project #:05U3389										
Company:Sierra Wireless										
EUT Descrip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module										
EUT M/N: MC5720										
Test Target:FCC 22 / RSS-129										
Mode Oper:Tx, 800MHz Band_Harmonic & Spur Substitution (ERP)										
<b>Test Equipment:</b>										
Bilog Antenna		Cable		Pre-amplifer 8447D		Limit				
5m Chamber Sunol Bilog		5m Chamber Cable				ERP				
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
61.40	26.0	H	-61.7	1.1	-2.1	-4.3	-67.1	-13.0	-54.1	
815.00	25.3	H	-45.6	3.4	6.7	4.5	-44.5	-13.0	-31.5	
855.60	34.3	H	-36.1	3.5	6.7	4.6	-35.1	-13.0	-22.1	
61.40	25.2	V	-62.8	1.1	-2.1	-4.3	-68.2	-13.0	-55.2	
815.00	26.7	V	-43.8	3.4	6.7	4.5	-42.6	-13.0	-29.6	
855.60	3.5	V	-66.4	3.5	6.7	4.6	-65.4	-13.0	-52.4	
NO OTHER EMISSIONS WERE DETECTED ABOVE SYSTEM NOISE FLOOR										

**800MHz Band CDMA Spurious & Harmonic (ERP)**

04/27/05 High Frequency Substitution Measurement Compliance Certification Services, Morgan Hill 5m Chamber Site  Test Engr: Vien Tran Project #:05U3389 Company:Sierra Wireless EUT Descrip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module EUT M/N: MC5720 Test Target:FCC 22 / RSS-129 Mode Oper:Tx, 800MHz Band_Above 1 GHz_Harmonic & Spur Substitution_ERP  Test Equipment: <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px solid black; padding: 5px; width: 20%;">EMCO Horn 1-18GHz T73; S/N: 6717 @3m</div> <div style="border: 1px solid black; padding: 5px; width: 20%;">Horn &gt; 18GHz</div> <div style="border: 1px solid black; padding: 5px; width: 20%;">Limit FCC 22</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px solid black; padding: 5px; width: 40%;">                     Hi Frequency Cables  <input type="checkbox"/> (2 ft)                        <input type="checkbox"/> (2 ~ 3 ft)                        <input checked="" type="checkbox"/> (4 ~ 6 ft)                        <input checked="" type="checkbox"/> (12 ft)                 </div> <div style="border: 1px solid black; padding: 5px; width: 20%;">                     Pre-amplifier 1-26GHz                      T63 Miteq 646456                 </div> <div style="border: 1px solid black; padding: 5px; width: 20%;">                     Pre-amplifier 26-40GHz                 </div> </div>											
f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
<b>LOW CH</b>											
1.649	66.0	V	-40.9	2.1	8.3	6.2	-36.8	-13.0	-23.8		
2.474	67.1	V	-37.0	2.6	9.7	7.6	-32.0	-13.0	-19.0		
3.299	58.3	V	-42.6	3.0	9.8	7.7	-37.9	-13.0	-24.9		
4.124	48.9	V	-49.7	3.5	10.4	8.3	-44.9	-13.0	-31.9		
1.649	60.8	H	-45.4	2.1	8.3	6.2	-41.3	-13.0	-28.3		
2.474	63.7	H	-40.2	2.6	9.7	7.6	-35.2	-13.0	-22.2		
3.299	54.5	H	-46.3	3.0	9.8	7.7	-41.6	-13.0	-28.6		
4.124	48.9	H	-49.3	3.5	10.4	8.3	-44.5	-13.0	-31.5		
<b>MID CH</b>											
1.637	64.1	V	-42.8	2.1	8.3	6.1	-38.8	-13.0	-25.8		
2.509	65.2	V	-38.7	2.6	9.7	7.5	-33.7	-13.0	-20.7		
3.346	56.4	V	-44.3	3.1	9.9	7.7	-39.7	-13.0	-26.7		
4.182	47.0	V	-51.5	3.5	10.5	8.3	-46.6	-13.0	-33.6		
1.637	58.9	H	-47.3	2.1	8.3	6.1	-43.3	-13.0	-30.3		
2.509	61.8	H	-41.9	2.6	9.7	7.5	-36.9	-13.0	-23.9		
3.346	52.6	H	-48.0	3.1	9.9	7.7	-43.4	-13.0	-30.4		
4.182	47.0	H	-51.1	3.5	10.5	8.3	-46.3	-13.0	-33.3		
<b>HI CH</b>											
1.697	64.9	V	-41.8	2.1	8.4	6.3	-37.7	-13.0	-24.7		
2.545	66.0	V	-37.7	2.6	9.7	7.5	-32.8	-13.0	-19.8		
3.393	57.2	V	-43.4	3.1	9.9	7.7	-38.7	-13.0	-25.7		
4.242	47.8	V	-50.5	3.6	10.5	8.4	-45.7	-13.0	-32.7		
1.697	59.7	H	-46.3	2.1	8.4	6.3	-42.1	-13.0	-29.1		
2.545	62.6	H	-40.9	2.6	9.7	7.5	-36.0	-13.0	-23.0		
3.393	53.4	H	-47.1	3.1	9.9	7.7	-42.4	-13.0	-29.4		
4.242	47.8	H	-50.2	3.6	10.5	8.4	-45.4	-13.0	-32.4		
NO OTHER EMISSIONS WERE DETECTED ABOVE SYSTEM NOISE FLOOR AFTER 5th HARMONIC											

PCS Spurious & Harmonic (EIRP): 30-1000MHz

04/27/05 <b>30 - 1000MHz Substitution Measurement</b>										
Compliance Certification Services, Morgan Hill 5m Chamber Site										
Test Engr: Vien Tran										
Project #:05U3389										
Company:Sierra Wireless										
EUT Descrip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module										
EUT M/N: MC5720										
Test Target:FCC 24 / RSS-133										
Mode Oper:Tx, 1900MHz Band_Below 1 GHz_Substitution (EIRP)										
<b>Test Equipment:</b>										
Bilog Antenna			Cable			Pre-amplifer 8447D		Limit		
5m Chamber Sunol Bilog			5m Chamber Cable					EIRP		
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
61.50	22.9	H	-64.8	1.1	-2.1	-4.3	-70.2	-13.0	-57.2	
266.40	15.9	H	-65.3	2.0	6.1	3.9	-63.4	-13.0	-50.4	
61.50	22.6	V	-65.4	1.1	-2.1	-4.3	-70.8	-13.0	-57.8	
266.40	13.5	H	-67.7	2.0	6.1	3.9	-65.8	-13.0	-52.8	
NO OTHER EMISSIONS WERE DETECTED ABOVE SYSTEM NOISE FLOOR										

PCS Spurious & Harmonic (EIRP):

04/27/05 High Frequency Substitution Measurement											
Compliance Certification Services, Morgan Hill 5m Chamber Site											
Test Engr: Vien Tran											
Project #:05U3389											
Company:Sierra Wireless											
EUT Descrip.: Express Mini PCI USB Wireless Dual band 800/1900MHz CDMA Modem Module											
EUT M/N: MC5720											
Test Target:FCC 24 / RSS-133											
Mode Oper:Tx, 1900MHz Band_Above 1 GHz_Harmonic & Spur Substitution (EIRP)											
<b>Test Equipment:</b>											
EMCO Horn 1-18GHz			Horn > 18GHz				Limit				
T73; S/N: 6717 @3m							FCC 24				
Hi Frequency Cables											
<input type="checkbox"/> (2 ft)			<input type="checkbox"/> (2 ~ 3 ft)			<input checked="" type="checkbox"/> (4 ~ 6 ft)			<input checked="" type="checkbox"/> (12 ft)		
Pre-amplifier 1-26GHz						Pre-amplifier 26-40GHz					
T63 Miteq 646456											
f GHz	SA reading (dBUV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
<b>LOW CH</b>											
3.703	57.8	V	-41.9	3.3	10.1	8.0	-35.0	-13.0	-22.0		
5.554	65.0	V	-29.4	4.3	11.0	8.8	-22.7	-13.0	-9.7		
7.405	62.2	V	-28.5	4.8	11.7	9.5	-21.6	-13.0	-8.6		
9.256	43.9	V	-45.2	5.4	12.2	10.0	-38.4	-13.0	-25.4		
3.703	52.8	H	-46.8	3.3	10.1	8.0	-40.0	-13.0	-27.0		
5.554	60.7	H	-32.7	4.3	11.0	8.8	-26.0	-13.0	-13.0		
7.405	57.2	H	-32.7	4.8	11.7	9.5	-25.8	-13.0	-12.8		
9.256	42.7	H	-46.4	5.4	12.2	10.0	-39.6	-13.0	-26.6		
<b>MID CH</b>											
3.760	60.6	V	-38.9	3.3	10.2	8.0	-32.1	-13.0	-19.1		
5.640	67.8	V	-26.5	4.3	11.1	8.9	-19.8	-13.0	-6.8		
7.520	65.0	V	-25.3	4.9	11.6	9.5	-18.6	-13.0	-5.6		
9.400	46.7	V	-42.3	5.4	12.3	10.1	-35.5	-13.0	-22.5		
3.760	55.6	H	-43.9	3.3	10.2	8.0	-37.0	-13.0	-24.0		
5.640	63.5	H	-29.8	4.3	11.1	8.9	-23.0	-13.0	-10.0		
7.520	60.0	H	-29.5	4.9	11.6	9.5	-22.8	-13.0	-9.8		
9.400	45.5	H	-43.5	5.4	12.3	10.1	-36.7	-13.0	-23.7		
<b>HI CH</b>											
3.818	57.6	V	-41.8	3.3	10.2	8.0	-34.9	-13.0	-21.9		
5.763	64.8	V	-29.5	4.4	11.2	9.1	-22.6	-13.0	-9.6		
7.635	62.0	V	-28.0	4.9	11.5	9.4	-21.3	-13.0	-8.3		
9.544	43.7	V	-45.2	5.5	12.4	10.2	-38.3	-13.0	-25.3		
3.818	52.6	H	-46.7	3.3	10.2	8.0	-39.8	-13.0	-26.8		
5.763	60.5	H	-32.7	4.4	11.2	9.1	-25.9	-13.0	-12.9		
7.635	57.0	H	-32.2	4.9	11.5	9.4	-25.5	-13.0	-12.5		
9.544	42.5	H	-46.4	5.5	12.4	10.2	-39.5	-13.0	-26.5		
NO OTHER EMISSIONS WERE DETECTED ABOVE SYSTEM NOISE FLOOR AFTER 5TH HARMONIC											

## 7.5. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.



## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

**LIMITS**

From §1.1310 Table 1 (B), S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

<b>Mode</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
800MHz Cellar	0.6	29.84	4.65	19.98
1900 MHz PCS	1.0	29.65	3.35	12.60

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## **7.6. FREQUENCY STABILITY**

### **LIMIT**

§22.355 Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2

### **RESULTS**

No non-compliance noted.


**INSTRUMENTS LIST**

<b>TEST EQUIPMENT LIST</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Due Date</b>
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	29800	05/13/2005
Peak Power Meter	Agilent	E4416A	GB41291160	02/09/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	02/10/2006
DC Power Suppy	Kenwood	PA-36-3A	N/A	NCR
Power Splitter	HP	11667B	N/A	N/A
Spectrum Analyzer	HP	E4446A	US42510266	08/25/05

**Detector Function Setting of Test Receiver**

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Mid Channel	Peak	300 Hz	300 Hz

**TEST SETUP**

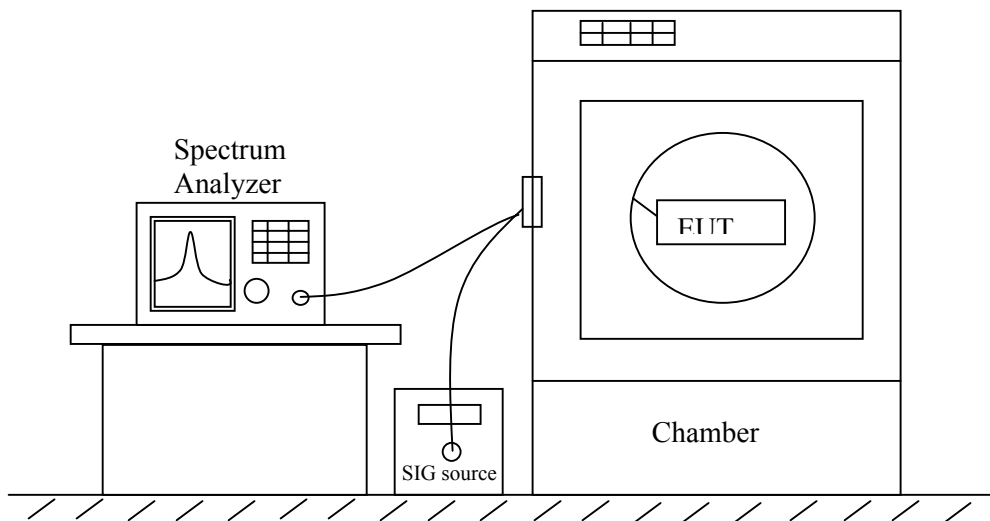

**800MHz CELLULAR – MID CHANNEL**

Reference Frequency: CELLULAR Mid Channel 835.829500MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2089.574 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
5.00	50	835.827967	1.834	2.5
5.00	40	835.828720	0.933	2.5
5.00	30	835.830120	-0.742	2.5
<b>5.00</b>	<b>20</b>	<b>835.829500</b>	<b>0</b>	2.5
5.00	10	835.829877	-0.451	2.5
5.00	0	835.830045	-0.652	2.5
5.00	-10	835.830235	-0.879	2.5
5.00	-20	835.830281	-0.934	2.5
5.00	-30	835.830320	-0.981	2.5

Reference Frequency: CDMA Mid Channel 835.829500MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2089.574 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>5.00</b>	<b>20</b>	<b>835.829500</b>	<b>0</b>	<b>2.5</b>
3.8 (end point)	20	835.829164	0.402	2.5
4.25	20	835.829332	0.201	2.5
5.75	20	835.829597	-0.116	2.5


**1900MHz PCS – MID CHANNEL**

Reference Frequency: PCS Mid Channel 1879.304572MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4698.261 Hz				
Power Supply (Vdc)	Environment Temperature (?C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
5.00	50	1879.300913	1.947	2.5
5.00	40	1879.302737	0.976	2.5
5.00	30	1879.302806	0.940	2.5
<b>5.00</b>	<b>20</b>	<b>1879.304572</b>	<b>0</b>	<b>2.5</b>
5.00	10	1879.305045	-0.252	2.5
5.00	0	1879.305241	-0.356	2.5
5.00	-10	1879.305378	-0.429	2.5
5.00	-20	1879.306015	-0.768	2.5
5.00	-30	1879.306191	-0.861	2.5


Reference Frequency: CDMA Mid Channel 1879.304.572MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4698.261 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>5.00</b>	<b>20</b>	<b>1879.304572</b>	<b>0</b>	<b>2.5</b>
3.8(end point)	20	1879.301226	1.780	2.5
4.25	20	1879.302899	0.890	2.5
5.75	20	1879.305133	-0.299	2.5

## 8. SETUP PHOTOS


### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

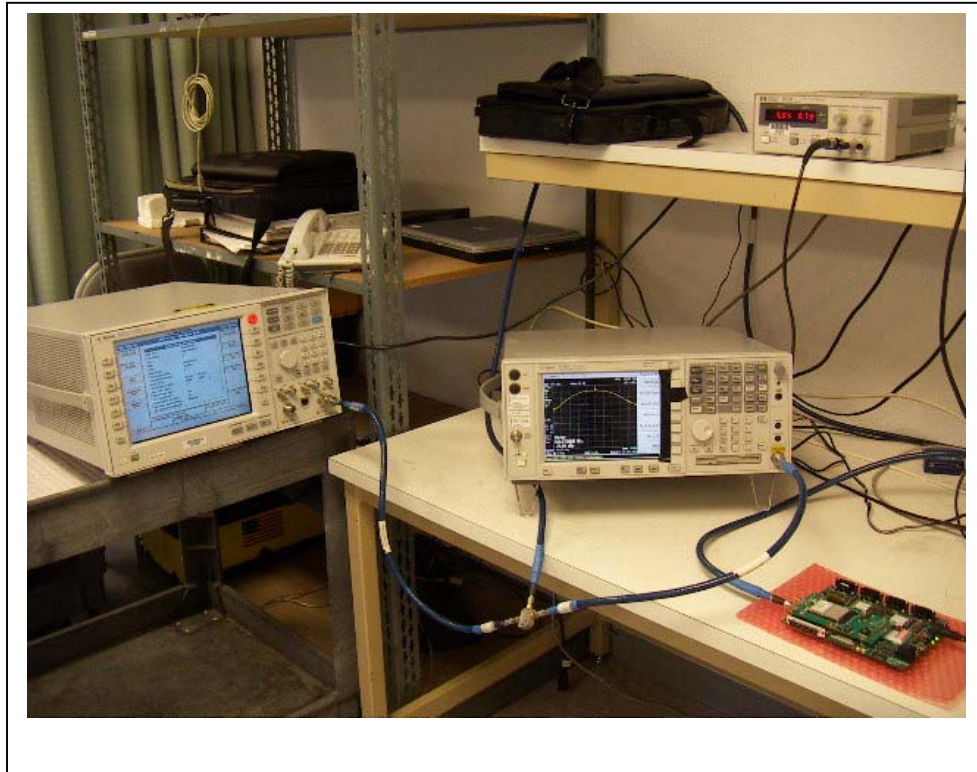


**RADIATED RF MEASUREMENT SETUP**

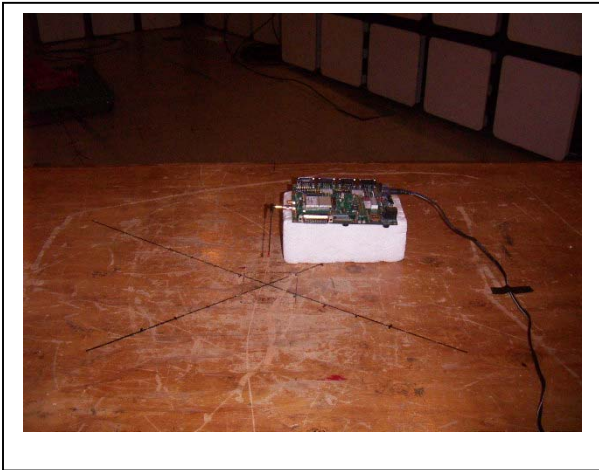

**X-Position**

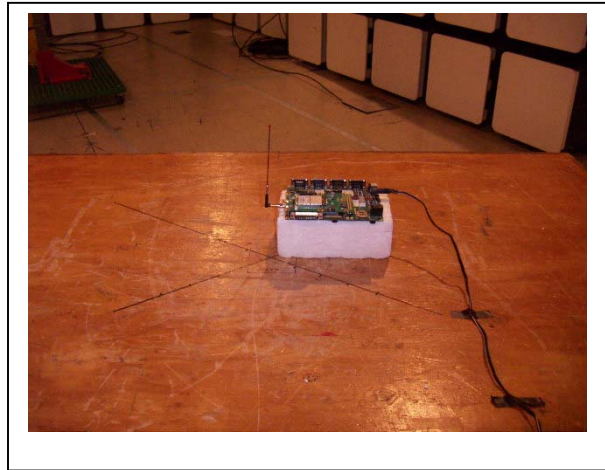

**Y-Position**

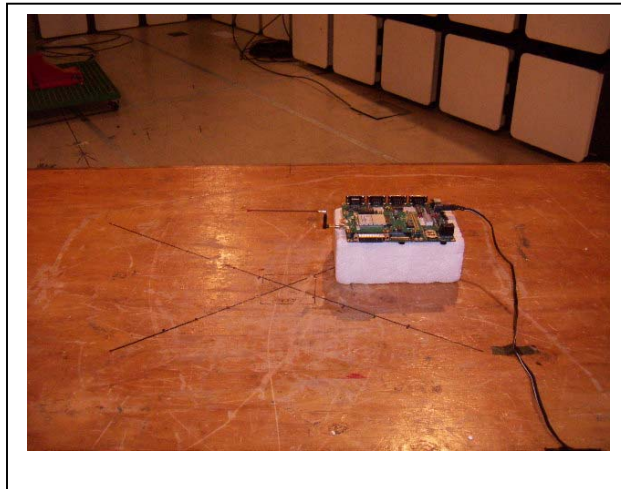


**Z-Position**




**RADIATED EMISSIONS SEUP PHOTO**

**Worst Case for 800 MHz: Y Position**

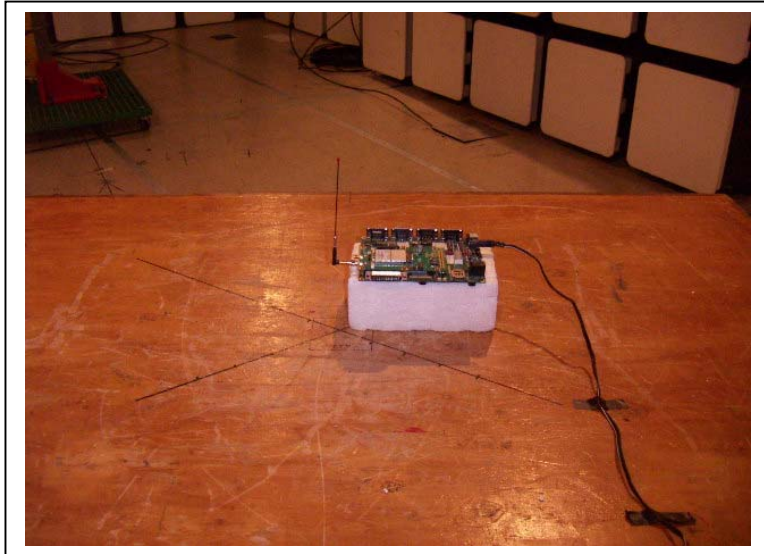


**Front**

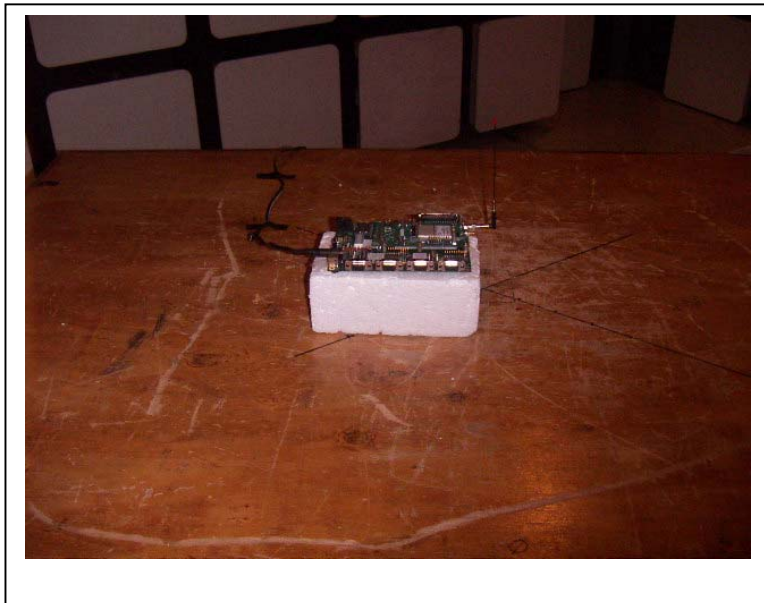


**Back**

**Worst Case for 1900 MHz: Z Position**

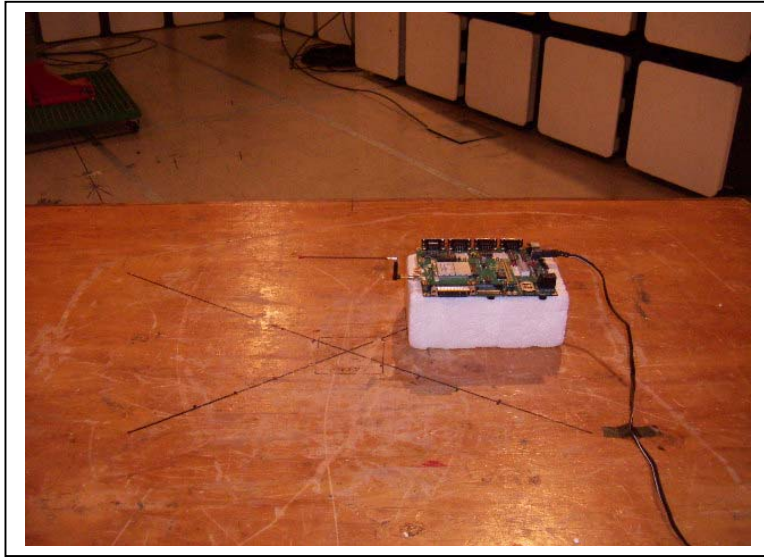

**Front**

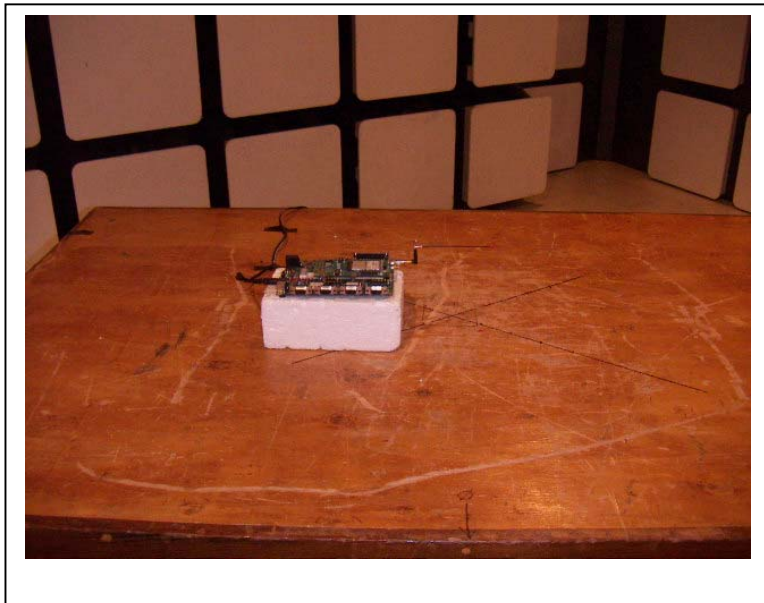

**Back**

**FREQUENCY STABILITY MEASUREMENT SETUP PHOTO**



**END OF REPORT**