

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

ITRONIX CORPORATION
801 South Stevens Street
Spokane, WA 99204
United States

FCC IDENTIFIER: KBCIX325-IWLBT
IC IDENTIFIER: 1943A-IX325a
Model(s): IX325-IWLBT

Rule Part(s): FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)
Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01)
FCC Device Classification: Digital Transmission System (DTS)
IC Device Classification: Low Power License-Exempt Radiocommunication Device (RSS-210 Issue 5)

Device Description: Rugged Tablet PC
Internal Transmitter(s): Intel Pro 2200BG 802.11b/g WLAN Mini-PCI Card
Co-located Transmitter(s): MSI MS-6837 Bluetooth (simultaneous transmission)
Mode(s) of Operation: DSSS (Direct Sequence Spread Spectrum) - 802.11b/g
FHSS (Frequency Hopping Spread Spectrum) - Bluetooth
Modulation Type(s): OFDM with BPSK, QPSK, 16QAM, 64QAM, DBPSK, DQPSK, CCK (802.11b/g)
GFSK 1 Mbps 0.5 BT Gaussian (Bluetooth)
Data Rate(s): 802.11b: 1 / 2 / 5.5 / 11 Mbps
802.11g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps
Tx Frequency Range(s): 2412 - 2462 MHz (802.11b/g)
2402 - 2480 MHz (Bluetooth)
Max. RF Output Power Tested: 20.5 dBm (0.112 Watts) Peak Conducted (802.11b, 11 Mbps)
4.14 dBm (0.0026 Watts) Peak Conducted (Bluetooth, 2441 MHz)
Power Source(s) Tested: Internal Lithium-ion Battery 11.1 V, 3600 mAh (Model: T8M-E)
75 W AC Power Adapter (Delta Electronics Model: ADP-75FB B)
Antenna Type(s) Tested: WLAN: Internal PIFA - Top Right Side of LCD Display
Bluetooth: Internal PIFA - Left Side Center of LCD Display

Max. SAR Level(s) Evaluated: Body: 0.210 W/kg (1g average) - Antenna Edge of Tablet PC

Celltech Labs Inc. declares under its sole responsibility that this wireless device was compliant with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested By:




Sean Johnston
Compliance Technologist
Celltech Labs Inc.

Reviewed By:



Spencer Watson
Senior Compliance Technologist
Celltech Labs Inc.



| | | | | | | |
|-------------------------|--|----------------|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 1 of 44 |

| TABLE OF CONTENTS | |
|--|-----------|
| 1.0 INTRODUCTION | 3 |
| 2.0 DESCRIPTION of DEVICE UNDER TEST (DUT) | 3 |
| 3.0 SAR MEASUREMENT SYSTEM | 4 |
| 4.0 MEASUREMENT SUMMARY | 5 |
| 5.0 DETAILS OF SAR EVALUATION | 6 |
| 6.0 EVALUATION PROCEDURES | 6 |
| 7.0 SYSTEM PERFORMANCE CHECK | 7 |
| 8.0 SIMULATED EQUIVALENT TISSUES | 8 |
| 9.0 SAR SAFETY LIMITS | 8 |
| 10.0 ROBOT SYSTEM SPECIFICATIONS | 9 |
| 11.0 PROBE SPECIFICATION (ET3DV6) | 10 |
| 12.0 SAM PHANTOM V4.0C | 10 |
| 13.0 PLANAR PHANTOM | 10 |
| 14.0 DEVICE HOLDER | 10 |
| 15.0 TEST EQUIPMENT LIST | 11 |
| 16.0 MEASUREMENT UNCERTAINTIES | 12 |
| 17.0 REFERENCES | 14 |
| APPENDIX A - SAR MEASUREMENT DATA | 15 |
| APPENDIX B - SYSTEM PERFORMANCE CHECK DATA | 24 |
| APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS | 31 |
| APPENDIX D - SAR TEST SETUP PHOTOGRAPHS | 36 |
| APPENDIX E - SYSTEM VALIDATION | 41 |
| APPENDIX F - PROBE CALIBRATION | 42 |
| APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY | 43 |
| APPENDIX H - PLANAR PHANTOM CERTIFICATE OF CONFORMITY | 44 |


| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

1.0 INTRODUCTION

This measurement report demonstrates that ITRONIX CORPORATION Model: IX325-IWLBT Rugged Tablet PC FCC ID: KBCIX325-IWLBT incorporating the Intel Pro 2200BG 802.11b/g WLAN Mini-PCI Card co-located with the MSI MS-6837 Bluetooth Transmitter complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)

| | | | | | | |
|---|--|----------------|---|--|-----------------------|-------------------|
| FCC Rule Part(s) | 47 CFR §2.1093 | | | | | |
| IC Rule Part(s) | RSS-102 Issue 1 (Provisional) | | | | | |
| Test Procedure(s) | FCC OET Bulletin 65, Supplement C (01-01) | | | | | |
| FCC Device Classification | Digital Transmission System (DTS) | | | | 15C | |
| IC Device Classification | Low Power License-Exempt Radiocommunication Device | | | | RSS-210 Issue 5 | |
| Device Description | Rugged Tablet PC | | | | | |
| Dominant Transmitter | Intel Pro 2200BG 802.11b/g WLAN Mini-PCI Card | | | | | |
| Co-located Transmitter | MSI MS-6837 Bluetooth | | | | | |
| Co-located Transmit Operation | 802.11b/g WLAN and Bluetooth co-located transmitters can transmit simultaneously | | | | | |
| FCC IDENTIFIER | KBCIX325-IWLBT | | IC IDENTIFIER | | 1943A-IX325a | |
| Model(s) | IX325-IWLBT | | | | | |
| Serial No.(s) | ZZGEG5074ZZ9799 | | Rugged Tablet PC | | Identical Prototype | |
| | 06036C074ADC54906006 | | Intel 802.11b/g | | Production Unit | |
| | BH5070000122 | | MSI Bluetooth | | Production Unit | |
| Mode(s) of Operation | 802.11b/g WLAN | | DSSS | Direct Sequence Spread Spectrum | | |
| | Bluetooth | | FHSS | Frequency Hopping Spread Spectrum | | |
| Modulation Type(s) | 802.11b/g WLAN | | OFDM with BPSK, QPSK, 16QAM, 64QAM, DBPSK, DQPSK, CCK | | | |
| | Bluetooth | | GFSK 1 Mbps 0.5 BT Gaussian | | | |
| Data Rate(s) | 802.11b | | 1 / 2 / 5.5 / 11 Mbps | | | |
| | 802.11g | | 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps | | | |
| Tx Frequency Range(s) | 2412 - 2462 MHz | | 802.11b/g | | | |
| | 2402 - 2480 MHz | | Bluetooth | | | |
| Max. Conducted RF Output Power Level(s) Measured | Freq. (MHz) | Chan. | Test Mode | Data Rate | Peak Conducted | |
| | 2442 | 6 | 802.11b | 1Mbps | 18.6 dBm | 0.072 Watts |
| | | | | 11Mbps | 20.5 dBm | 0.112 Watts |
| | 2442 | 6 | 802.11g | 6 Mbps | 16.7 dBm | 0.047 Watts |
| 2441 | 39 | Bluetooth | -- | 4.14 dBm | 0.0026 Watts | |
| Antenna Type(s) Tested | Internal PIFA | | Top Right Side of LCD Display | | | 802.11b/g |
| | Internal PIFA | | Left Side Center of LCD Display | | | Bluetooth |
| Power Source(s) Tested | Internal Lithium-ion Battery | | 11.1 V, 3600 mAh | | | Model: T8M-E |
| | Delta Electronics AC Power Adapter | | 75 Watts AC | | | Model: ADP-75FB B |
| Additional Power Source(s) (Not Tested) | External Second Lithium-ion Battery | | 11.1 V, 3600 mAh | | | Model: T8S-E |
| | Note: The external second lithium-ion battery was not evaluated for SAR due to the fact that it has exactly the same power specifications as the internal battery and provides additional spacing from the bottom of the tablet. | | | | | |
| DUT Configurations Evaluated | Bottom Side | 0.0 cm spacing | | Note: SAR evaluations for the bottom side of the DUT resulted in measured area scan peak SAR levels that were below the measurable range of the DASY4 system (<0.005 W/kg). All zoom scans were subsequently evaluated and the levels were below the measurement noise floor. See Appendix A for area scan test plots. | | |
| | Antenna Edge | 0.0 cm spacing | | | | |

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 3 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

3.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with planar phantom



DASY4 SAR Measurement System with SAM phantom

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 4 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

4.0 MEASUREMENT SUMMARY

BODY SAR MEASUREMENT RESULTS

DUT Test Position: Antenna Edge (General Purpose Hatch Cover Side)


| Test Date | Transmit Type | Test Mode | Freq. | Chan. | Data Rate (Mbps) | Power Source | Antenna Type | DUT Position to Planar Phantom | Separation Distance to Planar Phantom (cm) | Cond. Power Before Test (dBm) | Meas. SAR 1g (W/kg) | SAR Drift During Test (dB) | Scaled SAR 1g (W/kg) with droop |
|-----------|---------------|-----------------------|-------|-------|------------------|-------------------------|--------------|--------------------------------|--|-------------------------------|---------------------|----------------------------|---------------------------------|
| Jun 23 | WLAN | 802.11b | 2442 | Mid | 1 | Internal Li-ion Battery | Internal | Antenna Edge | 0.0 | 18.6 | 0.200 | -0.222 | 0.210 |
| Jun 23 | WLAN | 802.11b | 2442 | Mid | 1 | AC Power | Internal | Antenna Edge | 0.0 | 18.6 | 0.163 | -0.184 | 0.170 |
| Jun 23 | WLAN | 802.11b | 2442 | Mid | 1 | Internal Li-ion Battery | Internal | Antenna Edge (WLAN) | 0.0 | 18.6 | 0.181 | -0.128 | 0.186 |
| | Bluetooth | Modulated Fixed Freq. | 2441 | Mid | -- | | Internal | | | 4.14 | | | |
| Jul 15 | WLAN | 802.11b | 2442 | Mid | 11 | Internal Li-ion Battery | Internal | Antenna Edge | 0.0 | 20.5 | 0.116 | -0.0180 | 0.116 |

ANSI / IEEE C95.1 1999 - SAFETY LIMIT BODY: 1.6 W/kg (averaged over 1 gram) Spatial Peak - Uncontrolled Exposure / General Population

| Test Date(s) | June 23, 2005 | July 15, 2005 | Test Date(s) | June 23 | July 15 | Unit | | | |
|----------------------------------|---------------|---------------|--------------|-------------------|----------------------|-----------------------------|-------|------|----|
| Measured Fluid Type | 2450 MHz Body | | | Relative Humidity | 35 | 32 | % | | |
| Dielectric Constant ϵ_r | IEEE Target | Date | Meas. | Dev. | Atmospheric Pressure | 102.4 | 106.4 | kPa | |
| | 52.7 | ±5% | Jun 23 | 50.2 | -4.7% | Ambient Temperature | 23.0 | 24.6 | °C |
| | | | Jul 15 | 50.7 | -3.8% | | | | |
| Conductivity σ (mho/m) | 2450 MHz Body | | | Fluid Temperature | 23.7 | 23.9 | °C | | |
| | IEEE Target | Date | Meas. | Dev. | Fluid Depth | ≥ 15 | ≥ 15 | cm | |
| | 1.95 | ±5% | Jun 23 | 1.95 | 0.0% | ρ (Kg/m ³) | 1000 | | |
| | | | Jul 15 | 1.92 | -1.5% | | | | |

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the scaled SAR levels evaluated at the mid channel were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- The worst-case single-transmit SAR level was subsequently re-evaluated with the Bluetooth transmitter also enabled in order to show SAR results for simultaneous transmit operation of the WLAN and Bluetooth.
- 802.11g mode was not evaluated based on the average output power levels at the higher data rates were below the average power levels for the lower data rates in 802.11b mode (per May 2005 TCB Council Workshop - see reference [7]).
- SAR evaluations for the bottom side of the DUT resulted in measured area scan peak SAR levels that were below the measurable range of the DASY4 system (<0.005 W/kg). All zoom scans were subsequently evaluated and the resulting levels were below the measurement noise floor. See Appendix A for area scan test plots.
- The power droops measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above test data table.
- The DUT battery was fully charged prior to each SAR evaluation (battery power).
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).
- The SAR evaluations were performed within 24 hours of the system performance check.

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 5 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

5.0 DETAILS OF SAR EVALUATION

The ITRONIX CORPORATION Model: IX325-IWLBT Rugged Tablet PC FCC ID: KBCIX325-IWLBT with the internal Intel Pro 2200BG 802.11b/g WLAN Card co-located with the MSI MS-6837 Bluetooth Transmitter was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

SAR Test Configurations

1. The DUT was evaluated for body SAR with the antenna edge (general purpose hatch cover side) of the tablet PC placed parallel to, and touching, the outer surface of the planar phantom. The DUT was evaluated with internal lithium-ion battery and AC power supply.
2. The DUT was evaluated for body SAR with the bottom side of the tablet PC placed parallel to, and touching, the outer surface of the planar phantom. The DUT was evaluated with internal lithium-ion battery and AC power supply.
3. SAR evaluations for the bottom side of the DUT resulted in measured area scan peak SAR levels that were below the measurable range of the DASY4 system (<0.005 W/kg). All zoom scans were subsequently evaluated and the levels were below the measurement noise floor. See Appendix A for area scan test plots.
4. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
5. The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C for measured fluid dielectric parameters).
6. The SAR evaluations were performed within 24 hours of the daily system performance check.

Test Modes & Power Settings

7. The peak conducted power levels were measured prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
8. The power droops measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the test data table (page 5).
9. The DUT was controlled in test mode via internal software. SAR measurements were performed with the DUT transmitting continuously at maximum power with a modulated DSSS signal. For simultaneous transmit operation, the Bluetooth transmitter was tested in a continuous transmit operation with a modulated signal on a fixed frequency (frequency hopping disabled).
10. The DUT battery was fully charged prior to each SAR evaluation (utilizing battery power).

6.0 EVALUATION PROCEDURES


- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 6 of 44 |

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed with a 2450MHz dipole (see Appendix E for system validation procedures). System checks evaluated in brain simulant were performed at the planar section of the SAM phantom. System checks evaluated in body simulant were performed in the Barski planar phantom. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C for printout of measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plots). See Table 1 below for the SAR system manufacturer's reference body SAR values from the DASY4 Operation Manual, April 2005 (see reference [6]).

SYSTEM PERFORMANCE CHECK EVALUATION

| Test Date | 2450MHz Equiv. Tissue | SAR 1g (W/kg) | | | Dielectric Constant ϵ_r | | | Conductivity σ (mho/m) | | | ρ (Kg/m ³) | Amb. Temp. (°C) | Fluid Temp. (°C) | Fluid Depth (cm) | Humid. (%) | Barom. Press. (kPa) |
|-----------|-----------------------|-----------------|-------|-------|----------------------------------|-------|-------|-------------------------------|-------|-------|-----------------------------|-----------------|------------------|------------------|------------|---------------------|
| | | IEEE Target | Meas. | Dev. | IEEE Target | Meas. | Dev. | IEEE Target | Meas. | Dev. | | | | | | |
| 6/9/05 | Brain | 13.1 $\pm 10\%$ | 13.9 | +6.1% | 39.2 $\pm 5\%$ | 37.4 | -4.6% | 1.80 $\pm 5\%$ | 1.87 | +3.9% | 1000 | 22.0 | 24.8 | ≥ 15 | 38 | 101.7 |
| 6/23/05 | Body | 12.8 $\pm 10\%$ | 12.8 | 0.0% | 52.7 $\pm 5\%$ | 50.2 | -4.7% | 1.95 $\pm 5\%$ | 1.95 | 0.0% | 1000 | 23.0 | 23.7 | ≥ 15 | 35 | 102.4 |
| 7/15/05 | Body | 12.8 $\pm 10\%$ | 12.9 | +0.8% | 52.7 $\pm 5\%$ | 50.7 | -3.8% | 1.95 $\pm 5\%$ | 1.92 | -1.5% | 1000 | 24.6 | 23.9 | ≥ 15 | 32 | 106.4 |

Note(s):

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

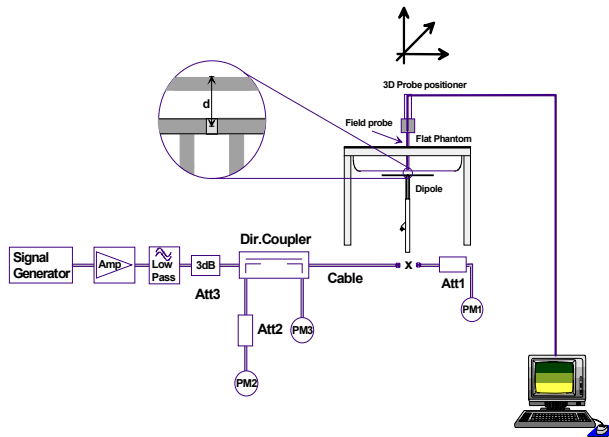


Figure 1. System Performance Check Setup Diagram

| Dipole Type | Distance [mm] | Frequency [MHz] | SAR (1g) [W/kg] | SAR (10g) [W/kg] | SAR (peak) [W/kg] |
|-------------|---------------|-----------------|-----------------|------------------|-------------------|
| D300V2 | 15 | 300 | 3.02 | 2.06 | 4.36 |
| D450V2 | 15 | 450 | 5.01 | 3.36 | 7.22 |
| D835V2 | 15 | 835 | 9.71 | 6.38 | 14.1 |
| D900V2 | 15 | 900 | 11.1 | 7.17 | 16.3 |
| D1450V2 | 10 | 1450 | 29.6 | 16.6 | 49.8 |
| D1500V2 | 10 | 1500 | 30.8 | 17.1 | 52.1 |
| D1640V2 | 10 | 1640 | 34.4 | 18.7 | 59.4 |
| D1800V2 | 10 | 1800 | 38.5 | 20.3 | 67.5 |
| D1900V2 | 10 | 1900 | 39.8 | 20.8 | 69.6 |
| D2000V2 | 10 | 2000 | 40.9 | 21.2 | 71.5 |
| D2450V2 | 10 | 2450 | 51.2 | 23.7 | 97.6 |
| D3000V2 | 10 | 3000 | 61.9 | 24.8 | 136.7 |

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

Table 1. SAR system manufacturer's reference body SAR values



2450MHz Dipole Setup (SAM Phantom)



2450MHz Dipole Setup (Planar Phantom)

8.0 SIMULATED EQUIVALENT TISSUES

The 2450MHz simulated tissue mixtures consist of Glycol-monobutyl, water, and salt (body mixture only). The fluids were prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

| SIMULATED TISSUE MIXTURES | | |
|---------------------------|--------------------------|--------------------------|
| INGREDIENT | 2450 MHz Brain | 2450 MHz Body |
| | System Performance Check | System Performance Check |
| | | DUT Evaluation |
| Water | 52.00 % | 69.98 % |
| Glycol Monobutyl | 48.00 % | 30.00 % |
| Salt | - | 0.02 % |

9.0 SAR SAFETY LIMITS

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|--|--|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average (averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak (averaged over any 1 g of tissue) | 1.60 | 8.0 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.0 | 20.0 |

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

| | |
|-----------------------|--|
| POSITIONER: | Stäubli Unimation Corp. Robot Model: RX60L |
| Repeatability: | 0.02 mm |
| No. of axis: | 6 |

Data Acquisition Electronic (DAE) System

Cell Controller

| | |
|--------------------------|-------------------------|
| Processor: | AMD Athlon XP 2400+ |
| Clock Speed: | 2.0 GHz |
| Operating System: | Windows XP Professional |

Data Converter

| | |
|--------------------------|---|
| Features: | Signal Amplifier, multiplexer, A/D converter, and control logic |
| Software: | DASY4 software |
| Connecting Lines: | Optical downlink for data and status info. Optical uplink for commands and clock |

DASY4 Measurement Server

| | |
|---------------------|--|
| Function: | Real-time data evaluation for field measurements and surface detection |
| Hardware: | PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM |
| Connections: | COM1, COM2, DAE, Robot, Ethernet, Service Interface |

E-Field Probe

| | |
|-----------------------|--|
| Model: | ET3DV6 |
| Serial No.(s): | 1590, 1387 |
| Construction: | Triangular core fiber optic detection system |
| Frequency: | 10 MHz to 6 GHz |
| Linearity: | ±0.2 dB (30 MHz to 3 GHz) |

Phantom(s)

| | |
|------------------------|-------------------|
| Type: | Planar Phantom |
| Shell Material: | Fiberglass |
| Thickness: | 2.0 ±0.1 mm |
| Volume: | Approx. 72 liters |

| | |
|------------------------|-------------------|
| Type: | SAM V4.0C |
| Shell Material: | Fiberglass |
| Thickness: | 2.0 ±0.1 mm |
| Volume: | Approx. 25 liters |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

11.0 PROBE SPECIFICATION (ET3DV6)


| | |
|--------------------|--|
| Construction: | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol) |
| Calibration: | In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$) |
| Frequency: | 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) |
| Directivity: | ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis) |
| Dynamic Range: | 5 μ W/g to >100 mW/g; Linearity: ± 0.2 dB |
| Surface Detection: | ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces |
| Dimensions: | Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm |
| Application: | General dosimetry up to 3 GHz Compliance tests of portable devices |



ET3DV6 E-Field Probe

12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix F for specifications of the SAM phantom V4.0C).

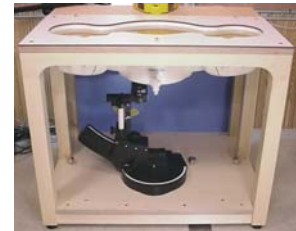

SAM Phantom

13.0 PLANAR PHANTOM

The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix G for dimensions and specifications of the planar phantom).




Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices such as Laptop and Tablet PCs, a Plexiglas platform is attached to the device holder.



Device Holder

| | | | | | | |
|-------------------------|--|---------|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 10 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

15.0 TEST EQUIPMENT LIST

| USED | TEST EQUIPMENT | ASSET NO. | SERIAL NO. | DATE CALIBRATED | | CALIBRATION DUE DATE | |
|------|--|-----------|------------|-----------------|---------|----------------------|--|
| | DESCRIPTION | | | | | | |
| x | Schmid & Partner DASY4 System | - | - | - | - | - | |
| x | -DASY4 Measurement Server | 00158 | 1078 | N/A | N/A | N/A | |
| x | -Robot | 00046 | 599396-01 | N/A | N/A | N/A | |
| | -DAE3 | 00019 | 353 | 06Jul04 | 06Jul05 | | |
| | -DAE4 | | | 15Jun05 | 15Jun06 | | |
| x | -DAE3 | 00018 | 370 | 25Jan05 | 25Jan06 | | |
| x | -ET3DV6 E-Field Probe | 00016 | 1387 | 18Mar05 | 18Mar06 | | |
| x | -ET3DV6 E-Field Probe | 00017 | 1590 | 20May05 | 20May06 | | |
| | -EX3DV4 E-Field Probe | 00125 | 3547 | 21Jan05 | 21Jan06 | | |
| | -300MHz Validation Dipole | 00023 | 135 | 26Oct04 | 26Oct05 | | |
| | -450MHz Validation Dipole | 00024 | 136 | 04Nov04 | 04Nov05 | | |
| | -835MHz Validation Dipole | 00022 | 411 | Brain | 30Mar05 | 30Mar06 | |
| | | | | Body | 12Apr05 | 12Apr06 | |
| | -900MHz Validation Dipole | 00020 | 054 | Brain | 10Jun04 | 10Jun05 | |
| | | | | Brain | 10Jun05 | 10Jun06 | |
| | | | | Body | 10Jun05 | 10Jun06 | |
| | | | | Body | 10Jun05 | 10Jun06 | |
| | -1800MHz Validation Dipole | 00021 | 247 | Brain | 08Jun04 | 08Jun05 | |
| | | | | Brain | 14Jun05 | 14Jun06 | |
| | | | | Body | 14Jun05 | 14Jun06 | |
| | | | | Body | 14Jun05 | 14Jun06 | |
| | -1900MHz Validation Dipole | 00032 | 151 | Brain | 18Jun04 | 18Jun05 | |
| | | | | Brain | 17Jun05 | 17Jun06 | |
| | | | | Body | 22Apr05 | 22Apr06 | |
| | | | | Body | 22Apr05 | 22Apr06 | |
| x | -2450MHz Validation Dipole | 00025 | 150 | Brain | 30Sep04 | 30Sep05 | |
| x | | | | Body | 22Apr05 | 22Apr06 | |
| | -5000MHz Validation Dipole | 00126 | 1031 | Brain | 11Jan05 | 11Jan06 | |
| | | | | Body | 11Jan05 | 11Jan06 | |
| x | -SAM Phantom V4.0C | 00154 | 1033 | N/A | N/A | N/A | |
| x | -Barski Planar Phantom | 00155 | 03-01 | N/A | N/A | N/A | |
| | -Plexiglas Planar Phantom | 00156 | 161 | N/A | N/A | N/A | |
| | -Validation Planar Phantom | 00157 | 137 | N/A | N/A | N/A | |
| | HP 85070C Dielectric Probe Kit | 00033 | N/A | N/A | N/A | N/A | |
| x | ALS-PR-DIEL Dielectric Probe Kit | 00160 | 260-00953 | N/A | N/A | N/A | |
| x | Gigatronics 8652A Power Meter | 00110 | 1835801 | 16Apr05 | 16Apr06 | | |
| | Gigatronics 8652A Power Meter | 00008 | 1835267 | 29Apr05 | 29Apr06 | | |
| | Gigatronics 8652A Power Meter | 00007 | 1835272 | 18Oct04 | 18Oct05 | | |
| x | Gigatronics 80701A Power Sensor | 00013 | 1833713 | 11Oct04 | 11Oct05 | | |
| x | Gigatronics 80701A Power Sensor | 00011 | 1833542 | 08Oct04 | 08Oct05 | | |
| x | Gigatronics 80701A Power Sensor | 00109 | 1834366 | 16Apr05 | 16Apr06 | | |
| x | HP 8753ET Network Analyzer | 00134 | US39170292 | 04May05 | 04May06 | | |
| x | HP 8648D Signal Generator | 00005 | 3847A00611 | 29Apr05 | 29Apr06 | | |
| | Rohde & Schwarz SMR40 Signal Generator | 00006 | 100104 | 12Apr05 | 12Apr06 | | |
| x | Amplifier Research 5S1G4 Power Amplifier | 00106 | 26235 | N/A | N/A | N/A | |

16.0 MEASUREMENT UNCERTAINTIES

| UNCERTAINTY BUDGET FOR DEVICE EVALUATION | | | | | | |
|--|----------------------|--------------------------|-------------|-------|---------------------------|------------------------------------|
| Error Description | Uncertainty Value ±% | Probability Distribution | Divisor | ci 1g | Uncertainty Value ±% (1g) | V _i or V _{eff} |
| Measurement System | | | | | | |
| Probe calibration | 5.9 | Normal | 1 | 1 | 5.9 | ∞ |
| Axial isotropy of the probe | 4.7 | Rectangular | 1.732050808 | 0.7 | 1.9 | ∞ |
| Spherical isotropy of the probe | 9.6 | Rectangular | 1.732050808 | 0.7 | 3.9 | ∞ |
| Spatial resolution | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Boundary effects | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Probe linearity | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Detection limit | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Readout electronics | 0.3 | Normal | 1 | 1 | 0.3 | ∞ |
| Response time | 0.8 | Rectangular | 1.732050808 | 1 | 0.5 | ∞ |
| Integration time | 2.6 | Rectangular | 1.732050808 | 1 | 1.5 | ∞ |
| RF ambient conditions | 3 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Mech. constraints of robot | 0.4 | Rectangular | 1.732050808 | 1 | 0.2 | ∞ |
| Probe positioning | 2.9 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Extrapolation & integration | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Test Sample Related | | | | | | |
| Device positioning | 2.9 | Normal | 1 | 1 | 2.9 | 12 |
| Device holder uncertainty | 3.6 | Normal | 1 | 1 | 3.6 | 8 |
| Power drift | 5 | Rectangular | 1.732050808 | 1 | 2.9 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | 4 | Rectangular | 1.732050808 | 1 | 2.3 | ∞ |
| Liquid conductivity (target) | 5 | Rectangular | 1.732050808 | 0.64 | 1.8 | ∞ |
| Liquid conductivity (measured) | 2.5 | Normal | 1 | 0.64 | 1.6 | ∞ |
| Liquid permittivity (target) | 5 | Rectangular | 1.732050808 | 0.6 | 1.7 | ∞ |
| Liquid permittivity (measured) | 2.5 | Normal | 1 | 0.6 | 1.5 | ∞ |
| Combined Standard Uncertainty | | | | | 10.79 | |
| Expanded Uncertainty (k=2) | | | | | 21.59 | |

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

MEASUREMENT UNCERTAINTIES (Cont.)


| UNCERTAINTY BUDGET FOR SYSTEM VALIDATION | | | | | | |
|--|----------------------|--------------------------|-------------|-------|---------------------------|------------------------------------|
| Error Description | Uncertainty Value ±% | Probability Distribution | Divisor | ci 1g | Uncertainty Value ±% (1g) | V _i or V _{eff} |
| Measurement System | | | | | | |
| Probe calibration | 5.9 | Normal | 1 | 1 | 5.9 | ∞ |
| Axial isotropy of the probe | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Spherical isotropy of the probe | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Spatial resolution | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Boundary effects | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Probe linearity | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Detection limit | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Readout electronics | 0.3 | Normal | 1 | 1 | 0.3 | ∞ |
| Response time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Integration time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| RF ambient conditions | 3 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Mech. constraints of robot | 0.4 | Rectangular | 1.732050808 | 1 | 0.2 | ∞ |
| Probe positioning | 2.9 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Extrapolation & integration | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Test Sample Related | | | | | | |
| Dipole Positioning | 2 | Normal | 1.732050808 | 1 | 1.2 | ∞ |
| Power & Power Drift | 4.7 | Normal | 1.732050808 | 1 | 2.7 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | 4 | Rectangular | 1.732050808 | 1 | 2.3 | ∞ |
| Liquid conductivity (target) | 5 | Rectangular | 1.732050808 | 0.64 | 1.8 | ∞ |
| Liquid conductivity (measured) | 2.5 | Normal | 1 | 0.64 | 1.6 | ∞ |
| Liquid permittivity (target) | 5 | Rectangular | 1.732050808 | 0.6 | 1.7 | ∞ |
| Liquid permittivity (measured) | 2.5 | Normal | 1 | 0.6 | 1.5 | ∞ |
| Combined Standard Uncertainty | | | | | 9.04 | |
| Expanded Uncertainty (k=2) | | | | | 18.08 | |

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |


17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] Schmid & Partner Engineering AG, "DASY4 Manual", V4.5: April 2005.
- [7] TCB Council Workshop, "SAR Test Configurations for 802.11 Wireless LAN Transmitters, 802.11 a/b/g Configurations Rev2, 802.11b/g Output Power": May 2005.

| | | | | | | |
|-------------------------|--|----------------|--|---------------|---------------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 14 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX A - SAR MEASUREMENT DATA

| | | | | | | |
|-------------------------|--|----------------|--|---------------|---------------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 15 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/09/2005

Body SAR - 802.11b - 1Mbps - Bottom Side of DUT - 0.0 cm Spacing - Internal Battery Power


DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799


Ambient Temp: 24.7 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.4 kPa; Humidity: 34%

11.1V, 3600mAh Internal Li-ion Battery Pack (Model: T8M-E)
 Communication System: DSSS WLAN
 Frequency: 2442 MHz; Duty Cycle: 1:1
 RF Output Power: 18.6 dBm (Peak Conducted)
 Medium: M2450 ($\sigma = 1.99$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b - 0.0 cm Separation Distance from Bottom Side of DUT to Planar Phantom - Mid Channel Area Scan (16x23x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.00201 mW/g

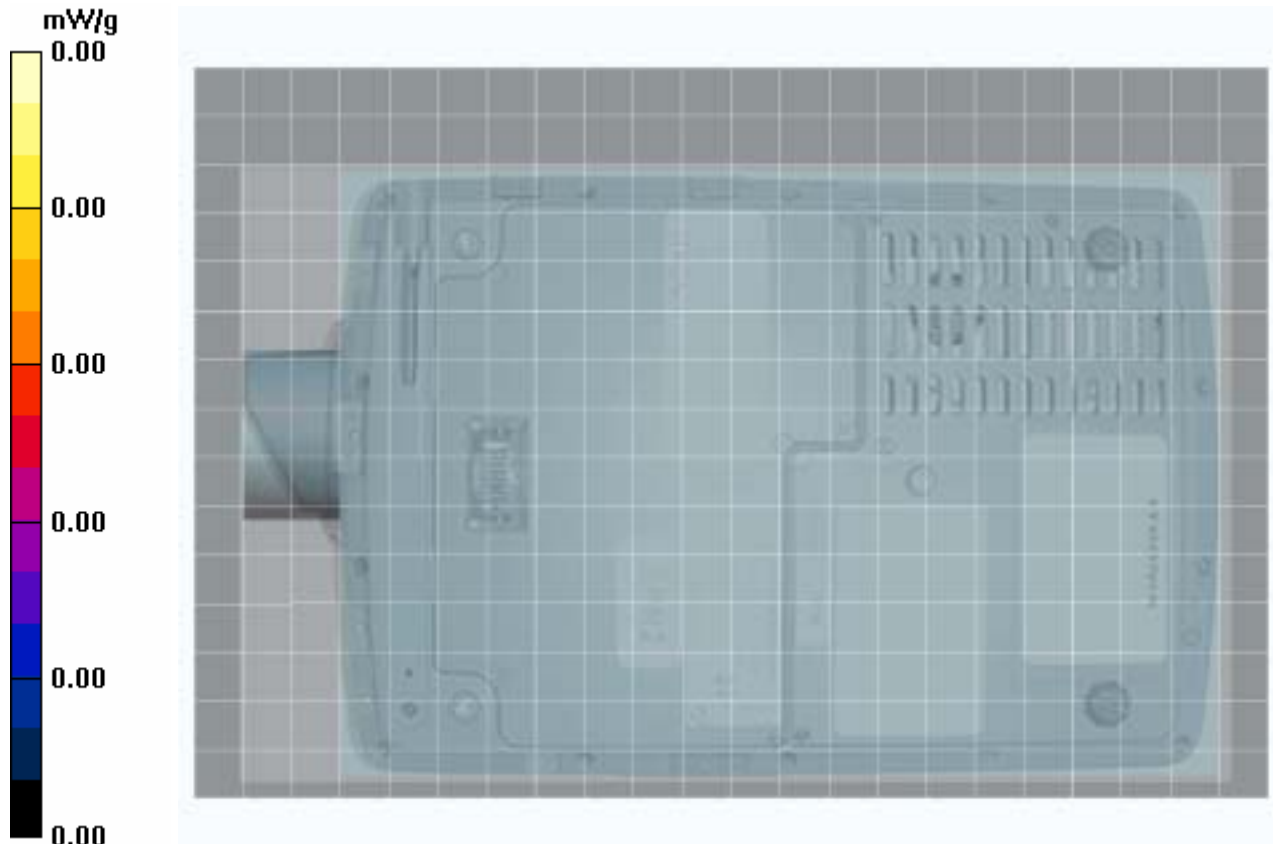

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 16 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/09/2005

Body SAR - 802.11b - 1Mbps - Bottom Side of DUT - 0.0 cm Spacing - AC Power Supply

DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799

Ambient Temp: 24.7 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.4 kPa; Humidity: 34%

75 W AC Power Adapter (Delta Electronics Model: ADP-75FB B)

Communication System: DSSS WLAN

Frequency: 2442 MHz; Duty Cycle: 1:1

RF Output Power: 18.6 dBm (Peak Conducted)


Medium: M2450 ($\sigma = 1.99$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b - 0.0 cm Separation Distance from Bottom Side of DUT to Planar Phantom - Mid Channel

Area Scan (16x23x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00148 mW/g

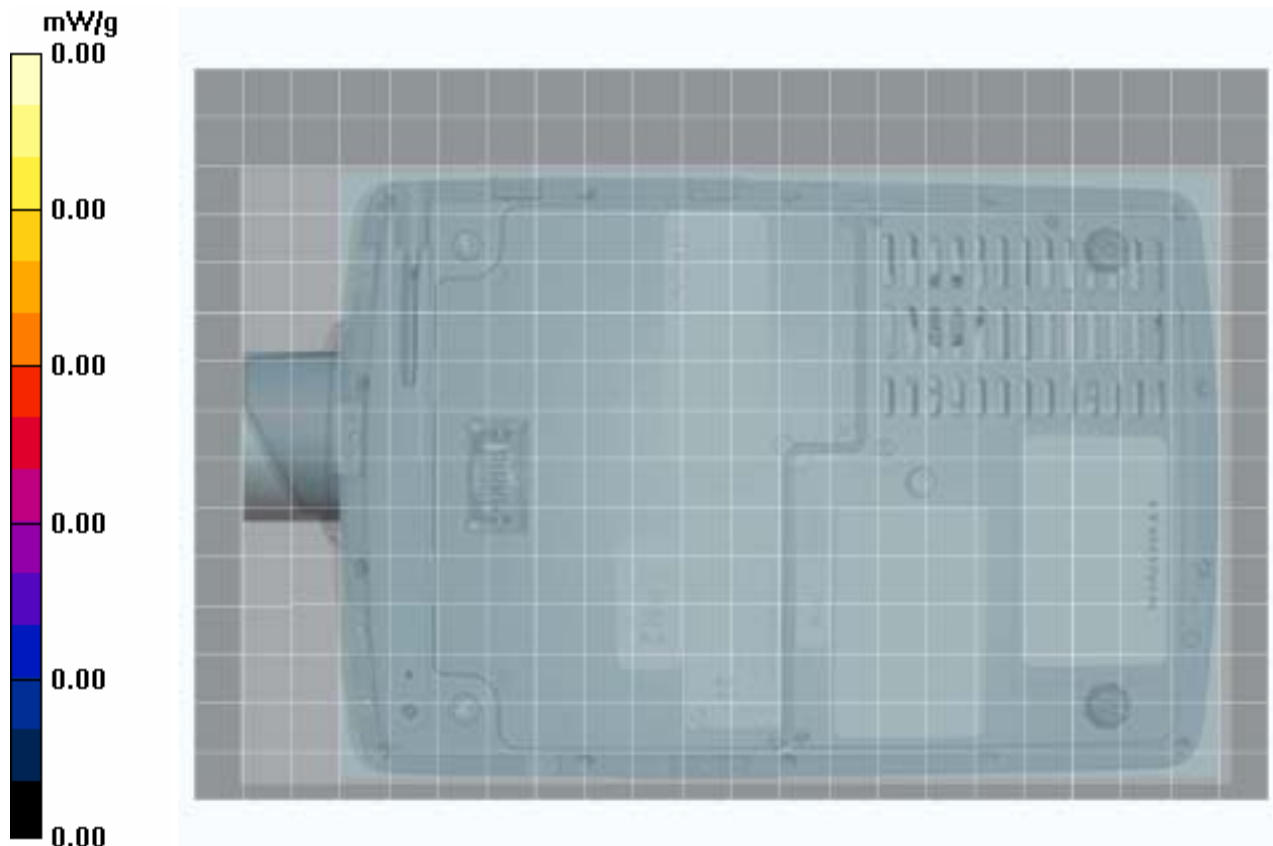

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 17 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/09/2005

Body SAR - 802.11b - 1Mbps - Bottom Side of DUT - 0.0 cm Spacing - Internal Battery Power Simultaneous Transmit with Co-Located Bluetooth


DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799

Ambient Temp: 24.7 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.4 kPa; Humidity: 34%

11.1V, 3600mAh Internal Li-ion Battery Pack (Model: T8M-E)
 Communication System: DSSS WLAN (802.11b)
 Frequency: 2442 MHz; Duty Cycle: 1:1
 RF Output Power: 18.6 dBm (Peak Conducted)
 Communication System: Modulated Fixed Frequency (Bluetooth)
 Frequency: 2441 MHz; Duty Cycle: 1:1
 RF Output Power: 4.14 dBm (Peak Conducted)
 Medium: M2450 ($\sigma = 1.99 \text{ mho/m}$; $\epsilon_r = 51.2$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b & Bluetooth - 0.0 cm Separation Distance from Bottom Side of DUT to Planar Phantom - Mid Channel Area Scan (16x23x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.000587 mW/g

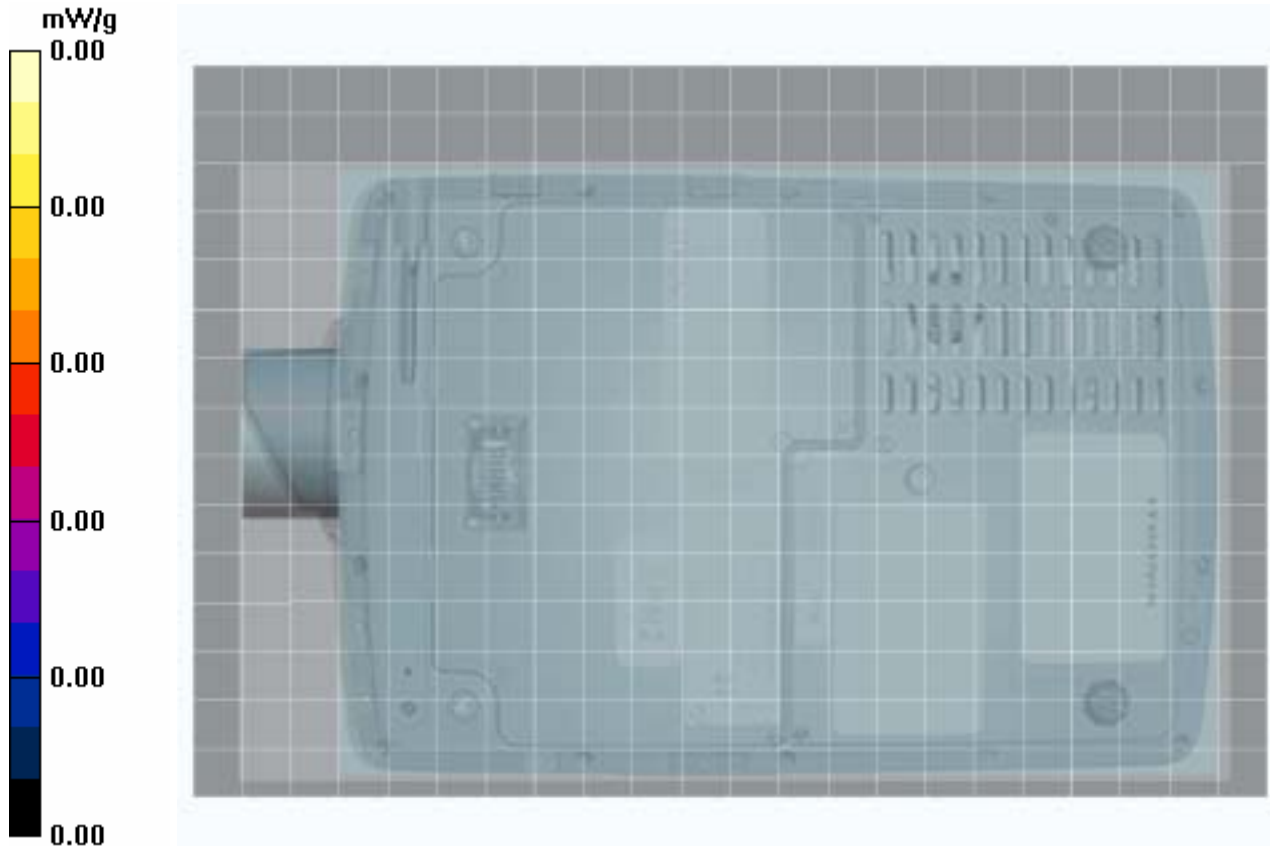

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|----------|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a | |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 18 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/23/2005

Body SAR - 802.11b - 1 Mbps - Antenna Edge of DUT - 0.0 cm Spacing - Internal Battery Power

DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799


Ambient Temp: 23.0 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.4 kPa; Humidity: 35%


11.1V, 3600mAh Internal Li-ion Battery Pack (Model: T8M-E)
 Communication System: DSSS WLAN
 Frequency: 2442 MHz; Duty Cycle: 1:1
 RF Output Power: 18.6 dBm (Peak Conducted)
 Medium: M2450 ($\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Area Scan (8x23x1): Measurement grid: dx=15mm, dy=15mm

Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.7 V/m; Power Drift = -0.222 dB
 Peak SAR (extrapolated) = 0.520 W/kg
SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.079 mW/g

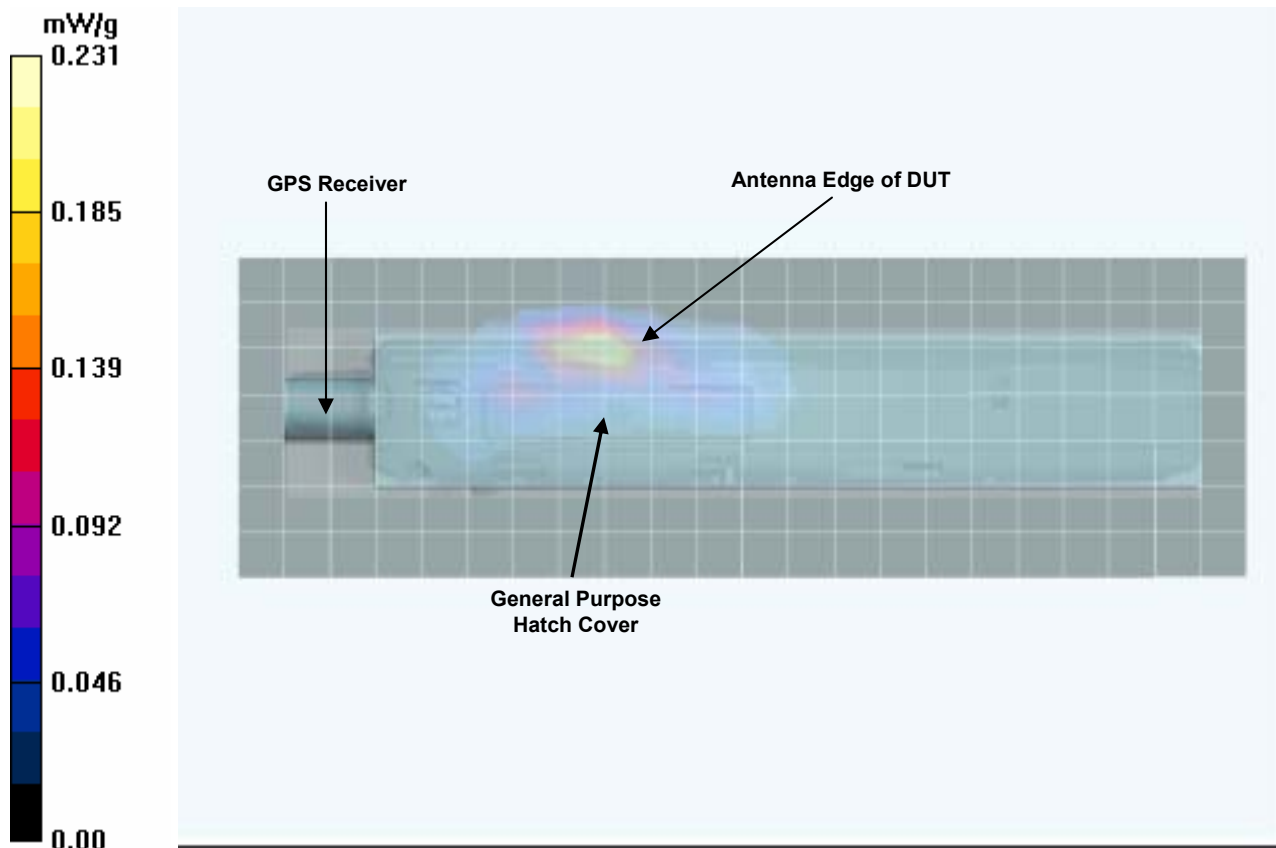

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 19 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/23/2005

Body SAR - 802.11b - 1 Mbps - Antenna Edge of DUT - 0.0 cm Spacing - AC Power Supply

DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799


Ambient Temp: 23.0 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.4 kPa; Humidity: 35%

75 W AC Power Adapter (Delta Electronics Model: ADP-75FB B)
 Communication System: DSSS WLAN
 Frequency: 2442 MHz; Duty Cycle: 1:1
 RF Output Power: 18.6 dBm (Peak Conducted)
 Medium: M2450 ($\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Area Scan (8x23x1): Measurement grid: dx=15mm, dy=15mm

Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.98 V/m; Power Drift = -0.184 dB
 Peak SAR (extrapolated) = 0.421 W/kg
SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.065 mW/g

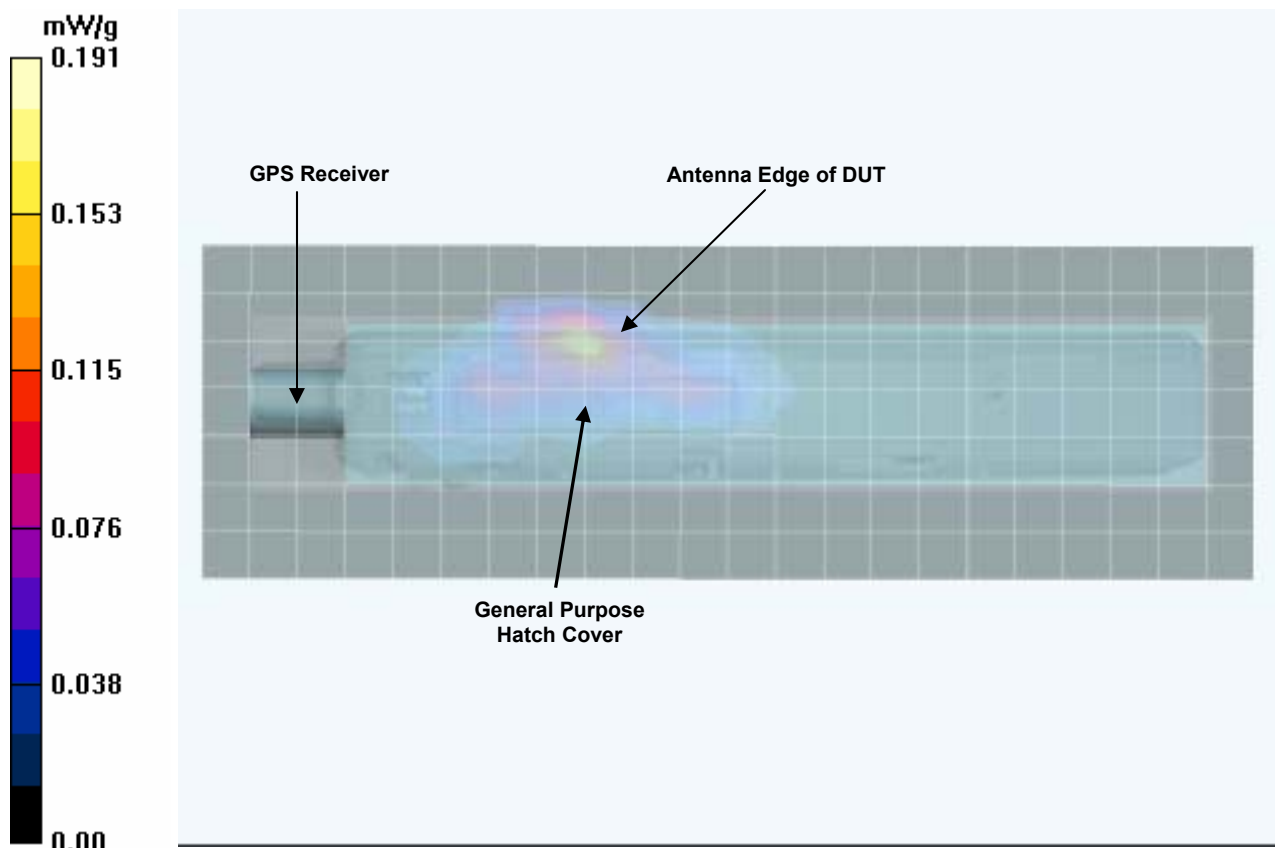

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|----------|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a | |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 20 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/23/2005

Body SAR - 802.11b - 1 Mbps - Antenna Edge of DUT - 0.0 cm Spacing - Internal Battery Power Simultaneous Transmit with Co-located Bluetooth

DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with 802.11b/g & Bluetooth; Serial: ZZGEG5074ZZ9799

Ambient Temp: 23.0 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.4 kPa; Humidity: 35%

- 11.1V, 3600mAh Internal Li-ion Battery Pack (Model: T8M-E)
- Communication System: DSSS WLAN (802.11b)
- Frequency: 2442 MHz; Duty Cycle: 1:1
- RF Output Power: 18.6 dBm (Peak Conducted)
- Communication System: Modulated Fixed Frequency (Bluetooth)
- Frequency: 2441 MHz; Duty Cycle: 1:1
- RF Output Power: 4.14 dBm (Peak Conducted)
- Medium: M2450 ($\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$)
- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Body - 802.11b & Bluetooth - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Area Scan (8x23x1): Measurement grid: dx=15mm, dy=15mm

Body - 802.11b & Bluetooth - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.072 mW/g

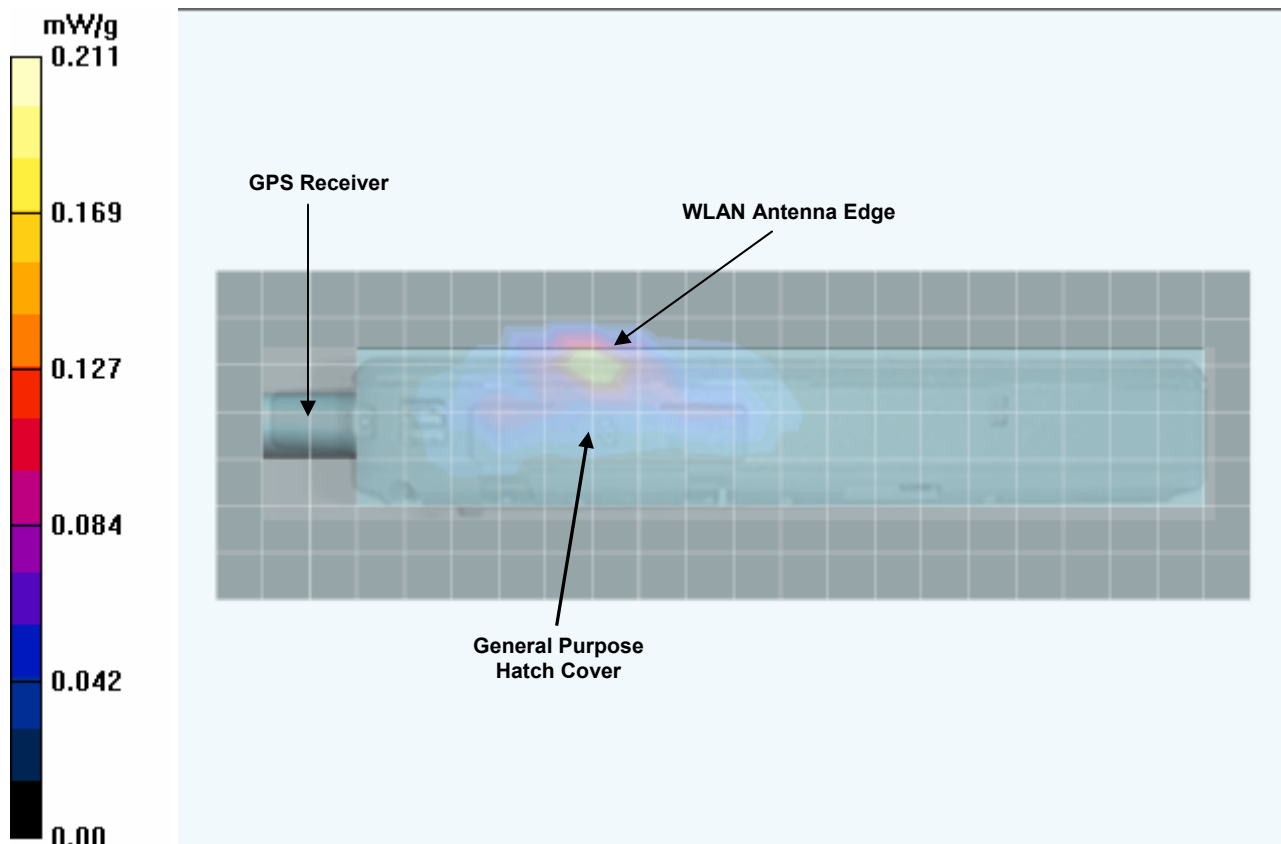

| | | | | | | |
|-------------------------|--|----------------|---|---------------|--------------|----------|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a | |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 21 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 07/15/2005

Body SAR - 802.11b - 11 Mbps - Antenna Edge of DUT - 0.0 cm Spacing - Internal Battery Power

DUT: Itronix Model: IX325-IWLBT; Type: Rugged Tablet PC with Intel Pro 2200BG 802.11b/g WLAN; Serial: ZZGEG5074ZZ9799


Ambient Temp: 24.6 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 106.4 kPa; Humidity: 32%

11.1V, 3600mAh Internal Li-ion Battery Pack (Model: T8M-E)
 Communication System: DSSS WLAN
 Frequency: 2442 MHz; Duty Cycle: 1:1
 RF Output Power: 20.5 dBm (Peak Conducted)
 Medium: M2450 ($\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Area Scan (8x23x1): Measurement grid: dx=15mm, dy=15mm


Body SAR - 802.11b - 0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom - Mid Channel Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.82 V/m; Power Drift = -0.0180 dB
 Peak SAR (extrapolated) = 0.309 W/kg
SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.045 mW/g

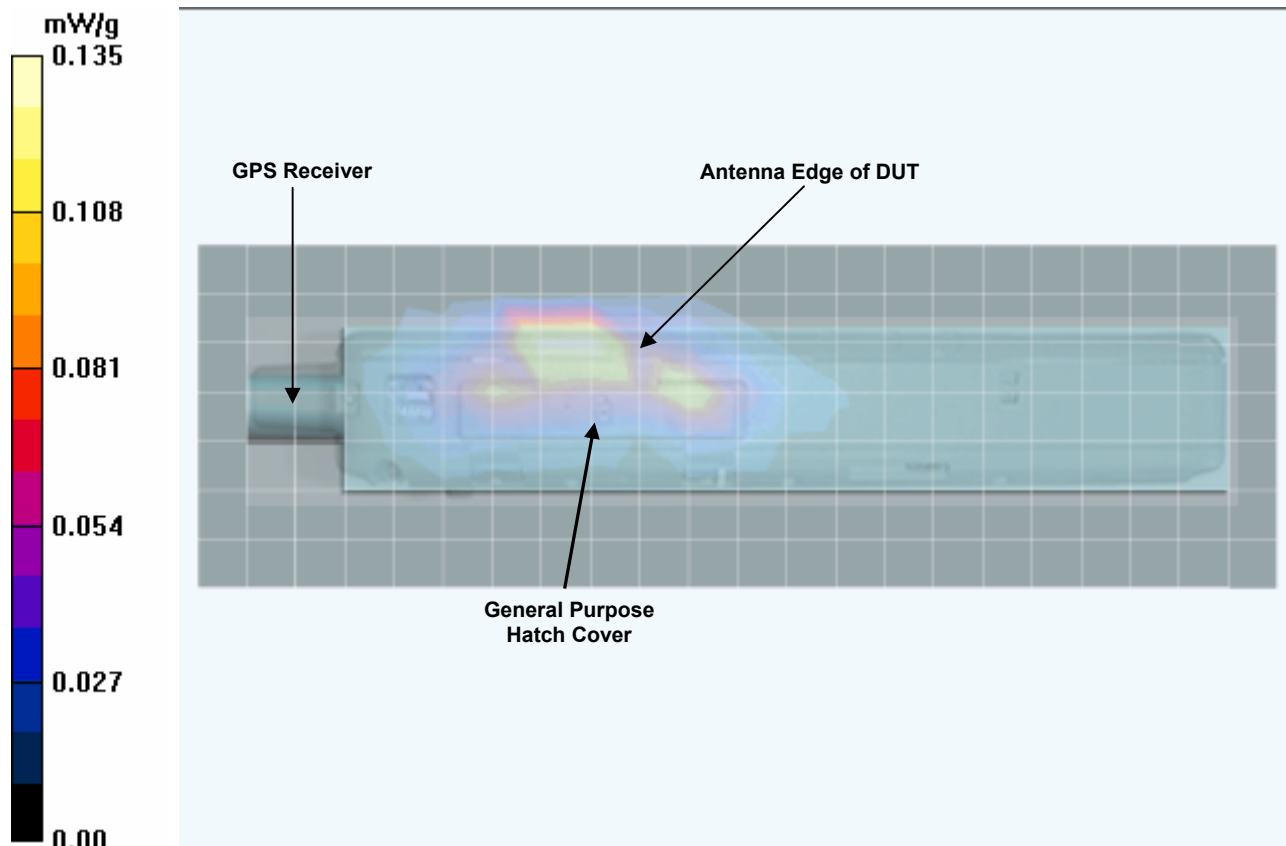


| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|----------|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a | |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 22 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Fluid Depth ($\geq 15\text{cm}$)

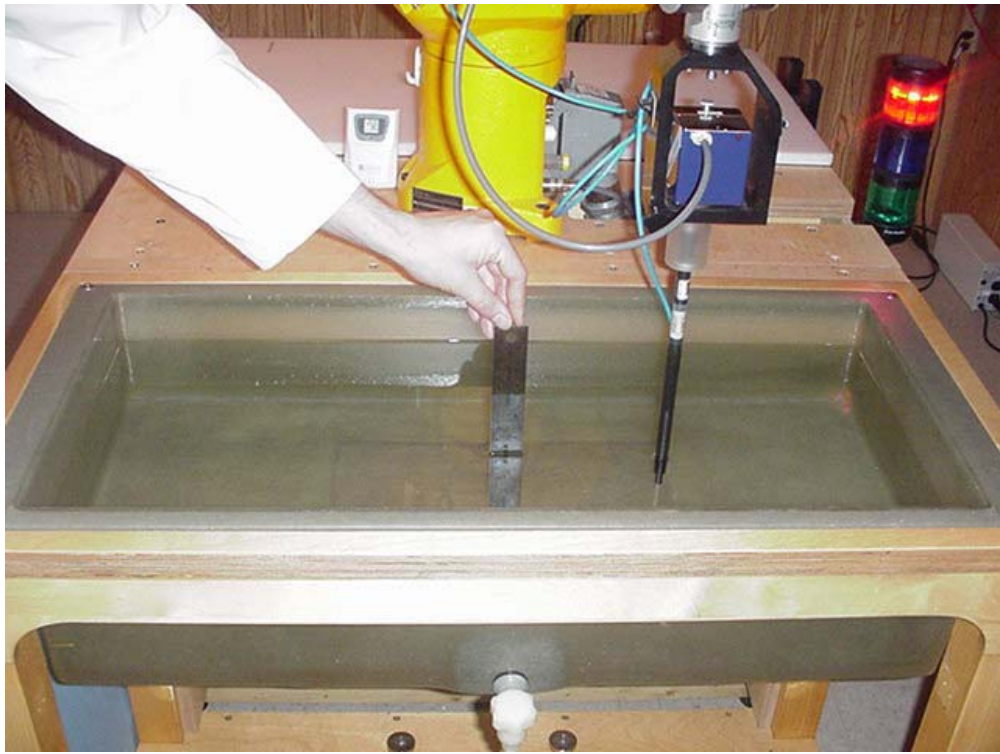

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 23 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/09/2005

System Performance Check (Brain) - 2450 MHz Dipole

DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 09/30/2004

Ambient Temp: 22.0 °C; Fluid Temp: 24.8 °C; Barometric Pressure: 101.7 kPa; Humidity: 38%

Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: HSL2450 ($\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 37.4$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1590; ConvF(4.56, 4.56, 4.56); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 96.5 V/m; Power Drift = -0.025 dB
 Peak SAR (extrapolated) = 30.2 W/kg
SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.41 mW/g

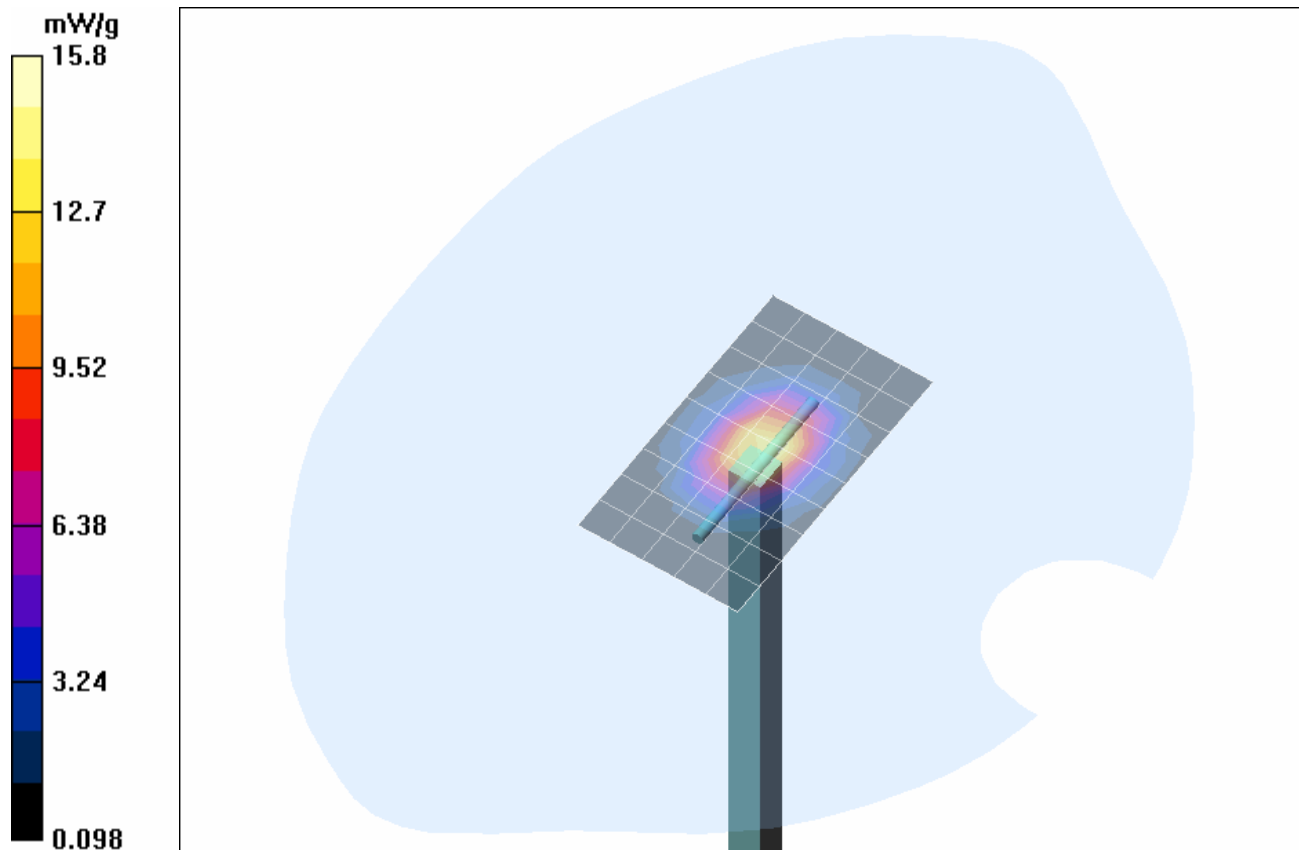

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 25 of 44 |

Z-Axis Scan

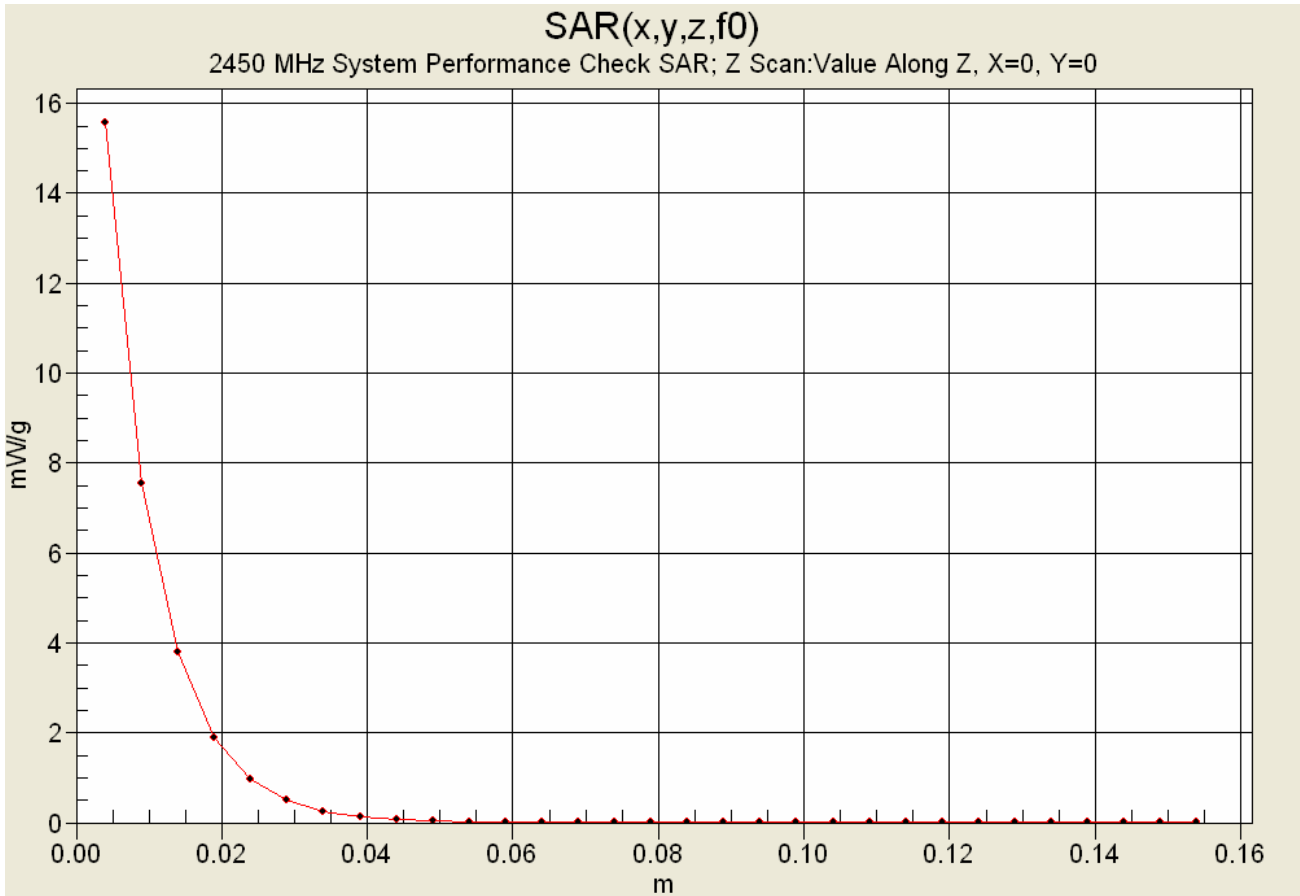

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 06/23/2005

System Performance Check (Body) - 2450 MHz Dipole

DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 04/22/2005

Ambient Temp: 23.0 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.4 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1590; ConvF(4.22, 4.22, 4.22); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.1 V/m; Power Drift = -0.031 dB


Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.9 mW/g

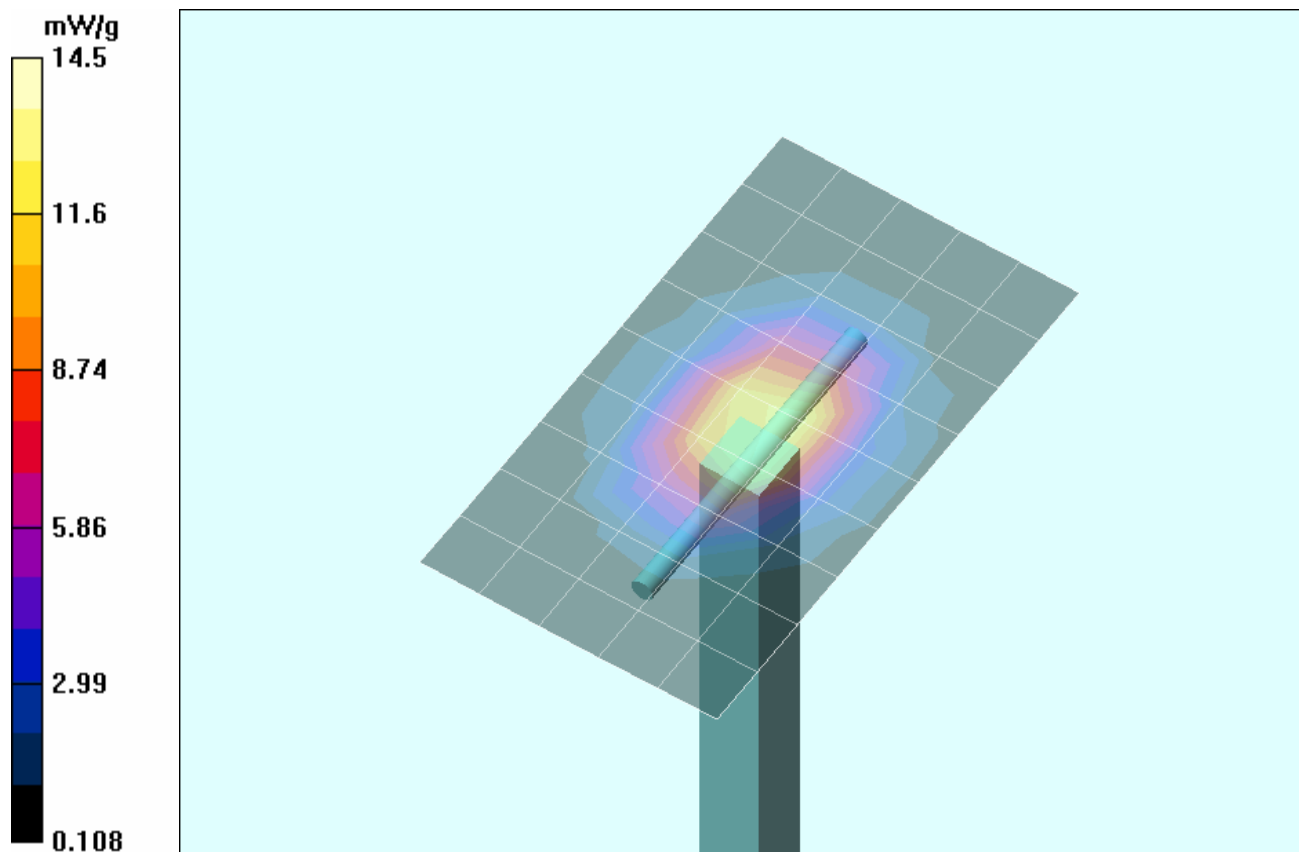

| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 27 of 44 |

Z-Axis Scan

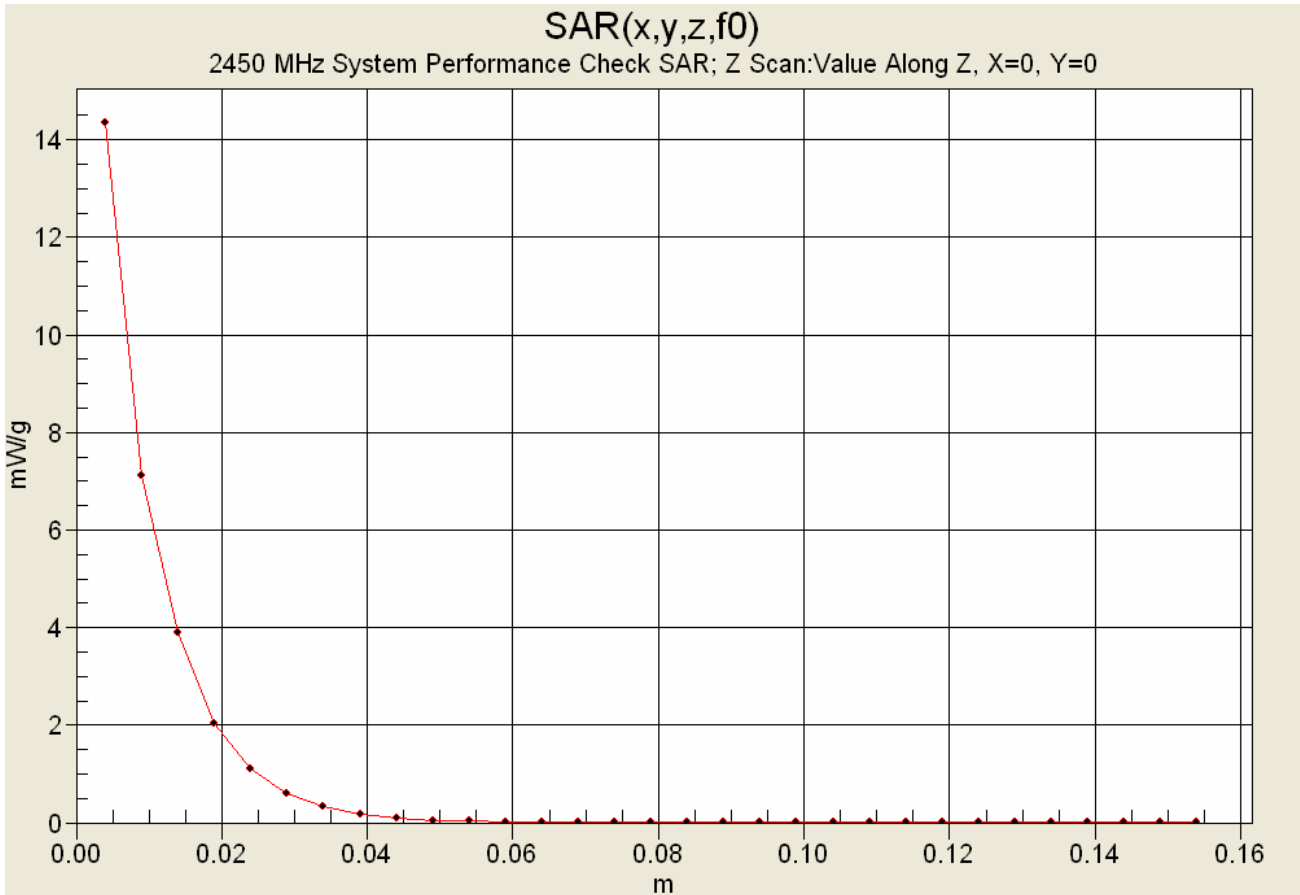

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

Date Tested: 07/15/2005

System Performance Check (Body) - 2450 MHz Dipole

DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 04/22/2005

Ambient Temp: 24.6 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 106.4 kPa; Humidity: 32%

Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: M2450 ($\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(4.3, 4.3, 4.3); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 87.7 V/m; Power Drift = -0.064 dB
 Peak SAR (extrapolated) = 29.3 W/kg
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.98 mW/g

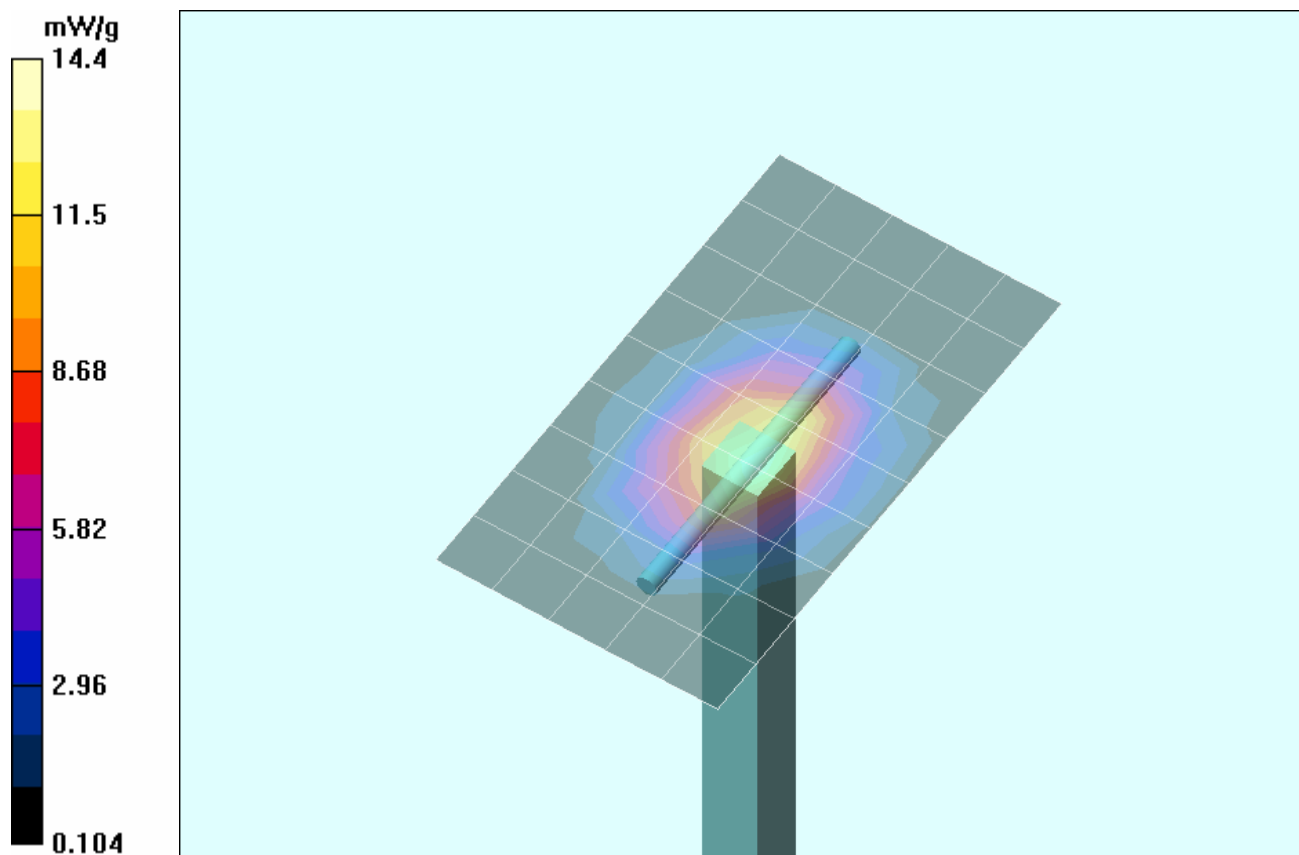


| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 29 of 44 |

Z-Axis Scan

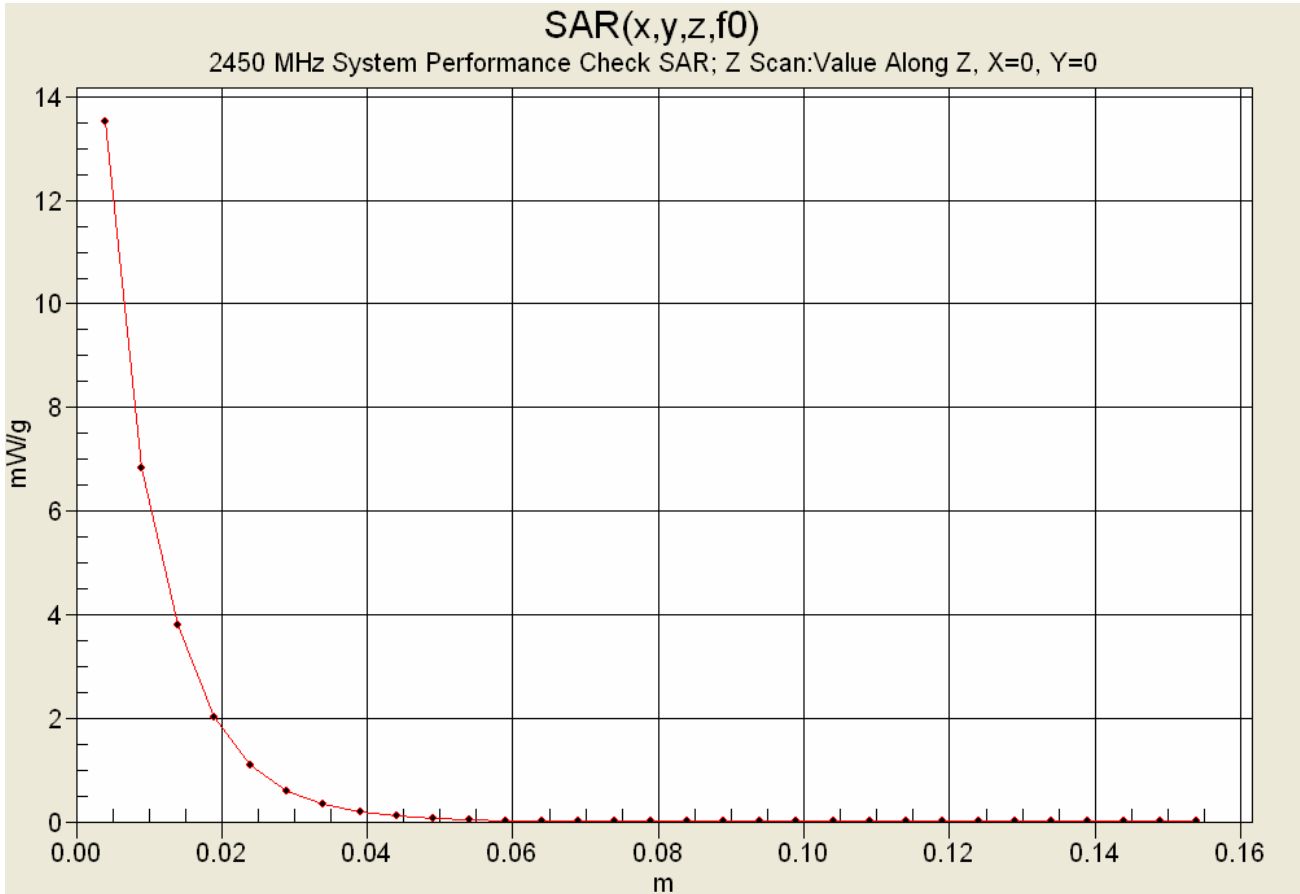

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

| | | | | | | |
|-------------------------|--|----------------|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 31 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

2450 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 09/Jun/2005

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.3500 | 52.83 | 1.85 | 51.45 | 1.82 |
| 2.3600 | 52.82 | 1.86 | 51.45 | 1.84 |
| 2.3700 | 52.81 | 1.87 | 51.37 | 1.87 |
| 2.3800 | 52.79 | 1.88 | 51.40 | 1.88 |
| 2.3900 | 52.78 | 1.89 | 51.26 | 1.90 |
| 2.4000 | 52.77 | 1.90 | 51.29 | 1.89 |
| 2.4100 | 52.75 | 1.91 | 51.19 | 1.93 |
| 2.4200 | 52.74 | 1.92 | 51.25 | 1.93 |
| 2.4300 | 52.73 | 1.93 | 51.33 | 1.96 |
| 2.4400 | 52.71 | 1.94 | 51.17 | 1.96 |
| 2.4500 | 52.70 | 1.95 | 51.23 | 1.99 |
| 2.4600 | 52.69 | 1.96 | 51.05 | 1.98 |
| 2.4700 | 52.67 | 1.98 | 50.99 | 2.00 |
| 2.4800 | 52.66 | 1.99 | 51.08 | 2.01 |
| 2.4900 | 52.65 | 2.01 | 50.82 | 2.04 |
| 2.5000 | 52.64 | 2.02 | 50.76 | 2.04 |
| 2.5100 | 52.62 | 2.04 | 50.83 | 2.06 |
| 2.5200 | 52.61 | 2.05 | 50.83 | 2.07 |
| 2.5300 | 52.60 | 2.06 | 50.72 | 2.08 |
| 2.5400 | 52.59 | 2.08 | 50.79 | 2.09 |
| 2.5500 | 52.57 | 2.09 | 50.79 | 2.11 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

2450 MHz System Performance Check (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 09/Jun/2005

Freq Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.3500 | 39.38 | 1.71 | 38.04 | 1.75 |
| 2.3600 | 39.36 | 1.72 | 37.94 | 1.78 |
| 2.3700 | 39.34 | 1.73 | 37.91 | 1.78 |
| 2.3800 | 39.32 | 1.74 | 37.86 | 1.80 |
| 2.3900 | 39.31 | 1.75 | 37.74 | 1.82 |
| 2.4000 | 39.29 | 1.76 | 37.71 | 1.82 |
| 2.4100 | 39.27 | 1.76 | 37.74 | 1.84 |
| 2.4200 | 39.25 | 1.77 | 37.66 | 1.85 |
| 2.4300 | 39.24 | 1.78 | 37.56 | 1.84 |
| 2.4400 | 39.22 | 1.79 | 37.57 | 1.87 |
| 2.4500 | 39.20 | 1.80 | 37.44 | 1.87 |
| 2.4600 | 39.19 | 1.81 | 37.48 | 1.89 |
| 2.4700 | 39.17 | 1.82 | 37.30 | 1.90 |
| 2.4800 | 39.16 | 1.83 | 37.26 | 1.90 |
| 2.4900 | 39.15 | 1.84 | 37.15 | 1.92 |
| 2.5000 | 39.14 | 1.85 | 37.13 | 1.93 |
| 2.5100 | 39.12 | 1.87 | 37.08 | 1.94 |
| 2.5200 | 39.11 | 1.88 | 36.97 | 1.96 |
| 2.5300 | 39.10 | 1.89 | 37.02 | 1.96 |
| 2.5400 | 39.09 | 1.90 | 37.00 | 1.97 |
| 2.5500 | 39.07 | 1.91 | 36.89 | 1.99 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

2450 MHz System Performance Check & DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 23/Jun/2005

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.3500 | 52.83 | 1.85 | 50.96 | 1.79 |
| 2.3600 | 52.82 | 1.86 | 50.74 | 1.84 |
| 2.3700 | 52.81 | 1.87 | 50.79 | 1.87 |
| 2.3800 | 52.79 | 1.88 | 50.90 | 1.87 |
| 2.3900 | 52.78 | 1.89 | 50.94 | 1.88 |
| 2.4000 | 52.77 | 1.90 | 50.68 | 1.87 |
| 2.4100 | 52.75 | 1.91 | 50.61 | 1.94 |
| 2.4200 | 52.74 | 1.92 | 50.91 | 1.96 |
| 2.4300 | 52.73 | 1.93 | 50.40 | 1.93 |
| 2.4400 | 52.71 | 1.94 | 50.47 | 1.96 |
| 2.4500 | 52.70 | 1.95 | 50.21 | 1.95 |
| 2.4600 | 52.69 | 1.96 | 50.77 | 1.99 |
| 2.4700 | 52.67 | 1.98 | 50.37 | 1.98 |
| 2.4800 | 52.66 | 1.99 | 50.51 | 2.00 |
| 2.4900 | 52.65 | 2.01 | 50.30 | 1.99 |
| 2.5000 | 52.64 | 2.02 | 50.43 | 2.00 |
| 2.5100 | 52.62 | 2.04 | 50.08 | 2.06 |
| 2.5200 | 52.61 | 2.05 | 50.31 | 2.01 |
| 2.5300 | 52.60 | 2.06 | 50.40 | 2.11 |
| 2.5400 | 52.59 | 2.08 | 50.24 | 2.06 |
| 2.5500 | 52.57 | 2.09 | 50.46 | 2.07 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

2450 MHz System Performance Check & DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 15/Jul/2005

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma


Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.3500 | 52.83 | 1.85 | 50.78 | 1.81 |
| 2.3600 | 52.82 | 1.86 | 50.76 | 1.79 |
| 2.3700 | 52.81 | 1.87 | 50.82 | 1.80 |
| 2.3800 | 52.79 | 1.88 | 50.28 | 1.83 |
| 2.3900 | 52.78 | 1.89 | 50.51 | 1.84 |
| 2.4000 | 52.77 | 1.90 | 50.86 | 1.88 |
| 2.4100 | 52.75 | 1.91 | 50.69 | 1.90 |
| 2.4200 | 52.74 | 1.92 | 50.44 | 1.86 |
| 2.4300 | 52.73 | 1.93 | 50.61 | 1.90 |
| 2.4400 | 52.71 | 1.94 | 50.84 | 1.90 |
| 2.4500 | 52.70 | 1.95 | 50.65 | 1.92 |
| 2.4600 | 52.69 | 1.96 | 50.33 | 1.96 |
| 2.4700 | 52.67 | 1.98 | 50.82 | 1.93 |
| 2.4800 | 52.66 | 1.99 | 50.09 | 1.98 |
| 2.4900 | 52.65 | 2.01 | 50.68 | 1.98 |
| 2.5000 | 52.64 | 2.02 | 50.15 | 2.01 |
| 2.5100 | 52.62 | 2.04 | 50.32 | 2.04 |
| 2.5200 | 52.61 | 2.05 | 50.10 | 2.03 |
| 2.5300 | 52.60 | 2.06 | 50.42 | 2.04 |
| 2.5400 | 52.59 | 2.08 | 50.11 | 2.05 |
| 2.5500 | 52.57 | 2.09 | 50.00 | 2.08 |


| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |


APPENDIX D - SAR TEST SETUP PHOTOGRAPHS

| | | | | | | |
|-------------------------|--|----------------|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 36 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |


BODY SAR TEST SETUP PHOTOGRAPHS
0.0 cm Separation Distance from Bottom of DUT to Planar Phantom
Internal Lithium-ion Battery Pack (Model: T8M-E)

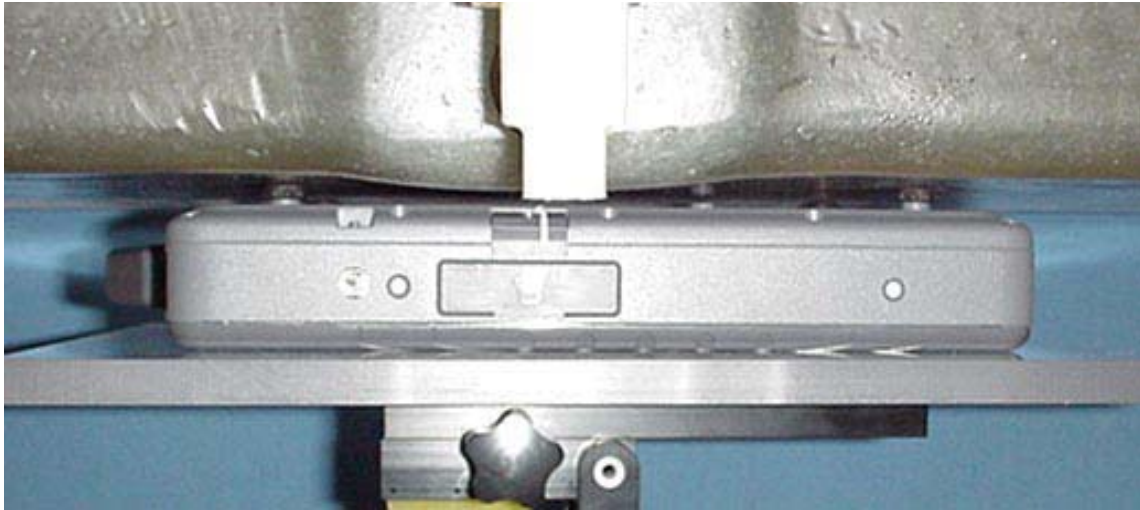


| | | | | | | |
|-------------------------|--|----------------|--|---------------|---------------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 37 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

BODY SAR TEST SETUP PHOTOGRAPHS
0.0 cm Separation Distance from Bottom of DUT to Planar Phantom
75 W AC Power Adapter (Delta Electronics Model: ADP-75FB B)

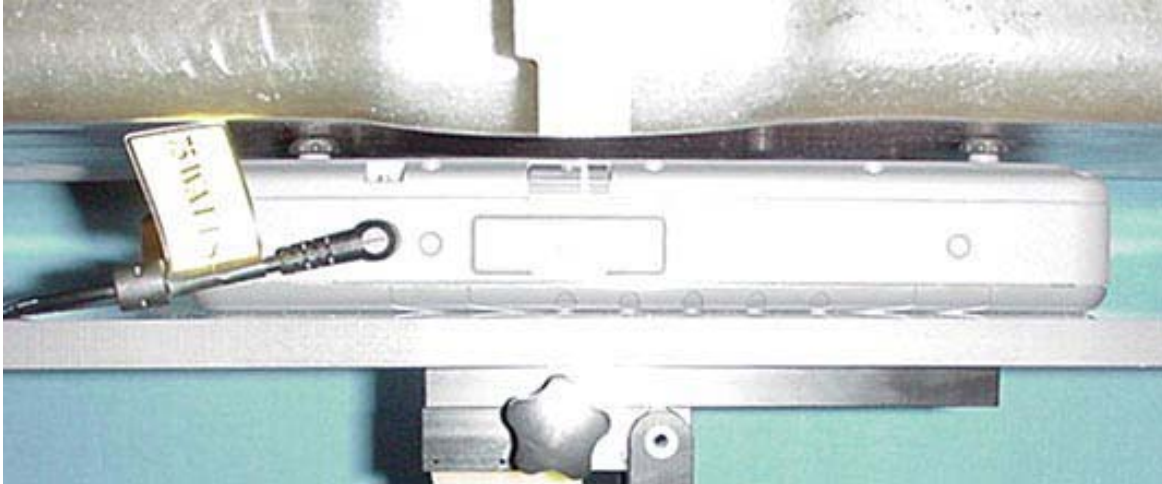


| | | | | | | |
|-------------------------|----------------------------|--|--|---------------|---------------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 38 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

BODY SAR TEST SETUP PHOTOGRAPHS
0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom
Internal Lithium-ion Battery Pack (Model: T8M-E)




| | | | | | | |
|-------------------------|----------------------------|--|--|---------------|---------------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 39 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |


BODY SAR TEST SETUP PHOTOGRAPHS
0.0 cm Separation Distance from Antenna Edge of DUT to Planar Phantom
75 W AC Power Adapter (Delta Electronics Model: ADP-75FB B)



| | | | | | | |
|-------------------------|---------------------|--|---|--------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 40 of 44 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX E - SYSTEM VALIDATION

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 41 of 44 |

2450 MHz SYSTEM VALIDATION DIPOLE

Type:

2450 MHz Validation Dipole

Serial Number:

150

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

September 30, 2004

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

Spencer Watson


Approved by:

Russell W. Pipe

1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

| | |
|----------------------------------|---------------------------------|
| Feed point impedance at 2450 MHz | $\text{Re}\{Z\} = 48.246\Omega$ |
| | $\text{Im}\{Z\} = 1.0996\Omega$ |
| Return Loss at 2450 MHz | -33.519 dB |

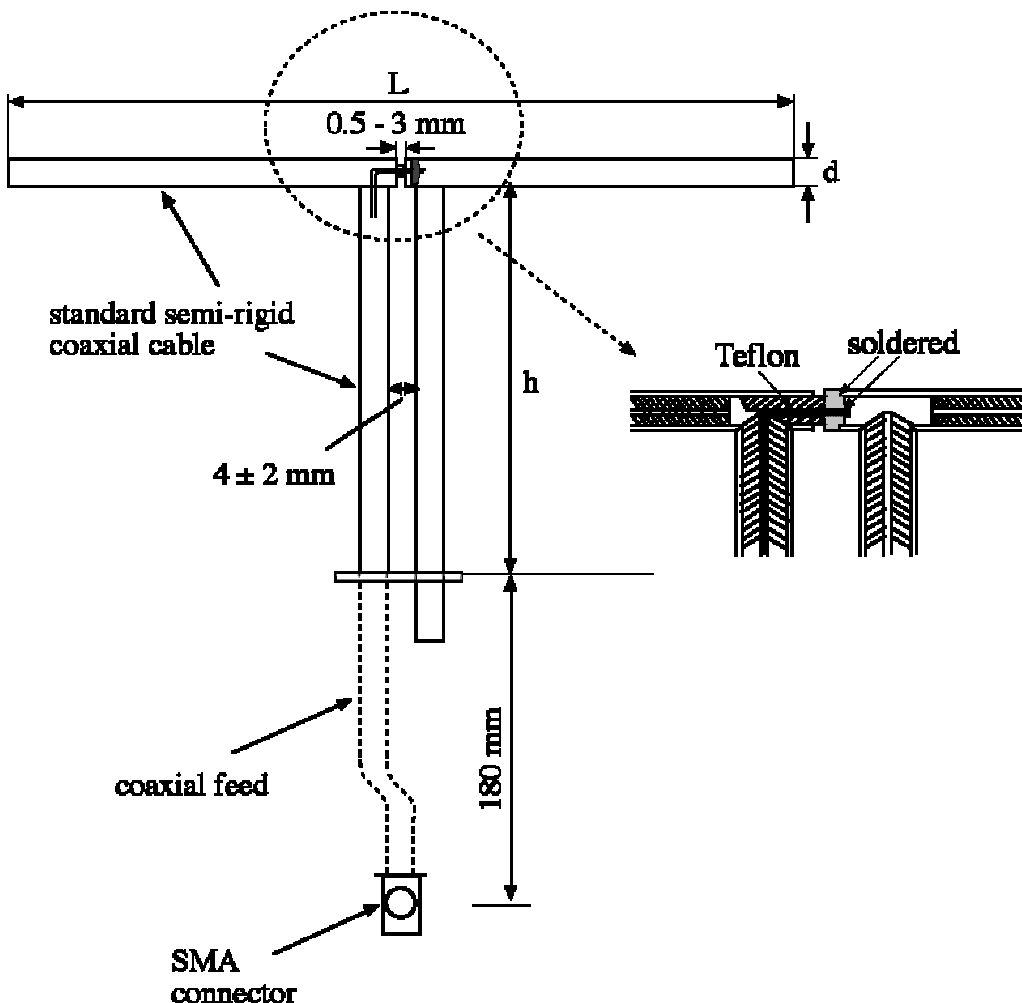


30 Sep 2004 16:29:23

MEM 1 U FS 1: 48.246 Ω 1.0996 Ω 71.432 pH 2 450.000 000 MHz

PRm

Cor

↑

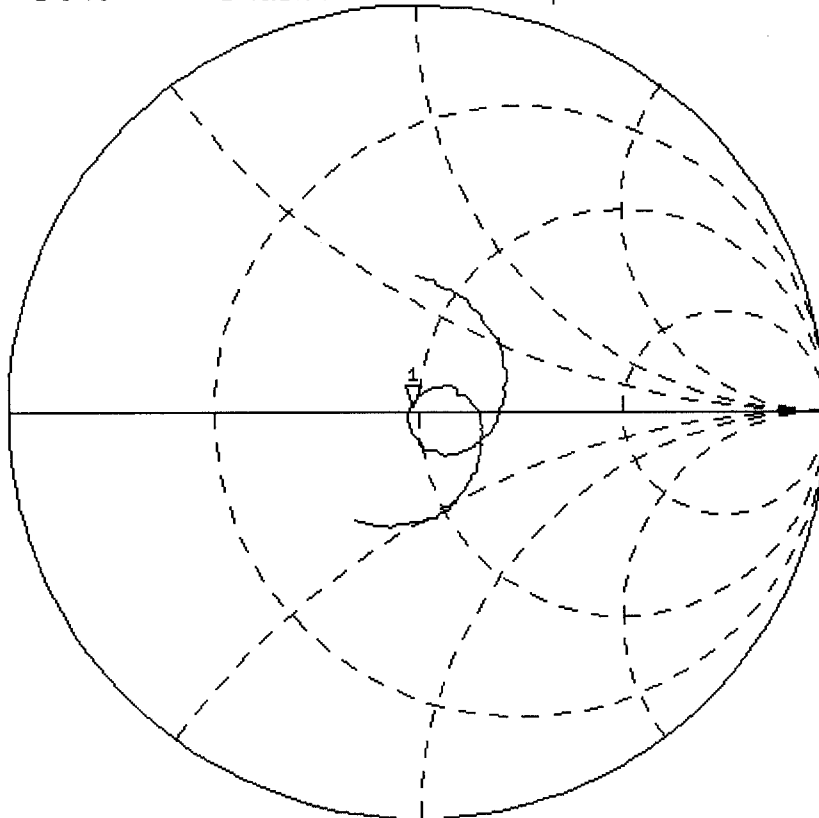


CENTER 2 450.000 000 MHz

SPAN 400.000 000 MHz

30 Sep 2004 16:28:38

CH1 MEM LOG 10 dB/REF 0 dB 1:-33.519 dB 2 450.000 000 MHz

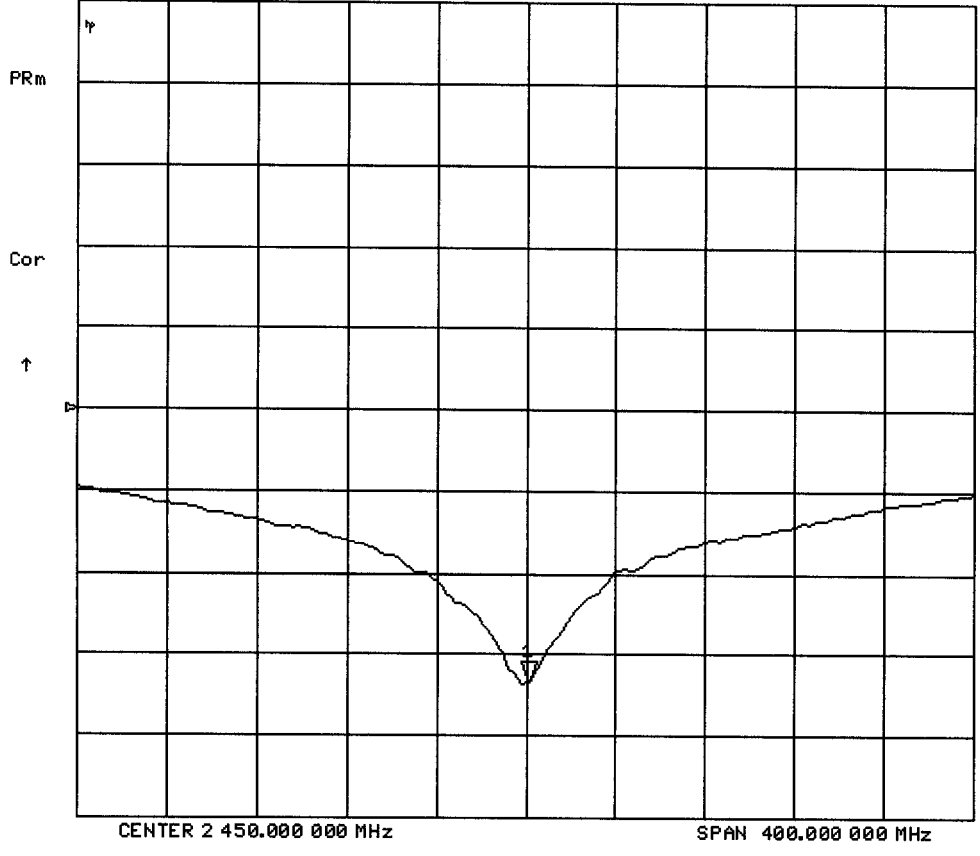

2. Validation Dipole Dimensions

| Frequency (MHz) | L (mm) | h (mm) | d (mm) |
|-----------------|--------|--------|--------|
| 300 | 420.0 | 250.0 | 6.2 |
| 450 | 288.0 | 167.0 | 6.2 |
| 835 | 161.0 | 89.8 | 3.6 |
| 900 | 149.0 | 83.3 | 3.6 |
| 1450 | 89.1 | 51.7 | 3.6 |
| 1800 | 72.0 | 41.7 | 3.6 |
| 1900 | 68.0 | 39.5 | 3.6 |
| 2000 | 64.5 | 37.5 | 3.6 |
| 2450 | 51.8 | 30.6 | 3.6 |
| 3000 | 41.5 | 25.0 | 3.6 |

3. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2.0 ± 0.1 mm
Filling Volume: Approx. 25 liters
Dimensions: 50 cm (W) x 100 cm (L)

4. 2450 MHz System Validation Setup



5. 2450 MHz Dipole Setup



6. Measurement Conditions

The phantom was filled with brain simulating tissue having the following electrical parameters at 2450 MHz:

Relative Permittivity: 38.5
 Conductivity: 1.86 mho/m
 Fluid Temperature: 23.7 °C
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:


Ambient Temperature: 25.3 °C
 Humidity: 32 %
 Barometric Pressure: 102.7 kPa

The 2450 MHz simulated brain tissue mixture consists of the following ingredients:

| Ingredient | Percentage by weight |
|---|---|
| Water | 52.00% |
| Glycol Monobutyl | 48.00% |
| Target Dielectric Parameters at 22°C | $\epsilon_r = 39.2 (+/-5\%)$ $\sigma = 1.80 \text{ S/m } (+/-5\%)$ |

7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

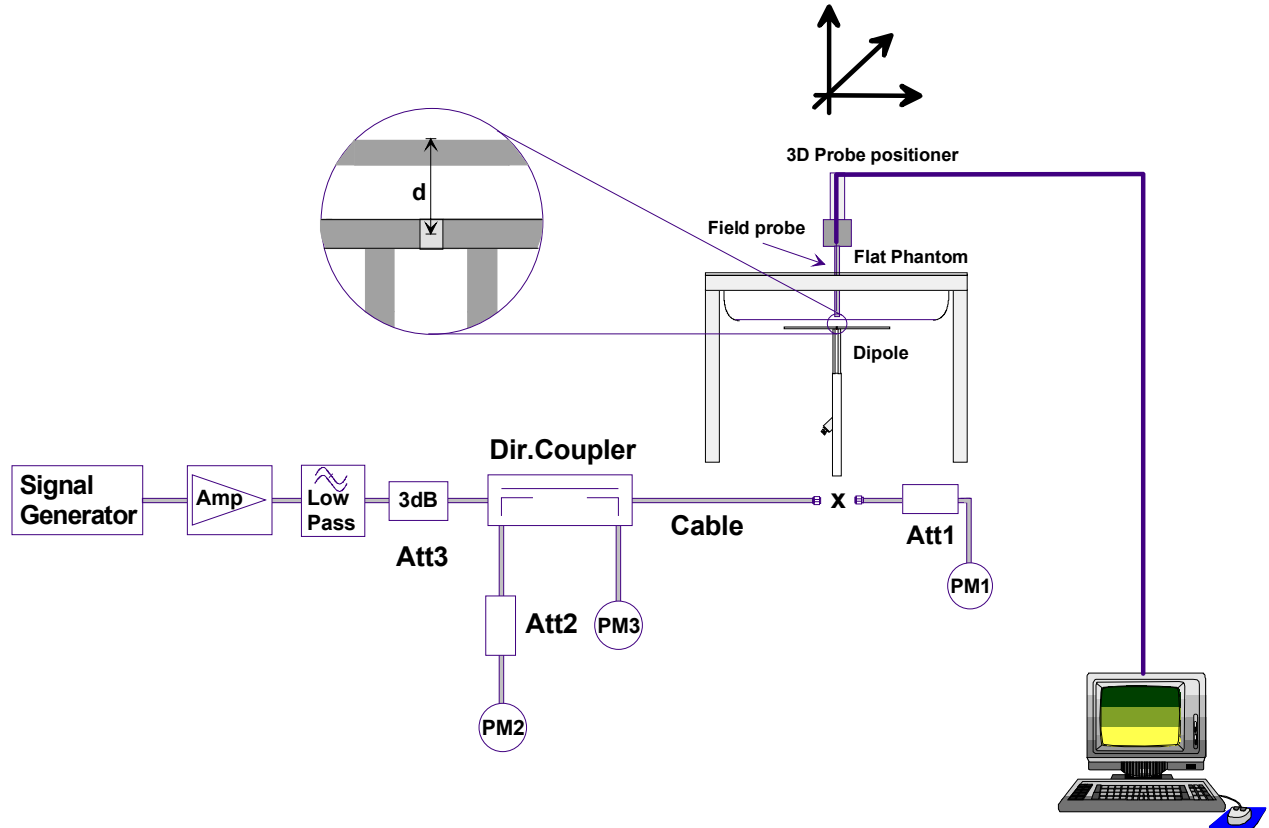

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

| Validation Measurement | SAR @ 0.25W Input averaged over 1g | SAR @ 1W Input averaged over 1g | SAR @ 0.25W Input averaged over 10g | SAR @ 1W Input averaged over 10g | Peak SAR @ 0.25W Input |
|------------------------|------------------------------------|---------------------------------|-------------------------------------|----------------------------------|------------------------|
| Test 1 | 14.2 | 56.8 | 6.58 | 26.32 | 30.4 |
| Test 2 | 14.1 | 56.4 | 6.54 | 26.16 | 30.2 |
| Test 3 | 14.1 | 56.4 | 6.54 | 26.16 | 30.4 |
| Test 4 | 14.1 | 56.4 | 6.51 | 26.04 | 30.6 |
| Test 5 | 14.0 | 56.0 | 6.51 | 26.04 | 29.8 |
| Test 6 | 14.0 | 56.0 | 6.49 | 25.96 | 29.6 |
| Test 7 | 14.1 | 56.4 | 6.54 | 26.16 | 30.0 |
| Test 8 | 14.1 | 56.4 | 6.53 | 26.12 | 30.1 |
| Test 9 | 14.0 | 56.0 | 6.50 | 26.00 | 29.8 |
| Test10 | 14.0 | 56.0 | 6.47 | 25.88 | 30.0 |
| Average Value | 14.07 | 56.28 | 6.52 | 26.08 | 30.09 |

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over 1cm³ (1g) of tissue: 52.4 mW/g (+/- 10%)

Averaged over 1cm (1g) of tissue: 56.28 mW/g (+ 7.4% deviation)

IEEE Target over 10cm³ (10g) of tissue: 24.0 mW/g (+/- 10%)

Averaged over 10cm (10g) of tissue: 26.08 mW/g (+ 8.7% deviation)

2540 MHz System Validation - September 30, 2004

DUT: Dipole 2450 MHz; Model: D2450V2; Serial: 150; Calibrated: 09/30/2004

Ambient Temp: 25.3 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 32%

Communication System: CW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450 ($\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(4.44, 4.44, 4.44); Calibrated: 24/05/2004

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 14/05/2004

- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033

- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

2450 MHz System Validation/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

2450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.58 mW/g

2450 MHz System Validation/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g

2450 MHz System Validation/Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g

2450 MHz System Validation/Zoom Scan 4 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.1 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.51 mW/g

2450 MHz System Validation/Zoom Scan 5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.51 mW/g

2450 MHz System Validation/Zoom Scan 6 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.49 mW/g

2450 MHz System Validation/Zoom Scan 7 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g

2450 MHz System Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.53 mW/g

2450 MHz System Validation/Zoom Scan 9 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.3 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 29.8 W/kg


SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.5 mW/g

2450 MHz System Validation/Zoom Scan 10 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 96.4 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.47 mW/g

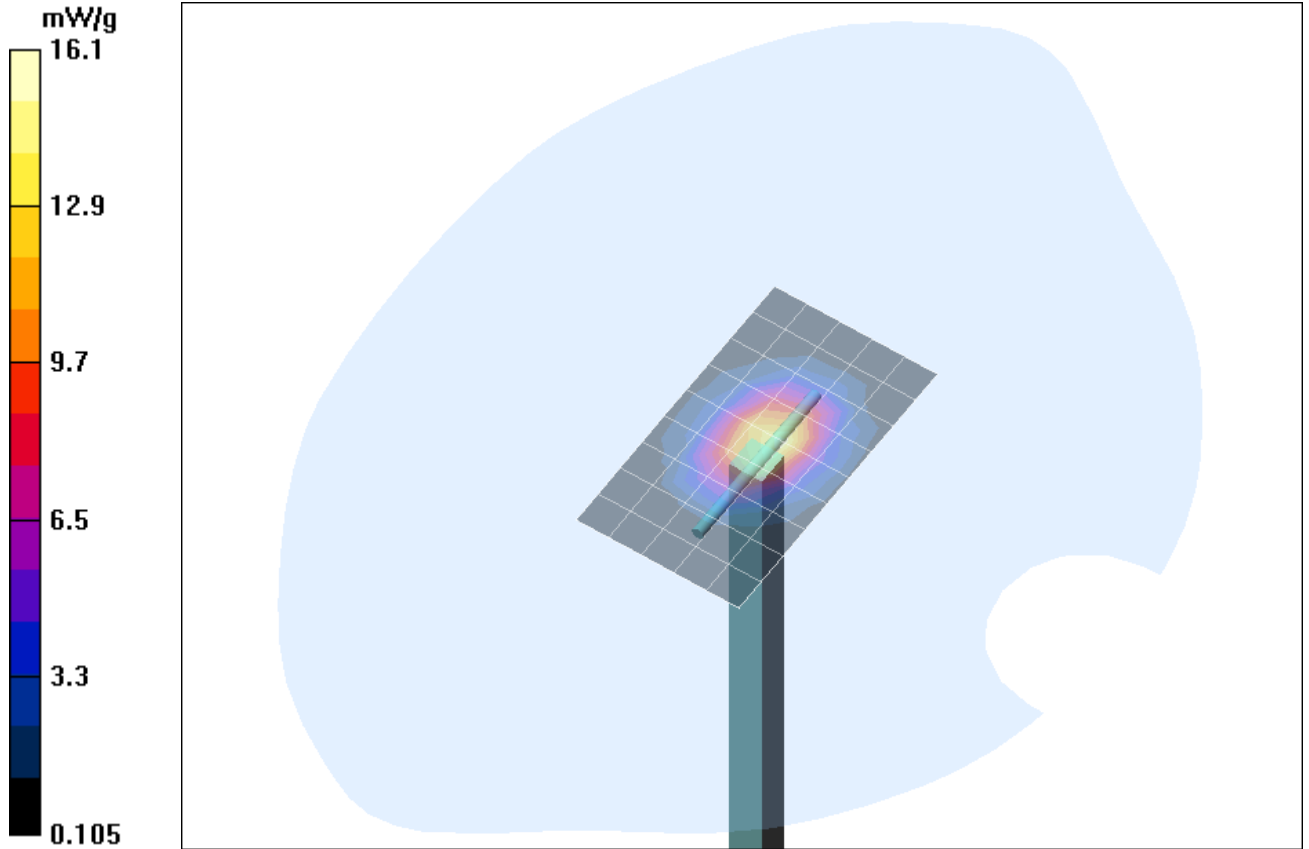

1 g average of 10 measurements: 14.07 mW/g
10 g average of 10 measurements: 6.521 mW/g

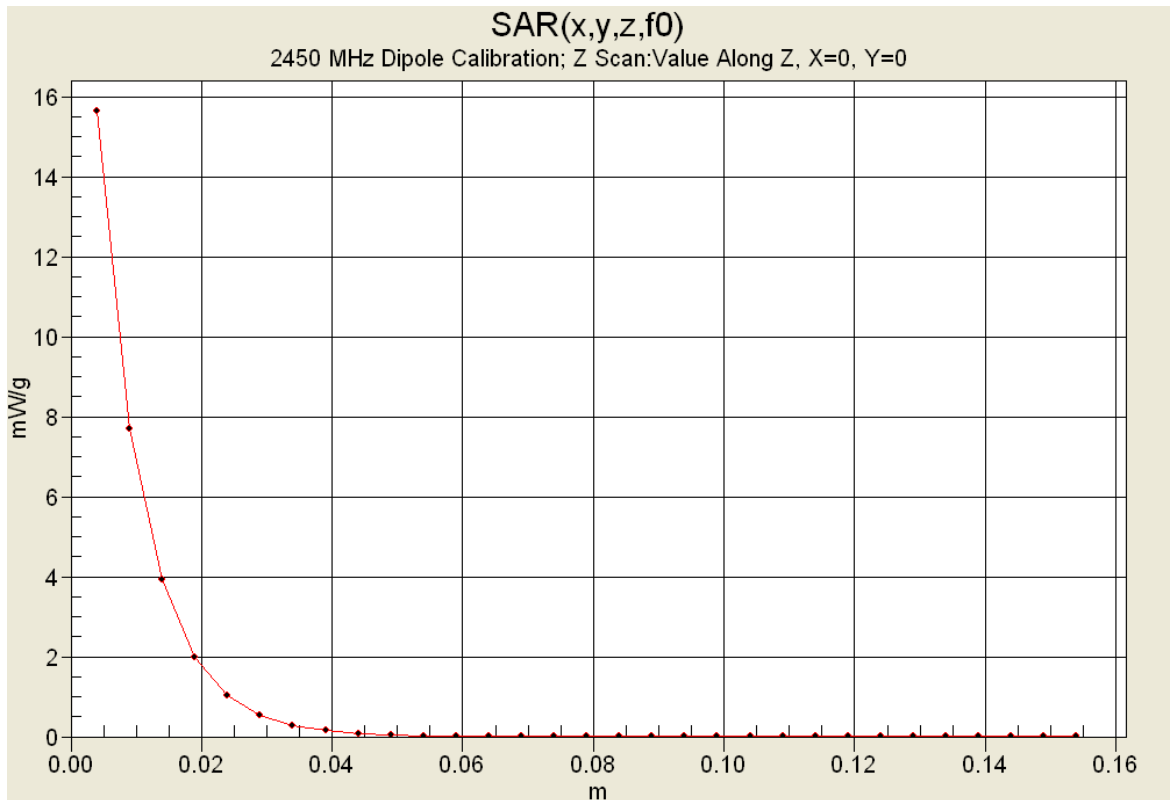

2450 MHz System Validation


Measured Fluid Dielectric Parameters (Brain)

September 30, 2004

| Frequency | ϵ' | ϵ'' |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 38.9044 | 13.2920 |
| 2.360000000 GHz | 38.8598 | 13.3262 |
| 2.370000000 GHz | 38.8346 | 13.3589 |
| 2.380000000 GHz | 38.7702 | 13.3903 |
| 2.390000000 GHz | 38.7465 | 13.4360 |
| 2.400000000 GHz | 38.6987 | 13.4546 |
| 2.410000000 GHz | 38.6553 | 13.4975 |
| 2.420000000 GHz | 38.6023 | 13.5376 |
| 2.430000000 GHz | 38.5771 | 13.5800 |
| 2.440000000 GHz | 38.5403 | 13.6072 |
| 2.450000000 GHz | 38.5010 | 13.6535 |
| 2.460000000 GHz | 38.4824 | 13.6770 |
| 2.470000000 GHz | 38.4488 | 13.7080 |
| 2.480000000 GHz | 38.4153 | 13.7445 |
| 2.490000000 GHz | 38.3700 | 13.7692 |
| 2.500000000 GHz | 38.3378 | 13.7887 |
| 2.510000000 GHz | 38.2798 | 13.8028 |
| 2.520000000 GHz | 38.2288 | 13.8500 |
| 2.530000000 GHz | 38.1683 | 13.8945 |
| 2.540000000 GHz | 38.1113 | 13.9420 |
| 2.550000000 GHz | 38.0791 | 13.9851 |

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

| | | | | | | |
|-------------------------|--|----------------|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | 43 of 44 |

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

| | |
|-----------------------|--|
| Item | SAM Twin Phantom V4.0 |
| Type No | QD 000 P40 BA |
| Series No | TP-1002 and higher |
| Manufacturer / Origin | Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland |

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test | Requirement | Details | Units tested |
|----------------------|---|--|------------------------------|
| Shape | Compliance with the geometry according to the CAD model. | IT'IS CAD File (*) | First article, Samples |
| Material thickness | Compliant with the requirements according to the standards | 2mm +/- 0.2mm in specific areas | First article, Samples |
| Material parameters | Dielectric parameters for required frequencies | 200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05. | Material sample TP 104-5 |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard. | Pre-series, First article |

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp




**Schmid & Partner
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

| | | | |
|-------------------------|---------------------------|---------------|-----------------------|
| Test Report Serial No.: | 060605KBC-T644-S15W | Issue Date: | Aug. 12, 2005 |
| Dates of Evaluation: | June 9, 23, July 15, 2005 | Report Issue: | Issue 1 Rev 0 |
| Type of Evaluation: | RF Exposure | SAR | FCC 2.1093 IC RSS-102 |

APPENDIX H - PLANAR PHANTOM CERTIFICATE OF CONFORMITY

| | | | | | | |
|-------------------------|---------------------|--|---|---------------|--------------|---|
| Applicant: | Itronix Corporation | FCC ID: | KBCIX325-IWLBT | IC ID: | 1943A-IX325a |  |
| Model: | IX325-IWLBT | DUT: | IX325 Rugged Tablet PC with 802.11b/g WLAN & co-located Bluetooth | | | |
| 2005 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | 44 of 44 |

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

| Test | Requirement | Details |
|---------------------|--|---|
| Shape | Compliance to geometry according to drawing | Supplied CAD drawing |
| Material Thickness | Compliant with the requirements | 2mm +/- 0.2mm in measurement area |
| Material Parameters | Dielectric parameters for required frequencies Based on Dow Chemical technical data | 100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05 |

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailier



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

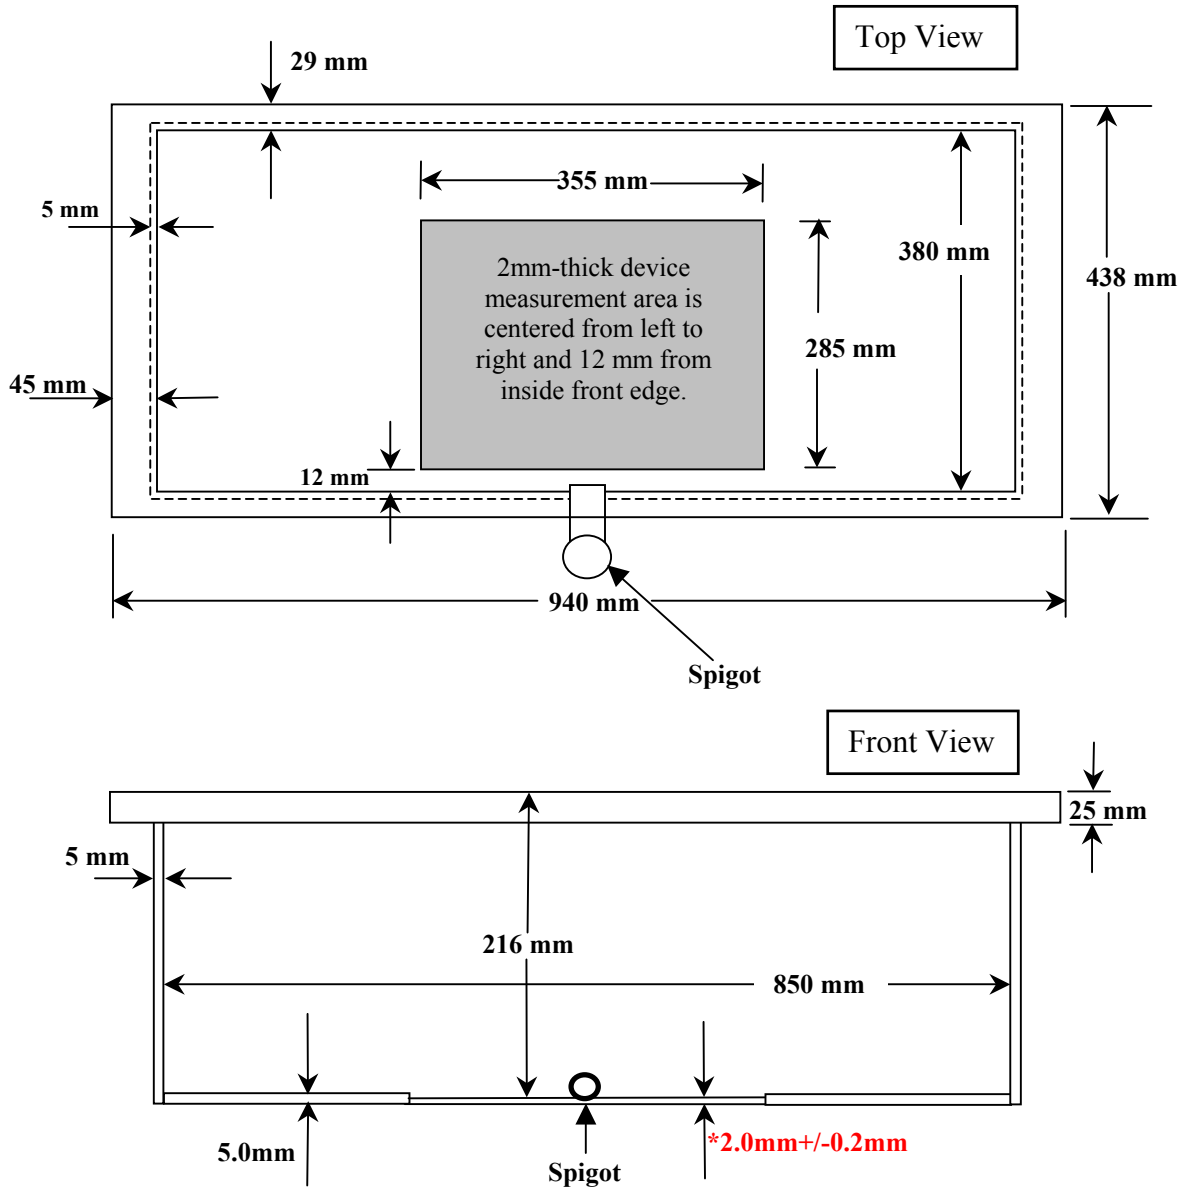

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.**