
## LABEL

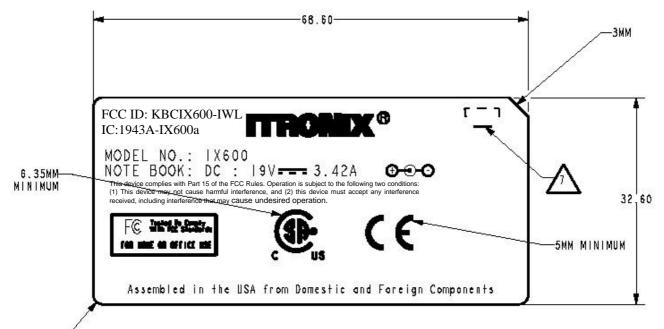

-RI.50 3 PL

NOTES: (UNLESS OTHERWISE SPECIFIED).

- I. MATERIAL: PC, THK. = 0.127mm(MATTED) + 0.05mm (ADHESIVE)
  WITH MATTED TEXTURE.
- 2. MATERIAL MUST BE UL AND CSA APPROVED.
- 3. PRINT ON BACK SURFACE.
- 4. ADHESIVE: SPEC REFER TO ES-811R05, SONY 303 OF TOYO DE2TROMR OR EQUIV.
- 5. COLOR: TEXT TO BE PMS 2C (COOL GRAY). BACKGROUND TO BE ACS-M.
- 6. PRINTING TOLERANCE OF DIMENSIONS TO BE +/-0.30mm.

```
    UL/CSA RECOGNIZED LOGO.
```

- ALL PART(S) TO BE CLEAN AND FREE FROM CONTAMINANTS TO MEET QUALITY APPEARANCE SPECIFICATION QE3-ODI.
- 9. ALL UNSPECIFIED GEOMETRY SHALL MATCH ITRONIX SUPPLIED DATABASE GENERATED FROM MODEL WHICH MATCHES THIS DRAWING. TOLERANCE UNSPECIFIED DIMENSIONS SHALL BE PER TABLE
- IO. PART(S) SHIPPED TO ITRONIX SHALL BE PACKAGED FOR SHIPMENT AND/OR STORAGE IN A CLEAN, PROTECTIVE CONTAINER PER ITRONIX PACKAGING AND SHIPPING SPEC. QE3-002. IF A BAG IS USED IT MUST BE NON-STATIC GENERATING.

## Label & Location

