

EMI TEST REPORT

Test Report No. : 23CE0012-HO

Applicant : CalsonicKansei Corp.

Type of Equipment : The keyless entry system for vehicle (Transmitter)

Model No. : ASTU51

Test standard : FCC Part 15 Subpart C Section 15.231

FCC ID : KBRASTU51

Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of A-Pex International Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.
5. This test report does not constitute an endorsement by NIST/NVLAP or U.S. Government.

Date of test : November 11, 2002

Issued date : November 14, 2002

Tested by : Y. Iwasa
Yoshiaki Iwasa

Approved by : H. Shimoji
Hironobu Shimoji
Group Leader of EMC Head Office Division

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

CONTENTS

	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures and results	4
SECTION 4: Operation of E.U.T. during testing	6
SECTION 5: Radiated Emission (Fundamental and Spurious Emission)	7
APPENDIX 1: Photographs of test setup	8
APPENDIX 2: Test instruments	8
APPENDIX 3: Data of EMI test	8

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

SECTION 1: Client information

Company name : CalsonicKansei Corp.
Brand name : NISSAN
Address : 540-7 Kyoei, Kodama-machi, Kodama-gun Saitama-ken 367-0206, Japan
Telephone Number : +81-495-72-5149
Facsimile Number : +81-495-72-5142
Contact Person : Toshinori Matsumoto

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : The keyless entry system for vehicle (Transmitter)
Model No. : ASTU51
Serial No. : 3
Rating : DC 3.0V
Country of Manufacture : JAPAN
Receipt Date of Sample : November 8, 2002
Condition of EUT : Production prototype

2.2 Product Description

CalsonicKansei Corp. Model: ASTU51(refer to as the EUT in this report) is the keyless entry system for vehicle (Transmitter).

The specification is as following:

Carrier Frequency : 315MHz
Type of Modulation : Amplitude Shift Keying
Antenna Type : PCB pattern antenna

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

SECTION 3: Test specification, procedures and results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66 – 40.70MHz and above 70MHz
Section 15.225 Operation within the Band 13.553-13.567MHz

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Deviation	Worst margin	Results
1	Automatically Deactivate	ANSI C63.4:2000	Section 15.231(a)(1)	N/A	-	Complied
2	Electric Field Strength of Fundamental Emission	ANSI C63.4:2000	Section 15.231(b)	N/A	11.7dB 315.00MHz Horizontal	Complied
3	Electric Field Strength of Spurious Emission	ANSI C63.4:2000	Section 15.205 Section 15.209 Section 15.231(b)	N/A	7.6dB 1575.00MHz Horizontal	Complied
4	-20dB Bandwidth	ANSI C63.4:2000	Section 15.231(c)	N/A	-	Complied

3.3 Additions to standards

No addition, deviation or exclusion has been made from standards.

3.4 Confirmation

A-Pex International Co., Ltd. hereby confirms that E.U.T., in the configuration tested, complies with the specifications FCC Part15 Subpart C Section 15.231.

3.5 Uncertainty

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.4 dB.
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.0 dB.
The measurement uncertainty (with a 95% confidence level) for this test using Horn Antenna is ± 5.5 dB.
The data listed in this test report may exceed the test limit because it does not have enough margin.
The data listed in this test report has enough margin.

3.6 Test Location

A-Pex International Co., Ltd. EMC Head Office Division. No.2 semi anechoic chamber, 7.5 x 5.8 x 5.2m.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124
This site has been fully described in a report submitted to FCC office, and listed on June 05, 2002 (Registration number: 846015).
*NVLAP Lab. code: 200572-0

3.7 Test setup, Data of EMI & Test instruments

Refer to Appendix 1 to 3.

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes


The EUT exercise program used during radiated testing was designed to exercise the various system components in a manner similar to typical use.

The operating mode/system was as follows:

Operation mode : Continuous Transmitting

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

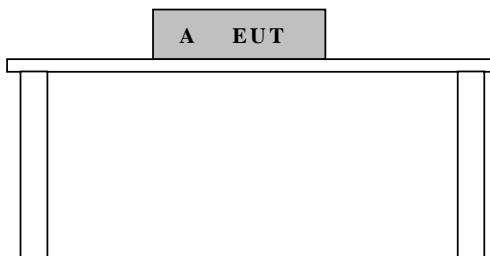

* Test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	FCC ID/DOC/others
A	The keyless entry system for vehicle (Transmitter)	ASTU51	3	CalsonicKansei Corp.	KBRASTU51

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

5.1 Operating environment

The test was carried out in a No.2 semi anechoic chamber, 7.5 x 5.8 x 5.2m.

Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The EUT was set on the center of the tabletop and the rear the peripheral was aligned and flushed with rear of tabletop. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. A drawing of the set up is shown in the photos of Appendix 1.

5.3 Test conditions

Frequency range : 30MHz-3200MHz
Test distance : 3m
EUT position : Tabletop
EUT operation mode : Transmitting

5.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on No.2 semi anechoic chamber with a ground plane and at a distance of 3m.

Measurements were performed with a quasi-peak detector.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver.

	Below 1GHz	Above 1GHz
Detector Type	Quasi-Peak/Peak	Average/Peak
IF Bandwidth	120kHz	1MHz

-The noise was measured at each position of all three axes X, Y and Z to compare the level, and the maximum noise occurred at the position showed in the photograph.

-The relative measurements were performed on the fundamental and the spurious emissions with each condition of the key folded and the key set up. The key set-up condition was worse case under both the fundamental and the spurious emissions. we, therefore, tested while the key was set up. See the photograph.

-The reading level was reduced by 10.6dB for comparison to the limits as this EUT had 29.7% duty cycle. See the data in Appendix 3.

5.5 Results

Summary of the test results: Pass

Date: November 11, 2002 Tested by: Y. Iwasa

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 **Facsimile: +81 596 24 8124**

APPENDIX 1: Photographs of test setup

Page 8 : Radiated emission

APPENDIX 2: Test instruments

Page 9 : Test instruments

APPENDIX 3: Data of EMI test

Page 10-11 : Automatically Deactivate

Page 12 : Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Page 13 : Duty Cycle Under Normal Operation

Page 14 : -20dB Bandwidth


A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

APPENDIX 1: Photographs of test setup

Radiated emission

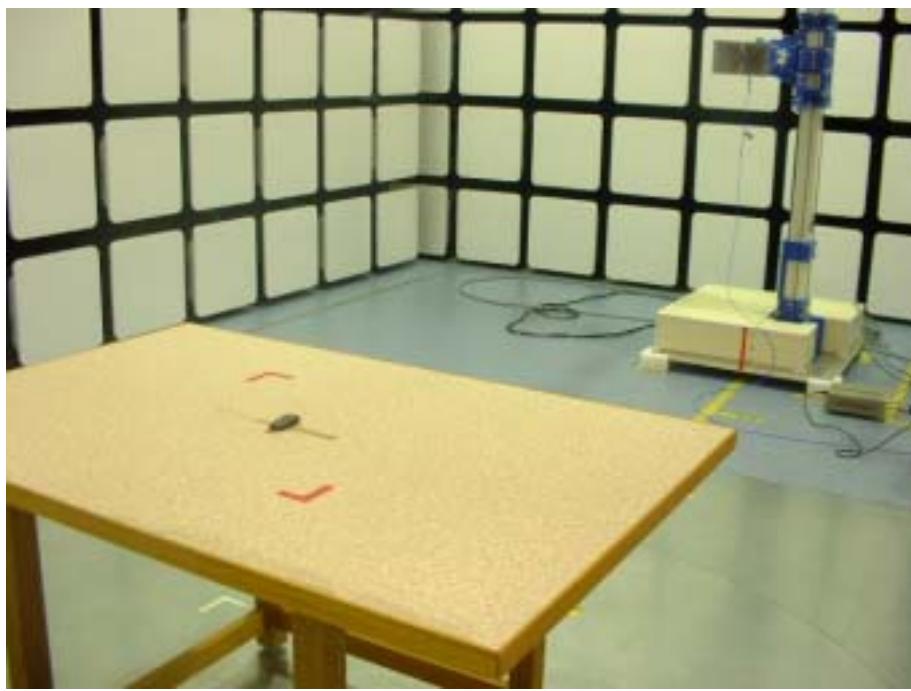

A-Pex International Co., Ltd. EMC Head Office Division.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

Test Report No : 23CE0012-HO

APPENDIX 2
Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No.	Test Item	Calibration Date * Interval(month)
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE	2002/11/01 * 12
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2002/04/12 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	RE	2001/12/27 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2002/05/02 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	MCC-12-01(8D -2W-15m) MCC-12-02(5D -2W-0.7m) MCC-12-05(RF SW) MCC-12-03(5D -2W-0.8m) MCC-12-06(RF SW) MCC-12-04(5D -2W-1m)	RE	2002/05/10 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2002/05/02 * 12
MPA-04	Pre Amplifier	Agilent	8447D	RE	2002/03/13 * 12
MSA-02	Spectrum Analyzer	Advantest	R3265A	RE	2002/09/20 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	RE	2002/10/11 * 12
MHA-05	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2002/01/13 * 12
MPA-01	Pre Amplifier	Agilent	8449B	RE	2002/02/09 * 12
MCC-05	Microwave Cable	Storm	421-011	RE	2002/01/14 * 12
MCC-06	Microwave Cable	Storm	421-011	RE	2002/01/14 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:**CE: Conducted emission,****RE: Radiated emission,****H/F: Harmonics and voltage fluctuation****RFI: RFI Power test,****AT: Antenna terminal disturbance voltage**



DATA OF AUTOMATICALLY DEACTIVATE

A-Pex International Co., Ltd.
EMC HEAD OFFICE DIVISION No.2 SEMI ANECHOIC CHAMBER

COMPANY	: CalsonicKansei Corp.	REPORT NO	: 23CE0012-HO
EQUIPMENT	: Keyless Entry System (Transmitter)	REGULATION	: Fcc Part15 Subpart C 231(b) / 205
MODEL	: ASTU51	TEST DISTANCE	: 3m
S/N	: 3	DATE	: 2002/11/11
FCC ID	: KBRASTU51	TEMPERATURE	: 20°C
POWER	: DC3.0V	HUMIDITY	: 47%
Mode	: Transmitting		

Y. Iwasa
ENGINEER : Yoshiaki Iwasa

Time of Transmitting	Limit	Result
[sec]	[sec]	
0.39	5.00	Pass

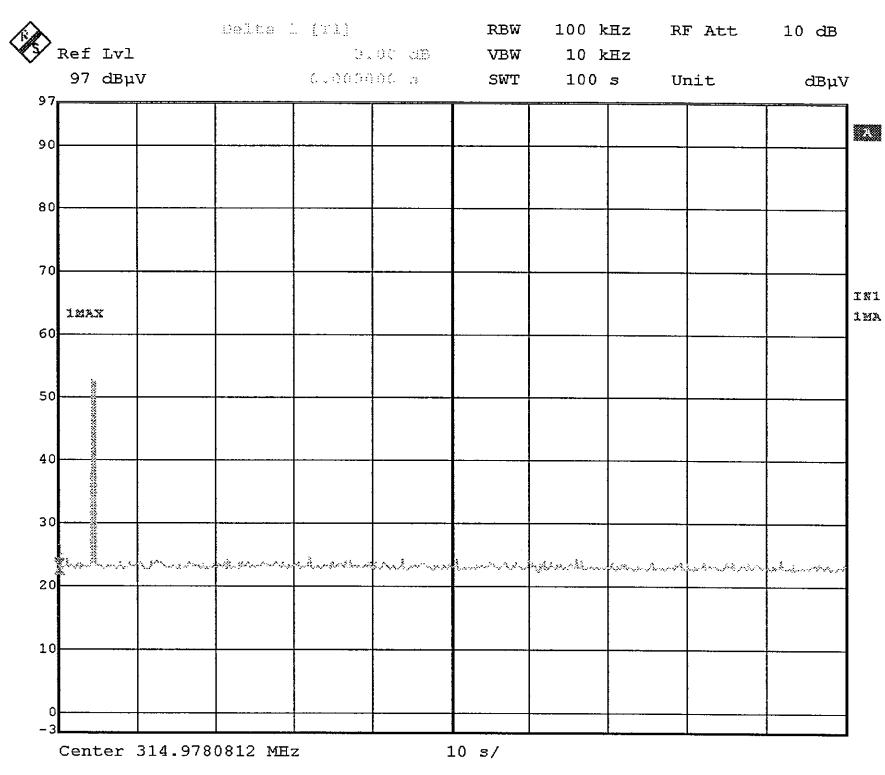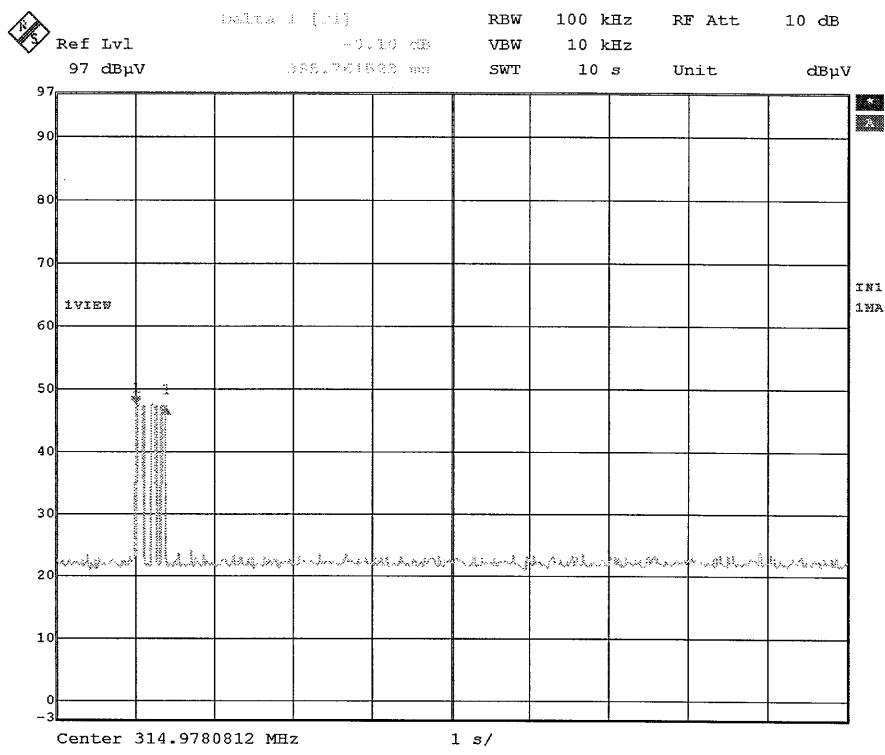Automatically Deactive

DATA OF RADIATED EMISSIONS

A-Pex International Co., Ltd.
EMC HEAD OFFICE DIVISION No.2 SEMI ANECHOIC CHAMBER

COMPANY	: CalsonicKansei Corp.	REPORT NO	: 23CE0012-HO
EQUIPMENT	: Keyless Entry System (Transmitter)	REGULATION	: Fcc Part15 Subpart C 231(b) / 205
MODEL	: ASTU51	TEST DISTANCE	: 3m
S/N	: 3	DATE	: 2002/11/11
FCC ID	: KBRASTU51	TEMPERATURE	: 20°C
POWER	: DC3.0V	HUMIDITY	: 47%
Mode	: Transmitting		

Y. Iwasa
ENGINEER : Yoshiaki Iwasa

No.	FREQ [MHz]	T/R READING : PK		ANT Factor [dB]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
1	315.00	78.2	75.4	14.8	26.3	7.8	-10.6	63.9	61.1	75.6	11.7	14.5

No.	FREQ [MHz]	T/R READING : QP		ANT Factor [dB]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
2	630.00	38.2	34.5	19.1	27.7	9.2	0.0	38.8	35.1	55.6	16.8	20.5
3	945.00	41.3	35.2	22.7	27.0	9.7	0.0	46.7	40.6	55.6	8.9	15.0

No.	FREQ [MHz]	T/R READING : PK		ANT Factor [dB]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
4	1260.00	51.8	52.5	25.2	37.3	3.4	0.0	43.1	43.8	75.6	32.5	31.8
5	1575.00	56.5	55.2	25.7	37.1	3.7	0.0	48.9	47.6	74.0	25.2	26.5
6	1890.00	46.8	49.6	26.3	36.9	4.1	0.0	40.3	43.1	75.6	35.3	32.5
7	2205.00	47.7	47.7	27.0	36.8	4.7	0.0	42.6	42.6	74.0	31.4	31.4
8	2520.00	45.8	46.0	27.7	36.7	5.3	0.0	42.1	42.3	75.6	33.5	33.3
9	2835.00	46.8	48.3	28.1	36.8	5.8	0.0	43.9	45.4	74.0	30.1	28.6
10	3150.00	45.0	46.0	28.4	36.8	6.2	0.0	42.8	43.8	75.6	32.8	31.8

No.	FREQ [MHz]	T/R READING : AV		ANT Factor [dB]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
4	1260.00	46.6	47.9	25.2	37.3	3.4	0.0	37.9	39.2	55.6	17.7	16.4
5	1575.00	54.0	52.0	25.7	37.1	3.7	0.0	46.4	44.4	54.0	7.6	9.6
6	1890.00	36.6	42.7	26.3	36.9	4.1	0.0	30.1	36.2	55.6	25.5	19.4
7	2205.00	39.8	39.6	27.0	36.8	4.7	0.0	34.7	34.5	54.0	19.3	19.5
8	2520.00	35.6	35.3	27.7	36.7	5.3	0.0	31.9	31.6	55.6	23.7	24.0
9	2835.00	36.5	41.0	28.1	36.8	5.8	0.0	33.6	38.1	54.0	20.4	15.9
10	3150.00	33.0	35.3	28.4	36.8	6.2	0.0	30.8	33.1	55.6	24.8	22.5

REMARKS

ANTENNA TYPE:30-300MHz Biconical / 300-1000MHz Logperiodic / 1-3.2GHz Horn

CALCULATION RESULT=Reading + ANT Factor - Amp Gain + LOSS (Cable+ ATTEN.)+Duty factor

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


*EUT was placed in X axis when the measurement antenna was positioned horizontally.

*EUT was placed in Z axis when the measurement antenna was positioned vertically.


*The noise was measured at each position of all three axes X, Y and Z to compare the level, and the maximum noise.

Duty cycle Factor Measurement

The duty cycle factor = $20\log(\Delta 1:220 + \Delta 2:351 + \Delta 3:341 + \Delta 4:341 + \Delta 5:230 / 5000) = -10.6$

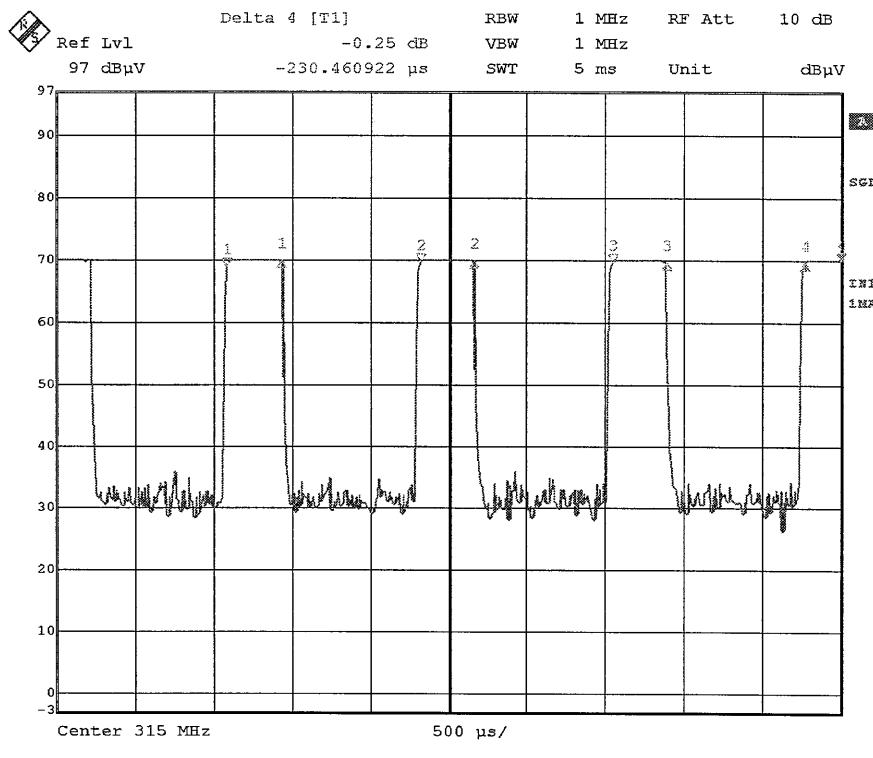Duty Cycle

Date: 13.NOV.2002 09:40:29

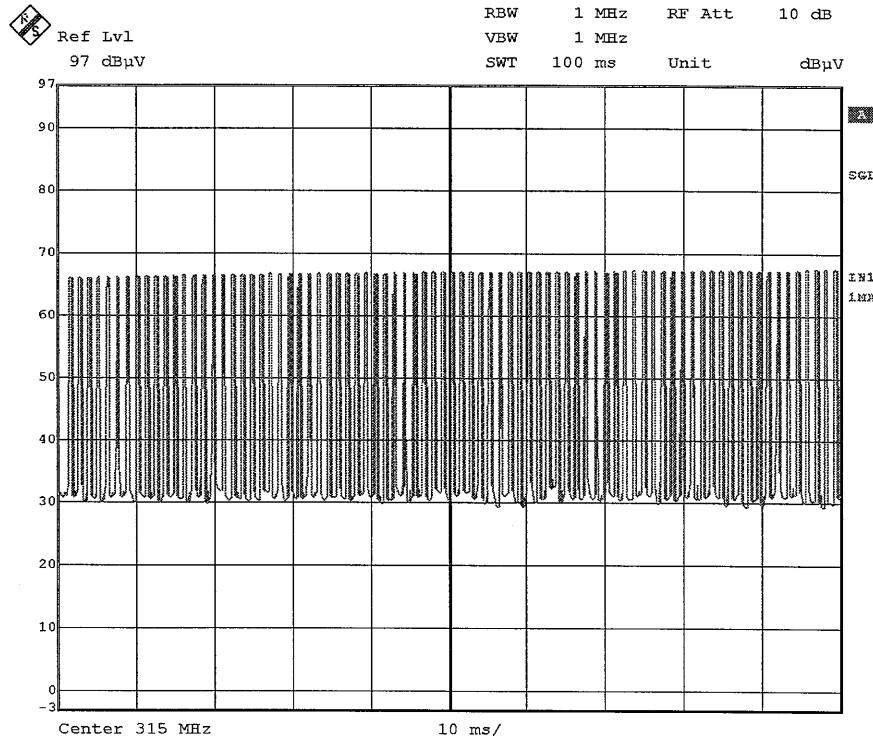

Date: 13.NOV.2002 10:03:27

DATA OF -20dB-Bandwidth

A-Pex International Co., Ltd.
EMC HEAD OFFICE DIVISION No.2 SEMI ANECHOIC CHAMBER

COMPANY : CalsonicKansei Corp.
EQUIPMENT : Keyless Entry System (Transmitter)
MODEL : ASTU51
S/N : 3
FCC ID : KBRASTU51
POWER : DC3.0V
Mode : Transmitting

REPORT NO : 23CE0012-HO
REGULATION : Fcc Part15 Subpart C 231(b) / 205
TEST DISTANCE : 3m
DATE : 2002/11/11
TEMPERATURE : 20°C
HUMIDITY : 47%

y. iwas

ENGINEER : Yoshiaki Iwasa

Bandwidth Limit : Fundamental Frequency $314.98\text{MHz} \times 0.25\% = 787.45\text{kHz}$

-20dB Bandwidth		Bandwidth Limit	Result
[kHz]	[kHz]		
215.43	787.45		Pass

