



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR
352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 15.231(a) &
RSS-210 (i9) ANNEX 1
MOMENTARILY OPERATED TRANSMITTER
COMBO TEST REPORT**

Applicant	LAB PARTNERS ASSOCIATES, INC.
Address	21 Gregory Drive Suite 140 South Burlington VT 05403 USA
Product Model Number	MM2-FCC
Product Description	POCKET WIZARD MULTIMAX TRANSCEIVER
FCC ID	KDS-PW2-201
IC	2170A-PW201
Date Sample Received	5/30/2017
Date Tested	7/3/2017
Tested By	Tim Royer
Approved By	Sid Sanders

Report Number	Version Number	Description	Issue Date
951AUT17TestReport	Rev1	Initial Issue	7/3/2017

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST RESULTS SUMMARY	5
TEST SETUP	5
PERIODIC OPERATION	6
Declaration Provided by Applicant.....	7
Test Data: Transmitter Deactivation Plot	8
DUTY CYCLE	9
Test Data: Calculation of Duty Cycle	9
Test Data: 100 ms Number of Pulses Plot	10
Test Data: Sub Pulse 1 Duration Plot.....	11
Test Data: Sub Pulse 2 Duration Plot.....	12
Test Data: Sub Pulse 3 Duration Plot.....	13
Test Data: Sub Pulse 4 Duration Plot.....	14
RADIATION EMISSIONS:.....	16
Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental	18
Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental	19
Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental	20
OCCUPIED BANDWIDTH.....	21
Test Data: Occupied Bandwidth Measurement Table	21
Test Data: 20 dB Occupied Bandwidth Plot.....	22
Test Data: 99% Occupied Bandwidth Plot	23
TEST EQUIPMENT LIST	24
STATE OF THE MEASUREMENT UC.....	25

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Tested by:

Tim Royer, Project Manager/Testing Engineer

Date: 7/6/2017

A blue ink signature of Sid Sanders is written over a circular purple stamp. The stamp contains the text "TIMCO ENGINEERING INC." around the perimeter and "FL 32669" in the center.

Reviewed and approved by: Sid Sanders, Engineer
Name and Title:

Date: 7/6/2017

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

GENERAL INFORMATION

EUT Description	POCKET WIZARD MULTIMAX TRANSCEIVER
FCC ID	KDS-PW2-201
IC Certification	2170A-PW201
Model Number	MM2-FCC
Operating Frequency	340.00 MHz – 354.00 MHz
Test Frequencies	340 , 347 & 354MHz
Type of Emission	Pulse
Modulation	OOK
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power 12V
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
Test Conditions	Temperature: 24-26°C Relative humidity: 50-65% Barometric Pressure: 1024mb
Modification to the EUT	NONE
Test Exercise	For radiated emissions testing a continuously transmitting modulated carrier was used, for verification of duty cycle and compliance with periodic operation a normally operating transmitter was used
Regulatory Standards	FCC CFR Title 47 Part 15C IC RSS-210 (i8) Annex 1
Measurement Standards	ANSI C63.10: 2013 FCC CFR Title 47 Part 15.31, 15.33, 15.35 RSS-GEN (i4)

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

TEST RESULTS SUMMARY

Requirement	FCC Rules Part No.	IC RSS §	RESULTS Pass/Fail/NA
Types of Momentary Signals	15.231(a)	210 A1.1.1	Pass
Fundamental Output Power	15.231(b)	210 A1.1.2 GEN 6.12	Pass
Spurious Emissions and Harmonics	15.231(b) 15.209(a) 15.205(a)(b)	210 A1.1.2 GEN 8.9 GEN 8.10	Pass
Occupied Bandwidth	15.231(c) 15.215(c)	210 A1.1.3 GEN 6.6	Pass

TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	Unit was powered on and operated in accordance with applicant's instruction manual.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Canon Rebel XSi Camera

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

PERIODIC OPERATION

FCC Rule Part No: 15.231(a)

IC RSS: 210 A1.1.1

Requirements:

The intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (1) and (2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Procedure: ANSI C63.10 § 7.4(e) Compliance for periodic operation

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

PERIODIC OPERATION

Declaration Provided by Applicant

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	X	
2	Does this device send data with this control signal?		X
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.		X
4	Does this device transmit continuously or automatically?		X
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	X	
6	If automatically operated does it deactivate 5 seconds after activation?	NA	
7	Does it transmit at regular predetermined intervals?		X
8	Does it poll or send supervisory information?		X
	If yes does it do a system integrity check? How often?	NA	
9	Is this a fire, security or safety of life device?		X
	If YES does the device stop transmitting after the alarm condition is satisfied?	NA	
10	Duty cycle: Maximum on-time?	3.186mS	
	If YES, on-time in 100 mS?	X	
	If Other, please specify here: On time in	NA	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	OOK	


Meets all requirements.

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

PERIODIC OPERATION

Test Data: Transmitter Deactivation Plot

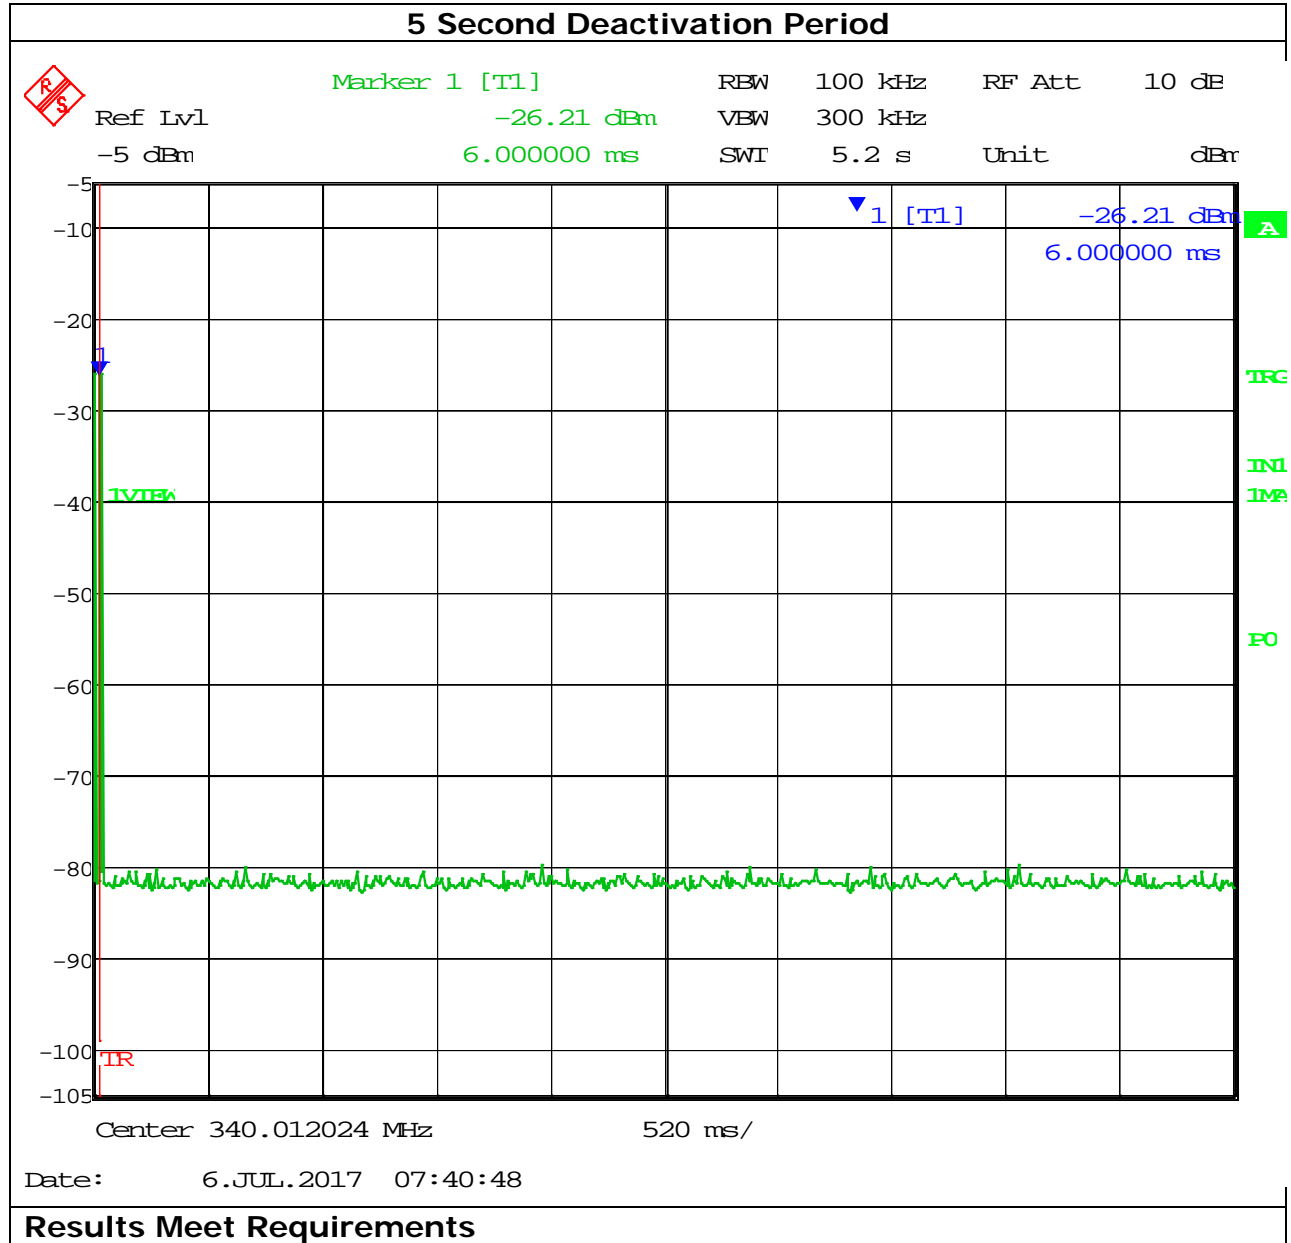

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
 FCC ID: KDS-PW2-201
 IC: 2170A-PW201
 Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Requirements: There are no requirements for the duty cycle; it is measured to determine compliance with the periodic operation average emission limits and the automatic transmission on time requirement.

Procedure: ANSI C63.10 § 7.5 Average value of pulsed emissions

Formula: $\delta \text{ (dB)} = 20 \log (n_1 t_1 + n_2 t_2 + n_3 t_3) / T$

Where:

δ is the duty cycle correction factor (dB)

T is the pulse width (100 ms period)

t₁ is the pulse width of sub pulse 1

t₂ is the pulse width of sub pulse 2

t₃ is the pulse width of sub pulse 3

n₁ is the number of t₁ pulses

n₂ is the number of t₂ pulses

n₃ is the number of t₃ pulses

Test Data: Calculation of Duty Cycle

Sub Pulse	Duration (ms)	Number	On Time (ms)
1	0.02164	7	0.15148
2	0.01423	7	0.09961
3	0.02144	7	0.15008
4	0.4	7	2.8
		Total On Time (ms)	3.20117
		Period (ms)	100
		Duty Cycle (%)	3%
		Cor Factor (dB)	-29.89


See the following plots.

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Test Data: 100 ms Number of Pulses Plot

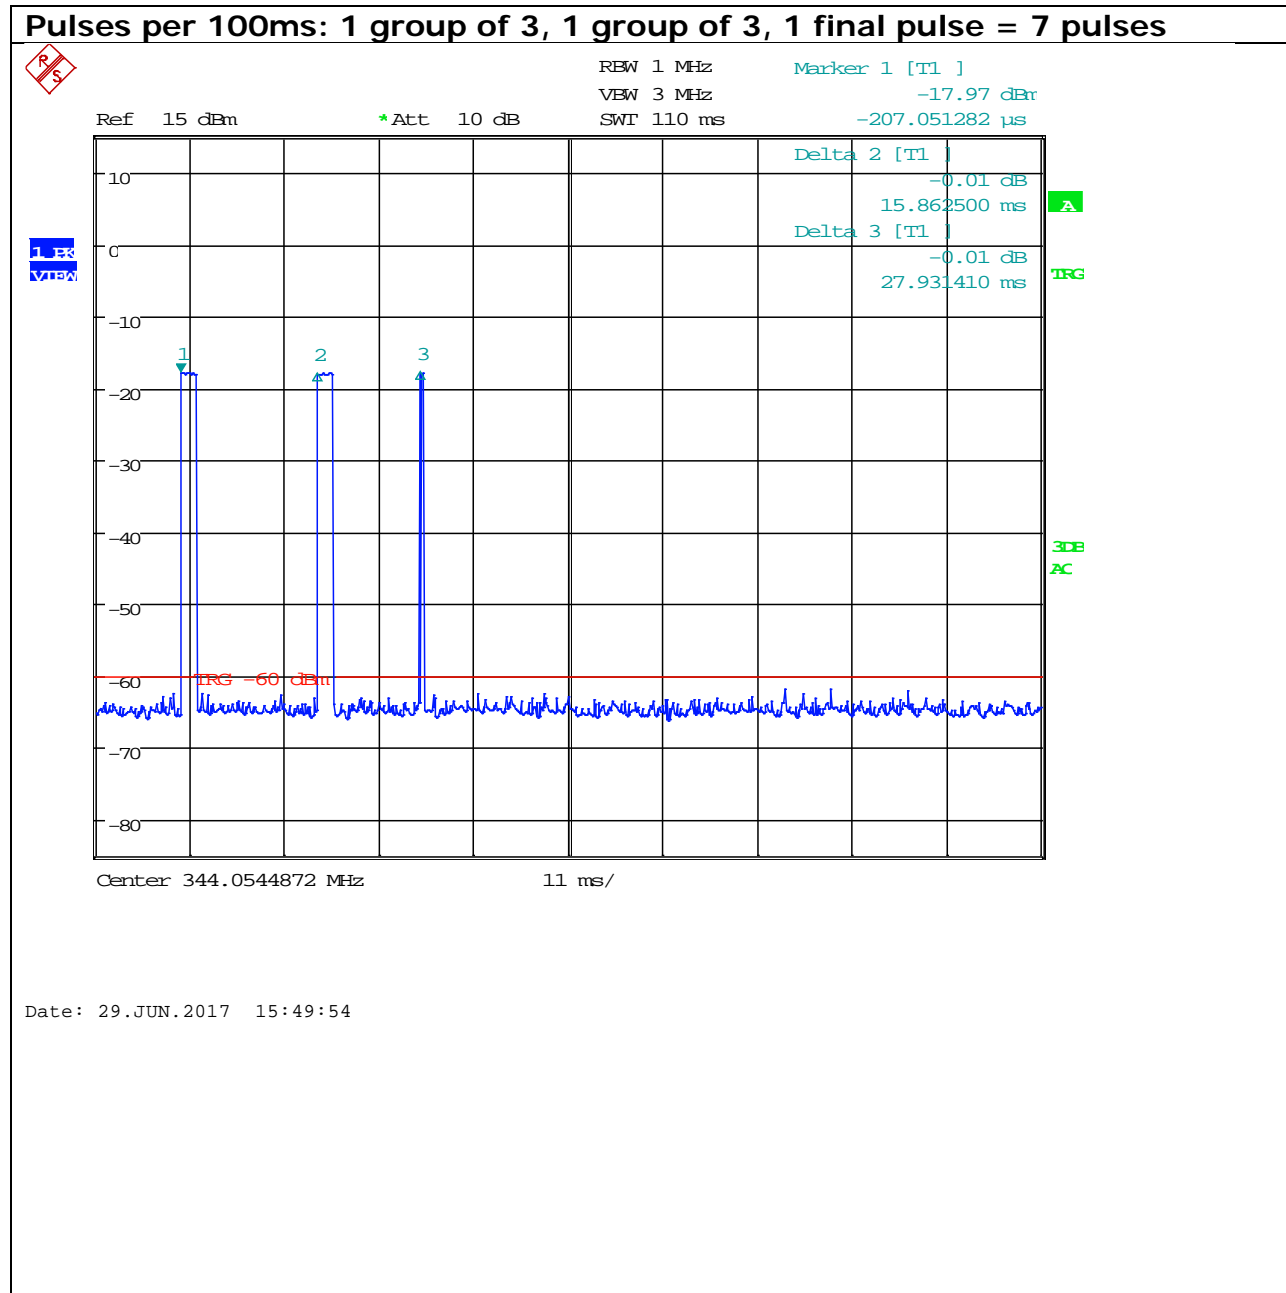


[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Test Data: Sub Pulse 1 Duration Plot

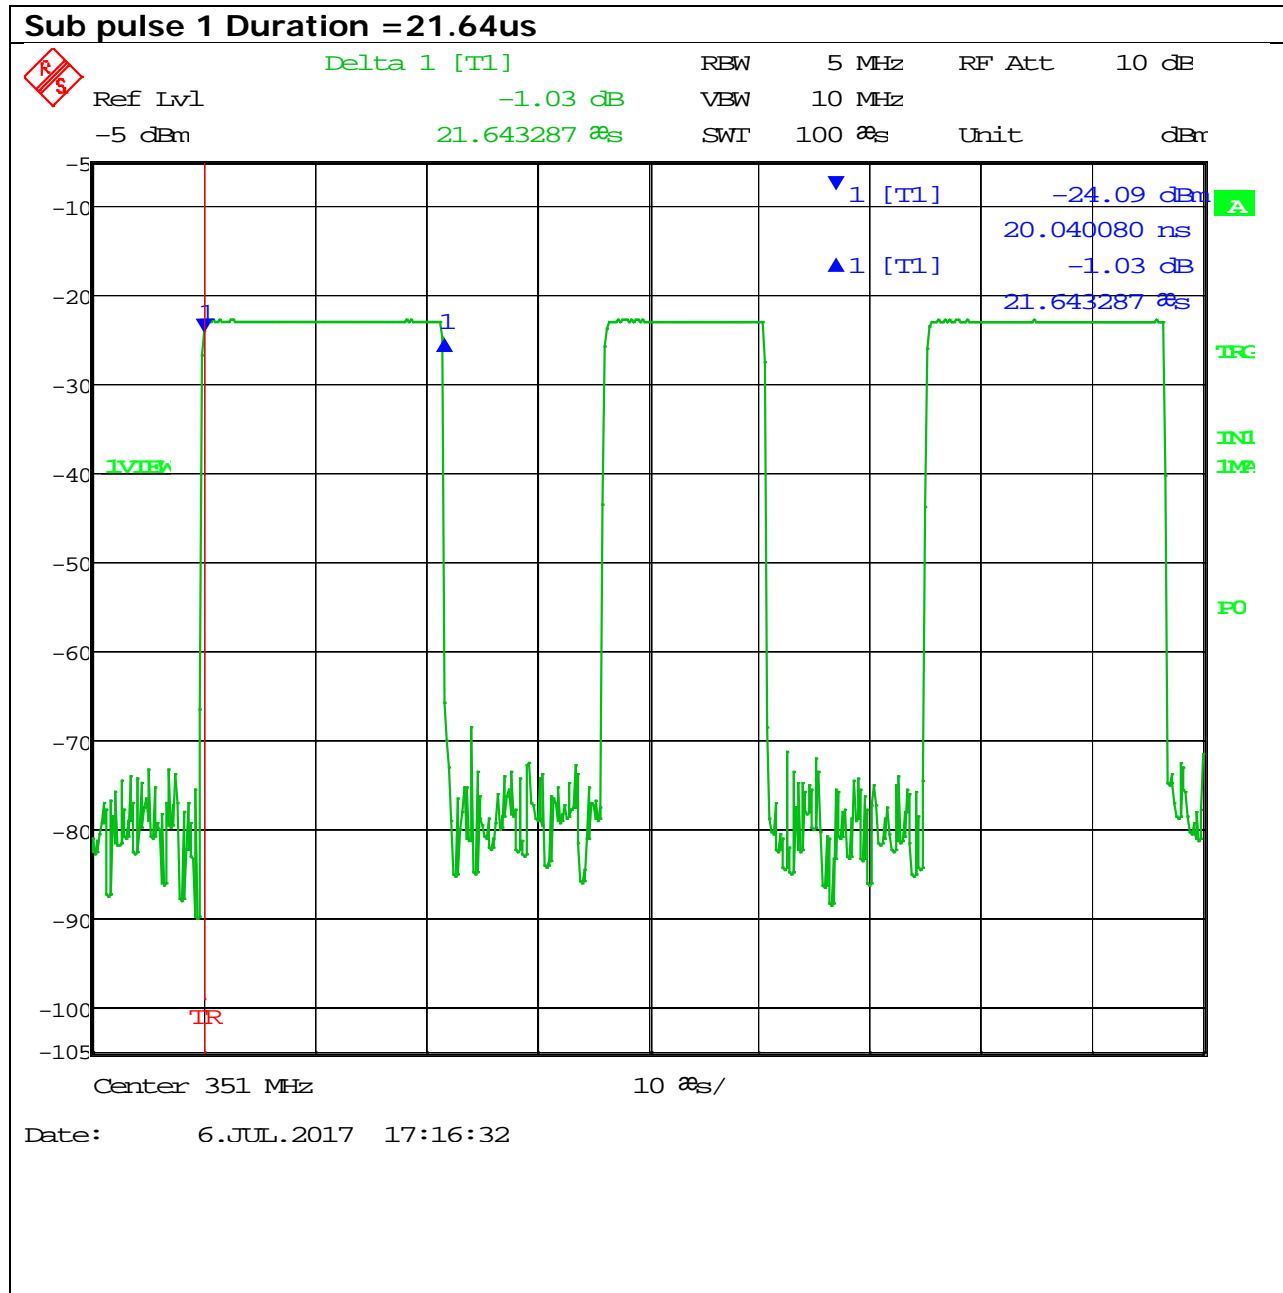


[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Test Data: Sub Pulse 2 Duration Plot

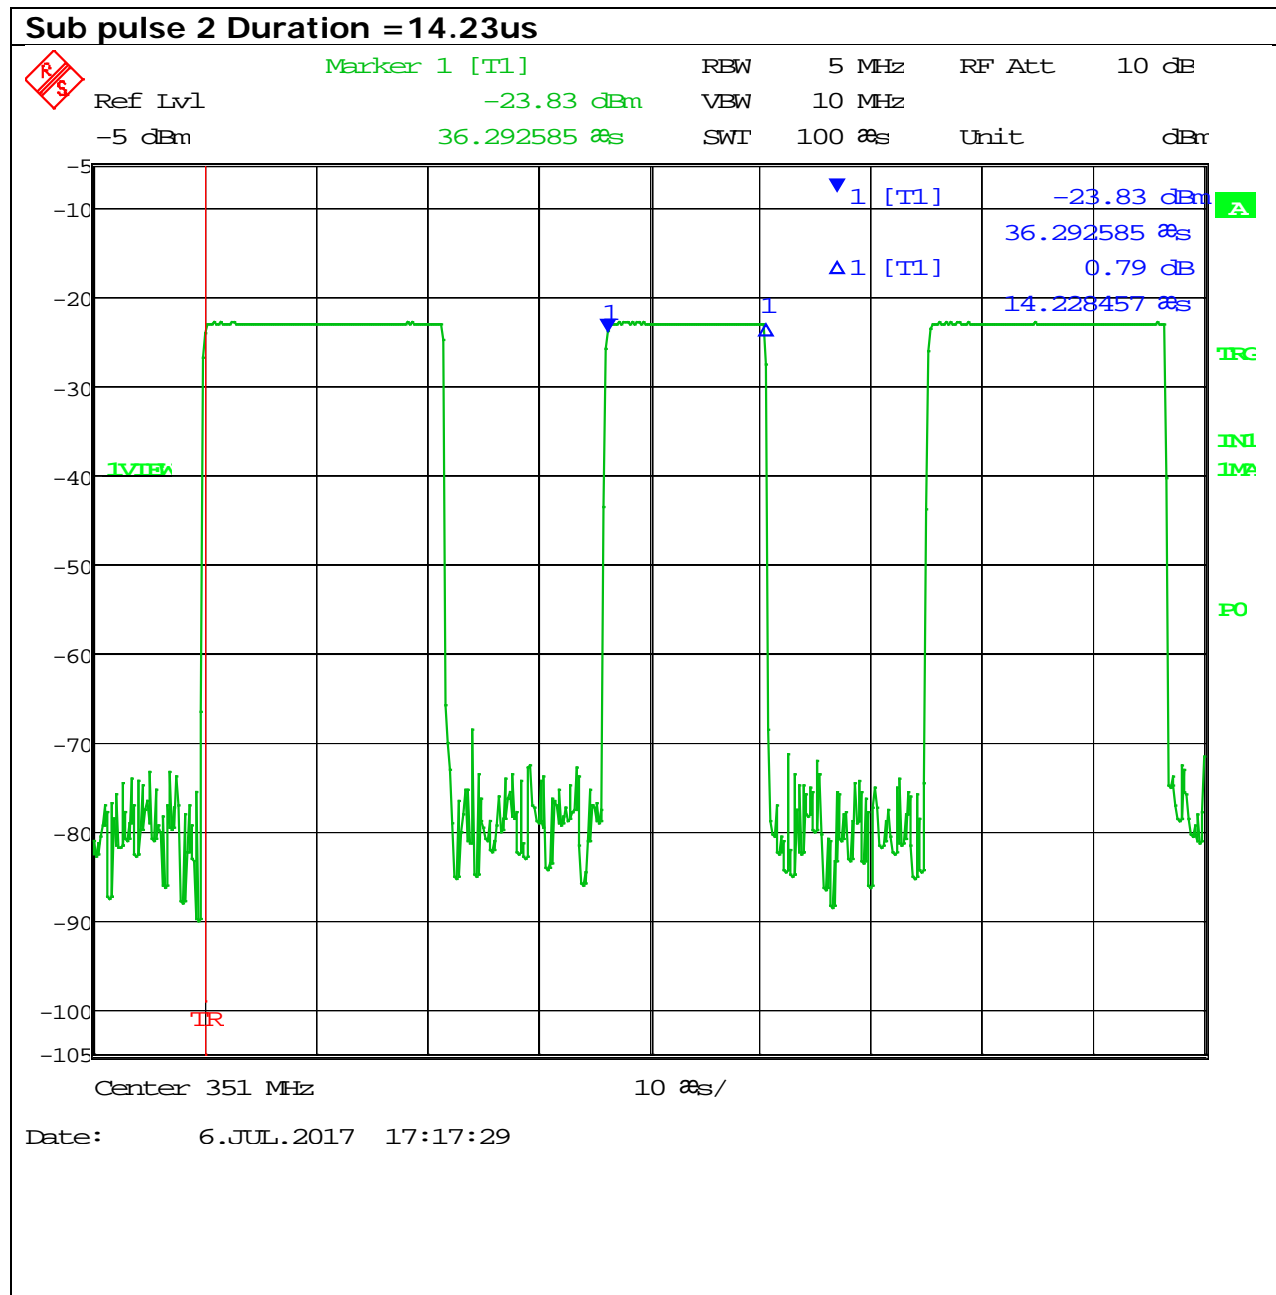


[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Test Data: Sub Pulse 3 Duration Plot

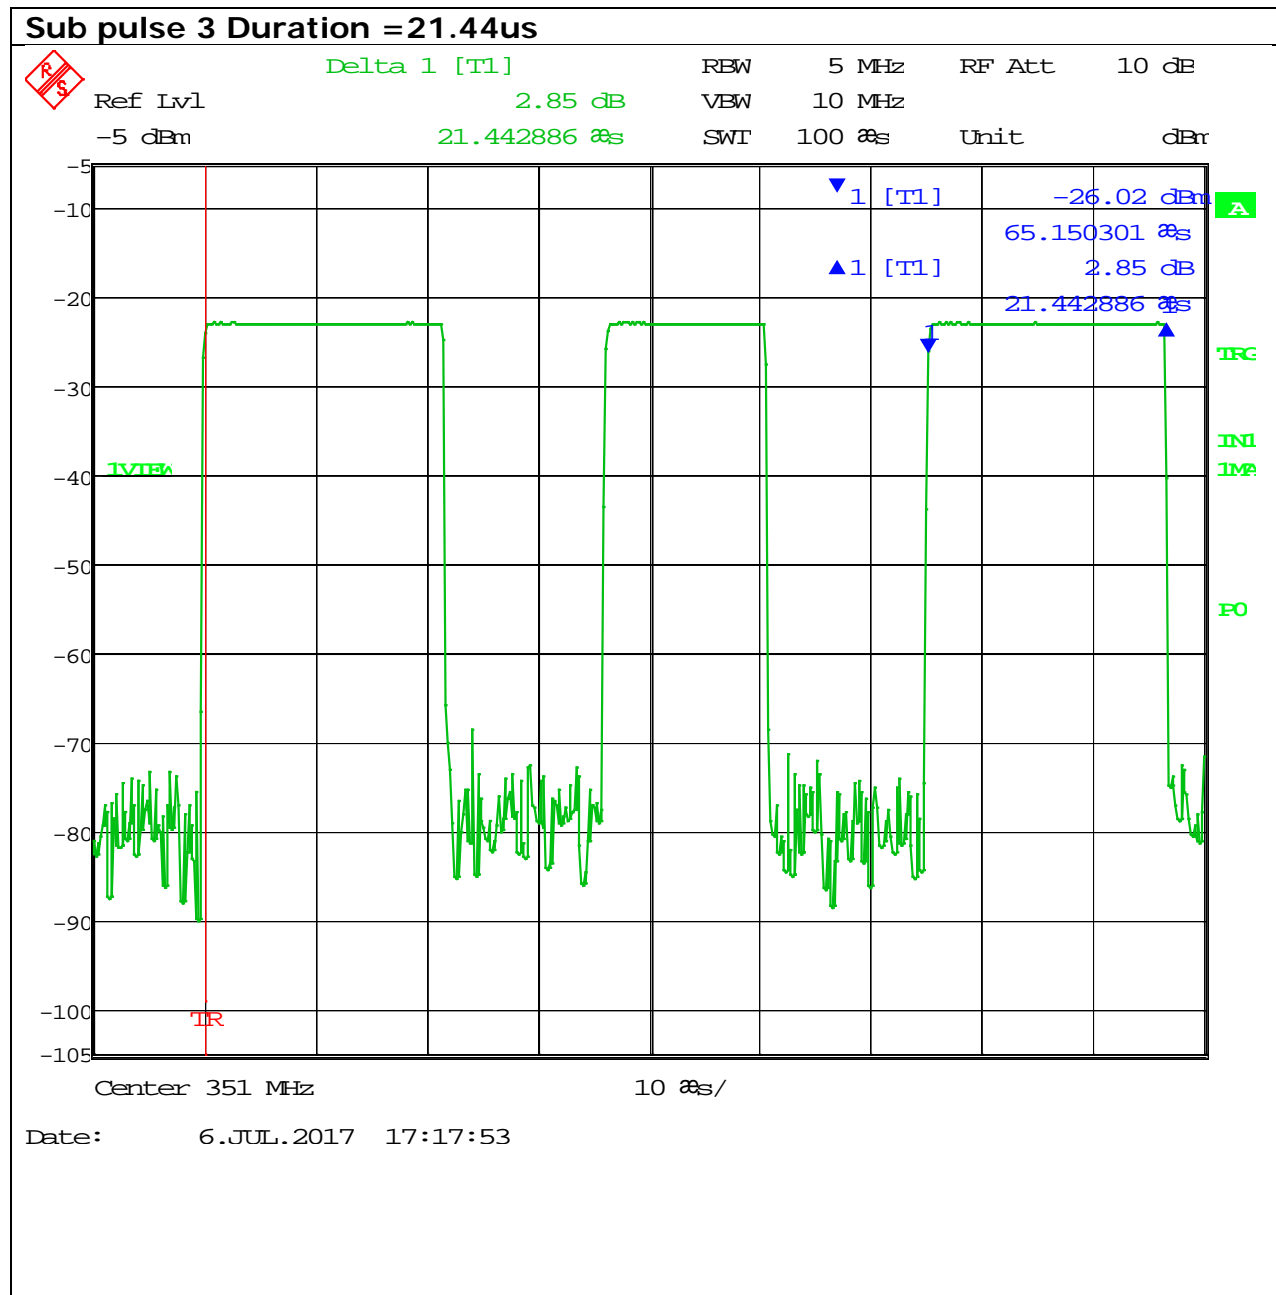


[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

DUTY CYCLE

Test Data: Sub Pulse 4 Duration Plot

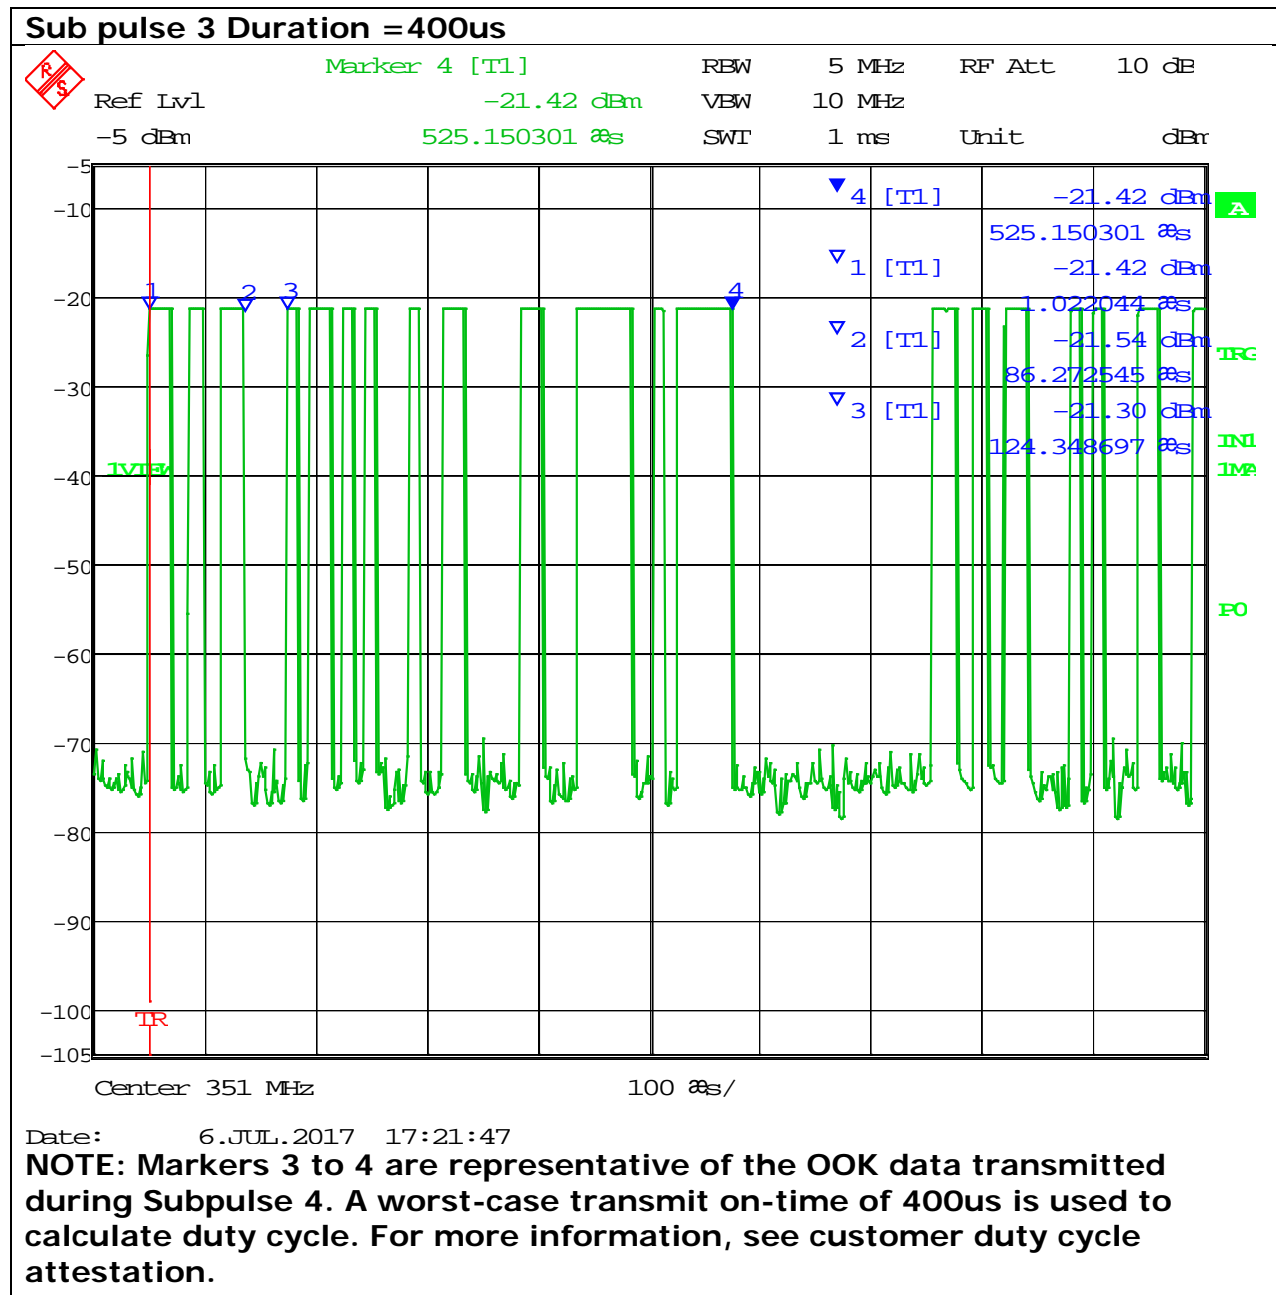

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

RADIATION EMISSIONS:**FCC Rules Part No.:** 15.231(b), 15.209 (a), 15.205(a) (b)**IC RSS:** 210 § A1.1 Table A, RSS-Gen § 8.9, & 8.10**Requirements:**

Fundamental and Harmonics not in Restricted Bands		
Fundamental Frequency (MHz)	Field Strength of Fundamental (dBμV/m)	Field Strength of Harmonics and Spurious Emissions (dBμV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94(12500)	61.94

Restricted Band Emissions	
Frequency (MHz)	Limits
9 – 490 kHz	2400/F (kHz) μV/m @ 300 meters
490 – 1705 kHz	24000/F (kHz) μV/m @ 30 meters
1705 – 30 MHz	29.54 dBμV/m measured @ 30 meters
30 – 88	40.0 dBμV/m measured @ 3 meters
88 – 216	43.5 dBμV/m measured @ 3 meters
216 – 960	46.0 dBμV/m measured @ 3 meters
Above 960	54.0 dBμV/m measured @ 3 meters

No fundamental frequency is allowed in the restricted bands.

No harmonic or spurious emissions may exceed the level of the fundamental carrier frequency.

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

RADIATION EMISSIONS:

Fundamental Emission Limit Formula:

1) For the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F)-6136.3636$;

2) For the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F)-7083.3333$.

Where F is the fundamental emission frequency in MHz

Example Calculation of limit @ 433.92 MHz:

$$41.6667 (433.9) - 7083.3333 = 10,995.85 \text{ } \mu\text{V/m}$$

$$20\log (10,995.85) = 80.82 \text{ dB}\mu\text{V/m}$$

Harmonics and Spurious Emissions Limit:

1) 20 dBc for all emissions outside of restricted bands

2) General limits of 15.209(a) & RSS-Gen for emissions inside restricted bands

3 Meter Field Strength Limit for this EUT:

Fund Freq (MHz)	Fund Limit (dB $\mu\text{V/m}$)	Harm & Spur (dB $\mu\text{V/m}$)	Restricted Bands
340	77.00	57.00	Limit of 15.209
347	77.36	57.36	Limit of 15.209
354	77.69	57.69	Limit of 15.209

[Table of Contents](#)

RADIATION EMISSIONS:

Test Method: ANSI C63.10 § 6.3 – 6.6 Radiated Emissions Unlicensed Devices

The EUT was placed on a table with dimensions of 1m by 1.5m, 80 cm high below 1 GHz and 150 cm high above 1 GHz. The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 9 KHz or the lowest frequency generated to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

Formula of Conversion Factors:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq. MHz	Meter Reading dB μ V	ACF dB/m	Cable Loss dB	Field Strength dB μ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

[Table of Contents](#)

RADIATION EMISSIONS:

Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental

Tuned Freq (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
340	340	62.41	V	2.13	13.70	48.30	77.00	28.70
340	340	70.35	H	2.13	13.70	56.24	77.00	20.76
340	680	9.15	H	3.01	21.00	3.22	57.00	53.78
340	680	2.49	V	3.01	21.00	-3.44	57.00	60.44
340	1020	10.50	V	3.66	27.13	11.35	57.00	45.65
340	1020	11.74	H	3.66	27.13	12.59	57.00	44.41
340	1360	11.56	H	4.20	28.58	14.40	57.00	42.60
340	1360	12.73	V	4.20	28.58	15.57	57.00	41.43
340	1700	13.50	V	4.64	29.10	17.30	57.00	39.70
340	1700	13.04	H	4.64	29.10	16.84	57.00	40.16
340	2040	15.18	H	5.27	31.18	21.69	57.00	35.31
340	2040	14.33	V	5.27	31.18	20.84	57.00	36.16
340	2380	12.26	H	5.66	31.82	19.80	57.00	37.20
340	2380	12.88	V	5.66	31.82	20.42	57.00	36.58
340	2720	12.50	V	6.05	32.50	21.11	57.00	35.89
340	2720	12.67	H	6.05	32.50	21.28	57.00	35.72
340	3060	13.90	H	6.39	32.68	23.03	57.00	33.97
340	3060	13.57	V	6.39	32.68	22.70	57.00	34.30
340	3400	12.69	V	6.74	32.70	22.19	57.00	34.81
340	3400	14.01	V	6.74	32.70	23.51	57.00	33.49

* -Denotes restricted bands which must comply with limits 15.209

Note: Emissions that are 20 dB below the limit are not required to be reported.

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

RADIATION EMISSIONS:

Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental

Tuned Freq (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
347	347	68.46	V	2.15	14.10	54.77	77.36	22.59
347	347	69.07	H	2.15	14.10	55.38	77.36	21.98
347	694	1.99	H	3.05	20.40	-4.50	57.36	61.86
347	694	-1.21	V	3.05	20.40	-7.70	57.36	65.06
347	1041	12.17	H	3.69	27.15	13.07	57.36	44.29
347	1041	13.59	V	3.69	27.15	14.49	57.36	42.87
347	1388	10.59	V	4.23	28.52	13.40	57.36	43.96
347	1388	10.71	H	4.23	28.52	13.52	57.36	43.84
347	1735	13.01	H	4.74	29.52	17.34	57.36	40.02
347	1735	12.30	V	4.74	29.52	16.62	57.36	40.74
347	2082	11.70	V	5.32	31.05	18.13	57.36	39.23
347	2082	12.66	H	5.32	31.05	19.09	57.36	38.27
347	2429	12.36	H	5.72	32.02	20.16	57.36	37.20
347	2429	13.05	V	5.72	32.02	20.85	57.36	36.51
347	2776	12.45	V	6.11	32.50	21.12	57.36	36.24
347	2776	13.16	H	6.11	32.50	21.83	57.36	35.53
347	3123	12.35	H	6.46	32.78	21.65	57.36	35.71
347	3123	12.26	V	6.46	32.78	21.56	57.36	35.80
347	3470	13.25	V	6.81	32.70	22.82	57.36	34.54
347	3470	12.36	V	6.81	32.70	21.93	57.36	35.43

* -Denotes restricted bands which must comply with limits 15.209

Note: Emissions that are 20 dB below the limit are not required to be reported.

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

RADIATION EMISSIONS:

Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental

Tuned Freq (MHz)	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
354	354	64.47	V	2.16	14.88	51.57	77.69	26.12
354	354	68.28	H	2.16	14.88	55.38	77.69	22.31
354	708	1.95	H	3.08	20.48	-4.43	57.69	62.12
354	708	5.17	V	3.08	20.48	-1.21	57.69	58.90
354	1062	14.16	V	3.72	27.17	15.11	57.69	42.58
354	1062	10.52	H	3.72	27.17	11.47	57.69	46.22
354	1416	11.67	H	4.27	28.39	14.39	57.69	43.30
354	1416	12.66	V	4.27	28.39	15.38	57.69	42.31
354	1770	12.98	V	4.85	29.94	17.83	57.69	39.86
354	1770	13.31	H	4.85	29.94	18.16	57.69	39.53
354	2124	13.76	H	5.37	31.07	20.26	57.69	37.43
354	2124	12.67	V	5.37	31.07	19.17	57.69	38.52
354	2478	11.67	V	5.78	32.21	19.72	57.69	37.97
354	2478	12.67	H	5.78	32.21	20.72	57.69	36.97
354	2832	12.32	H	6.17	32.40	20.95	57.69	36.74
354	2832	13.03	V	6.17	32.40	21.66	57.69	36.03
354	3186	13.66	V	6.52	32.71	22.95	57.69	34.74
354	3186	13.42	H	6.52	32.71	22.71	57.69	34.98
354	3540	12.94	H	6.89	32.86	22.75	57.69	34.94
354	3540	11.83	V	6.89	32.86	21.64	57.69	36.05

* -Denotes restricted bands which must comply with limits 15.209

Note: Emissions that are 20 dB below the limit are not required to be reported.

[Table of Contents](#)

OCCUPIED BANDWIDTH

FCC Rules Part No.: 15.231(C), & 15.215(c)

IC RSS: 210 § A1.1.3, & GEN § 6.6

Requirements:

The bandwidth of the emission shall fall completely inside the band of operation, and be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz.

For FCC compliance the Bandwidth is determined at the points 20 dB down from the modulated carrier.

For IC compliance the Bandwidth is determined as the 99% power bandwidth.

Test Method: ANSI C63.10 § 6.9.2 Occupied bandwidth Relative procedure
ANSI C63.10 § 6.9.3 Occupied bandwidth 99% Power

Test Data: **Occupied Bandwidth Measurement Table**

Tuned Frequency (MHz)	Limit (KHz)	Measured 20 dB BW (KHz)	Measured 99% BW (KHz)
351.00	877.50	350.89	673.35
Margin (KHz)		526.61	204.15


Results Meet Requirement

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 20 dB Occupied Bandwidth Plot

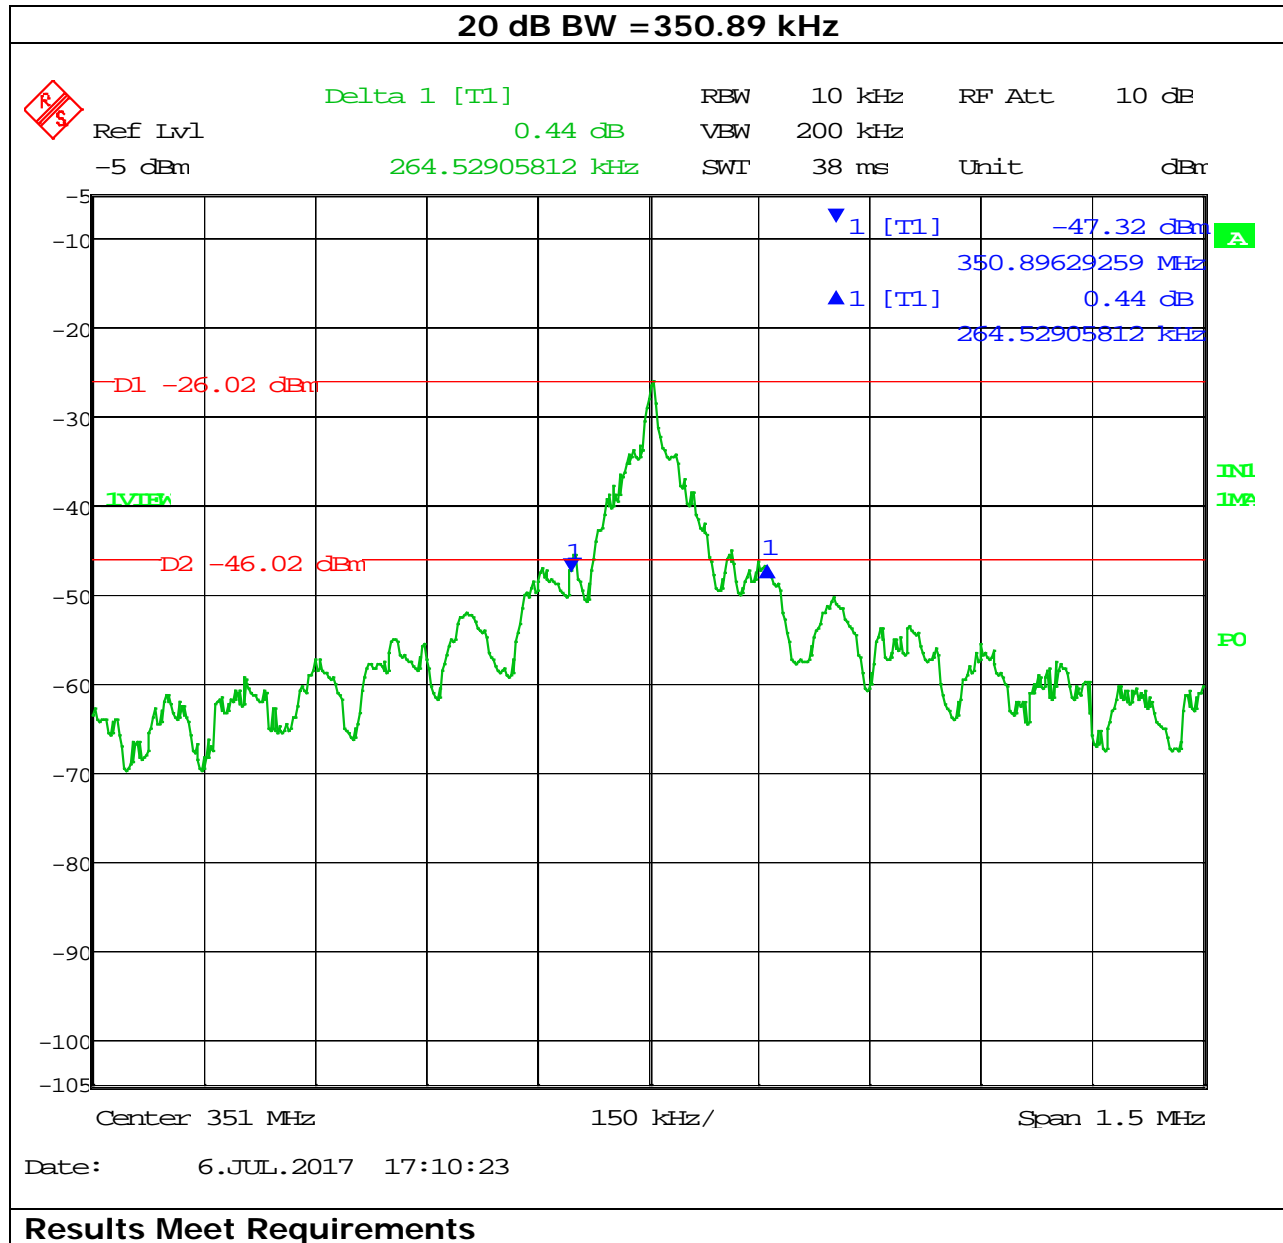


[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
 FCC ID: KDS-PW2-201
 IC: 2170A-PW201
 Report: 951AUT17TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 99% Occupied Bandwidth Plot

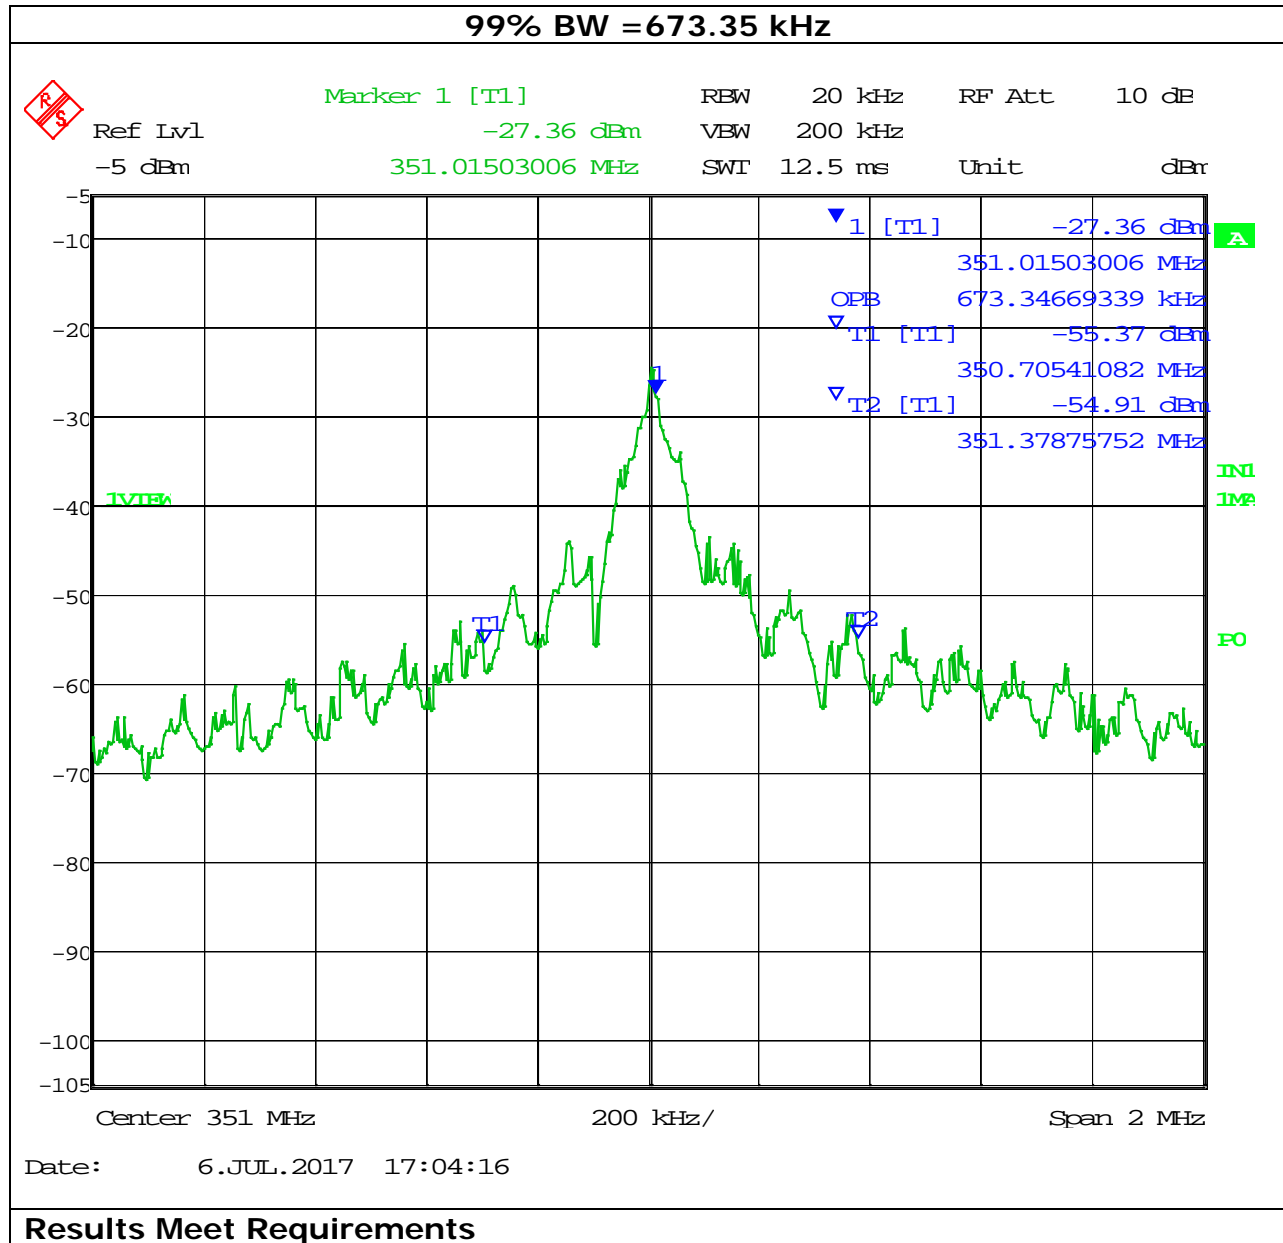

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1057	Eaton	94455-1	1057	11/18/15	11/18/17
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/14/15	07/14/17
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren Chamber	3117	00041534	03/01/17	03/01/19
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/18
Software: EMI Test Receiver	Rohde Schwartz	EMC 32	Version 4.30.0	N/A	N/A
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Antenna: Active Loop	ETS-Lindgren	6502	00062529	11/18/15	11/18/17
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-01; KMKM-0670-00; KFKF-0198-01	08/09/16	08/09/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

Applicant: LAB PARTNERS ASSOCIATES, INC.
 FCC ID: KDS-PW2-201
 IC: 2170A-PW201
 Report: 951AUT17TestReport_Rev1

STATE OF THE MEASUREMENT UC

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	$\pm 2.65\%$	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	$\pm 1.88\%$	
Within 6kHz and 25kHz of audio Freq.	$\pm 2.04\%$	
Transient Frequency Response	$\pm 1.88\%$	
Temperature	$\pm 1.0^{\circ}\text{C}$	(1)
Humidity	$\pm 5.0\%$	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

END OF TEST REPORT

[Table of Contents](#)

Applicant: LAB PARTNERS ASSOCIATES, INC.
FCC ID: KDS-PW2-201
IC: 2170A-PW201
Report: 951AUT17TestReport_Rev1