


Plot 1

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/6/2009 5:22:15 PM	DUT Battery Model/No:	
Filename:	BT2441.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.5°C	Liquid Simulant:	2450
Device Under Test:	MX7	Relative Permittivity:	49.33
Relative Humidity:	36.1%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.5°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	5.44 V/m
Test Frequency:	BT 2441MHz	SAR 1g:	0.020 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.72 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/03/09
Input Power Level:	1W	Extrapolation:	poly4

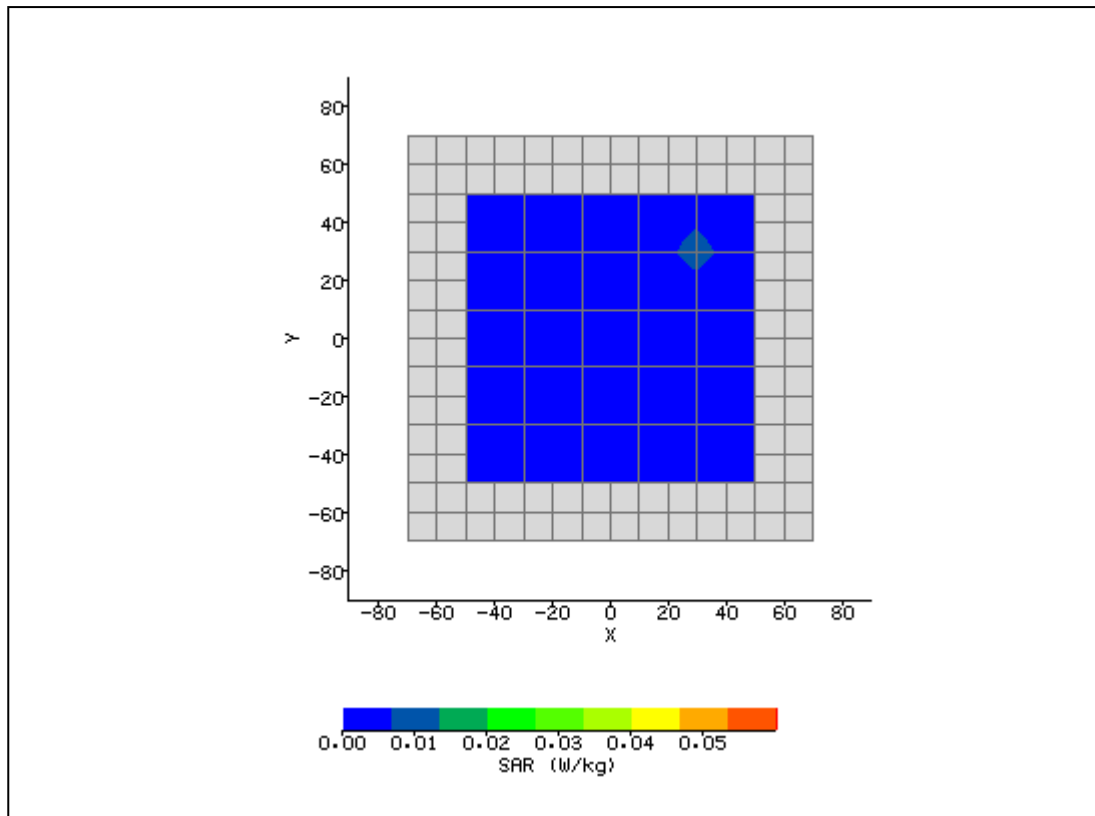

Plot 3

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/6/2009 3:00:06 PM	DUT Battery Model/No:	
Filename:	GSM 1784_left touch_Cetecom5_With case.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.5°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	49.33
Relative Humidity:	36.1%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.5°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	2.86 mm
Antenna Configuration:	Dipole	Max E Field:	131.85 V/m
Test Frequency:	2450MHz	SAR 1g:	45.342 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.487 / .487 / .487	SAR Start:	3.744 W/kg
Type of Modulation:		SAR End:	3.753 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/03/09
Input Power Level:	1W	Extrapolation:	poly4

