

Rating label

客户 Customer	Trimble
型号 Model	TD-1050
销往 Sales Area	EU/USA

安规审核Safety parts:

Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
-----	--------------------------	----	-------------------------------------

内销中文字体要求高度1.8mm以上

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

针对带有UL Logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.

条码印刷:
barcode print:
1.所有条码读码等级:C级及以上,客户有特殊要求除外;


REVISION

VERSION A

版本变更说明:
Version Changed Description:

备注Remark:

嘉捷科技(福建)有限公司
TPV Electronics (Fujian) Co., Ltd.
地址(Add): 中国福建省福州市元洪路上邦
Shangzheng, Yuanhong Road, Fuqing City,
Fujian Province, China
电话(Tel): +86-591-85285555 85285559
传真(Fax): +86-591-85285447
邮编(Postcode): 350301

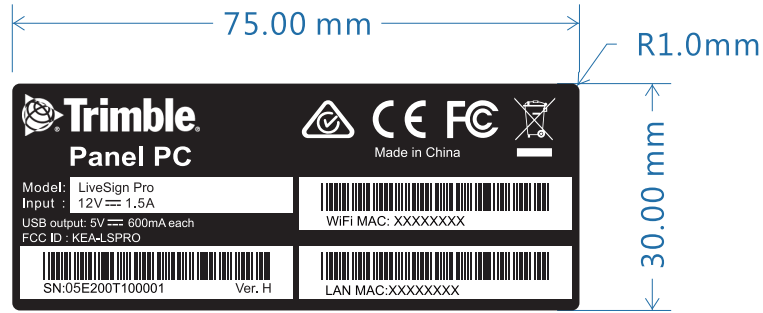

NOTE:

- 印刷如上图
Printing as the drawing
- 尺寸:具体见上图所示(公差: +/-0.2mm),R=2mm
Dimension:as the above drawing(Tolerance:+/-0.2mm),R=2mm
- 材质: 50#防刮PET带不干背胶
Material:50#PET with glue on the backside (material must be certified by UL laboratory)
- 底色 黑色; 字体颜色: 白色
Background color: Black, Fonts color: White
- 贴附位置: 后壳定位框内
- 粘力: 将label切成25mm宽,一端粘贴于钢板上,以180°方向的力拉胶带另一端,所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 正常耐温测试: 在钢板上耐温范围为-20~100°C,在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C,在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C . In 65 ° C to maintain 8 hours ,the label should not be warp, delamination, frothy and so on.
- 耐温湿度循环测试: 循环条件(贴在塑胶胶花面(PET)贴在塑胶胶花面): 温度-20~65°C,湿度30~90%,时间96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp, delamination, frothy and so on.
- 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象。
Printing ink can not have overflow and printing color can not be uneven etc.
- 包装方式: 卷状, 连接处打齿孔。
Packing style: coil and there should be a toothed hole between the link of two pieces
- 两张连接处距离3mm,左右边离型纸3mm(公差: +/-0.5mm)。
3mm should be left between the link of two pieces.Around the edge of paper distance is 3mm(Tolerance:+/-0.5mm)
- 内容由厂内打印,具体内容业务提供。
- 内容印刷由工厂条码组提供,具体内容业务提供。
- 其它测试要求详见(FQ-背胶类产品测试检验规格)。

Serial 编码原则:

S/N: XX X XXX X X 0 0 0 0 1 (SAMPLE CODE)
1 2 3 4 5 6 7 8 9 10 11 12 13

第1~2 碼為年份,年 = 公元年 - 1911,取後二碼。

第3 碼為月份,代號如下

1月=A, 2月=B, 3月=C, 4月=D, 5月=E, 6月=J
7月=K, 8月=L, 9月=M, 10月=X, 11月=Y, 12月=Z

第4~6碼為機種,同EAN code後三碼,代號如下

200:TD-1050(銀色) 201:D-1050(銀色) 204:TD-1050(白色)
202:TD-1050(黑色) 203:TD-1050(紅色) 210:D-1050(黑色)


第7 碼為ODM/OEM廠英文之縮寫, ex. T : TPV

第8 碼為硬體版(首版為1)

第9~13 碼為流水號, ex.00001

範例: 2016年05月生產的TD-1050(銀色),代工廠TPV,版本1,第100台。

S/N : 0 5 E 2 0 0 T 1 0 0 1 0 0

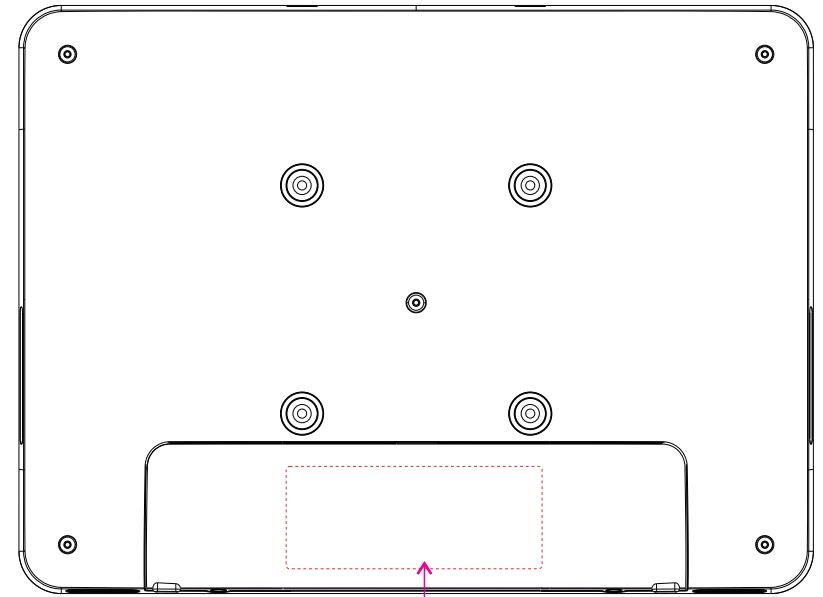

粘贴位置示意图

- 根据TPV推行RoHS的有关规定,所有的原材料及辅助材料必须符合RoHS的有关规定
- 所有原材料的固定物质:如镉(Cd)汞(Hg)铅(Pb)六价铬PBB's PBDE's及钕(Cd)+汞(Hg)+铅(Pb)+六价铬(针对随机出货的包装材料)的具体含量依据最新版RD EMS-01《供应商环境管理物质管控标准》的具体限值要求执行

- According to the rule about RoHS of TPV, All raw material and assistant material should accord with the rule of RoHS
- All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard about environment substance for supplier>>.

TPV
VISION INNOVATOR

冠捷科技
用心專注 領航視界