

EXHIBIT C

User Manual

WTX-01 TRANSMITTER WATCH

The VISION Transmitter Watch has been designed combined a code hopping transmitter with crystal watch display to give you an innovative and fun way to operate your car alarm or keyless entry system. The Transmitter Watch (please refer fig.1) can be programmed to your car alarm or keyless entry system by following the same procedure used for your original transmitters (refer to owners manual). Once programmed, the 2 channel watch transmitter will operate with the same features as your existing transmitters.

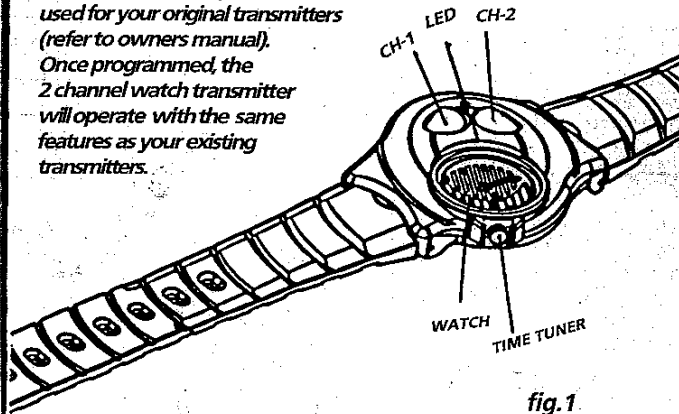


fig.1

Note: Please do not touch any component on the circuit board during your replacement. And, please check the seal is fixed properly before you screw the back cover.

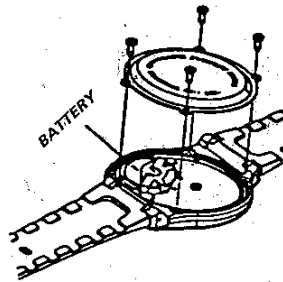


fig.2

How to change the transmitter battery

To change the transmitter battery, (refer to fig.2)

1. Release all 4 screws on the back cover of the Watch Transmitter
2. Take out the batteries (CR-1616) and replace with new batteries
3. Put the cover back on and on and screw in the 4 screws

How to change the watch battery

To change the watch battery, (refer to fig. 3)

1. Release all 4 screws on the back cover of Watch Transmitter
2. Release the middle screw on the transmitter PC board
3. Take out the battery (SR521) replace with new battery
4. Put the PC board back in, securing it with the screw
5. Put the cover back on and screw in the 4 screws

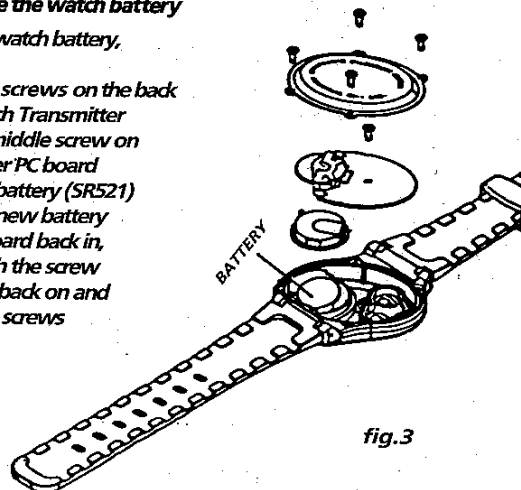


fig.3