



FCC DOC TEST REPORT

REPORT NO.: D90041610
MODEL NO.: MASTER CONCEPTS
RECEIVED: April 30, 2001
TESTED: May 07, 2001

APPLICANT: VISION AUTO MOBILE ELECTRONICS
INDUSTRIAL CO., LTD.

ADDRESS: No.17, Alley 92, Lane 189, Sec. 1,
An Chung Rd, Tainan, Taiwan R.O.C

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	5
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4	DESCRIPTION OF SUPPORT UNITS	6
4	TEST PROCEDURES AND RESULTS	7
4.1	CONDUCTED EMISSION MEASUREMENT	7
4.2	RADIATED EMISSION MEASUREMENT	7
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	7
4.2.2	TEST INSTRUMENTS	8
4.2.3	TEST PROCEDURES	9
4.2.4	TEST SETUP	10
4.2.5	EUT OPERATING CONDITIONS	10
4.2.6	TEST RESULTS	11
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	12
6	INFORMATION ON THE TESTING LABORATORIES	13



1 CERTIFICATION

PRODUCT : Brakebuddy Alert System (Receiver Part)
BRAND NAME : VISION
MODEL NO : MASTER CONCEPTS
APPLICANT : VISION AUTO MOBILE ELECTRONICS
INDUSTRIAL CO., LTD.
STANDARDS : 47 CFR Part 15, Subpart B
ANSI C63.4-1992
SITE REGISTRATION NO : 90422 (FCC)
IC 3789-5 (Canada IC)

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on May 07, 2001. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: Gary Chang , **DATE:** May 28, 2001
(Gary Chang)

CHECKED BY: Demi Chen , **DATE:** May 28, 2001
(Demi Chen)

APPROVED BY: Harris W. Lai , **DATE:** May 28, 2001
(Harris W. Lai)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard Section	Test Type	Result	Remarks
FCC PART 15, SUBPART B, 15.107 & 15.209	Conducted Test	NA	NA
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is – 2.5dBuV at 405.19 MHz

NOTE: For conducted emission test, the test limit used is according to FCC Part 15.107. In this part, conducted emission test for telecom port is not mentioned and therefore this item is not tested.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Brakebuddy Alert System (Receiver Part)
MODEL NO.	MASTER CONCEPTS
POWER SUPPLY	12VDC
DATA CABLE	NA
I/O PORTS	NA
MODULATION TYPE	AM
FREQUENCY RANGE	NA
CARRIER FREQUENCY OF EACH CHANNEL	433.92MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Monopole Antenna
ASSOCIATED DEVICES	NA
DESCRIPTION OF MODELS	NA

NOTE : The alert system allows you to monitor the braking in the towed vehicle conveniently at any time. The EUT is the receiver part of the alert system.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel is provided from the EUT.

Channel	Frequency	Channel	Frequency
1	433.92 MHz	7	
2		8	
3		9	
4		10	
5		11	
6			



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the receiver part of a Brakebuddy Alert System. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart B (DoC)

ANSI C63.4-1992

All tests have been performed and recorded as per the above standards. The conducted test is not necessary, as the power input of EUT is DC 12V from motor coach.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	DC Power Supply	GW	GPC-3030DQ	8070434	Nonshielded Power (1.8m)

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}$
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. Emission level ($\text{dB}\mu\text{V}/\text{m}$) = $20 \log$ Emission level ($\mu\text{V}/\text{m}$).
 3. All emanation from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
*HP Preamplifier	8447D	2944A08485	Nov. 4, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
* Antenna (Horn)	BBHA9120-D	D130	July 10, 2001
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipments are used for the final measurement.


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

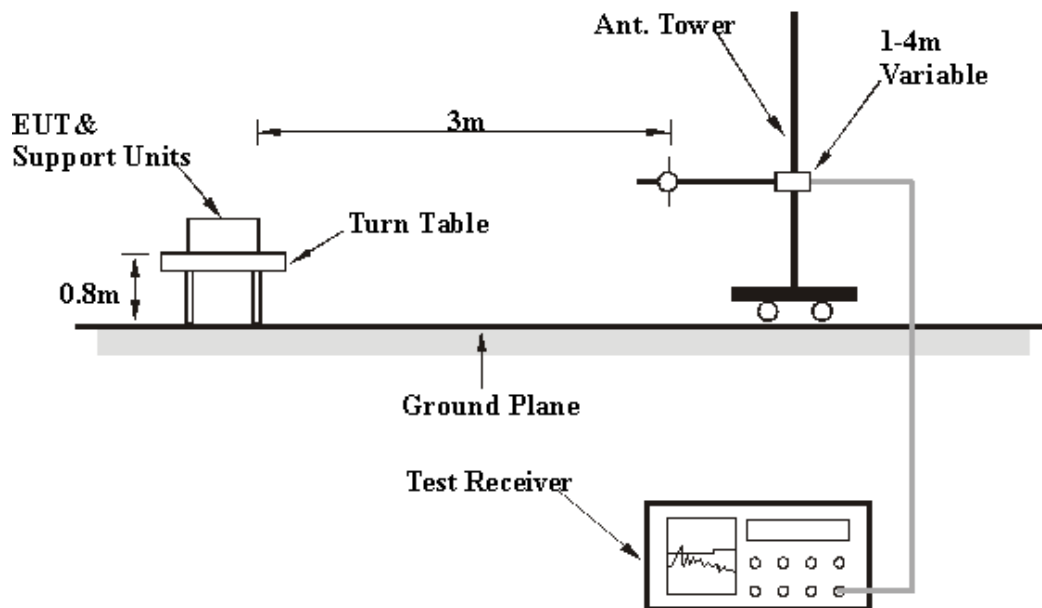

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

- Turn on the power of all equipment.
- The EUT was operated at receiving condition continuously during the test.



4.2.6 TEST RESULTS

EUT	Brakebuddy Alert System (Receiver Part)	MODEL	Master Concepts
MODE	433.92MHz	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak / Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 78 % RH, 1050 hPa	TESTED BY: Gary Chang	



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	385.80	31.1	40.0	-14.9	164	206	39.74	14.992	33.44	27.00	8.63
2	405.19	43.5	46.0	-2.5	173	9	24.60	15.43	3.44	0.00	-18.87
3	440.00	34.1	46.0	-11.9	154	9	41.92	15.93	3.27	27.00	7.80
4	594.00	28.4	46.0	-17.6	195	40	34.22	17.66	3.54	27.00	5.80
5	650.00	21.3	46.0	-24.7	153	221	26.93	17.61	3.78	27.00	5.60
6	688.50	31.8	46.0	-14.2	234	111	36.55	18.23	4.02	27.00	4.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	403.00	34.9	46.0	-11.1	131	192	43.08	15.39	3.45	27.00	8.16
2	429.50	29.4	46.0	-16.6	248	10	37.24	15.79	3.32	27.00	7.89
3	439.50	32.3	46.0	-13.7	293	293	40.14	15.93	3.27	27.00	7.80
4	452.30	29.2	46.0	-16.8	166	71	36.82	16.11	3.24	27.00	7.65
5	513.50	34.2	46.0	-11.8	156	110	40.53	16.99	3.68	27.00	6.33
6	704.30	29.5	46.0	-16.5	127	252	34.00	18.43	4.09	27.00	4.47

- NOTE:**
- 1 Emission level (dBuV/m) = Reading value (dBuV) - Correction Factor (dB)
 - 2 Correction Factor (dB) = External Preamp. Gain (dB)-Ant. Factor (dB/m) -Cable loss (dB)
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

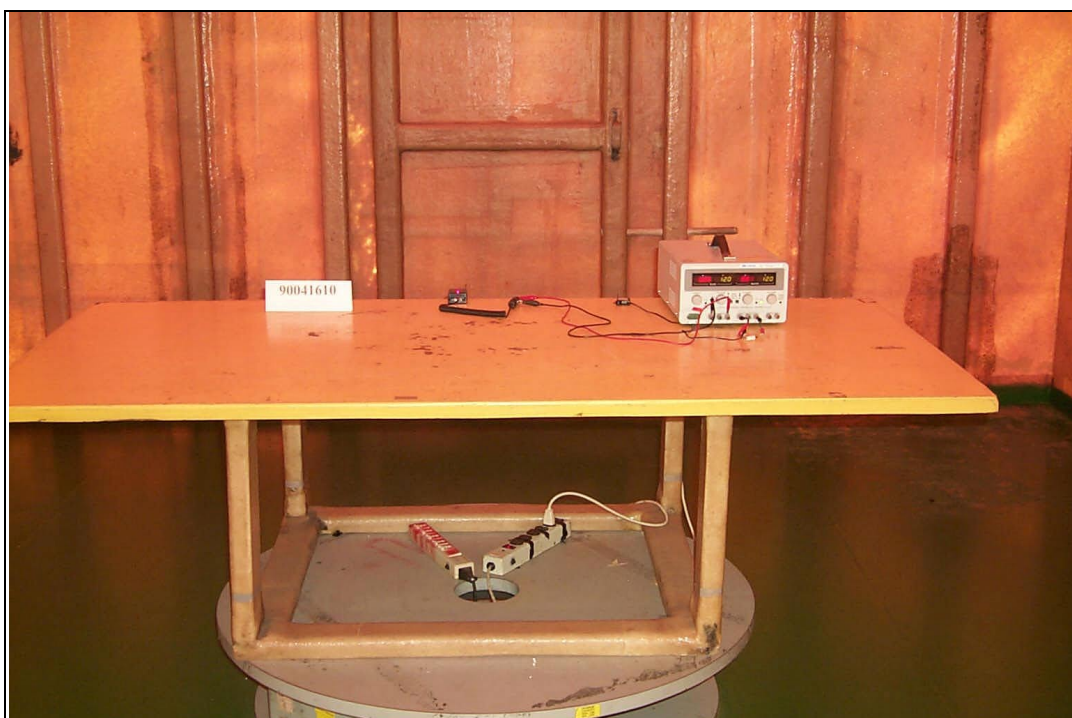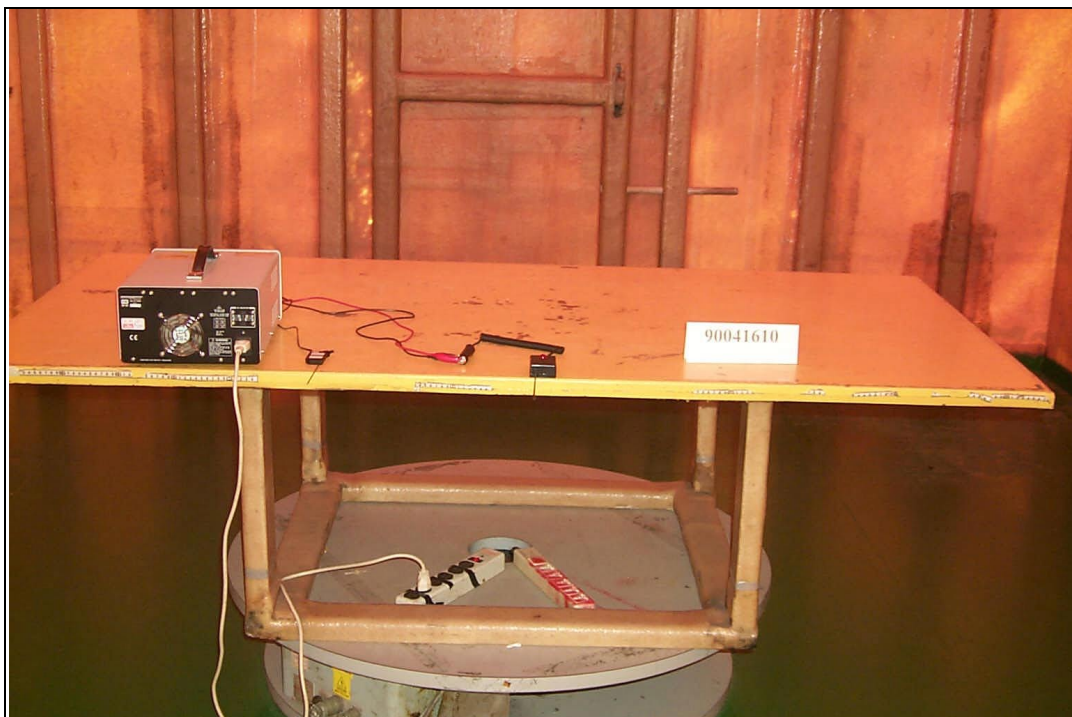



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.