

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

*for*

**INTENTIONAL RADIATOR**

**434 MHz CAR ALARM TRANSMITTER**

**MODEL NO: SAIC**

**FCC ID NO: KFRSAIC**

**REPORT NO: 00E9005**

**ISSUE DATE: OCTOBER 23, 2000**

*Prepared for*

**VISION AUTOMOBILE ELECTRONICS INDUSTRIAL CO., LTD.  
NO. 17, ALLEY 92, LANE 189, SEC. 1,  
AN CHUNG RD., TAINAN,  
TAIWAN, R.O.C.**

*Prepared by*

**COMPLIANCE ENGINEERING SERVICES, INC.**

*d.b.a.*

**COMPLIANCE CERTIFICATION SERVICES**

**1366 BORDEAUX DRIVE  
SUNNYVALE, CA 94089, USA**

**TEL: (408) 752-8166**

**FAX: (408) 752-8168**



<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
1. VERIFICATION OF COMPLIANCE.....	1
2. Product Description.....	2
3. Test Facility.....	2
4. Measurement Standards .....	2
5. Test Methodology .....	2
6. Measurement Equipment Used .....	2
7. POWERLINE RFI LIMIT .....	3
8. RADIATED EMISSION LIMITS .....	3
9. SYSTEM TEST CONFIGURATION.....	4
10. Test Procedure.....	5
11. Equipment Modifications.....	6
12. TEST RESULT .....	7
12.1 Maximum Modulation Percentage (M%) .....	7
12.2 The Emissions Bandwidth.....	7

#### TEST DATA

- Maximum Modulation Percentage Plot
- Emission Bandwidth Plot
- Radiated Emission Worksheet for Peak Measurement
- Radiated Emission Worksheet for Average Measurement

**1. VERIFICATION OF COMPLIANCE**

COMPANY NAME: VISION AUTOMOBILE ELECTRONICS  
INDUSTRIAL CO., LTD.  
NO. 17, ALLEY 92, LANE 189, SEC. 1,  
AN CHUNG RD., TAINAN,  
TAIWAN, R.O.C.

CONTACT PERSON: WANG TSUNG CHIN / ENGINEER

TELEPHONE NO.: (06)255-1269

EUT DESCRIPTION: 434 MHz CAR ALARM TRANSMITTER

MODEL NAME/NUMBER: SAIC

FCC ID: KFRSAIC

DATE TESTED: OCTOBER 2, 2000 ~ OCTOBER 4, 2000

REPORT NUMBER: 00E9005

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (INTENTIONAL RADIATOR)
EQUIPMENT TYPE	434 MHz CAR ALARM TRANSMITTER
MEASUREMENT PROCEDURE	ANSI C63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

*Rick Yeo*

RICK YEO / EMC MANAGER  
COMPLIANCE ENGINEERING SERVICES, INC.

PAGE NO: 1

COMPLIANCE ENGINEERING SERVICES, INC.  
1366 BORDEAUX DRIVE, SUNNYVALE, CA 94089, USA

CCS DOCUMENT NO: CCSUP4020B  
TEL: (408) 752-8166 FAX: (408) 752-8168

*This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.*

**1. VERIFICATION OF COMPLIANCE**

COMPANY NAME: VISION AUTOMOBILE ELECTRONICS  
INDUSTRIAL CO., LTD.  
NO. 17, ALLEY 92, LANE 189, SEC. 1,  
AN CHUNG RD., TAINAN,  
TAIWAN, R.O.C.

CONTACT PERSON: WANG TSUNG CHIN / ENGINEER

TELEPHONE NO.: (06)255-1269

EUT DESCRIPTION: 434 MHz CAR ALARM TRANSMITTER

MODEL NAME/NUMBER: SAIC

FCC ID: KFRSAIC

DATE TESTED: OCTOBER 2, 2000 ~ OCTOBER 4, 2000

REPORT NUMBER: 00E9005

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (INTENTIONAL RADIATOR)
EQUIPMENT TYPE	434 MHz CAR ALARM TRANSMITTER
MEASUREMENT PROCEDURE	ANSI C63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

---

RICK YEO / EMC MANAGER  
COMPLIANCE ENGINEERING SERVICES, INC.

---

PAGE NO: 1

COMPLIANCE ENGINEERING SERVICES, INC.

CCS DOCUMENT NO:CCSUP4020B

1366 BORDEAUX DRIVE, SUNNYVALE, CA 94089, USA

TEL:(408)752-8166 FAX:(408)752-8168

*This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.*

## 2. Product Description

Fundamental Frequency	<b>434 MHz</b>
Power Source	<b>6V Battery</b>
Transmitting Time	<b>Periodic <math>\leq</math> 5 seconds</b>
Associated Receiver	<b>FCC ID: KFRSAIC</b>

## 3. Test Facility

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

## 4. Measurement Standards

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

## 5. Test Methodology

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

## 6. Measurement Equipment Used

Manufacturer	Model Number	Description	Cal Due Date
H.P.	8566B	Spectrum Analyzer (100Hz – 22GHz)	12/00
H.P.	8595EM	Spectrum Analyzer (9KHz – 6.5GHz)	01/01
EMCO	3115	Antenna (1-18GHz)	09/01
EMCO	3142	Antenna (30-2000MHz)	06/01
T.E.C.	PA-102	Amplifier(30-2000MHz)	05/01
MITEQ	NSP2600-44	Amplifier(1-26GHz)	12/00

**7. POWERLINE RFI LIMIT**

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 kHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NO REQUIRED.

**8. RADIATED EMISSION LIMITS**

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 -40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231


## 9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.



## 10. Test Procedure

### Radiated Emissions, 15.231(4)(b)

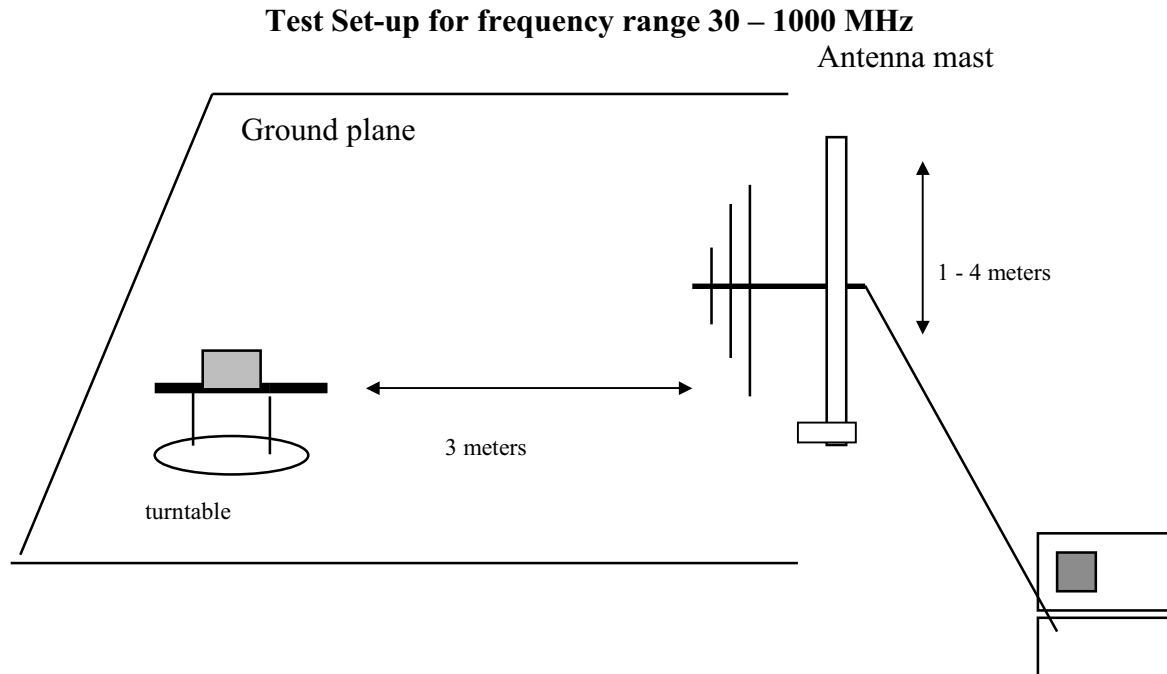

preamplifier/spectrum analyzer

**Fig. 1**

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.



### Test set-up for measurements above 1GHz

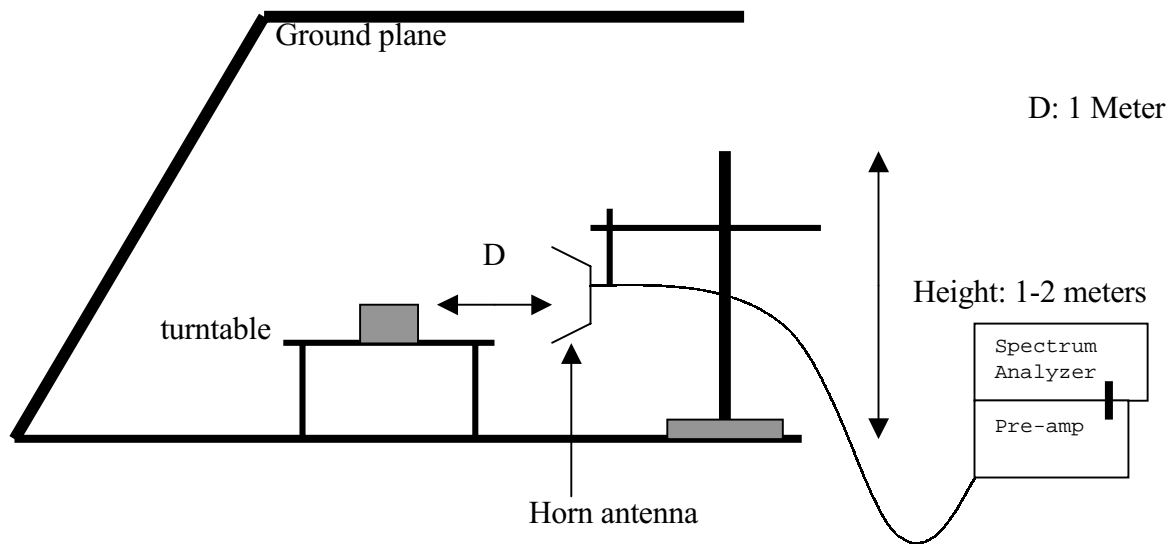


FIG. 2

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

### 11. Equipment Modifications

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

**NONE**

**12. TEST RESULT**

<b>Powerline RFI Class B</b>	<b>Eut</b>	<b>Radiated Emission Limits</b>	<b>Eut</b>
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	
BATTERY POWER	X	SECTION 15.231 (b)	X
		SECTION 15.231 (e)	

**12.1 Maximum Modulation Percentage (M%)**

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured:

WHERE      1 Period                      =99.000 mS.  
                  Long pulse                      =0.644 mS  
                  Short pulse                      =0.289 mS  
                  No of Long pulse              =38  
                  No of Short pulse              =40

Duty Cycle = ( N1L1+N2L2+...+Nn-1Ln-1+NnLn)/100 or T

Duty Cycle = ((38X0.644)+(40x0.289))/99=0.3640=36.40% or -8.78dB

**12.2 The Emissions Bandwidth**

The bandwidth of the emissions were investigated per 15.231(c)

<b>Center Frequency</b>	<b>Measured</b>	<b>Limits</b>
<b>434 MHz</b>	<b>322.2 kHz &lt; (refer to plot)</b>	<b>434X0.25%=1085 kHz</b>