

Data Sheets for Instrument Specialties Test Report No: 112384-A

Dated: 15 May 2000

Title: FCC PART 15 Subpart C Section 15.231

For: Martec Access Products


Equipment under test (EUT): KWT Transmitter

FCC ID: KJ802-3039

Part 3 of 4

Pulse Width

2 pages

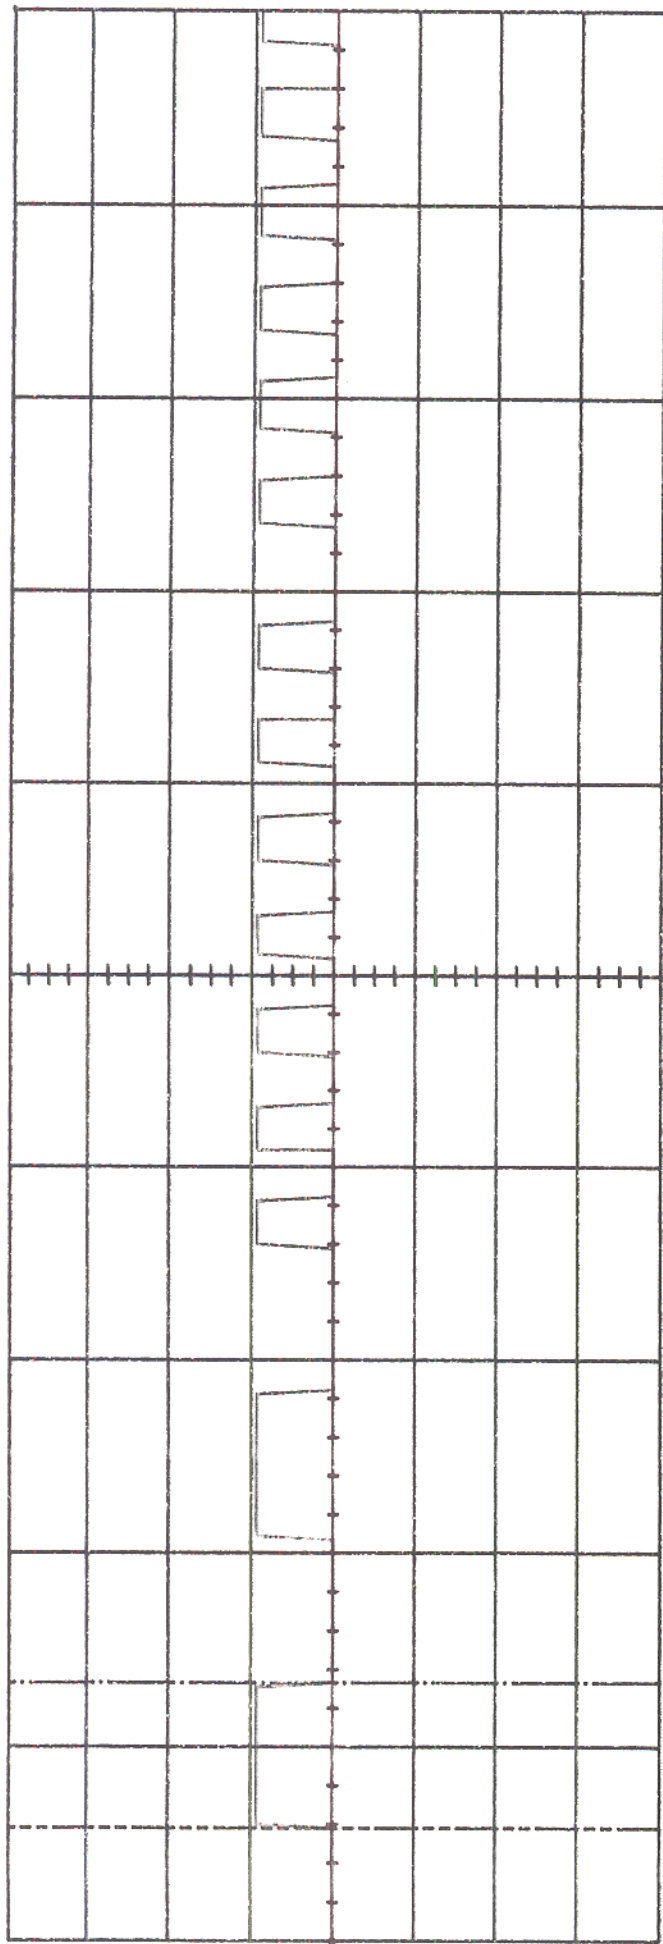

Main
 Timebase 2.00 ms/div
 Delay/Pos 8.80000 ms
 Sensitivity 5.00 V/div
 Offset 0.00000 V
 Channel 1
 Trigger mode : Edge
 On Positive Edge Of Chan1
 Trigger Level
 Chan1 = 2.50000 V (noise reject OFF)
 Holdoff = 40.000 ns


Markers
 Vmarker2 (c1) = 5.62500 V
 Vmarker1 (c1) = -7.03125 V
 delta V (c1) = 12.6563 V
 stop = 1.48000 ms
 start = -40.0000 us
 delta t = 1.52000 ms
 1/delta t = 657.895 Hz

Measurements
 V rms (c1) = 2.34354 V

Mode
 Realtime (NORMAL)
 Coupling
 dc (1M ohm)

Reference
 Center
 Probe
 10.00 : 1

Specification	FCC Part 15.231
Characteristics	PULSE WIDTH
Sales Order No.	112384
Date	23 DEC 99
Technician	

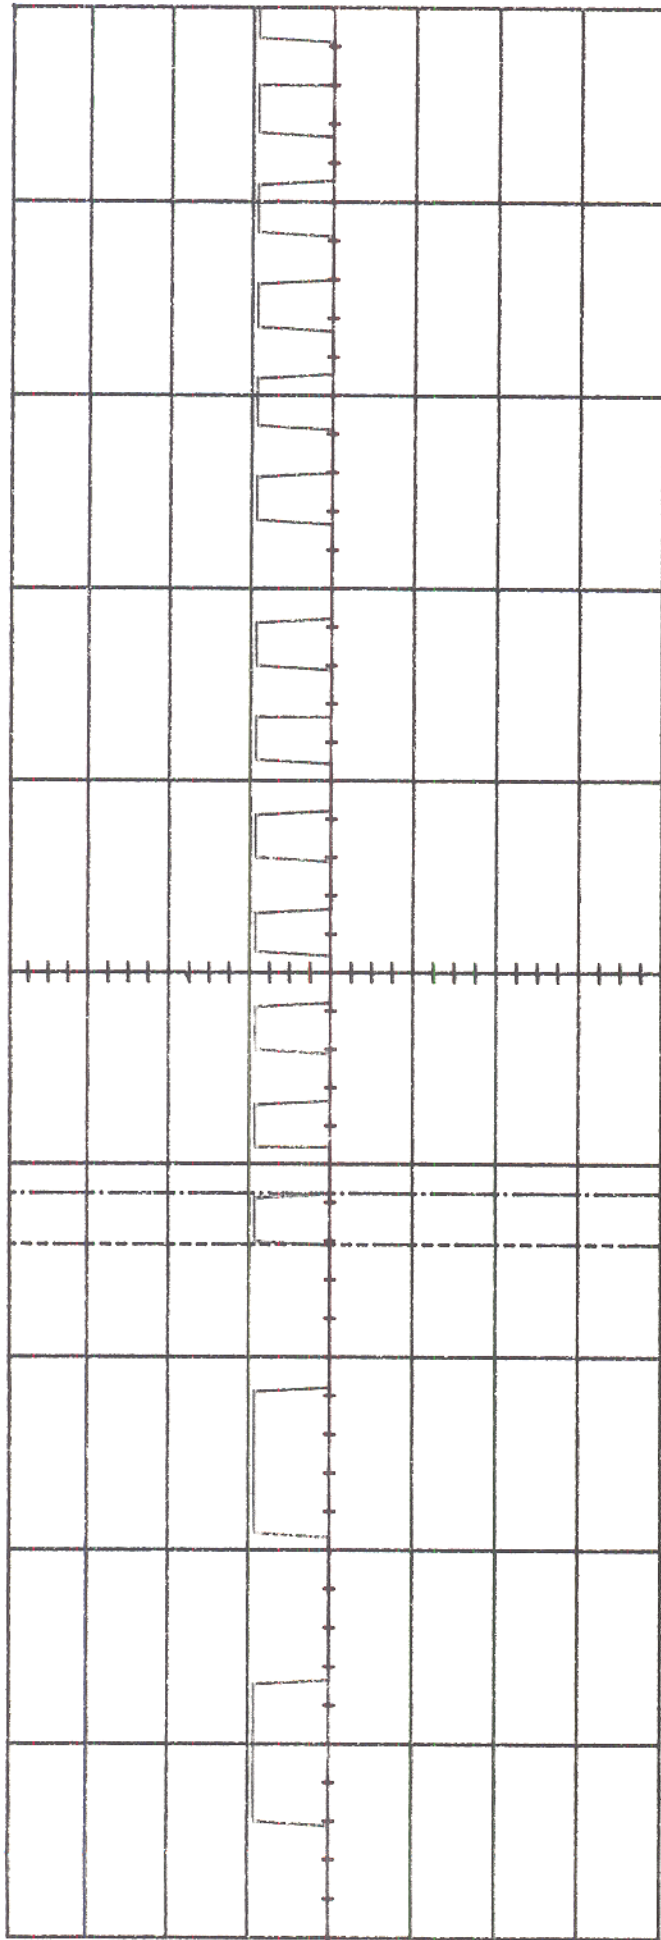

Main
 Timebase 2.00 ms/div
 Delay/Pos 8.80000 ms
 Sensitivity 5.00 V/div
 Channel 1 5.00 V/div
 Trigger mode : Edge
 On Positive Edge of Chan1
 Trigger Level
 Chan1 = 2.50000 V (noise reject OFF)
 Holdoff = 40.000 ns

Markers
 Vmarker2 (c1) = 5.62500 V
 Vmarker1 (c1) = -7.03125 V
 delta V (c1) = 12.6563 V
 stop = 6.48000 ms
 start = 5.95000 ms
 delta t = 520.000 us
 1/delta t = 1.92308 kHz

Measurements
 V rms (c1) = 2.34354 V

Mode
 Realtime (NORMAL)
 Coupling dc (1M ohm)

Reference
 Center Probe
 10.00 : 1

Specification	FCC Part 15.231
Characteristics	PULSE WIDTH
Sales Order No.	112384
Date	23 DEC 99
Technician	dy

231725