



## MEASUREMENT/TECHNICAL REPORT

**COMPANY NAME:** Wayne Dalton Corporation

**MODEL:** KEP1-0000

**FCC ID:** KJ8KYE-3725SW

**DATE:** July 23, 1999

This report concerns (check one): Original grant X  
Class II change \_\_\_\_\_

Equipment type: Low Power Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes \_\_\_\_\_ No X

If yes, defer until: \_\_\_\_\_  
date

N.A. agrees to notify the Commission by N.A.  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.  
3505 Francis Circle  
Alpharetta, GA 30004

Phone Number: (770) 740-0717  
Fax Number: (770) 740-1508

## **TABLE OF CONTENTS**

### **AGENCY AGREEMENT LETTER OF CONFIDENTIALITY**

### **SECTION 1**

### **GENERAL INFORMATION**

Product Description

### **SECTION 2**

### **TESTS AND MEASUREMENTS**

Configuration of Tested  
Test Facility  
Test Equipment  
Modifications  
Periodic Operation  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
20 dB Bandwidth of Fundamental Emission  
Frequency Tolerance of Carrier Signal  
Radiated Digital Device Emissions  
Power Line Conducted Emissions

### **SECTION 3**

### **LABELING INFORMATION**

### **SECTION 4**

### **BLOCK DIAGRAM(S)/SCHEMATICS**

### **SECTION 5**

### **PHOTOGRAPHS**

### **SECTION 6**

### **USER'S MANUAL**

## **LIST OF FIGURES AND TABLES**

### **FIGURES**

Test Configuration  
Photograph(s) for Spurious and Fundamental Emissions  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
Bandwidth of Fundamental Emission

### **TABLES**

EUT and Peripherals  
Test Instruments  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
Bandwidth of Fundamental Emission  
Radiated Emissions  
Power Line Conducted Emissions

# SECTION 1

## GENERAL INFORMATION

## **GENERAL INFORMATION**

### **Product Description**

The Equipment Under Test (EUT) is a Wayne Dalton Corporation, Model KEP1-0000, 372.5 MHz Keyless Entry Transmitter. The EUT is a thirteen button transmitter with a keypad, and part of a system which connects to a garage door opener. The EUT incorporates an internal antenna which is etched directly into the PCB.

### **Related Submittal(s)/Grant(s)**

The EUT will be used with a receiver (application already submitted and approved under FCC ID: KJ8SAR-3725GE).

## SECTION 2

# TESTS AND MEASUREMENTS

## **TESTS AND MEASUREMENTS**

### **Configuration of Tested System**

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2.

Since the EUT is typically mounted to the wall, it was placed into a continuous mode of transmit and placed in an upright position.

### **Test Facility**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and submitted to the FCC, and accepted in their letter marked 31040/SIT. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.

### **Test Equipment**


Table 2 describes test equipment used to evaluate this product.

### **MODIFICATIONS:**

No modification was made to bring the EUT into compliance with FCC Rules and Regulations.



**FIGURE 1**  
**TEST CONFIGURATION**



## FIGURE 2A

**Photograph(s) for Spurious and Fundamental Emissions**



**FIGURE 2B**

**Photograph(s) for Spurious and Fundamental Emissions**



**TABLE 1****EUT and Peripherals**

<b>PERIPHERAL MANUFACTURER</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>FCC ID:</b>	<b>CABLES P/D</b>
Keyless Entry Transmitter Wayne Dalton Corporation (EUT)	KEP1-0000	None	KJ8KYE- 3725SW (Pending)	None

**TABLE 2****TEST INSTRUMENTS**


<b>TYPE</b>	<b>MANUFACTURER</b>	<b>MODEL</b>	<b>SN.</b>
SPECTRUM ANALYZER	HEWLETT-PACKARD	8593E	3205A00124
SPECTRUM ANALYZER	HEWLETT-PACKARD	8558B	2332A09900
S A DISPLAY	HEWLETT-PACKARD	853A	2404A02387
COMB GENERATOR	HEWLETT-PACKARD	8406A	1632A01519
RF PREAMP	HEWLETT-PACKARD	8447D	1937A03355
RF PREAMP	HEWLETT-PACKARD	8449B	3008A00480
HORN ANTENNA	EMCO	3115	3723
ROBERTS ANTENNAS	COMPLIANCE DESIGN	A100	167
BICONICAL ANTENNA	EMCO	3110	9307-1431
LOG PERIODIC ANTENNA	EMCO	3146	9110-3600
LISN	SOLAR ELE.	8028	N/A
THERMOMETER	FLUKE	52	5215250
MULTIMETER	FLUKE	85	53710469
FUNCTION GENERATOR	TEKTRONIX	CFG250	CFG250TW15059
PLOTTER	HEWLETT-PACKARD	7475A	2325A65394
BILOG	CHASE	CBL6112A	2238

## **Periodic Operation (47 CFR 15.231(a1))**

A transmitter manually activated must automatically deactivate within not more than 5 seconds of being released. The transmitter is a 13 button transmitter. The EUT continues to transmit while each button is being pressed. The EUT ceases transmission almost immediately upon being released and appears to finish the current packet being transmitted. Therefore the longest period of time the transmitter should take to deactivate is a packet length, or 52.25 msec as shown in Figure 3.

FIGURE 3

## Periodic Operation 15.231(a)(c1)

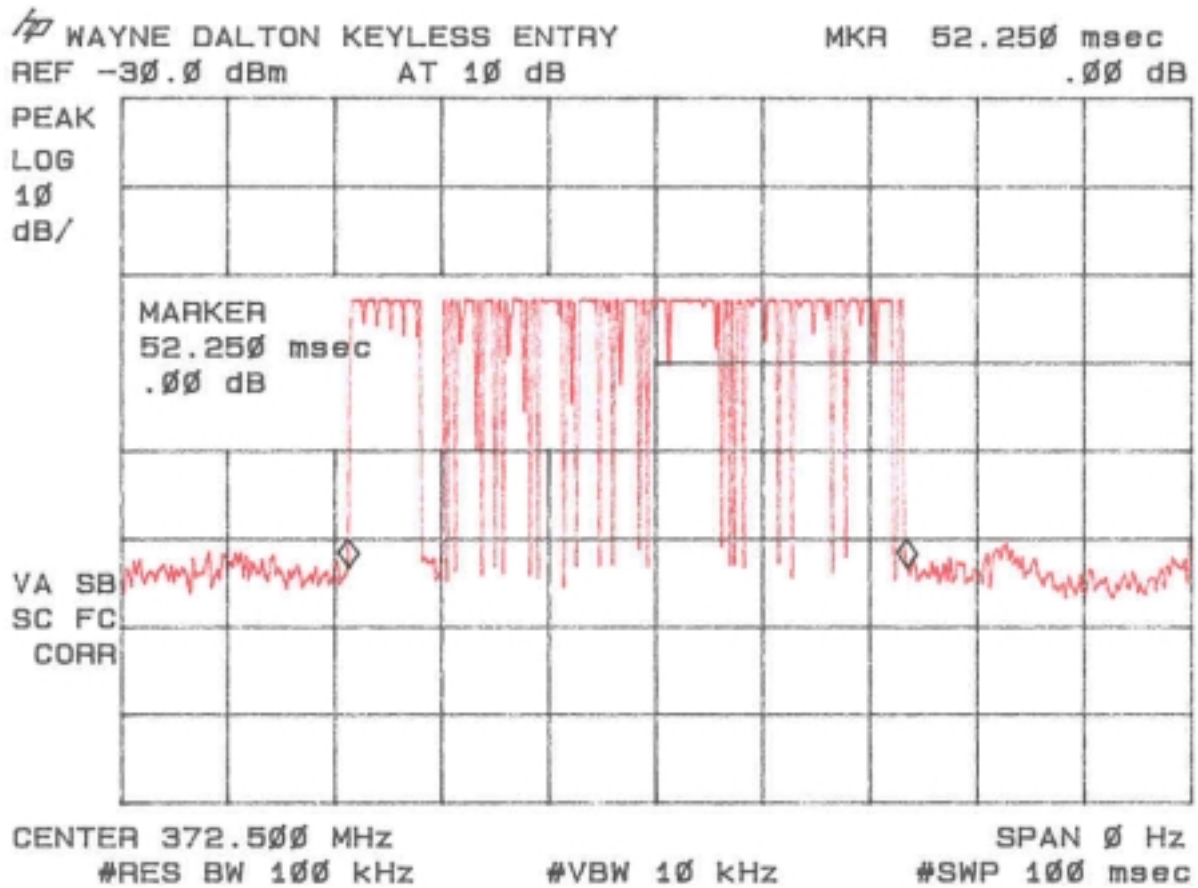

## Field Strength of Fundamental Emission (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of the peak fundamental emission is shown in Table 3 and Figure 4.

### Duty Cycle Correction During 100 msec:

Each function key sends a different series of characters, but each packet period (125.0 msec) never exceeds a series of 79\* long (375.0  $\mu$ s) and short (150.0  $\mu$ s) pulses. Assuming any combination of short or long pulses may be obtained due to encoding the worse case transmit duty cycle would be considered 79 x 375.0  $\mu$ s per 125 msec = 30% duty cycle (per 100 msec). Figures 5a through 5f show the characteristics of the pulse train for one of these functions.

\*- Note: 43.25 msec (data transmit time) / 637.5  $\mu$ s (period of long pulse) = 67.84  
 7.0 msec (preamble transmit time) / 637.5  $\mu$ s (period of long pulse) = 10.98  
 67.84 + 10.98 = 79 pulses

Duty Cycle Correction =  $20 \log (0.24) = -10.6 \text{ dB}$

Field strength of the average fundamental emission is shown in Table 4.



**TABLE 3****FIELD STRENGTH OF FUNDAMENTAL EMISSION**

**Test Date:** July 18, 1999  
**UST Project:** 99-574  
**Customer:** Wayne Dalton Corporation  
**Model:** KEP1-0000

<b>FREQ. (MHz)</b>	<b>TEST DATA (dBm) @ 3m</b>	<b>ANTENNA FACTOR + CABLE ATTENUATION</b>	<b>RESULTS (uV/m) @ 3m</b>	<b>PEAK FCC LIMITS (uV/m) @ 3m</b>
372.5	-45.0	19.8	12,260.3	84,375

**SAMPLE CALCULATIONS:**

**RESULTS uV/m @ 3m = Antilog  $((-45.0 + 19.8 + 107)/20)$  = 12,260.3**

**CONVERSION FROM dBm TO dBuV = 107 dB**

**Test Results**

**Reviewed By:** \_\_\_\_\_

**Name:** Tim R. Johnson

**TABLE 4****FIELD STRENGTH OF FUNDAMENTAL EMISSION**

**Test Date:** July 18, 1999  
**UST Project:** 99-574  
**Customer:** Wayne Dalton Corporation  
**Model:** KEP1-0000

<b>FREQ. (MHz)</b>	<b>TEST DATA (dBm) @ 3m*</b>	<b>ANTENNA FACTOR + CABLE ATTENUATION</b>	<b>RESULTS (uV/m) @ 3m</b>	<b>AVERAGE FCC LIMITS (uV/m) @ 3m</b>
372.5	-55.6	19.8	3,630.8	8,437.5

\* Adjusted by duty cycle =  $20 \log (0.30) = -10.6 \text{ dB}$

**SAMPLE CALCULATIONS:**

**RESULTS uV/m @ 3m = Antilog  $((-55.6 + 19.8 + 107)/20) = 3,630.8$**

**CONVERSION FROM dBm TO dBuV = 107 dB**

**Test Results**

**Reviewed By:** \_\_\_\_\_

**Name:** Tim R. Johnson

FIGURE 4

## FIELD STRENGTH OF FUNDAMENTAL EMISSION 15.231(b)

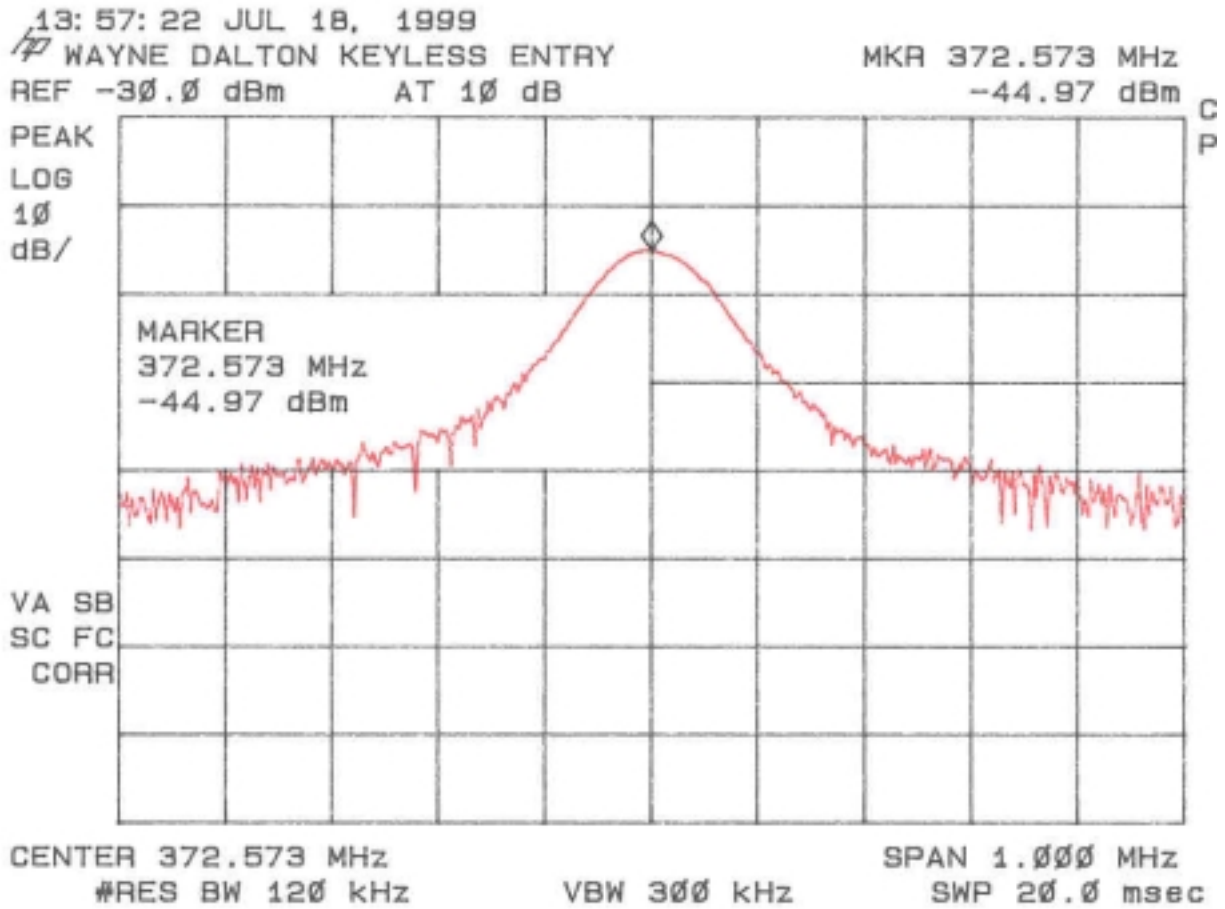


FIGURE 5a

## DUTY CYCLE CHARACTERISTICS

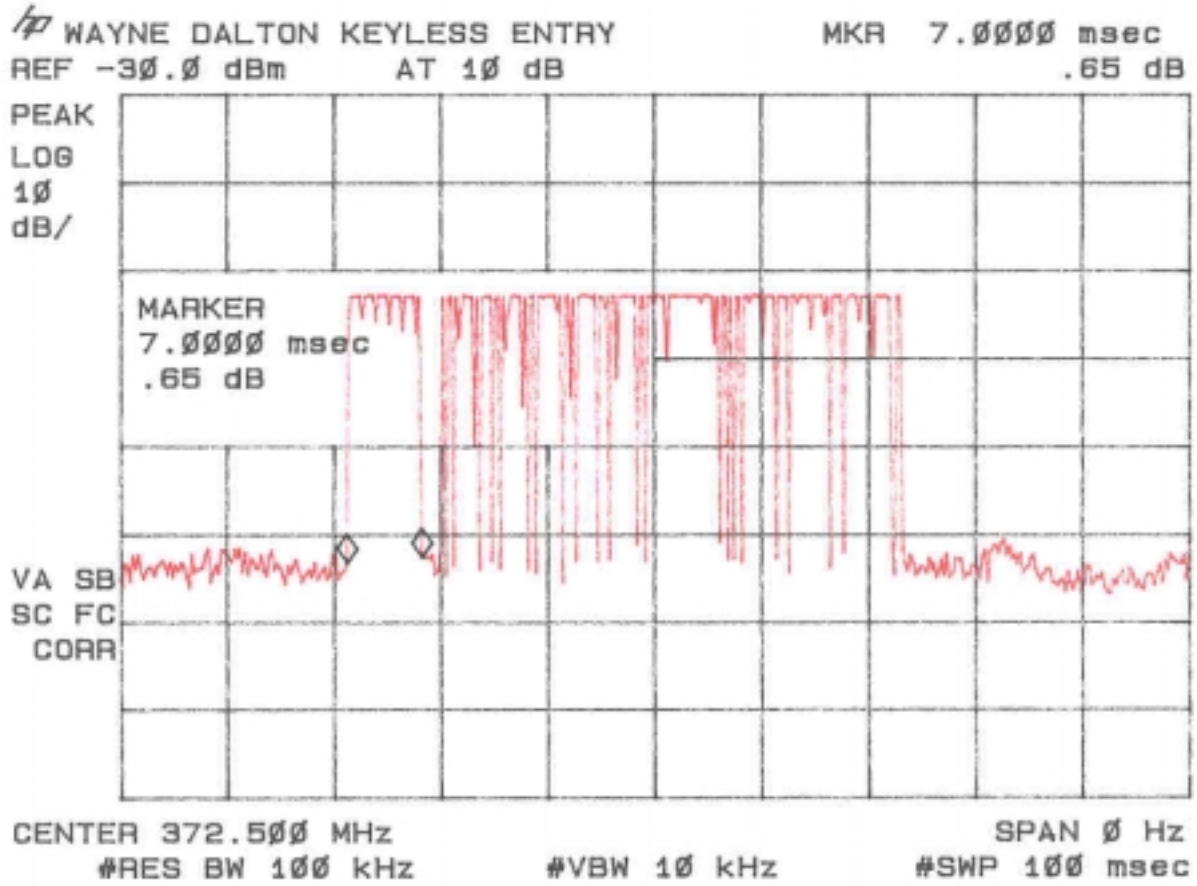


FIGURE 5b

## DUTY CYCLE CHARACTERISTICS

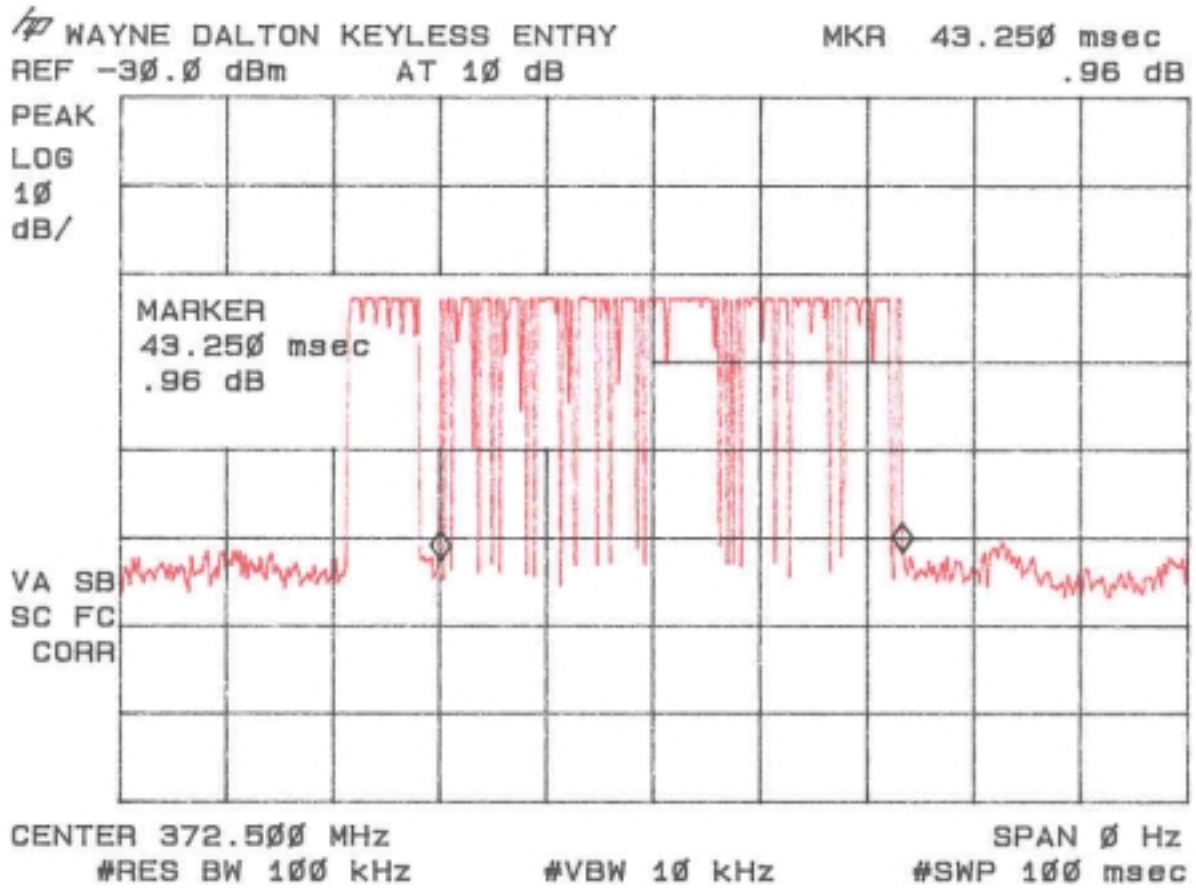


FIGURE 5c

## DUTY CYCLE CHARACTERISTICS

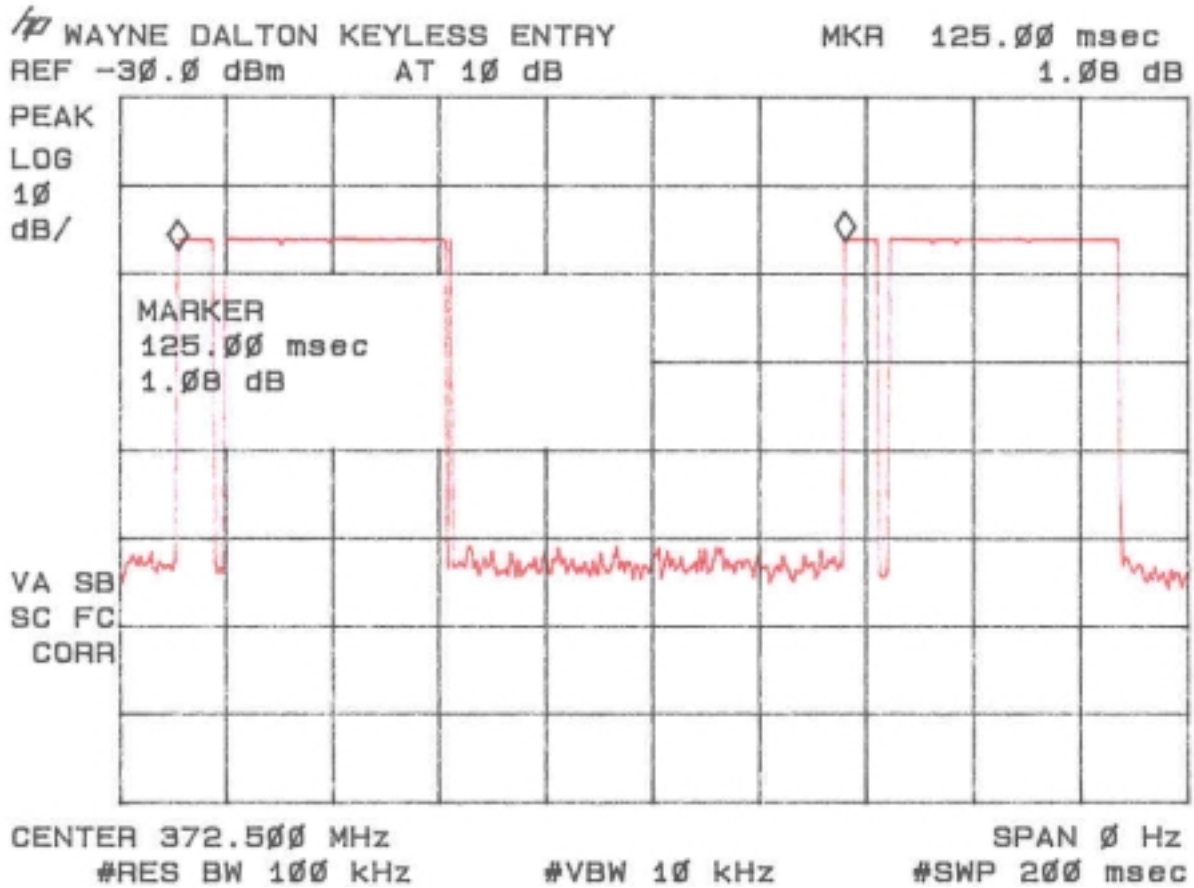


FIGURE 5d

## DUTY CYCLE CHARACTERISTICS

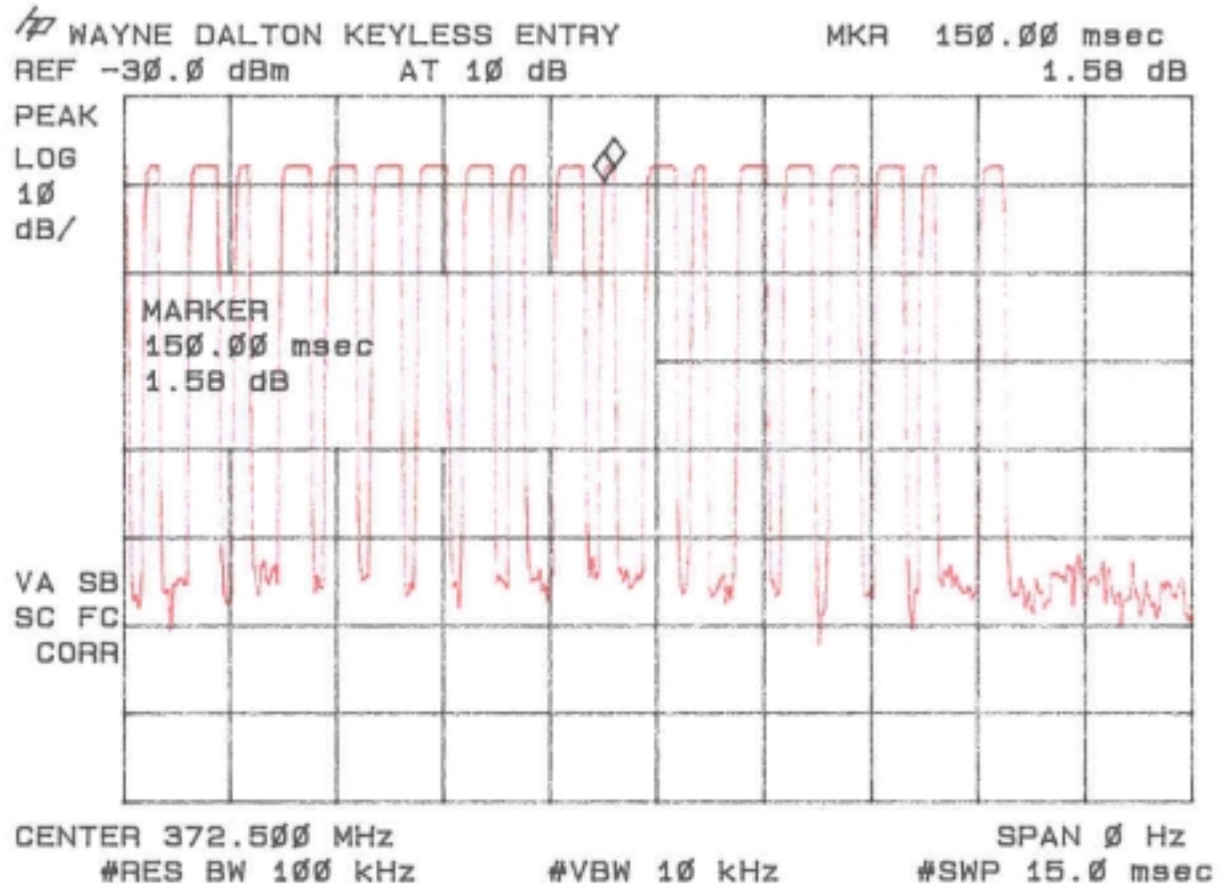


FIGURE 5e

## DUTY CYCLE CHARACTERISTICS


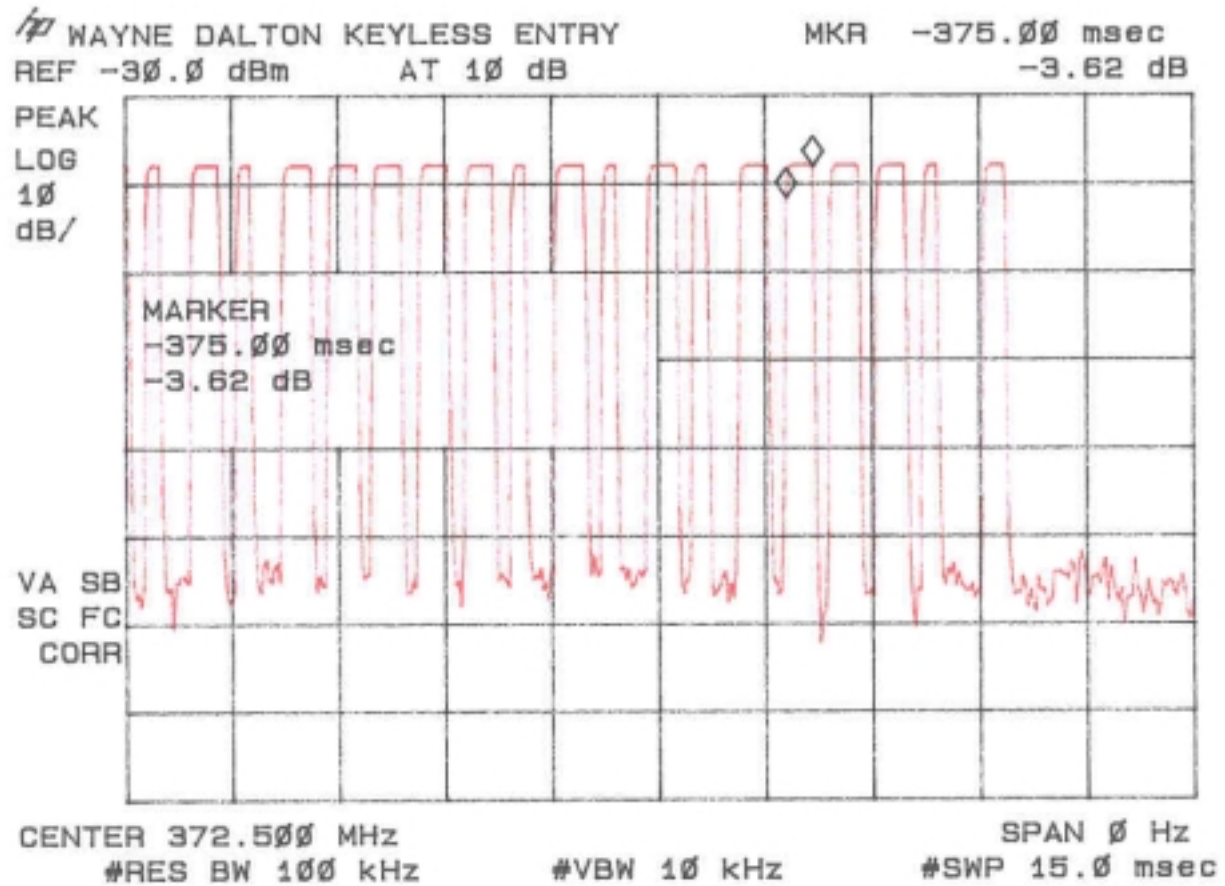




FIGURE 5f

## DUTY CYCLE CHARACTERISTICS

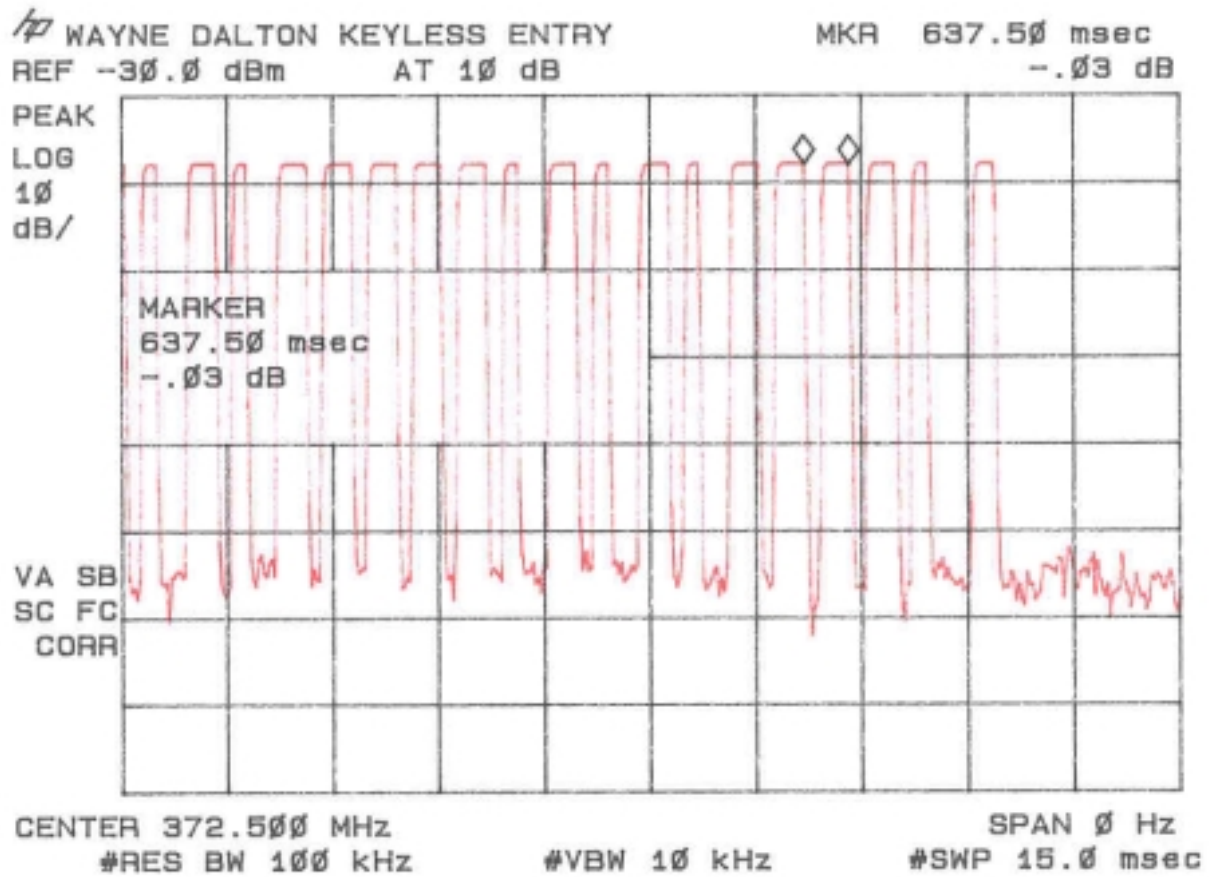

### **Field Strength Of Spurious Emissions (47 CFR 15.231b)**

Measurements were made using a peak detector. Field strength of Spurious Emissions are shown in Table 5 and Figures 6. For comparison to the average limits, duty cycle corrections were made as given in the previous section. Any emission less than 1000 MHz and falling within the restricted bands of 15.205 were not adjusted for averaging and the limits of 15.209 were applied.

TABLE 5a

## FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: July 18, 1999  
 UST Project: 99-574  
 Customer: Wayne Dalton Corporation  
 Model: KEP1-0000

FREQ. (MHz.)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN	RESULTS (uV/m) @ 3m	PEAK FCC LIMITS (uV/m) @ 3m
745.2	-66.7	28.6	2700.0	8437.5
1117.70**	-40.7	-6.2	1015.6	5000.0
1490.20**	-45.3	-5.5	651.6	5000.0
1862.83	-51.9	-3.4	385.3	8437.5
2235.50**	-66.4#	-1.2	92.4	5000.0
2608.38	-66.4#	0.4	111.9	8437.5
2980.60	-65.8#	0.9	127.0	8437.5
3353.25**	-63.8#	2.4	189.1	5000.0
3725.75**	-67.9#	4.1	145.5	5000.0

#- The measurements were taken @ 1m to achieve better dynamic range. They have been corrected by  $20 \log (\alpha) = -9.54 \text{ dB}$

\*\* Denotes restricted band of operation

## SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m =  $\text{Antilog} ((-66.7 + 28.6 + 107)/20) = 2780.0$   
 CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed By: \_\_\_\_\_

Name: Tim R. Johnson

**TABLE 5b****FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Test Date:** July 18, 1999  
**UST Project:** 99-574  
**Customer:** Wayne Dalton Corporation  
**Model:** KEP1-0000

<b>FREQ. (MHz.)</b>	<b>TEST DATA (dBm) @ 3m*</b>	<b>ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN</b>	<b>RESULTS (uV/m) @ 3m</b>	<b>AVERAGE FCC LIMITS (uV/m) @ 3m</b>
745.7	-77.3	28.6	822.2	843.8
1117.70**	-51.3	-6.2	298.5	500.0
1490.20**	-55.9	-5.5	190.5	500.0
1862.83	-62.5	-3.4	113.5	843.8
2235.50**	-77.0*#	-1.2	27.5	500.0
2608.38	-77.0*#	0.4	33.1	843.8
2980.60	-76.4*#	0.9	37.6	843.8
3353.25**	-74.4*#	2.4	56.2	500.0
3725.75**	-78.5*#	4.1	42.7	500.0

\* Adjusted by duty cycle =  $20 \log (0.30) = -10.6 \text{ dB}$

\*\* Denotes restricted band of operation

#- The measurements were taken @ 1m to achieve better dynamic range. They have been corrected by  $20 \log (\alpha) = -9.54 \text{ dB}$

**SAMPLE CALCULATIONS:**

**RESULTS uV/m @ 3m = Antilog  $((-77.3 + 28.6 + 107)/20) = 822.2$**

**CONVERSION FROM dBm TO dBuV = 107 dB**

**Test Results**

**Reviewed By:** \_\_\_\_\_ **Name:** Tim R. Johnson

**FIGURE 6a**

# SPURIOUS EMISSIONS 15.231(b)

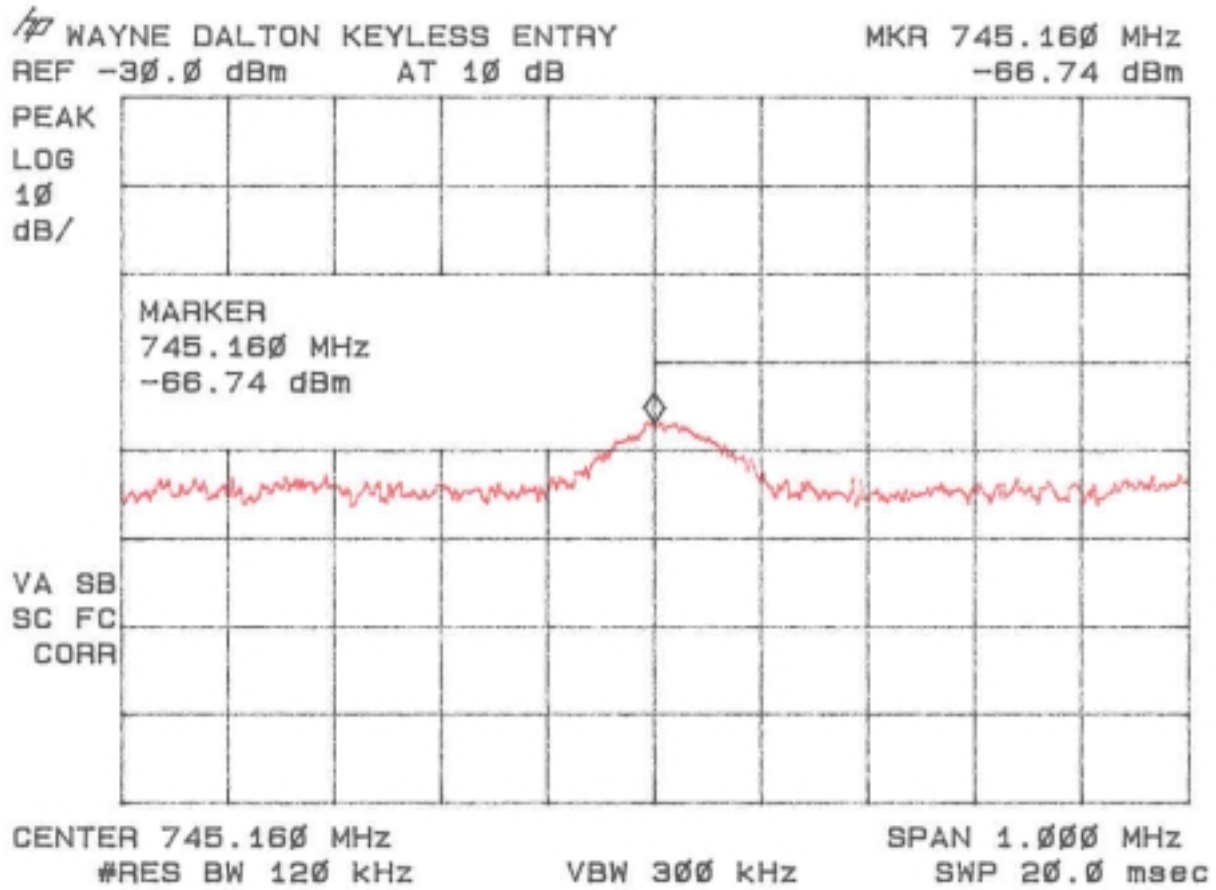


FIGURE 6b

## SPURIOUS EMISSIONS 15.231(b)

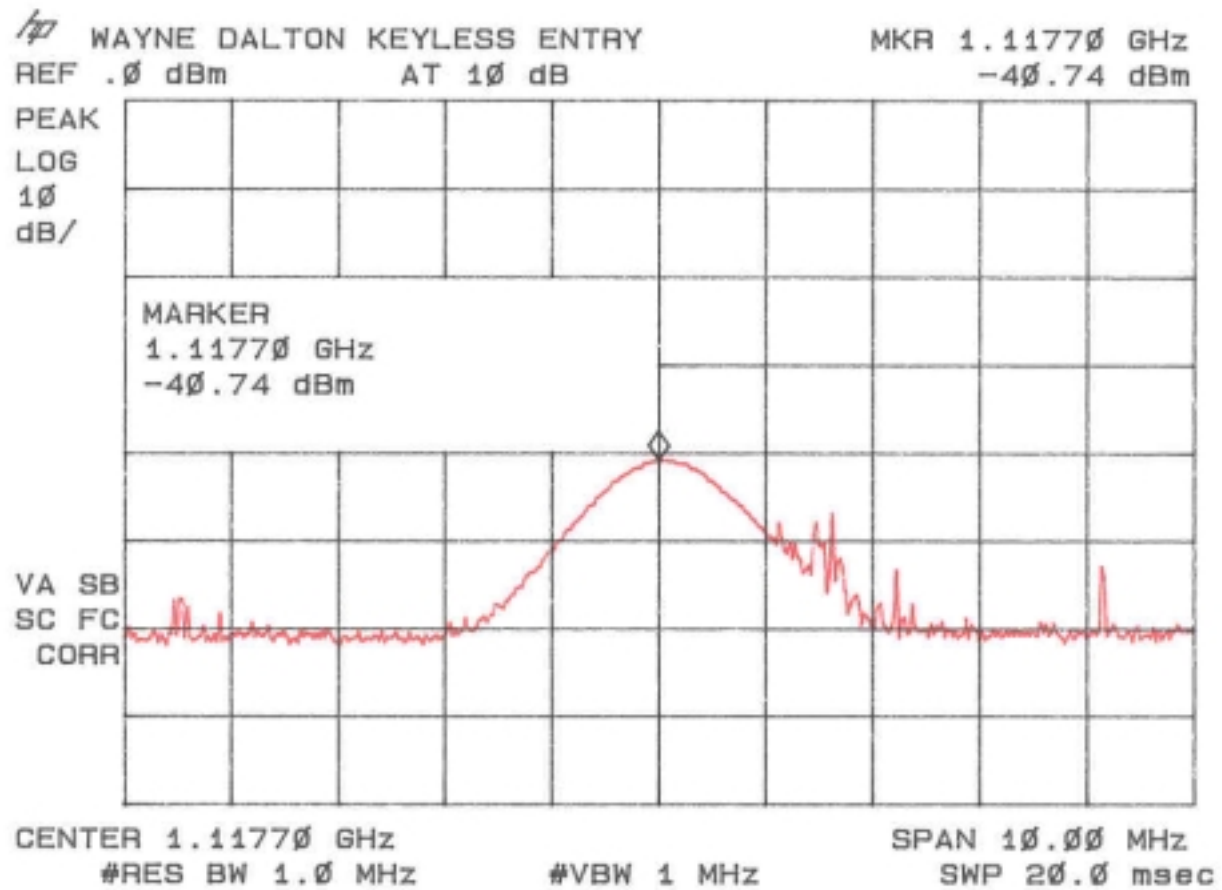


FIGURE 6c

## SPURIOUS EMISSIONS 15.231(b)

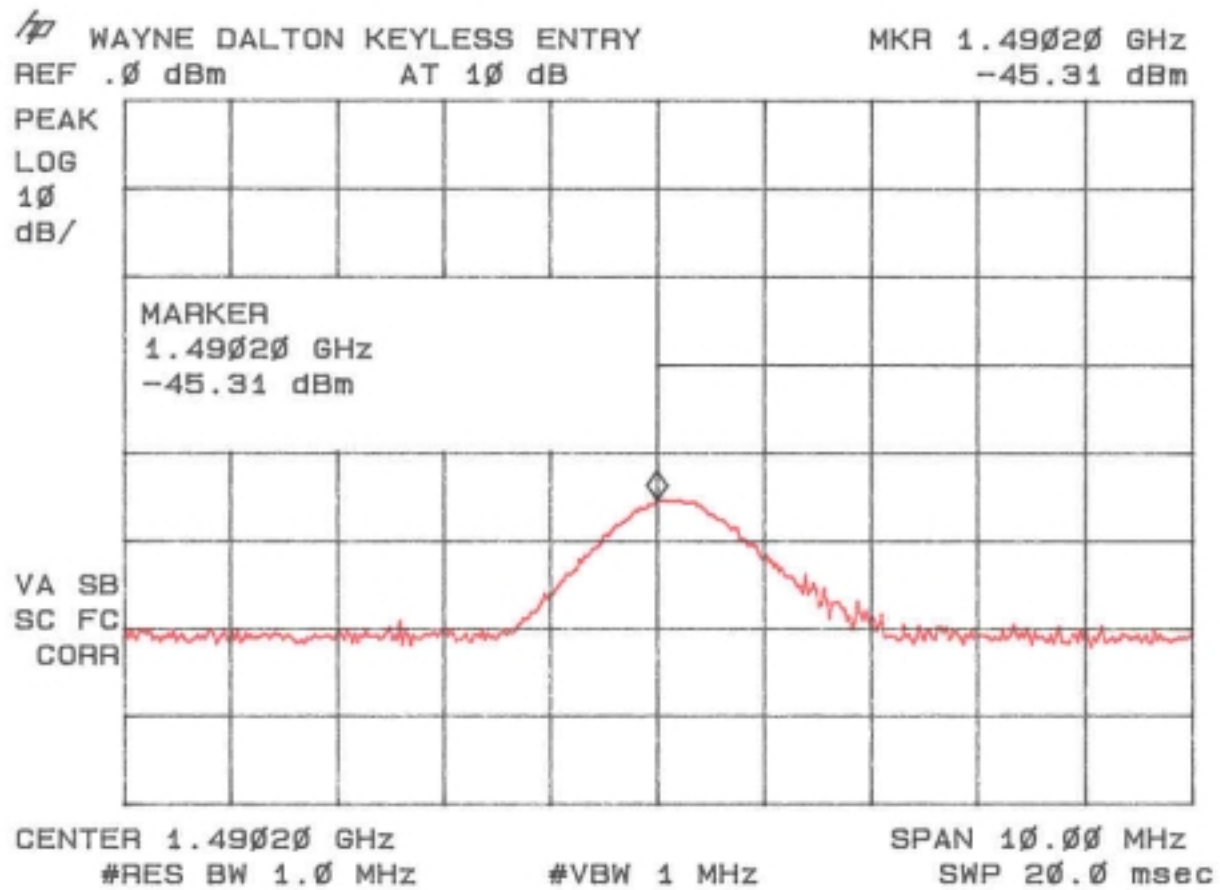


FIGURE 6d

## SPURIOUS EMISSIONS 15.231(b)

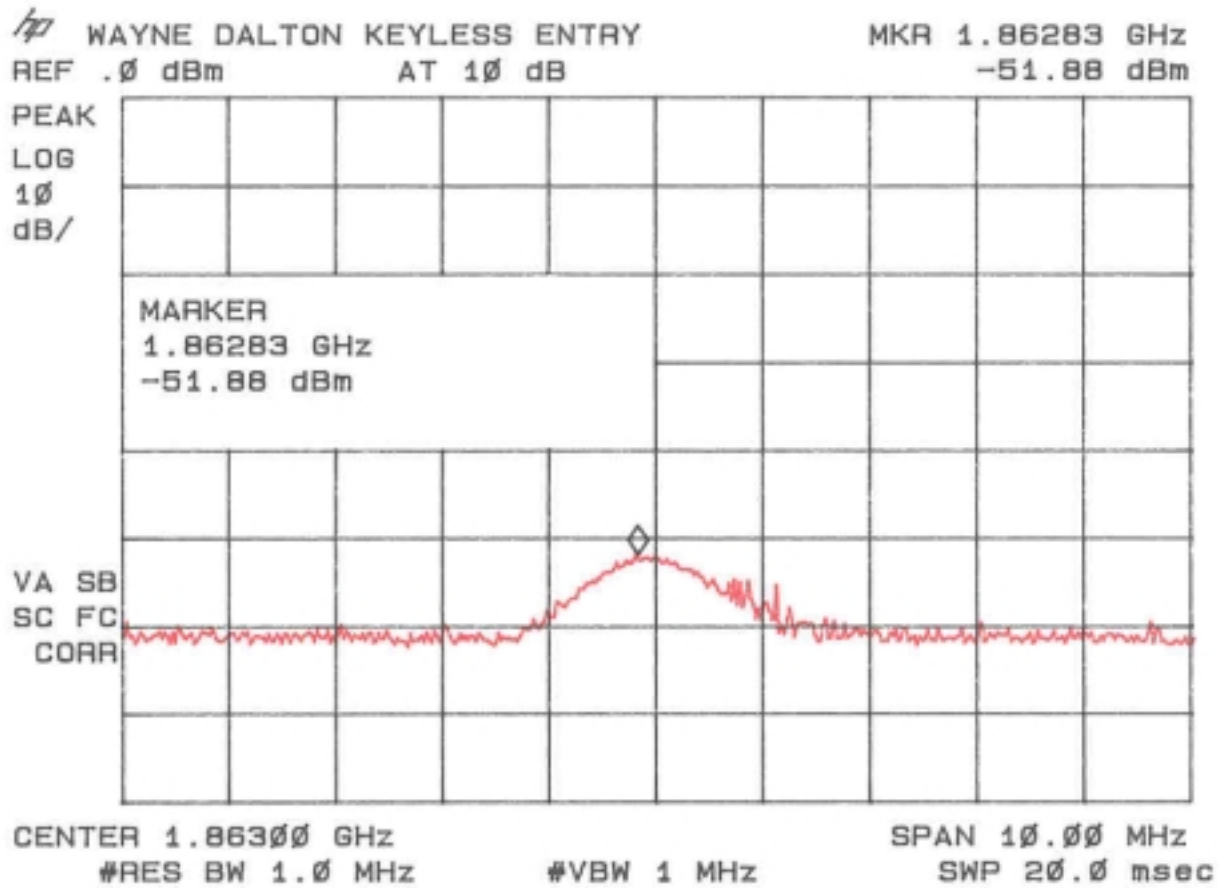




FIGURE 6e

SPURIOUS EMISSIONS 15.231(b)

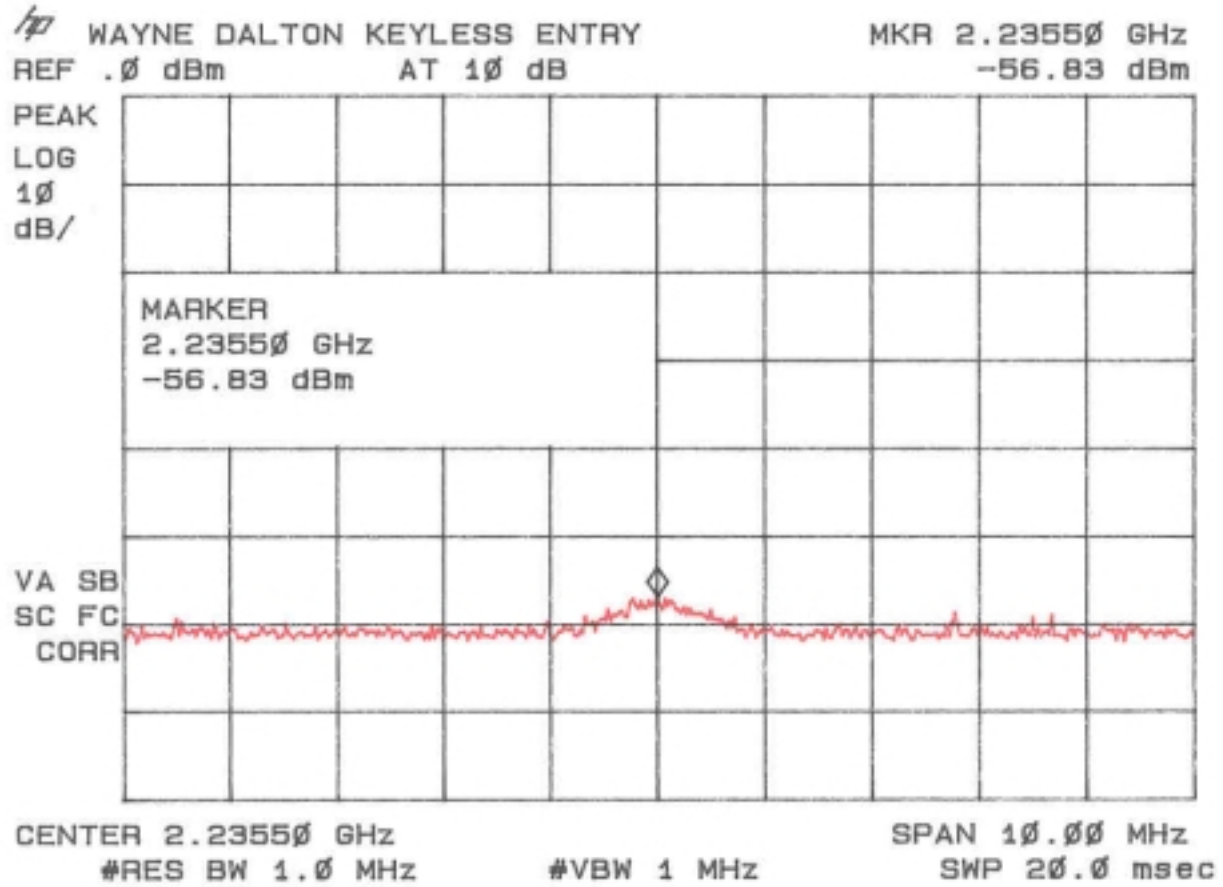


FIGURE 6f

## SPURIOUS EMISSIONS 15.231(b)

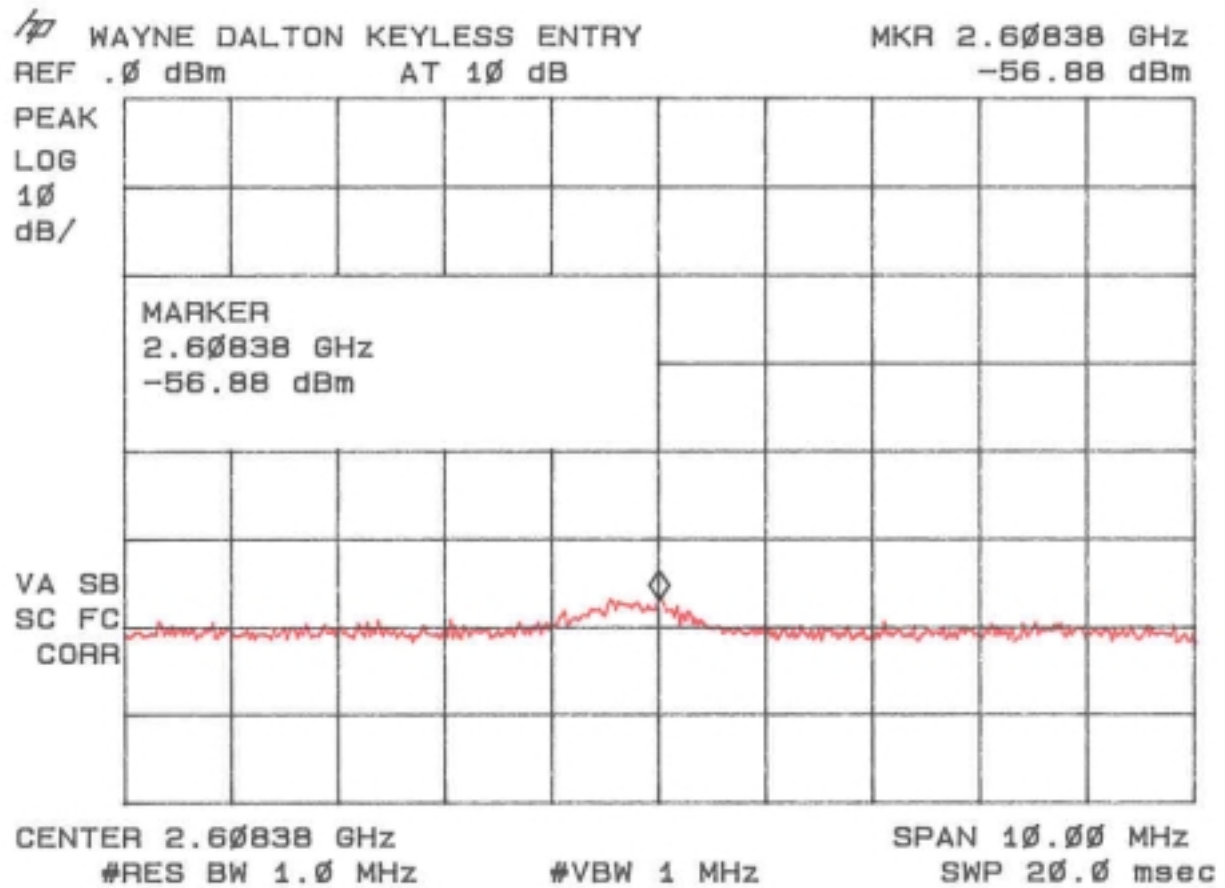


FIGURE 6g

## SPURIOUS EMISSIONS 15.231(b)

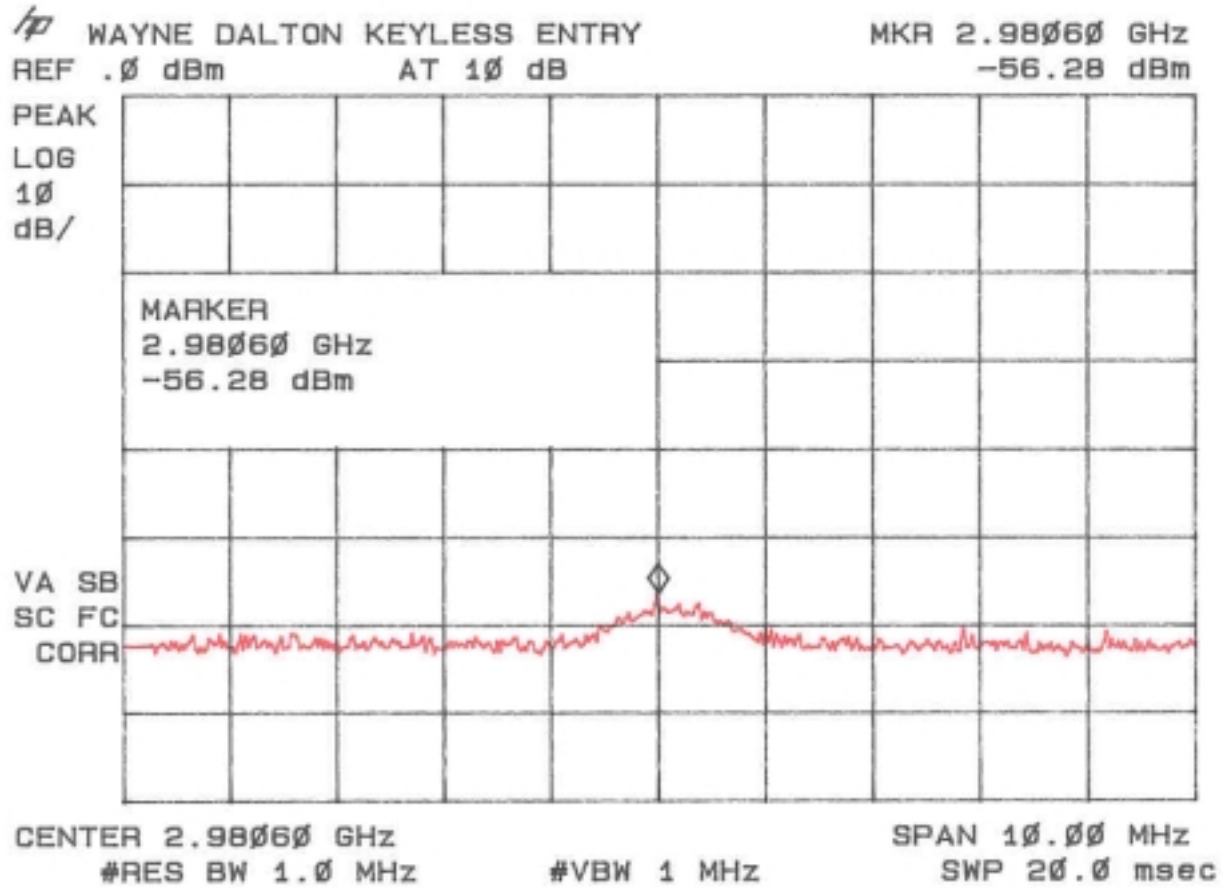


FIGURE 6h

## SPURIOUS EMISSIONS 15.231(b)


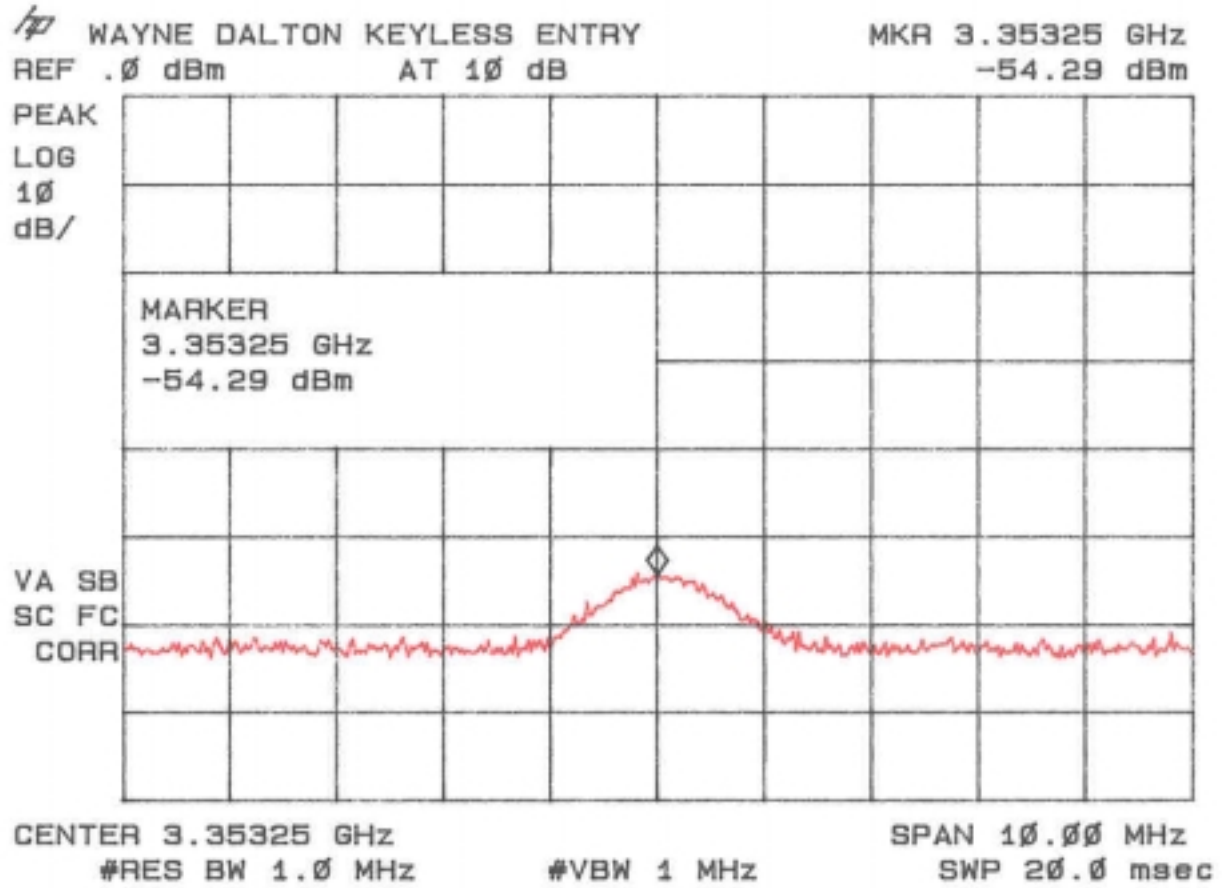


FIGURE 6i

## SPURIOUS EMISSIONS 15.231(b)

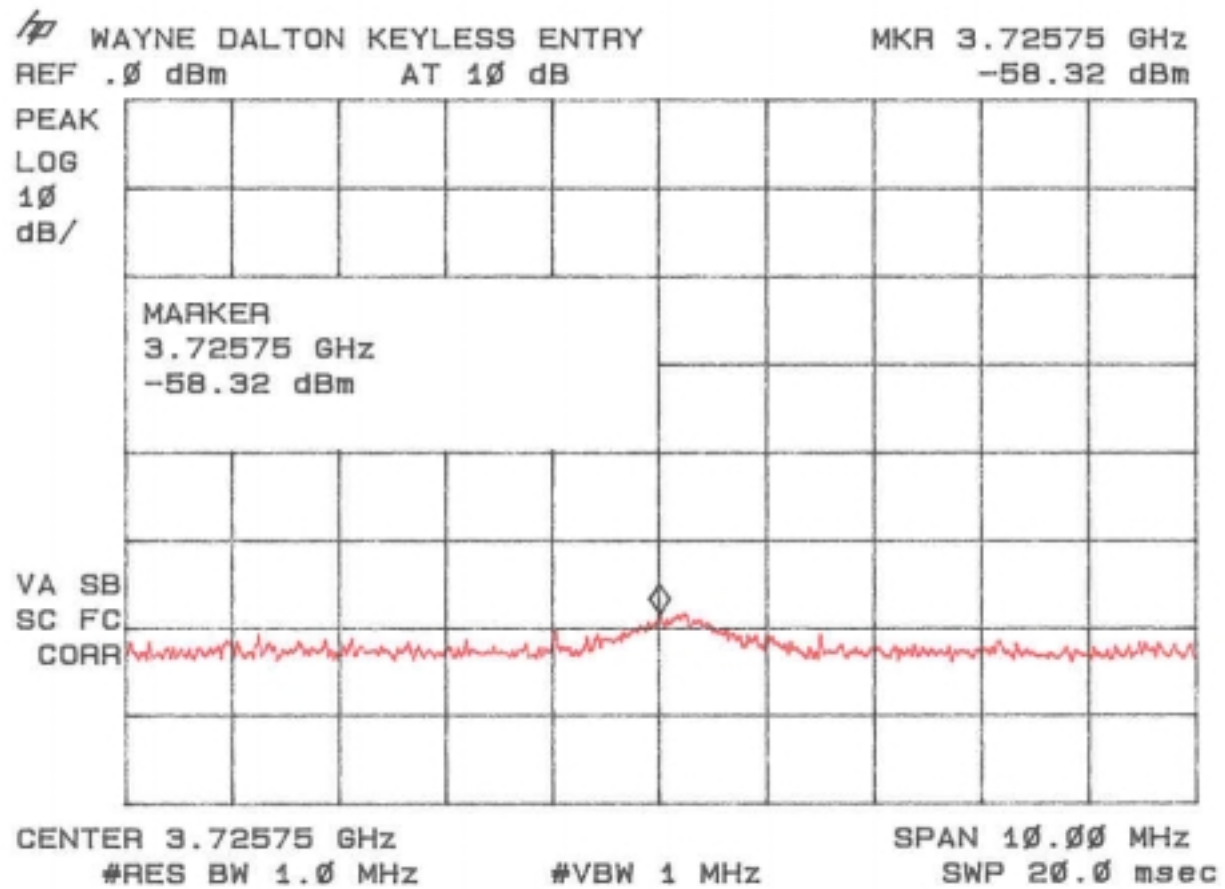

## **20 dB Bandwidth of Fundamental Emission (47 CFR 15.231c)**

The peak 20 dB bandwidth measurement of the fundamental emission is shown in Table 6 and Figure 7.

**TABLE 6****20 dB BANDWIDTH OF FUNDAMENTAL EMISSION**

**Test Date:** July 18, 1999  
**UST Project:** 99-574  
**Customer:** Wayne Dalton Corporation  
**Model:** KEP1-0000

<b>FREQUENCY (MHz)</b>	<b>20 dB BANDWIDTH (kHz)</b>	<b>FCC LIMITS (kHz)</b>
372.5	350.0	931

**FCC Limit = (0.25%) (Center Frequency) = (0.0025)(372.5) = 931 kHz**


**Test Results**

**Reviewed By:** \_\_\_\_\_

**Name:** Tim R. Johnson

FIGURE 7

## 20 dB BANDWIDTH OF FUNDAMENTAL EMISSION 15.231(c)

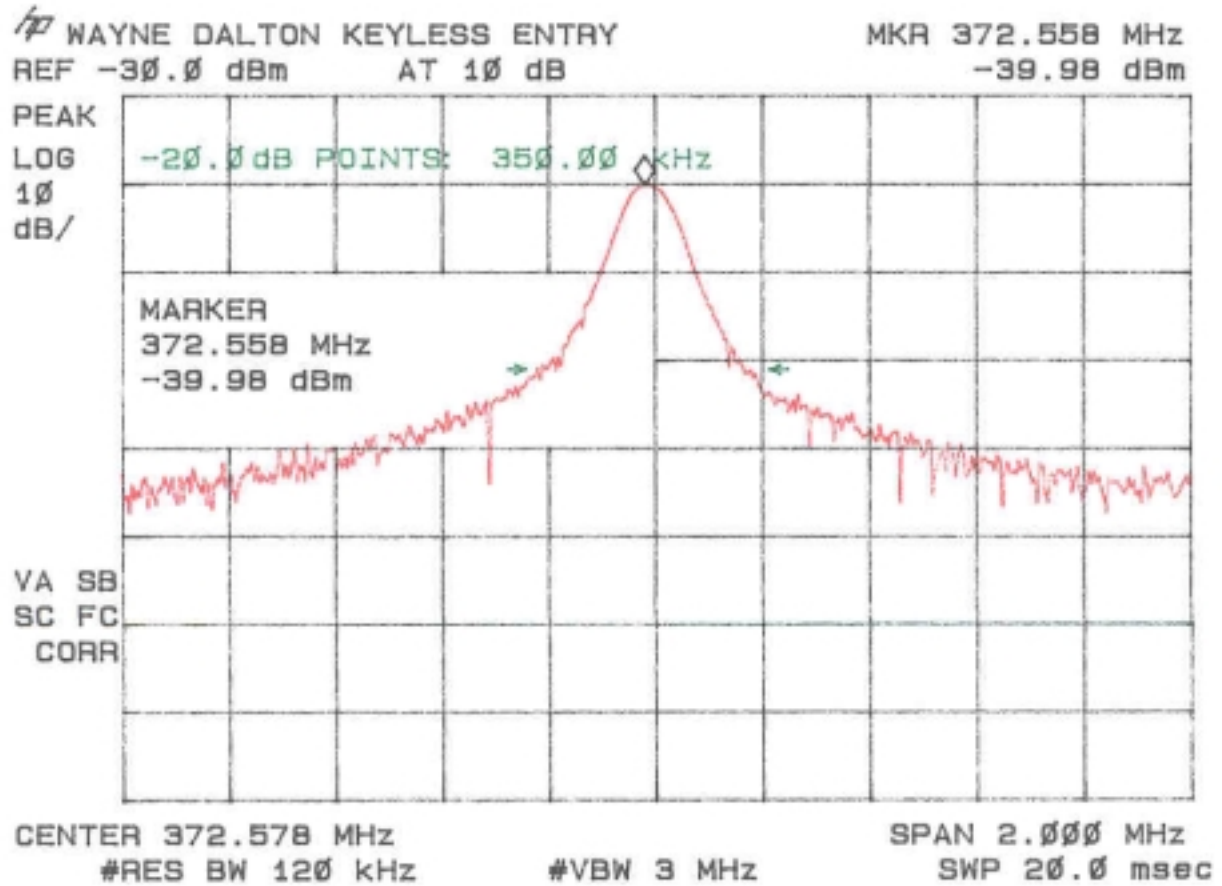



### **Frequency Tolerance of Carrier Signal (47 CFR 15.231d)**

The EUT does not operate in the 40.66 - 40.70 MHz band, therefore frequency tolerance measurements were deemed unnecessary.

## **Radiated Digital Device Emissions (47 CFR 15.109a)**

Radiated emissions were evaluated from 30 to 1000 MHz. Measurements were made with the analyzer's bandwidth set to 120 kHz. Emissions are shown in Table 7.

**TABLE 7****CLASS B  
RADIATED EMISSIONS**

**Test Date:** July 18, 1999  
**UST Project:** 99-574  
**Customer:** Wayne Dalton Corporation  
**Model:** KEP1-0000

<b>FREQ. (MHz)</b>	<b>TEST DATA (dBm) @ 3m</b>	<b>ANTENNA FACTOR + CABLE ATTENUATION</b>	<b>RESULTS (uV/m) @ 3m</b>	<b>FCC LIMITS (uV/m) @ 3m</b>
<b>NO EMISSIONS DETECTED WITHIN 10 dB OF THE FCC LIMITS</b>				

**Test Results**  
**Reviewed By:** \_\_\_\_\_ **Name:** Tim R. Johnson



**Power Line Conducted Emissions (47 CFR 15.107a)**

The EUT is operated by internal battery power only, therefore power line conducted emissions was deemed unnecessary.