

**Wayne-Dalton Corp.**  
**FCC Part 15, Certification Application**  
**Model 5BWS-B433**

**December 5, 2001**

## MEASUREMENT/TECHNICAL REPORT

**COMPANY NAME:** Wayne-Dalton Corp.

**MODEL:** 5BWS-B433

**FCC ID:** KJ8WST-433BSW

**DATE:** December 5, 2001

This report concerns (check one): Original grant X  
Class II change \_\_\_\_\_

Equipment type: **Low Power Transmitter**

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes \_\_\_\_\_ No X

If yes, defer until: \_\_\_\_\_  
date

N.A. agrees to notify the Commission by N.A.  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.  
3505 Francis Circle  
Alpharetta, GA 30004

Phone Number: (770) 740-0717  
Fax Number: (770) 740-1508

## **TABLE OF CONTENTS**

### **AGENCY AGREEMENT LETTER OF CONFIDENTIALITY**

### **SECTION 1**

### **GENERAL INFORMATION**

Product Description

### **SECTION 2**

### **TESTS AND MEASUREMENTS**

Configuration of Tested  
Test Facility  
Test Equipment  
Modifications  
Periodic Operation  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
20 dB Bandwidth of Fundamental Emission  
Frequency Tolerance of Carrier Signal  
Radiated Digital Device Emissions  
Power Line Conducted Emissions

### **SECTION 3**

### **LABELING INFORMATION**

### **SECTION 4**

### **BLOCK DIAGRAM(S)/SCHEMATICS**

### **SECTION 5**

### **PHOTOGRAPHS**

### **SECTION 6**

### **USER'S MANUAL**

## **LIST OF FIGURES AND TABLES**

### **FIGURES**

Test Configuration  
Photograph(s) for Spurious and Fundamental Emissions  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
Bandwidth of Fundamental Emission

### **TABLES**

EUT and Peripherals  
Test Instruments  
Field Strength of Fundamental Emission  
Field Strength of Spurious Emissions  
Bandwidth of Fundamental Emission  
Radiated Emissions  
Power Line Conducted Emissions

# SECTION 1

## GENERAL INFORMATION

## **GENERAL INFORMATION**

### **Product Description**

The Equipment Under Test (EUT) is a Wayne-Dalton Corp., Model 5BWS-B433. The EUT is a wall mount 5-button hand transmitter operating at 433.92 MHz using OOK modulation for use with Wayne-Dalton Corp. garage door openers.

The EUT incorporates an internal antenna only. The antenna is etched directly on the PCB board. The antenna is a tapped doubly tuned “hairpin” type antenna.

### **Related Submittal(s)/Grant(s)**

The EUT will be used with DoC approved receivers.

## SECTION 2

# TESTS AND MEASUREMENTS

## **TESTS AND MEASUREMENTS**

### **Configuration of Tested System**

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2.

Since the EUT is wall mounted, it was placed into a continuous mode of transmit and positioned in an upright position.

### **Test Facility**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and submitted to the FCC, and accepted in their letter marked 31040/SIT. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.

### **Modifications**


No modifications were made to bring the EUT into compliance with FCC Part 15, Class B Requirements.

### **Test Equipment**

Table 2 describes test equipment used to evaluate this product.



**FIGURE 1**  
**TEST CONFIGURATION**



**FIGURE 2a**

**Photograph(s) for Spurious and Fundamental Emissions**



**FIGURE 2b**

**Photograph(s) for Spurious and Fundamental Emissions**



**TABLE 1****EUT and Peripherals**

<b>PERIPHERAL MANUFACTURER</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>FCC ID:</b>	<b>CABLES P/D</b>
Transmitter Wayne-Dalton Corp. (EUT)	5BWS- B433	433-E1	KJ8WST-433BSW (Pending)	None

**TABLE 2****TEST INSTRUMENTS**


<b>TYPE</b>	<b>MANUFACTURER</b>	<b>MODEL</b>	<b>SN.</b>
SPECTRUM ANALYZER	HEWLETT-PACKARD	8593E	3205A00124
SPECTRUM ANALYZER	HEWLETT-PACKARD	8558B	2332A09900
S A DISPLAY	HEWLETT-PACKARD	853A	2404A02387
COMB GENERATOR	HEWLETT-PACKARD	8406A	1632A01519
RF PREAMP	HEWLETT-PACKARD	8447D	1937A03355
RF PREAMP	HEWLETT-PACKARD	8449B	3008A00480
HORN ANTENNA	EMCO	3115	3723
BICONICAL ANTENNA	EMCO	3110	9307-1431
BILOG ANTENNA	CHASE	CBL6112	2584
MULTIMETER	FLUKE	85	53710469
PLOTTER	HEWLETT-PACKARD	7475A	2325A65394

### **Periodic Operation (47 CFR 15.231(a1))**

A transmitter manually activated must automatically deactivate within not more than 5 seconds of being released. The transmitter is a 5 button transmitter. The EUT continues to transmit while each button is being pressed. The EUT ceases transmission almost immediately upon being released and appears to finish the current packet being transmitted. Therefore the longest period of time the transmitter should take to deactivate is a packet length, or 42.563 msec as shown in Figure 3.

FIGURE 3

## Periodic Operation 15.231(a)(c1)

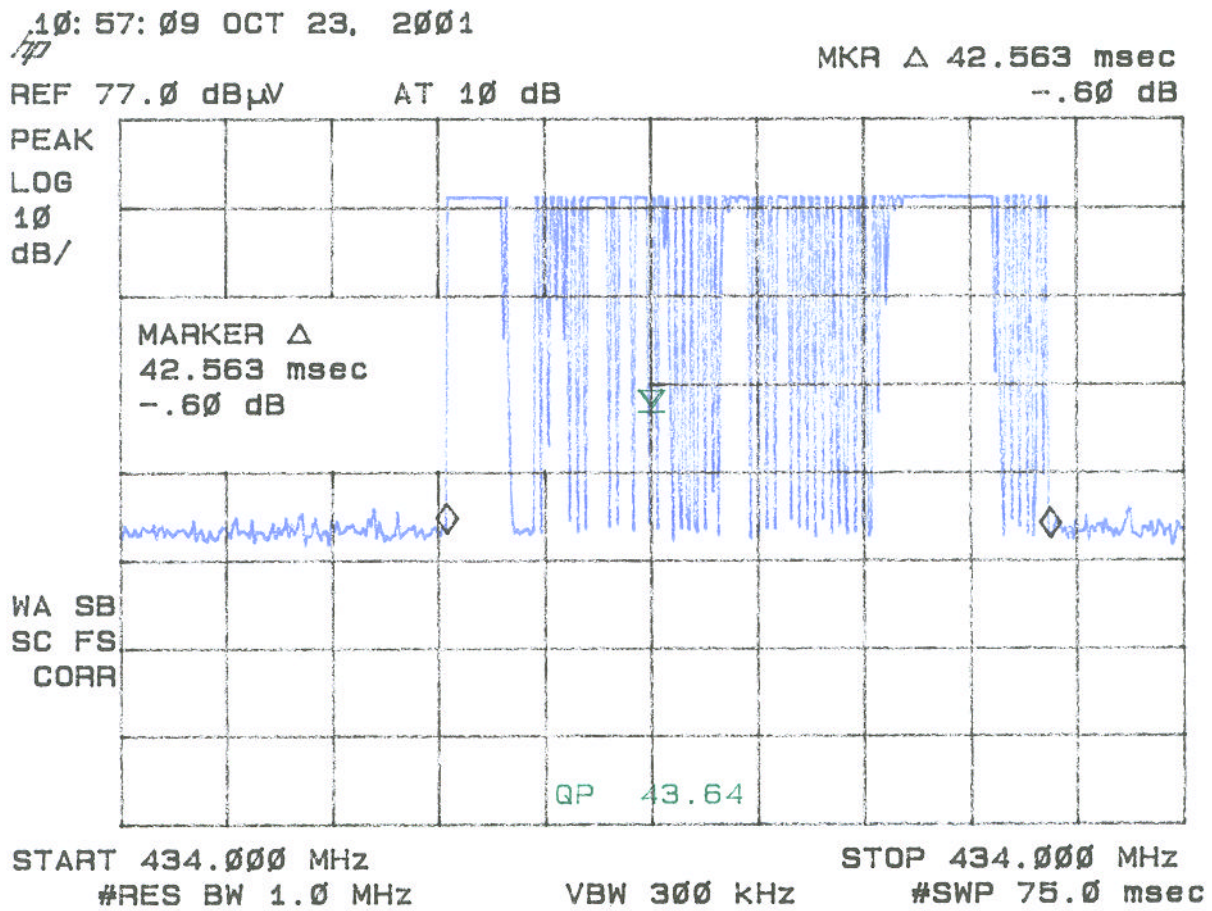

## Field Strength of Fundamental Emission (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of the peak fundamental emission is shown in Table 3 and Figure 4.

### Duty Cycle Correction During 100 msec:

Each function key sends a different series of characters, but each packet period (99.5 msec) never exceeds a series of \*65 long (450.0  $\mu$ s) and short (225.0  $\mu$ s) pulses. Assuming any combination of short or long pulses may be obtained for the data due to encoding the worse case transmit duty cycle would be considered 2.7 msec (preamble) + (65 x 0.450  $\mu$ s) per 99.5 msec = 32.1% duty cycle. Figures 5a through 5f show the characteristics of the pulse train for one of these functions.

\*- Note:

36.563 msec (data transmit time) / 562.5  $\mu$ s (period of data pulse) = 65.0

12 pulses (preamble transmit) \* 225.0  $\mu$ s = 2.7 msec

Duty Cycle Correction =  $20 \log (0.321) = -9.9 \text{ dB}$

Field strength of the average fundamental emission is shown in Table 4.



## TABLE 3

## FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: October 30, 2001  
 UST Project: 01-0603  
 Customer: Wayne-Dalton Corp.  
 Model: 5BWS-B433

## Peak Measurement

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (uV/m) @ 3m	PEAK FCC LIMITS (uV/m) @ 3m
433.92	-42.8	22.1	20,539.4	109,966.7

## SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog  $((-42.8 + 22.1 + 107)/20)$  = 20,539.4  
 CONVERSION FROM dBm TO dBuV = 107 dB

Tested By: David P. Blethen Name: David Blethen

TABLE 4

## FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: October 30, 2001  
 UST Project: 01-0603  
 Customer: Wayne-Dalton Corp.  
 Model: 5BWS-B433

## Average Measurement

FREQ. (MHz)	TEST DATA (dBm) @ 3m*	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (uV/m) @ 3m	AVERAGE FCC LIMITS (uV/m) @ 3m
433.92	-52.7	22.1	6570.3	10,996.7

\* Duty Cycle Correction =  $20 \log (0.321) = -9.9 \text{ dB}$

## SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m =  $\text{Antilog} ((-52.7 + 22.1 + 107)/20) = 6570.3$

CONVERSION FROM dBm TO dBuV = 107 dB

Tested

By:

David B. Blethen Name: David Blethen

FIGURE 4

## FIELD STRENGTH OF FUNDAMENTAL EMISSION 15.231(b)

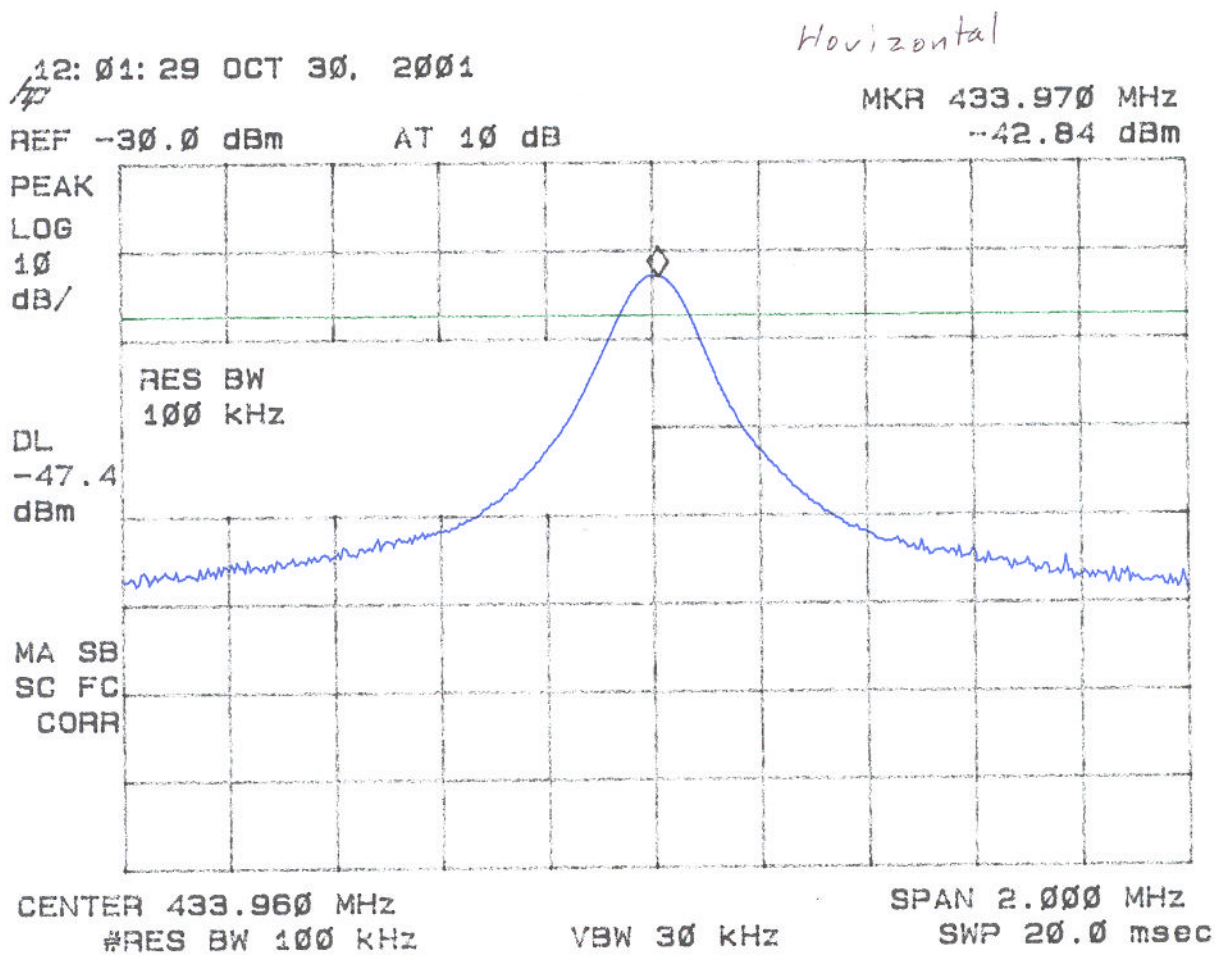


FIGURE 5a

## DUTY CYCLE CHARACTERISTICS

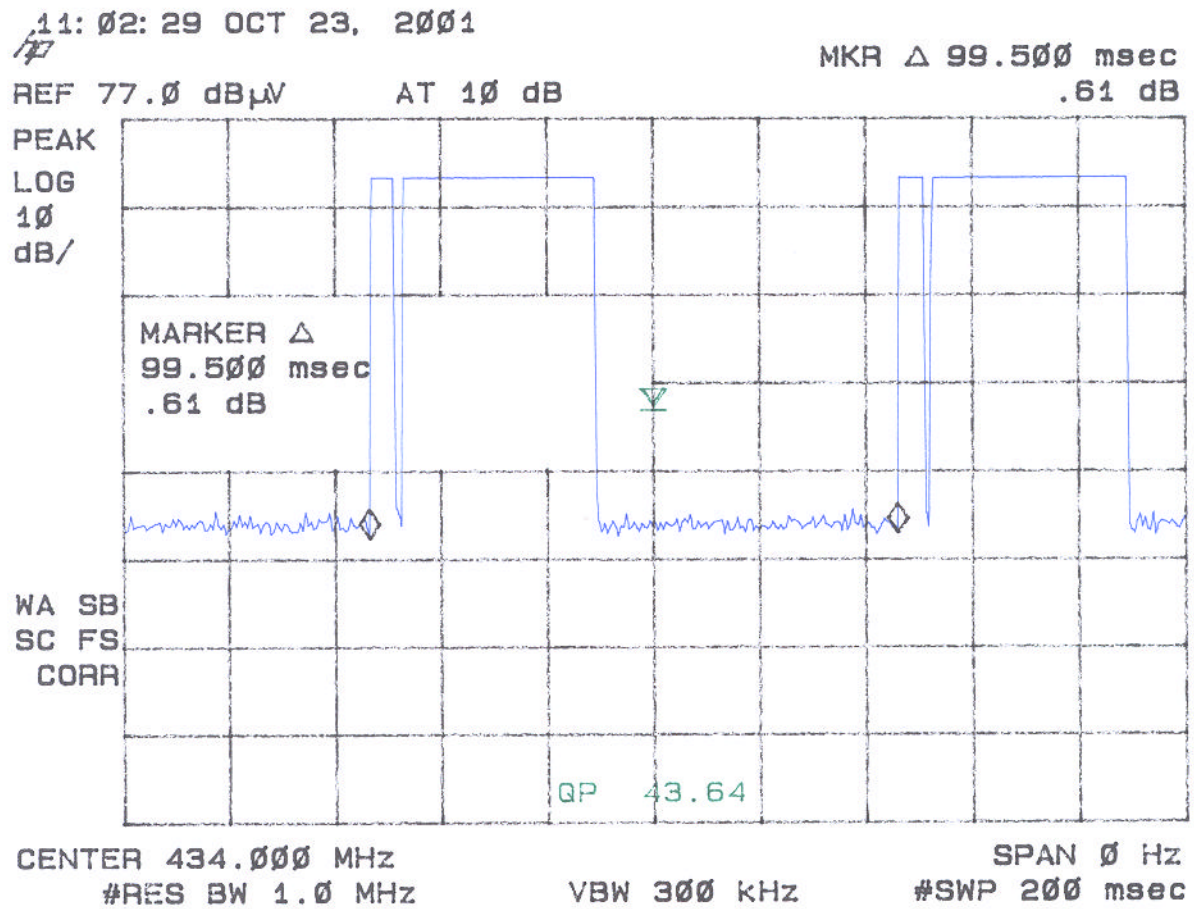


FIGURE 5b

## DUTY CYCLE CHARACTERISTICS

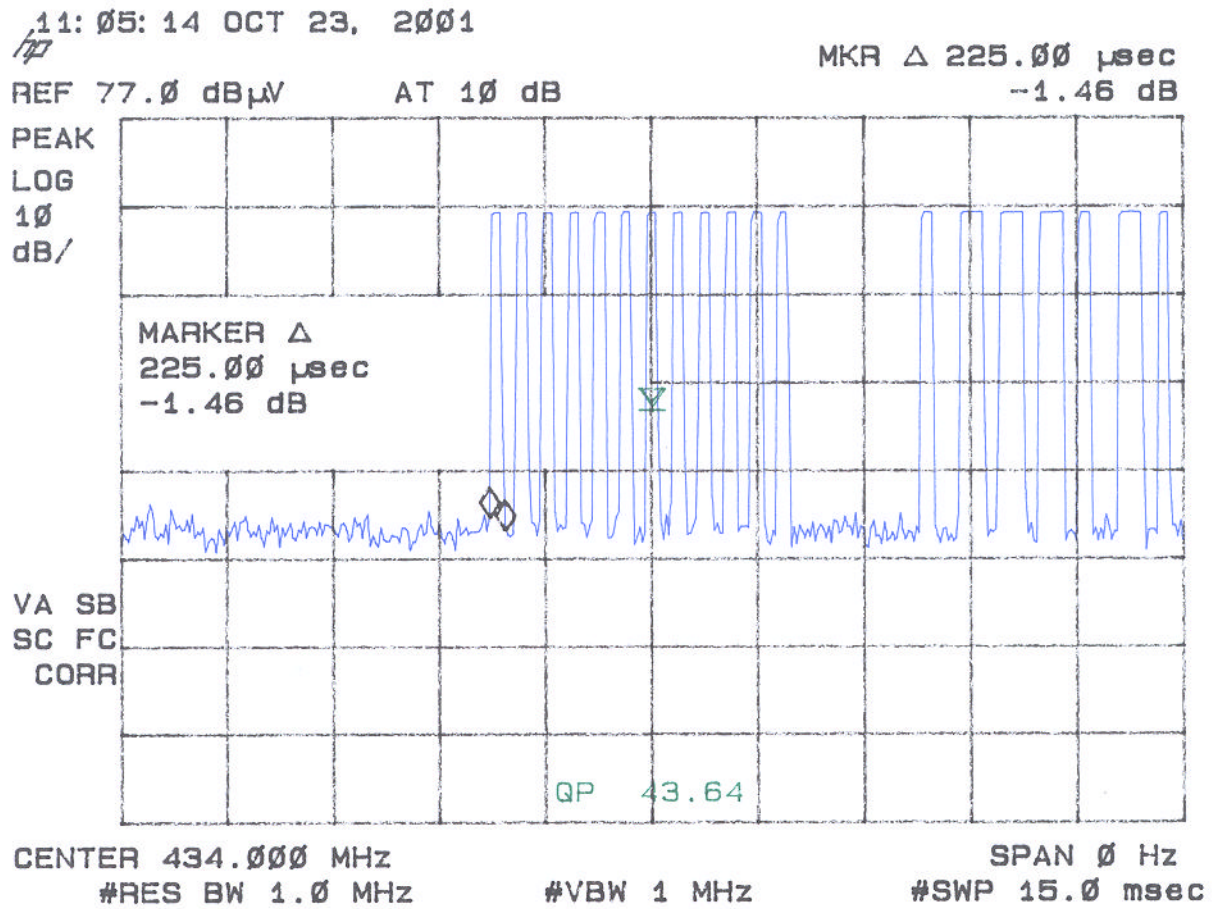


FIGURE 5c

## DUTY CYCLE CHARACTERISTICS

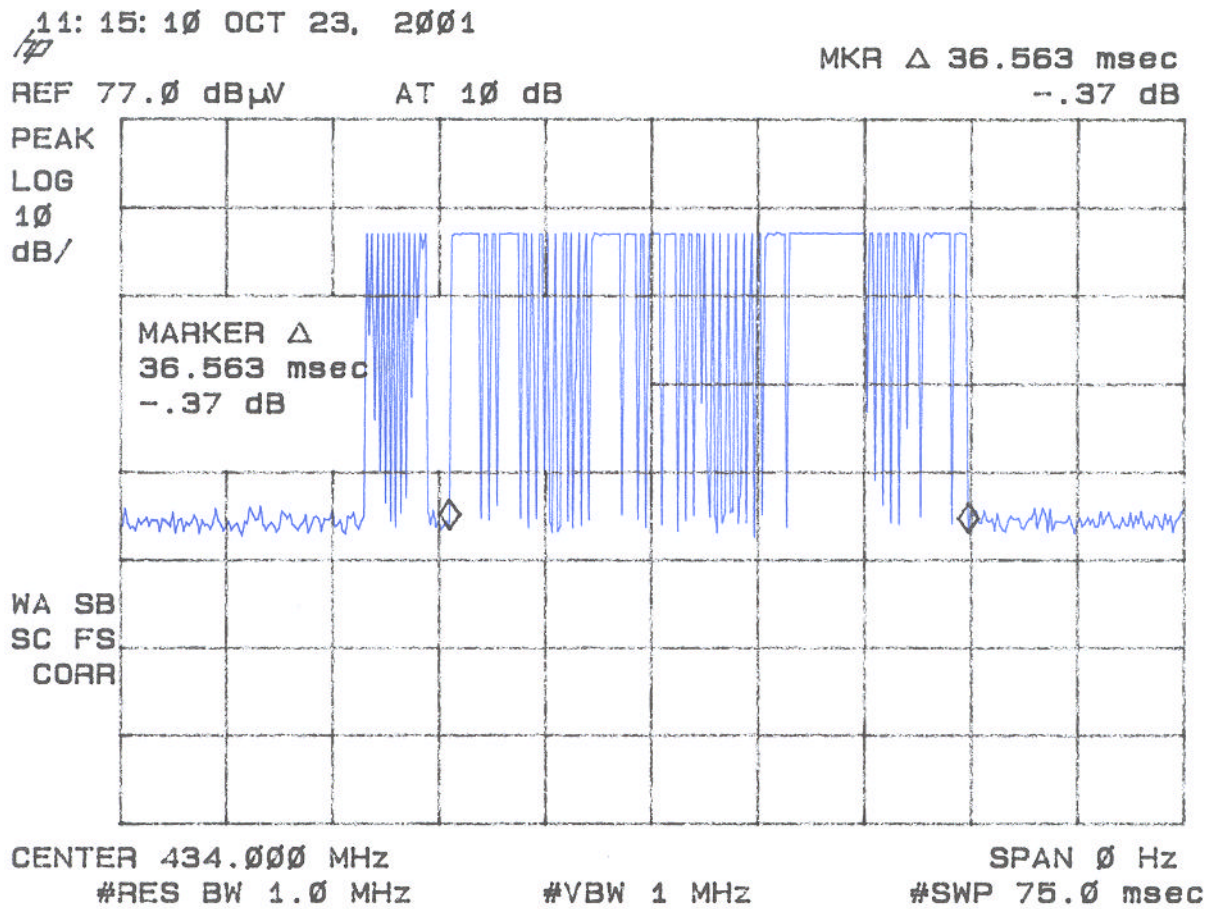




FIGURE 5d

## DUTY CYCLE CHARACTERISTICS

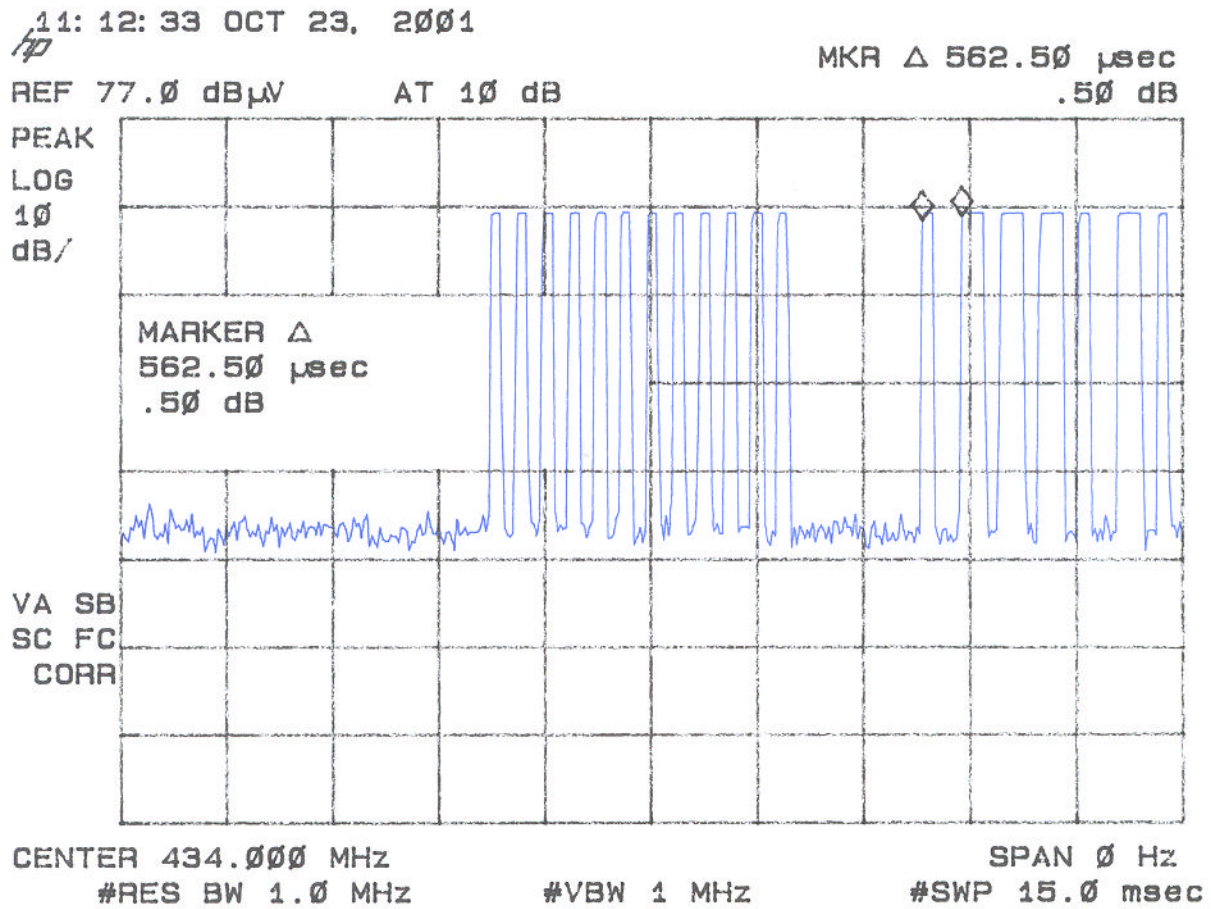


FIGURE 5e

## DUTY CYCLE CHARACTERISTICS

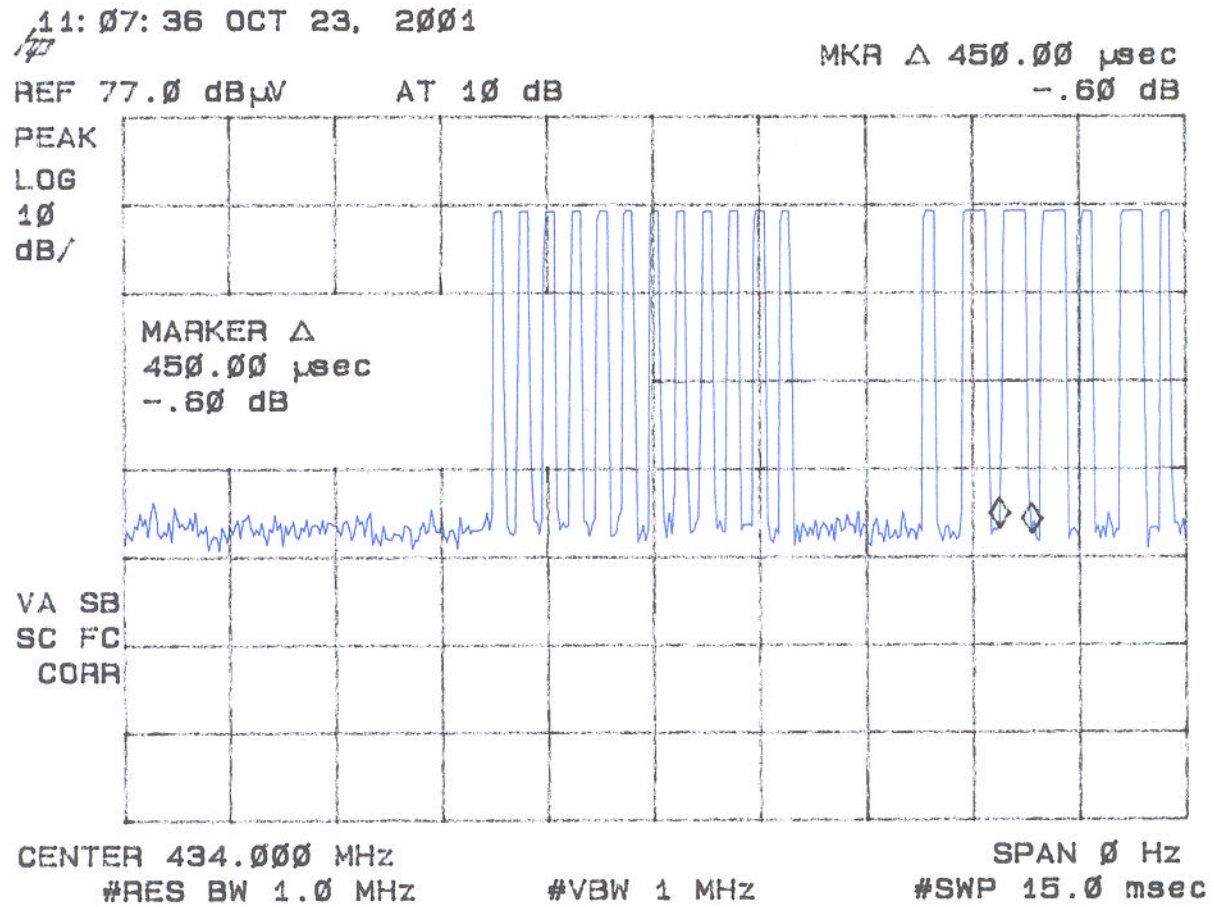




FIGURE 5f

## DUTY CYCLE CHARACTERISTICS


11:09:39 OCT 23, 2001

/

MKR  $\Delta$  225.00  $\mu$ secREF 77.0 dB $\mu$ V

AT 10 dB

.71 dB

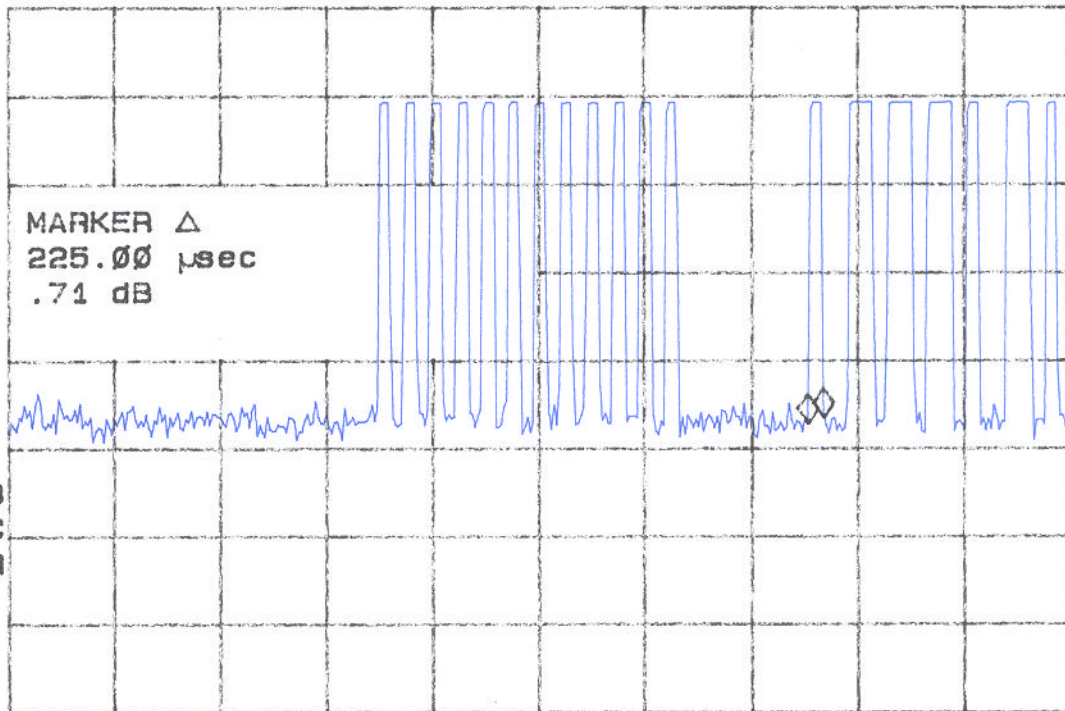PEAK  
LOG  
10  
dB/VA SB  
SC FC  
CORR

CENTER 434.000 MHz

#RES BW 1.0 MHz

#VBW 1 MHz

SPAN 0 Hz

#SWP 15.0 msec

### **Field Strength Of Spurious Emissions (47 CFR 15.231b)**

Measurements were made using a peak detector. Field strength of Spurious Emissions are shown in Table 5 and Figures 6. For comparison to the average limits, duty cycle corrections were made as given in the previous section. Any emission less than 1000 MHz and falling within the restricted bands of 15.205 were not adjusted for averaging and the limits of 15.209 were applied.

TABLE 5a

## FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: October 30, 2001  
 UST Project: 01-0603  
 Customer: Wayne-Dalton Corp.  
 Model: 5BWS-B433

## Peak Measurement

FREQ. (MHz.)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN	RESULTS (uV/m) @ 3m	PEAK FCC LIMITS (uV/m) @ 3m
867.8	-90.0	28.4	186.8	10,996.7
1735.0	-53.8	-4.3	280.9	10,996.7

\*\* Denotes restricted band of operation

## SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog  $((-90.0 + 28.4 + 107)/20)$  = 186.8  
 CONVERSION FROM dBm TO dBuV = 107 dB

Tested By: David P. Blethen Name: David Blethen

**TABLE 5b****FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Test Date:** October 30, 2001  
**UST Project:** 01-0603  
**Customer:** Wayne-Dalton Corp.  
**Model:** 5BWS-B433

**Average Measurement**

<b>FREQ. (MHz.)</b>	<b>TEST DATA (dBm) @ 3m*</b>	<b>ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN</b>	<b>RESULTS (uV/m) @ 3m</b>	<b>AVERAGE FCC LIMITS (uV/m) @ 3m</b>
867.8	-99.9	28.4	59.8	1099.7
1735.0	-63.7	-4.3	89.9	1099.7

\* Duty Cycle Correction =  $20 \log (0.321) = -9.9 \text{ dB}$

\*\* Denotes restricted band of operation

**SAMPLE CALCULATIONS:**

**RESULTS uV/m @ 3m = Antilog  $((-99.9 + 28.4 + 107)/20) = 59.8$**   
**CONVERSION FROM dBm TO dBuV = 107 dB**

**Tested**  
**By:** David P. Blethen **Name:** David Blethen

**FIGURE 6a**

**SPURIOUS EMISSIONS 16.231(b)**

**Plots Not Available**

## **20 dB Bandwidth of Fundamental Emission (47 CFR 15.231c)**

The peak 20 dB bandwidth measurement of the fundamental emission is shown in Table 6 and Figure 7.

TABLE 6

## 20 dB BANDWIDTH OF FUNDAMENTAL EMISSION

Test Date: October 30, 2001  
UST Project: 01-0603  
Customer: Wayne-Dalton Corp.  
Model: 5BWS-B433

FREQUENCY (MHz)	20 dB BANDWIDTH (kHz)	FCC LIMITS (kHz)
433.92	380	1085


FCC Limit = (0.25%) (Center Frequency) = (0.0025)(433.92 MHz) = 1085 kHz

Tested By  
Signature: 

Name: Timothy R. Johnson

FIGURE 7

## 20 dB BANDWIDTH OF FUNDAMENTAL EMISSION 15.231(c)

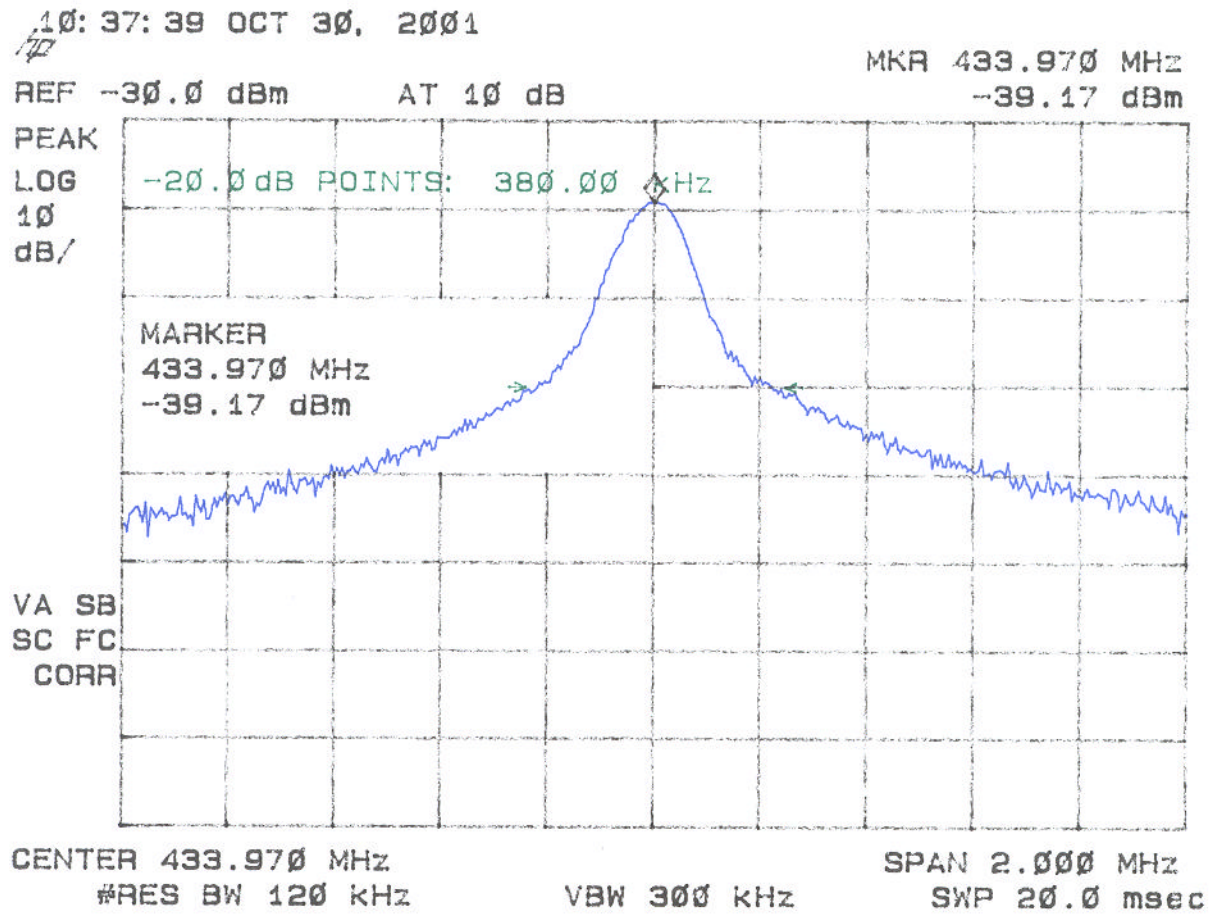



### **Frequency Tolerance of Carrier Signal (47 CFR 15.231d)**

The EUT does not operate in the 40.66 - 40.70 MHz band, therefore frequency tolerance measurements were deemed unnecessary.

## **Radiated Digital Device Emissions (47 CFR 15.109a)**

Radiated emissions were evaluated from 30 to 1000 MHz. Measurements were made with the analyzer's bandwidth set to 120 kHz. Emissions are shown in Table 7.

**TABLE 7****CLASS B****RADIATED EMISSIONS**

**Test Date:** October 30, 2001  
**UST Project:** 01-0603  
**Customer:** Wayne-Dalton Corp.  
**Model:** 5BWS-B433

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (uV/m) @ 3m	FCC LIMITS (uV/m) @ 3m
<p>Since the digital devices circuitry is used only to enable operation of the transmitter and did not control additional functions or capability, testing of digital device emissions was deemed not necessary.</p>				

**Tested**  
**By:** David P. Blethen **Name:** David Blethen

### **Power Line Conducted Emissions (47 CFR 15.107a)**

The EUT is operated by internal battery power only, therefore power line conducted emissions was deemed unnecessary.