

Digital Control, Inc.

FXL 19.2

Report No. DIGC0107.1

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2010 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test

Last Date of Test: June 23, 2010
Digital Control, Inc.
Model: FXL 19.2

Emissions			
Test Description	Specification	Test Method	Pass/Fail
Field Strength of Spurious Emissions	FCC 15.209:2010	ANSI C63.10:2009	Pass
Field Strength of Fundamental	FCC 15.209:2010	ANSI C63.10:2009	Pass
Radiated Emissions	FCC 15.109:2010 Class A	ANSI C63.4:2003	Pass

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400
Hillsboro, OR 97124

Phone: (503) 844-4066 Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada (Site filing #2834D-1).

Approved By:

Don Facticeau, IS Manager

NVLAP Lab Code: 200630-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

Barometric Pressure

The recorded barometric pressure has been normalized to sea level.



Accreditations and Authorizations

FCC

Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP

Northwest EMC, Inc. is accredited under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 2004/108/EC, and ANSI C63.4. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



NVLAP LAB CODE 200629-0
NVLAP LAB CODE 200630-0
NVLAP LAB CODE 200676-0
NVLAP LAB CODE 200761-0
NVLAP LAB CODE 200881-0

Industry Canada

Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS-Gen, Issue 2 and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements. (Site Filing Numbers - Hillsboro: 2834D-1, 2834D-2, Sultan: 2834C-1, Irvine: 2834B-1, 2834B-2, Brooklyn Park: 2834E-1)



CAB

Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



NEMKO

Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).





Accreditations and Authorizations

Australia/New Zealand

The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI

Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (Registration Numbers. - Hillsboro: C-1071, R-1025, G-84, C-2687, T-1658, and R-2318, Irvine: R-1943, G-85, C-2766, and T-1659, Sultan: R-871, G-83, C-1784, and T-1511, Brooklyn Park: R-3125, G-86, G-141, C-3464, and T-1634).



BSMI

Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement (US0017). License No. SL2-IN-E-1017.



GOST

Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



KCC

Northwest EMC, Inc is a CAB designated by MRA partners and recognized by Korea. (Assigned Lab Numbers: Hillsboro: US0017, Irvine: US0158, Sultan: US0157)



VIETNAM

Vietnam MIC has approved Northwest EMC as an accredited test lab. Per Decision No. 194/QD-QLCL (dated December 15, 2009), Northwest EMC test reports can be used for Vietnam approval submissions.



SCOPE

For details on the Scopes of our Accreditations, please visit:
<http://www.nwemc.com/accreditations/>



Northwest EMC Locations





Oregon
Labs EV01-EV12
22975 NW Evergreen Pkwy
Suite 400
Hillsboro, OR 97124
(503) 844-4066

California
Labs OC01-OC13
41 Tesla
Irvine, CA 92618
(949) 861-8918

Minnesota
Labs MN01-MN08
9349 W Broadway Ave.
Brooklyn Park,
MN 55445
(763) 425-2281

Washington
Labs SU01-SU07
14128 339th Ave. SE
Sultan, WA 98294
(360) 793-8675

New York
Labs WA01-WA04
4939 Jordan Rd.
Elbridge, NY 13060
(315) 685-0796

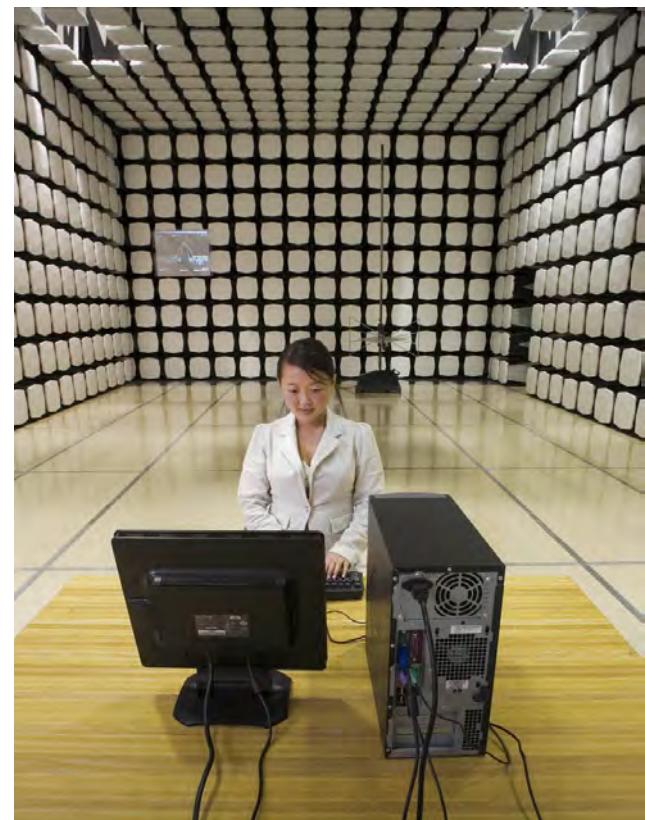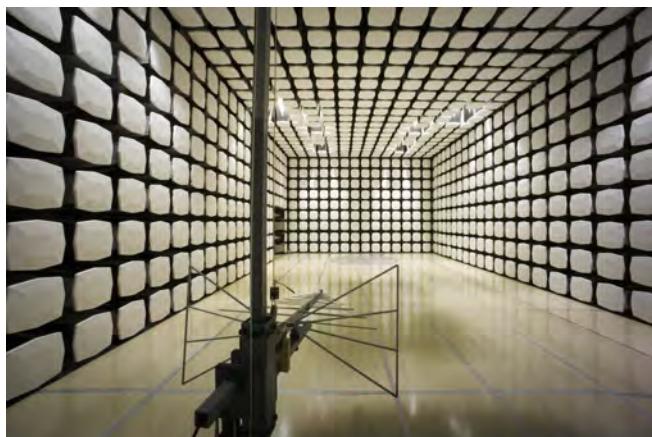

Party Requesting the Test

Company Name:	Digital Control, Inc.
Address:	19625 62nd Avenue South, Suite B103
City, State, Zip:	Kent, WA 98032
Test Requested By:	Amanda Hamm
Model:	FXL 19.2
First Date of Test:	June 23, 2010
Last Date of Test:	June 23, 2010
Receipt Date of Samples:	June 21, 2010
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test**Functional Description of the EUT (Equipment Under Test):**

19.2 kHz transmitters located in a horizontal Drill Head

Testing Objective:

To demonstrate compliance to FCC 15.209 requirements.

CONFIGURATION 2 DIGC0107

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
FXL	Digital Controls, Inc.	FXL 19.2	1147892

Equipment modifications					
Item	Date	Test	Modification	Note	Disposition of EUT
1	6/22/2010	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	6/23/2010	Field Strength of Spurious Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	6/23/2010	Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Tx

POWER SETTINGS INVESTIGATED

Battery

FREQUENCY RANGE INVESTIGATED

Start Frequency	19.2kHz	Stop Frequency	19.2kHz
-----------------	---------	----------------	---------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4443A	AFB	2/1/2010	12
EV11 Cables	N/A	3m Test Distance Cables	EVM	7/13/2009	13
Antenna, Loop	EMCO	6502	AOA	7/1/2009	24

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. The measurement uncertainty estimation is available upon request.

TEST DESCRIPTION

The antenna to be used with the EUT was tested. The EUT was transmitting while set at the channel available. While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal plane, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.10:2009). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

Field Strength of Fundamental												PSA 2008.07.21	EMI 2009.8.29	
EMC						Work Order: D1G0107								
EUT: FXL 19.2			Serial Number: 1147892			Customer: Digital Control, Inc.			Temperature: 21					
Attendees: None			Project: None			Humidity: 45%			Barometric Pres.: 30.22					
Tested by: Jennifer Herrett			Power: Battery			Job Site: EV11			Test Method					
TEST SPECIFICATIONS						FCC 15.209 Field Strength of Fundamental:2010						ANSI C63.10:2009		
TEST PARAMETERS						Antenna Height(s) (m) 1.85 - 2.5m						Test Distance (m) 3		
COMMENTS						None								
EUT OPERATING MODES						Tx								
DEVIATIONS FROM TEST STANDARD						None								
Run #	3	Configuration #	2	Results	Pass							Signature <i>Jennifer Herrett</i>		
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments	
0.019	91.1	14.6	365.0	1.9	3.0	0.0	See comments	AV	-80.0	25.7	41.9	-16.2	EUT horizontal with serial number up. Antenna perp to EUT, perp to ground.	
0.019	89.6	14.6	292.0	1.9	3.0	0.0	See comments	AV	-80.0	24.2	41.9	-17.7	EUT horizontal with serial number up. Antenna parallel to EUT, perp to ground.	
0.019	88.5	14.6	98.0	2.5	3.0	0.0	See comments	AV	-80.0	23.1	41.9	-18.8	EUT horizontal with serial number up. Antenna perp to EUT, parallel to ground.	
0.019	87.8	14.6	280.0	1.9	3.0	0.0	See comments	AV	-80.0	22.4	41.9	-19.5	EUT horizontal with serial number up. Antenna perp to EUT, parallel to ground.	
0.019	87.2	14.6	365.0	1.9	3.0	0.0	See comments	AV	-80.0	21.8	41.9	-20.1	EUT horizontal with serial number up. Antenna perp to EUT, perp to ground.	
0.019	83.8	14.6	99.0	1.9	3.0	0.0	See comments	AV	-80.0	18.4	41.9	-23.5	EUT horizontal with serial number to the side. Antenna perp to EUT, parallel to ground.	
0.019	82.4	14.6	178.0	1.9	3.0	0.0	See comments	AV	-80.0	17.0	41.9	-24.9	EUT vertical. Antenna perp to EUT, parallel to ground.	
0.019	79.4	14.6	-5.0	2.5	3.0	0.0	See comments	AV	-80.0	14.0	41.9	-27.9	EUT vertical. Antenna parallel to EUT, perp to ground.	
0.019	93.4	14.6	99.0	1.9	3.0	0.0	See comments	PK	-80.0	28.0	61.9	-33.9	EUT horizontal with serial number to the side. Antenna parallel to EUT, perp to ground.	
0.019	92.8	14.6	292.0	1.9	3.0	0.0	See comments	PK	-80.0	27.4	61.9	-34.5	EUT horizontal with serial number up. Antenna parallel to EUT, perp to ground.	
0.019	92.1	14.6	365.0	1.9	3.0	0.0	See comments	PK	-80.0	26.7	61.9	-35.2	EUT horizontal with serial number up. Antenna perp to EUT, perp to ground.	
0.019	92.0	14.6	280.0	1.9	3.0	0.0	See comments	PK	-80.0	26.6	61.9	-35.3	EUT horizontal with serial number up. Antenna parallel to EUT, perp to ground.	
0.019	92.0	14.6	365.0	1.9	3.0	0.0	See comments	PK	-80.0	26.6	61.9	-35.3	EUT horizontal with serial number up. Antenna perp to EUT, parallel to ground.	
0.019	91.7	14.6	98.0	2.5	3.0	0.0	See comments	PK	-80.0	26.3	61.9	-35.6	EUT horizontal with serial number up. Antenna perp to EUT, perp to ground.	
0.019	70.3	14.6	49.0	1.9	3.0	0.0	See comments	AV	-80.0	4.9	41.9	-37.0	EUT horizontal. Antenna perp to EUT, parallel to ground.	
0.019	90.0	14.6	178.0	1.9	3.0	0.0	See comments	PK	-80.0	24.6	61.9	-37.3	EUT vertical. Antenna perp to EUT, parallel to ground.	
0.019	82.5	14.6	-5.0	2.5	3.0	0.0	See comments	PK	-80.0	17.1	61.9	-44.8	EUT vertical. Antenna parallel to EUT, perp to ground.	
0.019	73.4	14.6	49.0	1.9	3.0	0.0	See comments	PK	-80.0	8.0	61.9	-53.9	EUT vertical. Antenna perp to EUT, perp to ground.	

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Tx

POWER SETTINGS INVESTIGATED

Battery

FREQUENCY RANGE INVESTIGATED

Start Frequency	9kHz	Stop Frequency	30MHz
-----------------	------	----------------	-------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4443A	AFB	2/1/2010	12
EV11 Cables	N/A	3m Test Distance Cables	EVM	7/13/2009	13
Antenna, Loop	EMCO	6502	AOA	7/1/2009	24

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. The measurement uncertainty estimation is available upon request.

TEST DESCRIPTION

The antenna to be used with the EUT was tested. The EUT was transmitting while set at the channel available. While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal plane, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.10:2009). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

Field Strength of Spurious Emissions												PSA 2008.07.21	EMI 2009.8.29
EMC						Work Order: D1G0107							
EUT: FXL 19.2			Serial Number: 1147892			Customer: Digital Control, Inc.			Temperature: 23				
Attendees: None			Project: None			Humidity: 49%			Barometric Pres.: 30.07				
Tested by: Jennifer Herrett			Power: Battery			Job Site: EV11							
TEST SPECIFICATIONS												Test Method	
FCC 15.209:2010						ANSI C63.10:2009							
TEST PARAMETERS													
Antenna Height(s) (m)			1.85 - 2.5m			Test Distance (m)			3				
COMMENTS													
None													
EUT OPERATING MODES													
Tx													
DEVIATIONS FROM TEST STANDARD													
None													
Run #	6												
Configuration #	2												
Results	Pass											Signature: Jennifer Herrett	
<p>The graph plots Field Strength (dBuV/m) on the y-axis (ranging from -40 to 80) against Frequency (MHz) on the x-axis (logarithmic scale from 0.010 to 1.000). A red line represents the EUT's performance, showing a downward trend from approximately 70 dBuV/m at 0.010 MHz to about 15 dBuV/m at 1.000 MHz. Green dots represent individual measurement data points, which are clustered around the red line, indicating compliance with the test standard.</p>													
Freq (MHz)	Amplitude (dBuV)	Factor	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted Spec. (dBuV/m)	Compared to Spec. (dB)	Comments	
0.058	74.7	11.3	99.0	1.9	3.0	0.0	See comments	AV	-80.0	6.0	32.4	-26.4	
0.058	72.4	11.3	-5.0	1.9	3.0	0.0	See comments	AV	-80.0	3.7	32.4	-28.7	
0.058	72.2	11.3	276.0	1.9	3.0	0.0	See comments	AV	-80.0	3.5	32.4	-28.9	
0.058	70.7	11.3	-5.0	1.9	3.0	0.0	See comments	AV	-80.0	2.0	32.4	-30.4	
0.058	70.6	11.3	285.0	2.5	3.0	0.0	See comments	AV	-80.0	1.9	32.4	-30.5	
0.058	69.0	11.3	280.0	2.0	3.0	0.0	See comments	AV	-80.0	0.3	32.4	-32.1	
0.096	64.4	10.8	103.0	1.9	3.0	0.0	See comments	OP	-80.0	-4.8	27.9	-32.7	
0.096	64.2	10.8	281.0	2.5	3.0	0.0	See comments	OP	-80.0	-5.0	27.9	-32.9	
0.058	67.9	11.3	365.0	1.9	3.0	0.0	See comments	AV	-80.0	-0.8	32.4	-33.2	
0.096	63.8	10.8	-5.0	1.9	3.0	0.0	See comments	OP	-80.0	-5.4	27.9	-33.3	
0.058	64.4	11.3	296.0	2.5	3.0	0.0	See comments	AV	-80.0	-4.3	32.4	-36.7	
0.134	52.3	10.8	281.0	1.9	3.0	0.0	See comments	AV	-80.0	-16.9	25.0	-41.9	
0.058	77.7	11.3	276.0	1.9	3.0	0.0	See comments	PK	-80.0	9.0	52.4	-43.4	
0.058	77.4	11.3	280.0	2.0	3.0	0.0	See comments	PK	-80.0	8.7	52.4	-43.7	
0.058	77.2	11.3	99.0	1.9	3.0	0.0	See comments	PK	-80.0	8.5	52.4	-43.9	
0.058	77.0	11.3	230.0	2.5	3.0	0.0	See comments	PK	-80.0	9.3	52.4	-44.1	
0.058	76.5	11.3	-5.0	1.9	3.0	0.0	See comments	PK	-80.0	7.8	52.4	-44.6	
0.058	76.5	11.3	-5.0	1.9	3.0	0.0	See comments	PK	-80.0	7.8	52.4	-44.6	
0.134	48.6	10.8	365.0	1.9	3.0	0.0	See comments	AV	-80.0	-20.6	25.0	-45.6	
0.058	73.8	11.3	365.0	1.9	3.0	0.0	See comments	PK	-80.0	5.1	52.4	-47.3	

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Tx

POWER SETTINGS INVESTIGATED

Battery

FREQUENCY RANGE INVESTIGATED

Start Frequency	30MHz	Stop Frequency	1000MHz
-----------------	-------	----------------	---------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
--

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4443A	AFB	2/1/2010	12
Pre-Amplifier	Miteq	AM-1551	AOY	7/13/2009	13
EV11 Cables	N/A	10m Test Distance Cables	EVL	7/13/2009	13
Antenna, Biconilog	EMCO	3142	AXB	1/14/2010	13

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. The measurement uncertainty estimation is available upon request.

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level was detected. This required the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search was utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance was 3 meters or 10 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna was increased so that the lowest point of the bottom of the antenna cleared the ground surface by at least 25 cm.

If measurements above 1 GHz were required, the test setup was modified to meet the regulatory requirements for higher frequency measurements. If required, RF absorber was placed on the floor between the measurement antenna and EUT. Measurements were made at a 3 meter test distance with the EUT placed on a 0.8 meter high table. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

EUT: FXL 19.2	Work Order: DIGC0107
Serial Number: 1147892	Date: 06/23/10
Customer: Digital Control, Inc.	Temperature: 23
Attendees: None	Humidity: 48%
Project: None	Barometric Pres.: 30.07
Tested by: Jennifer Herrett	Job Site: EV11

TEST SPECIFICATIONS

FCC 15.109:2010 Class A | ANSI C63.4:2003

TEST PARAMETERS

Antenna Height(s) (m) | 1 - 4 | Test Distance (m) | 10

COMMENTS

None


EUT OPERATING MODES

Tx

DEVIATIONS FROM TEST STANDARD

No deviations.

Run #	5
Configuration #	2
Results	Pass

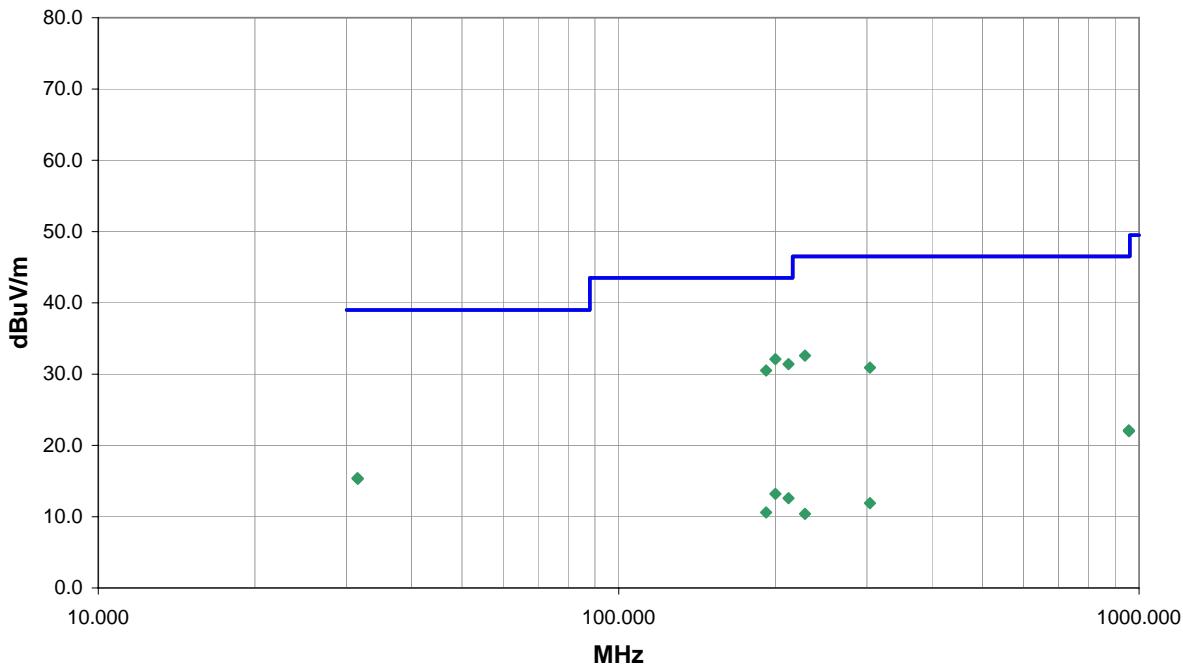Signature: *Jennifer Herrett*

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
200.001	55.8	-23.7	301.0	1.0	10.0	0.0	V-Bilog	QP	0.0	32.1	43.5	-11.4
211.999	54.6	-23.2	318.0	1.0	10.0	0.0	V-Bilog	QP	0.0	31.4	43.5	-12.1
192.000	54.4	-23.9	268.0	1.0	10.0	0.0	V-Bilog	QP	0.0	30.5	43.5	-13.0
227.998	55.0	-22.4	236.0	1.0	10.0	0.0	V-Bilog	QP	0.0	32.6	46.5	-13.9
304.000	50.9	-20.0	103.0	1.0	10.0	0.0	V-Bilog	QP	0.0	30.9	46.5	-15.6
31.475	31.9	-16.5	252.0	1.4	10.0	0.0	V-Bilog	QP	0.0	15.4	39.0	-23.6
31.523	31.8	-16.5	153.0	1.0	10.0	0.0	H-Bilog	QP	0.0	15.3	39.0	-23.7
956.012	30.8	-8.7	270.0	1.0	10.0	0.0	V-Bilog	QP	0.0	22.1	46.5	-24.4
956.143	30.7	-8.7	164.0	1.0	10.0	0.0	H-Bilog	QP	0.0	22.0	46.5	-24.5
200.001	36.9	-23.7	321.0	1.3	10.0	0.0	H-Bilog	QP	0.0	13.2	43.5	-30.3
212.008	35.8	-23.2	343.0	1.7	10.0	0.0	H-Bilog	QP	0.0	12.6	43.5	-30.9
192.005	34.5	-23.9	-2.0	1.3	10.0	0.0	H-Bilog	QP	0.0	10.6	43.5	-32.9
303.998	31.9	-20.0	211.0	1.0	10.0	0.0	H-Bilog	QP	0.0	11.9	46.5	-34.6
227.992	32.8	-22.4	240.0	1.0	10.0	0.0	H-Bilog	QP	0.0	10.4	46.5	-36.1