

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart C Specifications for an
Intentional Radiator
and FCC Part 15, Subpart B Specifications for a
Receiver on the
Savi Technology, Inc.
Model: EchoPoint Reader 600, model SR-600-101***

FCC ID: KL7 - 612R- V1


GRANTEE: Savi Technology, Inc.
615 Tasman Drive
Sunnyvale, CA 94089-1707

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: October 16, 2001

FINAL TEST DATE: September 6, 2001

AUTHORIZED SIGNATORY:



Mark Briggs
Director of Engineering

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

COVER PAGE..... 1

TABLE OF CONTENTS.....2

SCOPE.....4

OBJECTIVE.....4

STATEMENT OF COMPLIANCE.....5

EMISSION TEST RESULTS5

 LIMITS OF CONDUCTED INTERFERENCE VOLTAGE..... 5

 LIMITS OF RADIATED FIELD STRENGTH - RECEIVER 6

 BANDWIDTH..... 6

 DUTY CYCLE CALCULATION..... 6

 PERIOD OF OPERATION..... 6

 LIMITS OF RADIATED FIELD STRENGTH –INTENTIONAL RADIATOR 7

 MEASUREMENT UNCERTAINTIES 7

EQUIPMENT UNDER TEST (EUT) DETAILS8

 GENERAL..... 8

 ENCLOSURE..... 8

 SUPPORT EQUIPMENT 8

 EXTERNAL I/O CABLING..... 8

 TEST SOFTWARE 8

TEST SITE.....9

 GENERAL INFORMATION..... 9

 CONDUCTED EMISSIONS CONSIDERATIONS..... 9

 RADIATED EMISSIONS CONSIDERATIONS..... 9

MEASUREMENT INSTRUMENTATION.....10

 RECEIVER SYSTEM 10

 INSTRUMENT CONTROL COMPUTER 10

 LINE IMPEDANCE STABILIZATION NETWORK (LISN) 10

 FILTERS/ATTENUATORS 11

 ANTENNAS 11

 ANTENNA MAST AND EQUIPMENT TURNTABLE 11

 INSTRUMENT CALIBRATION 11

TEST PROCEDURES12

 EUT AND CABLE PLACEMENT..... 12

 CONDUCTED EMISSIONS 12

 RADIATED EMISSIONS..... 12

 SPECIFICATION LIMITS AND SAMPLE CALCULATIONS..... 13

 CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207 & 15.107(A)..... 13

 FUNDAMENTAL AND HARMONIC LIMITS 15.231 (B) 13

 FUNDAMENTAL AND HARMONIC LIMITS 15.231 (E)..... 14

 RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209..... 14

 RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.109(A) (RECEIVER) 15

 SAMPLE CALCULATIONS - CONDUCTED EMISSIONS 15

 SAMPLE CALCULATIONS - RADIATED EMISSIONS..... 16

TABLE OF CONTENTS (Continued)

EXHIBIT 1: Test Equipment Calibration Data..... 1
EXHIBIT 2: Test Data Log Sheets 2
EXHIBIT 3: Test Configuration Photographs..... 3
EXHIBIT 4: Theory of Operation..... 4
EXHIBIT 5: Proposed FCC ID Label & Label Location 5
EXHIBIT 6: Detailed Photographs..... 6
EXHIBIT 7: Installation Guide..... 7
EXHIBIT 8: Block Diagram..... 8
EXHIBIT 9: Schematic Diagrams..... 9

SCOPE

An electromagnetic emissions test has been performed on the Savi Technology model EchoPoint Reader 600, model SR-600-101 pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators and Subpart B of Part 15 of FCC Rules for receivers. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The transceiver above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Savi Technology model SaviReader 612R and therefore apply only to the tested sample. The sample was selected and prepared by Eugene Schindwein of Savi Technology, Inc.

OBJECTIVE

The primary objective of the manufacturer is compliance with Subparts B and C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators and receivers. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

STATEMENT OF COMPLIANCE

The tested sample of Savi Technology, Inc. model EchoPoint Reader 600, model SR-600-101 complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators and the requirements of Subpart B of Part 15 of the FCC Rules for receivers operating between 30 MHz and 960 MHz.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

EMISSION TEST RESULTS

The following emissions tests were performed on the Savi Technology model EchoPoint Reader 600, model SR-600-101. The actual test results are contained in an exhibit of this report.

LIMITS OF CONDUCTED INTERFERENCE VOLTAGE

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.207 for an intentional radiator and Part 15 Section 15.107(a) for a receiver.

The following measurement was extracted from the data recorded during the conducted emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

120V/60Hz						
Frequency MHz	Level dBuV	Power Lead	12.207 / 15.107(a) Limit	Margin	Detector QP/Ave	Comments
0.6133	30.4	Neutral	48.0	-17.6	QP	

LIMITS OF RADIATED FIELD STRENGTH - RECEIVER

The EUT tested complied with the limits detailed in FCC Rules Part 15 FCC Rules Part 15 Section 15.109(a) for a receiver.

The following measurement was extracted from the data recorded during the radiated electric field emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

30 – 1000 MHz

Frequency MHz	Level dBuV/m	Pol v/h	Class B		Detector Pk/QP/Avg	Azimuth Degrees	Height Meters	Comments
			Limit	Margin				
112.030	32.0	V	43.5	-11.5	QP	67	1.0	

BANDWIDTH

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.231(c). The 20dB bandwidth was 445 kilohertz.

DUTY CYCLE CALCULATION

The maximum duty cycle permitted for the data and control signals (other than the Wake-Up signal) is 33% (refer to the Theory of Operations for details) when measured over any 100mS period. This corresponds to a minimum average duty cycle correction factor of -9.5 dB to be applied to peak readings to calculate the average level of the signal.

PERIOD OF OPERATION

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.231(a) for control signals and 15.231(e) for data signals. Refer to the Theory of Operations for more details.

LIMITS OF RADIATED FIELD STRENGTH –INTENTIONAL RADIATOR

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.231 and 15.209 in the case of emissions falling within the frequency bands specified in Section 15.205.

The following measurement was extracted from the data recorded during the radiated electric field emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

“Wake-Up” Control Signal: Fundamental

Frequency MHz	Level dBuV/m	Pol v/h	15.231(a)		Detector Pk/QP/Av g	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.920	75.4	V	80.8	-5.4	Pk	250	1.6	

“Wake-Up” Control Signal: Harmonics

Frequency MHz	Level dBuV/m	Pol v/h	15.231(a)		Detector Pk/QP/Av g	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1301.743	43.7	V	54.0	-10.3	Pk	260	1.1	

Data and Other Control Signals: Fundamental

Frequency MHz	Level dBuV/m	Pol v/h	15.231(e)		Detector Pk/QP/Av g	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.920	72.3	H	72.9	-0.6	Avg	165	1.6	

Data and Other Control Signals: Harmonics

Frequency MHz	Level dBuV/m	Pol v/h	15.231(e)		Detector Pk/QP/Av g	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2603.000	53.2	H	54.0	-0.8	Pk	245	1.3	

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Savi Technology model EchoPoint Reader 600, model SR-600-101 is a controlling transceiver that is used as a part of a Tag identification system. The device operates at 433.92MHz.

The sample was received on October 4, 2001 and tested on September 6, 2001. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number	FCC ID Number
Savi Technology/ SR-600-101 /Tag identification system	N/A	KL7-612R-V1

ENCLOSURE

The EUT enclosure is primarily constructed of plastic with an internal conductive paint coating. It measures approximately 30 cm (12 in.) diameter x 14 cm (5.5 in.) high.

SUPPORT EQUIPMENT

The following equipment was used as remote support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Compaq	Armada	Laptop PC	-	-
Savi	SR-600-101	433.92MHz transceiver	-	-

EXTERNAL I/O CABLING

The I/O cabling configuration during emissions testing was as follows:

Cable Description	Length (m)	From Unit/Port	To Unit/Port
RS485	30	RS485 in	Laptop
RS485	30	RS485 through	Savi Reader
AC Power	2	AC plug	AC power

TEST SOFTWARE

The system was configured to continuously transmit a CW signal at the maximum output power permitted in the current revision of firmware. The laptop was continuously acquiring data from the EUT.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken on September 6, 2001 at the Elliott Laboratories Open Area Test Site #2 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions, which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207 & 15.107(a)

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

FUNDAMENTAL AND HARMONIC LIMITS 15.231 (b)

The table below shows the limits for both the Fundamental and Harmonic emissions for each frequency band of operation detailed in Section 15.231 (b) for control signals.

Operating Frequency (MHz)	Field strength (microvolts/m)	Harmonics (microvolts/m)
70 - 130	1250	125
130 - 174	1250 - 3750	125 - 375
174 - 260	3750	375
260 - 470	3750 - 12,500	375 - 1250
Above 470	12,500	1250

FUNDAMENTAL AND HARMONIC LIMITS 15.231 (e)

The table below shows the limits for both the Fundamental and Harmonic emissions (that do not fall in restricted bands) for each frequency band of operation detailed in Section 15.231 (e) for data signals.

Operating Frequency (MHz)	Field strength (microvolts/m)	Harmonics (microvolts/m)
70 - 130	500	50
130 - 174	500 - 1500	50 - 150
174 - 260	1500	150
260 - 470	1500 - 5000	150 - 500
Above 470	5000	500

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.109(a) (RECEIVER)

The table below shows the limits for emissions from the receiver.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

R_r = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

- * Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

EXHIBIT 1: Test Equipment Calibration Data

Radiated Emissions, 30 - 4300 MHz, 31-Aug-01 05:15 PM**Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
A.H. Systems	Biconical Antenna, 20-200 MHz	SAS-200/540H	866	12	3/16/2001	3/16/2002
Dorado International Corp	Horn Antenna, 1 - 12 GHz	GH1-12N	1258	12	11/9/2000	11/9/2001
EMCO	Conical Log Spiral Antenna	3101	608	12	5/2/2001	5/2/2002
Hewlett Packard	EMC Spectrum Analyzer 9kHz - 6.5GHz	8595EM	787	12	2/14/2001	2/14/2002
Hewlett Packard	Microwave Preamplifier 0.5-26.5GHz	83017A	1257	12	10/16/2000	10/16/2001
Hewlett Packard	RF Preamplifier 100 kHz -1.3 GHz	8447D	789	12	12/13/2000	12/13/2001

Radiated Emissions, 30 - 1000 MHz (Digital Device/Receiver), 06-Sep-01 05:43 PM**Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Biconical Antenna, 30-300 MHz	3110B	801	11	10/12/2000	10/12/2001
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	4/10/2001	4/10/2002
Rohde & Schwarz	Test Receiver, 20-1300MHz	ESVP	273	12	10/5/2000	10/5/2001

Radiated Emissions, 30 - 4340 MHz (FCC15.231(e)), 06-Sep-01 05:45 PM**Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Biconical Antenna, 30-300 MHz	3110B	801	11	10/12/2000	10/12/2001
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	868	12	10/26/2000	10/26/2001
Filtek	High Pass Filter, 1GHz	HP12/1000-5BA	956	12	3/22/2001	3/22/2002
Hewlett Packard	EMC Spectrum Analyzer, Opt. 026 □9 KHz -26.5GHz	8593EM	1141	12	2/16/2001	2/16/2002
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12	8/21/2001	8/21/2002
Rohde & Schwarz	Test Receiver, 20-1300MHz	ESVP	273	12	10/5/2000	10/5/2001

Conducted Emissions, AC and DC lines, 0.15 - 30 MHz, 06-Sep-01 08:03 PM**Engineer: Mark**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	12	6/14/2001	6/14/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12	7/27/2001	7/27/2002
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	215	12	10/5/2000	10/5/2001

EXHIBIT 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T44655 10 Pages



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Emissions Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B
Immunity Spec:	EN 301 489-03	Environment:	-

EMC Test Data

For The

Savi

Model

EchoPoint Reader 600 Model SR-600-101



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Emissions Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B
Immunity Spec:	EN 301 489-03	Environment:	-

EUT INFORMATION

General Description

The EUT is a transceiver which is designed to operate at 433.92 MHz. The EUT can operate from either AC power (230V/50Hz or 120V/60Hz) or from dc power. In addition the system has mutually exclusive RS 232 and RS 485 interface ports. The RS 232 interface is intended to connect to an RS232 to ethernet adapter.

The electrical rating of the EUT is 92-125/184-250 VAC, 50/60 Hz, 200/100 mA, 6-15 VDC, 300 mA

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Savi Technology	SR-600-101	433.92 MHz transceiver		

Other EUT Details

The EUT is designed to be used as a part of Savi's tag identification systems. With respect to Part 15 of the FCC's rules the EchoPoint Reader 600 is classified as a Class A digital device and as a transceiver operating under section 15.231.

The emissions related to the digital circuitry must comply with the limits for Class A digital devices detailed in FCC Parts 15.107(b) and 15.109(b).

The emissions from the receiver must comply with the limits detailed in 15.107(a) and 15.109(a). The transmitter emissions must comply with the requirements of 15.207 (with respect to AC conducted emissions) and with 15.231 for the intentionally transmitted signals. The requirements of 15.231(e) are to be applied to the data signals. the Wake-Up signal, which is a control signal, must meet the requirements of 15.231(a).

EUT Enclosure

The EUT enclosure is primarily constructed of plastic with an internal conductive paint coating. It measures approximately 30 cm (12 in.) diameter x 14 cm (5.5 in.) high.

Modification History

Mod. #	Test	Date	Modification
1	-	-	None



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Emissions Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B
Immunity Spec:	EN 301 489-03	Environment:	-

Test Configuration (RS485 Mode)

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Compaq	Armada	Laptop PC	-	-
Savi	SR-600-101	433.92MHz transceiver	-	-

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
AC Power	AC power		unshielded	2
RS485 In	Laptop		shielded	30
RS485 through	SaviReader		shielded	30

The system has both RS232 and RS485 interface ports. Only one interface protocol is supported at a time (i.e. they are mutually exclusive). This test configuration was used for evaluating the RS 485 interface)

EUT Operation During Emissions

Transmit Mode

The system was configured to continuously transmit a CW signal at the maximum output power permitted in the current revision of firmware. The laptop was continuously acquiring data from the EUT.

Receive Mode

The product was configured to receive with the transmitter disabled.



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/6/2001

Config. Used: #1 (RS 485 Mode)

Test Engineer: Mark Briggs

Config Change: -

Test Location: SVOATS #3

EUT Voltage: Refer to individual run

General Test Configuration

The EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. Remote support equipment was located approximately 30 meters away from the test area, with all I/O connections routed overhead.

Ambient Conditions:

Temperature: 21°C

Rel. Humidity: 56%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 230V/50Hz	EN 301 489-03	Pass	
2	CE, AC Power 120V/60Hz	FCC 15.207 / FCC B	Pass	
3	CE, DC Power 9V	EN 301 489-03	Pass	

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz
This data is for Elliott FCC Receiver/Digital device (RS 485 mode) verification report and FCC certification report

Frequency	Level	AC	FCC B/15.207		Detector	Comments
MHz	dB μ V	Line	Limit	Margin	QP/Ave	
0.6133	30.4	Neutral	48.0	-17.6	QP	
1.8466	21.8	Neutral	48.0	-26.2	QP	
7.4786	15.1	Neutral	48.0	-32.9	QP	
7.4636	14.8	Line 1	48.0	-33.2	QP	
1.8466	23.1	Line 1	48.0	-24.9	QP	
0.6066	28.0	Line 1	48.0	-20.0	QP	



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Preliminary Radiated Emissions, 30-1000 MHz

RS 485 Mode

Frequency MHz	Level dBµV/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
423.145	32.3	H	46.0	-13.7	QP	138	1.0	Receiver LO
112.030	29.0	H	43.5	-14.5	QP	48	1.9	
423.145	30.6	V	46.0	-15.4	QP	145	1.0	Receiver LO
112.030	27.4	V	43.5	-16.1	QP	67	1.0	
141.020	26.7	V	43.5	-16.8	QP	34	1.0	Broadband noise
124.030	26.0	V	43.5	-17.5	QP	85	1.0	
140.030	24.6	V	43.5	-18.9	QP	280	1.0	Broadband noise
120.030	23.2	V	43.5	-20.3	QP	73	1.0	
31.340	19.5	V	40.0	-20.5	QP	231	1.0	
136.030	22.3	V	43.5	-21.2	QP	90	1.0	
116.030	22.0	H	43.5	-21.5	QP	139	1.8	
52.010	17.5	V	40.0	-22.5	QP	238	1.0	
128.030	20.6	V	43.5	-22.9	QP	61	1.0	
120.030	20.5	H	43.5	-23.0	QP	164	1.7	
133.310	20.4	V	43.5	-23.1	QP	112	1.0	
116.030	19.6	V	43.5	-23.9	QP	242	1.0	
132.030	19.3	V	43.5	-24.2	QP	302	1.0	
141.020	18.9	H	43.5	-24.6	QP	135	1.5	Broadband noise
124.030	18.0	H	43.5	-25.5	QP	261	1.5	
140.030	17.6	H	43.5	-25.9	QP	186	1.7	Broadband noise
31.340	14.0	H	40.0	-26.0	QP	198	1.4	
128.030	17.5	H	43.5	-26.0	QP	203	1.5	
136.030	16.6	H	43.5	-26.9	QP	360	1.0	
138.030	16.1	H	43.5	-27.4	QP	86	1.6	
52.010	12.2	H	40.0	-27.8	QP	187	1.2	
138.030	14.2	V	43.5	-29.3	QP	67	1.0	
132.030	14.0	H	43.5	-29.5	QP	113	1.0	
133.310	10.5	H	43.5	-33.0	QP	170	1.0	



EMC Test Data

Client:	Savi	Job Number:	J44653
Model:	EchoPoint Reader 600 Model SR-600-101	T-Log Number:	T44655
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC 15.231(e) & 15 Subpart B	Class:	B

Run #2: Maximized Readings From Run #1
RS 485 Mode - Digital Device and Receiver

Frequency MHz	Level dBμV/m	Pol v/h	FCC 15.109		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
112.030	32.0	V	43.5	-11.5	QP	67	1.0	
112.030	30.5	H	43.5	-13.0	QP	48	1.9	Front cables moved around.
423.145	32.3	v	46.0	-13.7	QP	138	1.0	Receiver LO
423.145	30.6	h	46.0	-15.4	QP	145	1.0	Receiver LO
141.020	26.7	V	43.5	-16.8	QP	34	1.0	Broadband noise
124.030	26.0	V	43.5	-17.5	QP	85	1.0	

Run #3: Preliminary Radiated Emissions 30 - 4339 MHz, Transmitter - Data and Control Signals

Measurements made at 3m per FCC requirements.
Transmitter #2 (note 1)

Frequency MHz	Level dBμV/m	Pol v/h	FCC 15.231(e)		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.920	72.3	H	72.9	-0.6	Avg	165	1.6	Note 2
433.920	71.8	V	72.9	-1.1	Avg	300	1.3	Note 2
2603.000	53.2	H	54.0	-0.8	Pk	245	1.3	Peak reading, average limit
2603.000	52.1	V	54.0	-1.9	Pk	252	1.1	Peak reading, average limit
1735.662	49.0	V	54.0	-5.0	Pk	167	1.0	Peak reading, average limit
1735.662	46.7	H	54.0	-7.3	Pk	66	1.9	Peak reading, average limit
1301.743	44.1	V	54.0	-9.9	Pk	120	1.0	Peak reading, average limit
433.920	81.8	H	92.9	-11.1	Pk	165	1.6	
1301.743	42.7	H	54.0	-11.3	Pk	310	1.8	Peak reading, average limit
433.920	81.3	V	92.9	-11.6	Pk	300	1.3	
867.830	26.0	V	52.9	-26.9	QP	0	1.2	Note 3

Note 1: Transmitter #1 was not tested. Transmitter #1 and transmitter #2 are identical circuits. Preliminary measurements showed the difference to be less than 0.5dB between the output levels from the two transmitters, with transmitter #2 having the slightly higher output field strength.

Note 2: Average value calculated from the peak value by applying an average correction factor of -9.5dB for a duty cycle of 33% measured over any 100mS period (must be adjusted for actual duty cycle from theory of operations)

Note 3: Signal substitution measurement

Note 4: The limit for signals in restricted bands and signals above 960 MHz is the limit detailed in 15.209. For signals below 960 MHz the limit for spurious emissions is 52.9dBuV/m.



EMC Test Data

Client: Savi	Job Number: J44653
Model: EchoPoint Reader 600 Model SR-600-101	T-Log Number: T44655
	Proj Eng: Mark Briggs
Contact: Gene Schlindwein	
Spec: FCC 15.231(e) & 15 Subpart B	Class: B

Run #4: Preliminary Radiated Emissions 30 - 4339 MHz, Transmitter - "Wake-Up" Signal
 Measurements made at 3m per FCC requirements.
 Transmitter #2 (note 1)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.231(a)		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.920	75.4	V	80.8	-5.4	Pk	250	1.6	Peak reading, average limit
433.920	73.6	H	80.8	-7.2	Pk	330	1.9	Peak reading, average limit
1301.743	43.7	V	54.0	-10.3	Pk	260	1.1	Peak reading, average limit
2603.000	50.0	V	60.8	-10.8	Pk	90	1.6	Peak reading, average limit
2603.000	48.6	H	60.8	-12.2	Pk	175	1.3	Peak reading, average limit
1301.743	41.7	H	54.0	-12.3	Pk	316	1.8	Peak reading, average limit
1735.662	47.5	V	60.8	-13.3	Pk	140	1.3	Peak reading, average limit

- Note 1: Transmitter #1 was not tested. Transmitter #1 and transmitter #2 are identical circuits. Preliminary measurements showed the difference to be less than 0.5dB between the output levels from the two transmitters, with transmitter #2 having the slightly higher output field strength.
- Note 3: Signal substitution measurement
- Note 4: The limit for signals in restricted bands is the limit detailed in 15.209. For all other spurious signals the limit for spurious emissions is 60.8 dB μ V/m.

20dB Bandwidth Measurement

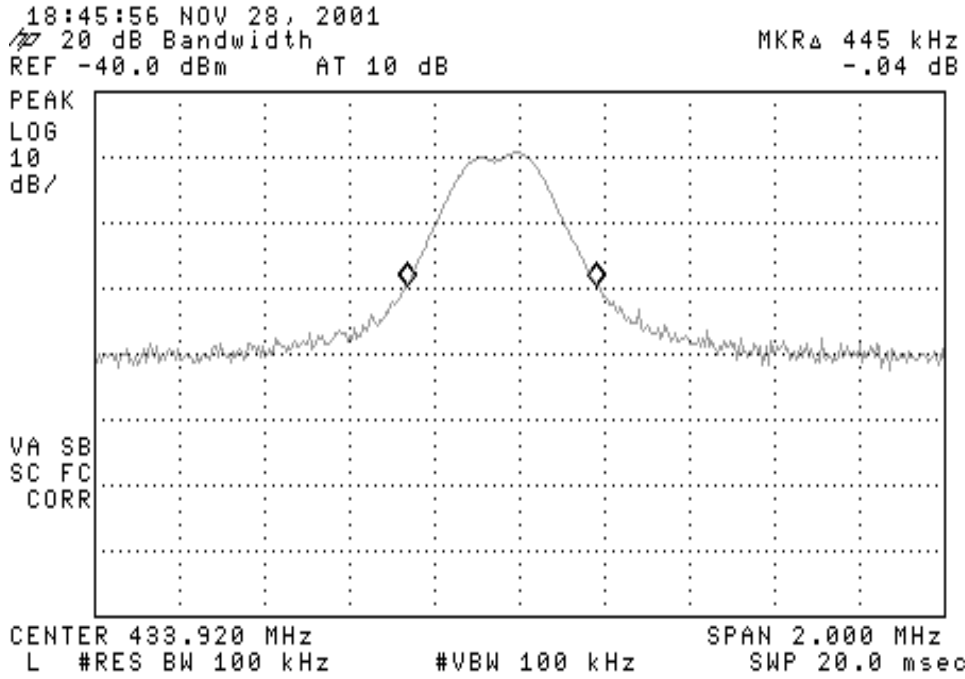


EXHIBIT 3: Test Configuration Photographs

Uploaded as A Separate Attachment

EXHIBIT 4: Theory of Operation
Savi Technology, Inc. Model EchoPoint Reader 600, model SR-600-101

Uploaded as A Separate Attachment

EXHIBIT 5: Proposed FCC ID Label & Label Location

Uploaded as A Separate Attachment

***EXHIBIT 6: Detailed Photographs
Savi Technology, Inc. Model EchoPoint Reader 600, model SR-600-101 Construction***

Uploaded as A Separate Attachment

EXHIBIT 7: Installation Guide
Savi Technology, Inc. Model EchoPoint Reader 600, model SR-600-101

Uploaded as A Separate Attachment

EXHIBIT 8: Block Diagram
Savi Technology, Inc. Model EchoPoint Reader 600, model SR-600-101

Uploaded as A Separate Attachment

***EXHIBIT 9: Schematic Diagrams
Savi Technology, Inc. Model EchoPoint Reader 600, model SR-600-101***

Uploaded as A Separate Attachment